

Лабораторная работа №06

Талебу Тенке Франк Устон

2025

Лабораторная работа №06

Лабораторная работа №06

Цель работы

Приобретение практических навыков администрирования сетевых подсистем

Загрузим нашу операционную систему и перейдём в рабочий каталог с проектом. Далее запустим виртуальную машину server (рис. @fig-1):

На виртуальной машине server войдём под нашим пользователем и откроем терминал. Далее перейдём в режим суперпользователя и установим необходимые для работы с базами данных пакеты (рис. @fig-2):

Просмотрим конфигурационные файлы mariadb в каталоге /etc/my.cnf.d и в файле /etc/my.cnf (рис. @fig-3):

Для запуска и включения программного обеспечения mariadb используем соответствующие команды. Убедимся, что mariadb прослушивает порт, и запустим скрипт конфигурации безопасности mariadb (рис. @fig-4):

Для входа в базу данных с правами администратора базы данных введём соответствующую команду. После чего посмотрим список команд MySQL (рис. @fig-5):

Из приглашения интерактивной оболочки MariaDB для отображения доступных в настоящее время баз данных введём MySQL-запрос. Для выхода из интерфейса интерактивной оболочки MariaDB используем соответствующую команду (рис. @fig-6):

```
root@server:~  
[vagrant@server ~]$ sudo -i  
[root@server ~]# dnf -y install mariadb mariadb-server  
Last metadata expiration check: 2:13:44 ago on Mon 09 Mar 2026 06:25:46 AM UTC.  
Dependencies resolved.  
=====
```

Package	Arch	Version	Repository	Size
---------	------	---------	------------	------

```
=====
```

Installing:

mariadb	x86_64	3:10.5.29-3.el9_7	appstream	1.6 M
mariadb-server	x86_64	3:10.5.29-3.el9_7	appstream	9.7 M

Upgrading:

selinux-policy	noarch	38.1.65-1.el9_7.1	baseos	37 k
selinux-policy-targeted	noarch	38.1.65-1.el9_7.1	baseos	6.5 M

Installing dependencies:

mariadb-common	x86_64	3:10.5.29-3.el9_7	appstream	27 k
mariadb-errmsg	x86_64	3:10.5.29-3.el9_7	appstream	210 k
mysql-selinux	noarch	1.0.14-1.el9_6	appstream	36 k
perl-DBD-MariaDB	x86_64	1.21-17.el9	appstream	149 k
perl-Sys-Hostname	x86_64	1.23-481.1.el9_6	appstream	15 k

Installing weak dependencies:

mariadb-backup	x86_64	3:10.5.29-3.el9_7	appstream	6.5 M
mariadb-gssapi-server	x86_64	3:10.5.29-3.el9_7	appstream	14 k
mariadb-server-utils	x86_64	3:10.5.29-3.el9_7	appstream	210 k

Transaction Summary


```
=====
```

Install 10 Packages
Upgrade 2 Packages

Total download size: 25 M
Downloading Packages:

(1/12): mariadb-common-10.5.29-3.el9_7.x86_64.r	87 kB/s	27 kB	00:00
(2/12): mariadb-errmsg-10.5.29-3.el9_7.x86_64.r	56 kB/s	210 kB	00:03
(3/12): mariadb-10.5.29-3.el9_7.x86_64.rpm	395 kB/s	1.6 MB	00:04
(4/12): mariadb-gssapi-server-10.5.29-3.el9_7.x	76 kB/s	14 kB	00:00
(5/12): mariadb-server-utils-10.5.29-3.el9_7.x8	713 kB/s	210 kB	00:00
(6/12): mysql-selinux-1.0.14-1.el9_6.noarch.rpm	185 kB/s	36 kB	00:00
(7/12): perl-DBD-MariaDB-1.21-17.el9.x86_64.rpm	562 kB/s	149 kB	00:00
(8/12): mariadb-backup-10.5.29-3.el9_7.x86_64.r	1.2 MB/s	6.5 MB	00:05
(9/12): perl-Sys-Hostname-1.23-481.1.el9_6.x86_	32 kB/s	15 kB	00:00
(10/12): selinux-policy-38.1.65-1.el9_7.1.noarc	56 kB/s	37 kB	00:00
(11/12): mariadb-server-10.5.29-3.el9_7.x86_64.	3.5 MB/s	9.7 MB	00:02
(12/12): selinux-policy-targeted-38.1.65-1.el9_	2.4 MB/s	6.5 MB	00:02

Рис. 1: Этап 1

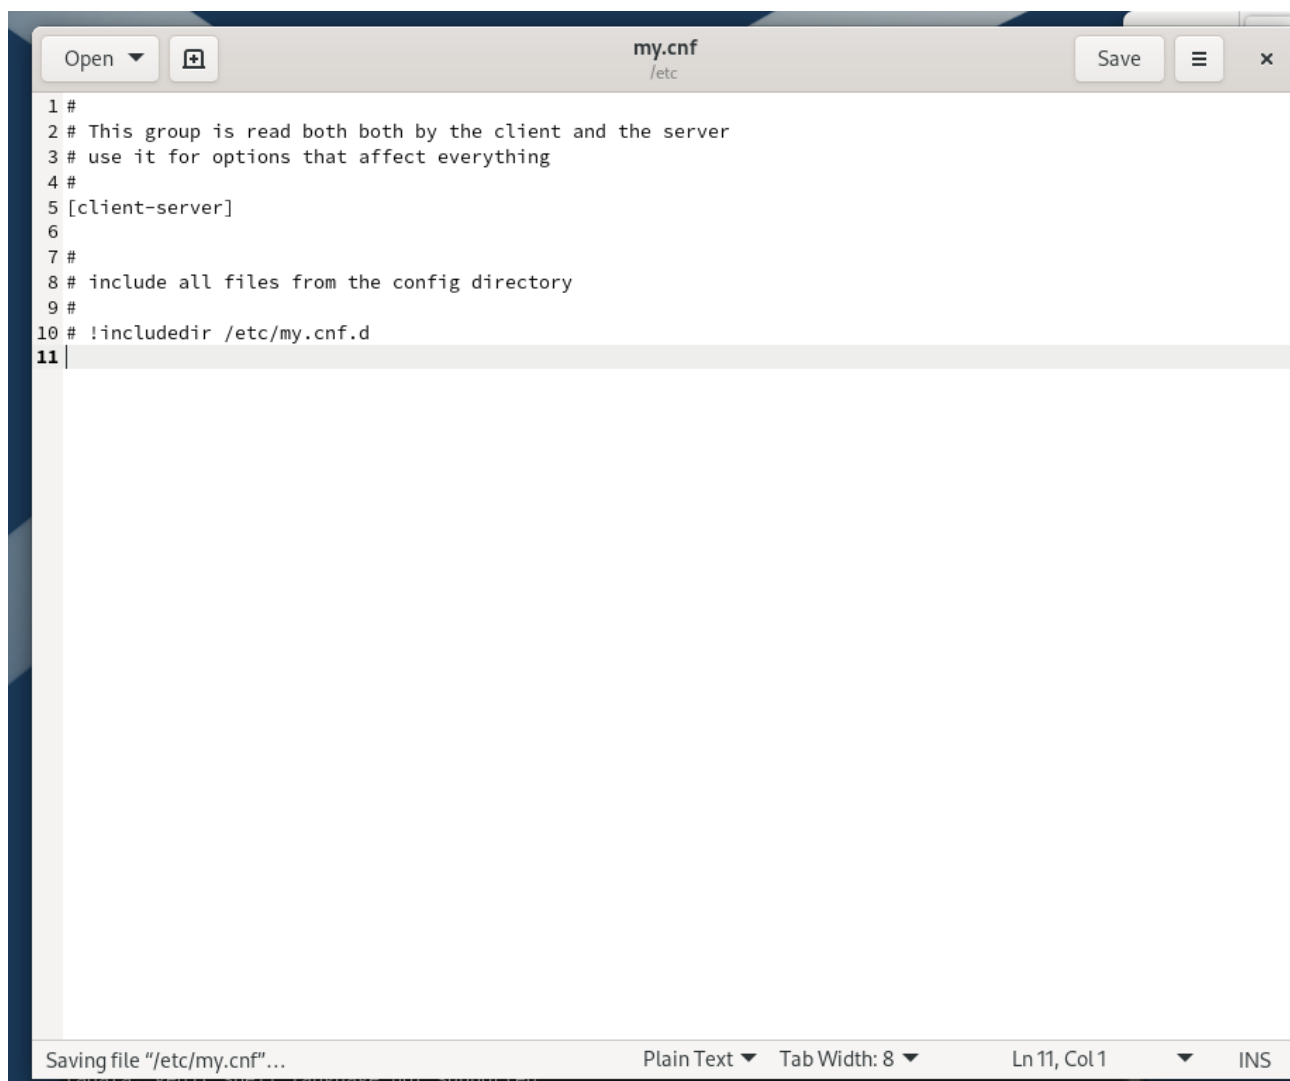

The image shows a text editor window with a title bar that includes the filename 'my.cnf' and the path '/etc'. The window has standard buttons for 'Open', 'Save', and a menu icon. The text inside the editor is as follows:

```
1 #
2 # This group is read both both by the client and the server
3 # use it for options that affect everything
4 #
5 [client-server]
6
7 #
8 # include all files from the config directory
9 #
10 # !includedir /etc/my.cnf.d
11 |
```

The status bar at the bottom of the window displays 'Saving file "/etc/my.cnf"...', 'Plain Text', 'Tab Width: 8', 'Ln 11, Col 1', and 'INS'.

Рис. 2: Этап 2

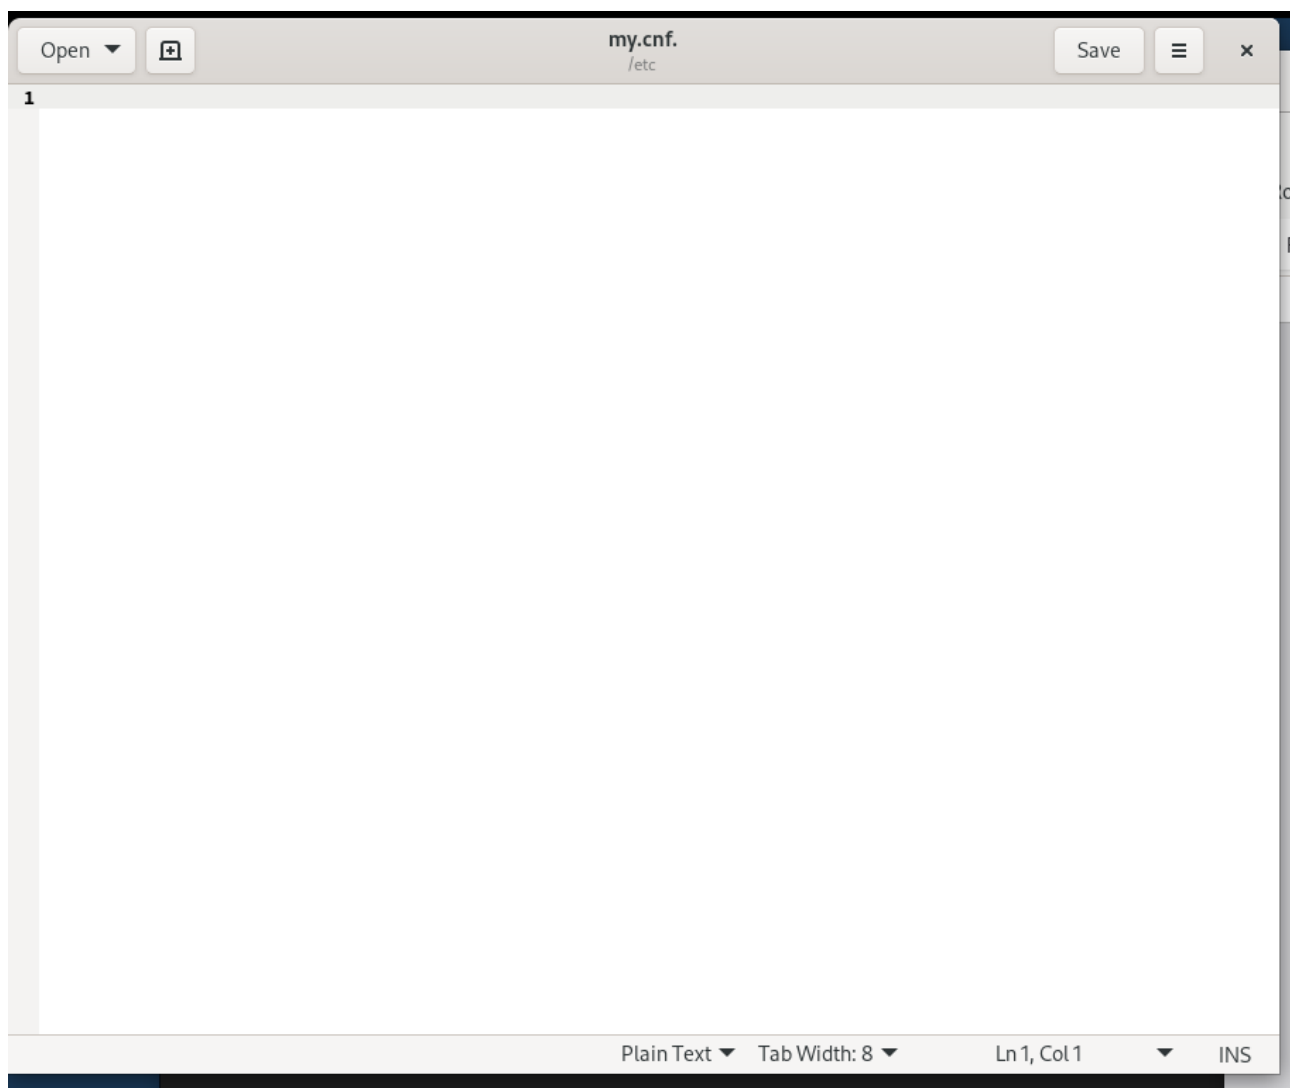


Рис. 3: Этап 3

```
** (gedit:18155): WARNING **: 08:48:46.983: Set document metadata failed: Setting attribute metadata
::gedit-position not supported

(gedit:18155): dconf-WARNING **: 08:48:47.002: failed to commit changes to dconf: Failed to execute
child process "dbus-launch" (No such file or directory)
[root@server etc]# systemctl start mariadb
[root@server etc]# systemctl enable mariadb
Created symlink /etc/systemd/system/mysql.service → /usr/lib/systemd/system/mariadb.service.
Created symlink /etc/systemd/system/mysqld.service → /usr/lib/systemd/system/mariadb.service.
Created symlink /etc/systemd/system/multi-user.target.wants/mariadb.service → /usr/lib/systemd/syste
m/mariadb.service.
[root@server etc]# ss -tulpen | grep mysql
[root@server etc]# netstat -tulpen | grep 3306
bash: prep-w: command not found...
[root@server etc]# netstat -tulpen | grep 3306
[root@server etc]# netstat -tulpen | grep 3306
tcp6      0      0 :::3306          :::*              LISTEN      27          781624
18288/mariabdb
[root@server etc]#
```

Рис. 4: Этап 4

```

** (gedit:18155): WARNING **: 08:48:46.983: Set document metadata failed: Setting attribute metadata
::gedit-position not supported

(gedit:18155): dconf-WARNING **: 08:48:47.002: failed to commit changes to dconf: Failed to execute
child process "dbus-launch" (No such file or directory)
[root@server etc]# systemctl start mariadb
[root@server etc]# systemctl enable mariadb
Created symlink /etc/systemd/system/mysql.service → /usr/lib/systemd/system/mariadb.service.
Created symlink /etc/systemd/system/mysqld.service → /usr/lib/systemd/system/mariadb.service.
Created symlink /etc/systemd/system/multi-user.target.wants/mariadb.service → /usr/lib/systemd/syste
m/mariadb.service.
[root@server etc]# ss -tulpen | grep mysql
[root@server etc]# netstat -tulpen | grep 3306
bash: netstat: command not found...
[root@server etc]# netstat -tulpen | grep 3306
tcp6      0      0 :::3306          :::*             LISTEN     27          781624
          18288/mariabdd
[root@server etc]#

```

Рис. 5: Этап 5

NOTE: RUNNING ALL PARTS OF THIS SCRIPT IS RECOMMENDED FOR ALL MariaDB
SERVERS IN PRODUCTION USE! PLEASE READ EACH STEP CAREFULLY!

In order to log into MariaDB to secure it, we'll need the current
password for the root user. If you've just installed MariaDB, and
haven't set the root password yet, you should just press enter here.

Enter current password for root (enter for none):
OK, successfully used password, moving on...

Setting the root password or using the unix_socket ensures that nobody
can log into the MariaDB root user without the proper authorisation.

You already have your root account protected, so you can safely answer 'n'.

Switch to unix_socket authentication [Y/n] Y
Enabled successfully!
Reloading privilege tables..
... Success!

You already have your root account protected, so you can safely answer 'n'.

Change the root password? [Y/n] Y
New password:
Re-enter new password:
Sorry, you can't use an empty password here.


New password:
Re-enter new password:
Password updated successfully!
Reloading privilege tables..
... Success!

By default, a MariaDB installation has an anonymous user, allowing anyone
to log into MariaDB without having to have a user account created for
them. This is intended only for testing, and to make the installation
go a bit smoother. You should remove them before moving into a
production environment.

Remove anonymous users? [Y/n]

Рис. 6: Этап 6

Войдём в базу данных с правами администратора. Для отображения статуса MariaDB введём из приглашения интерактивной оболочки соответствующую команду (рис. @fig-7):

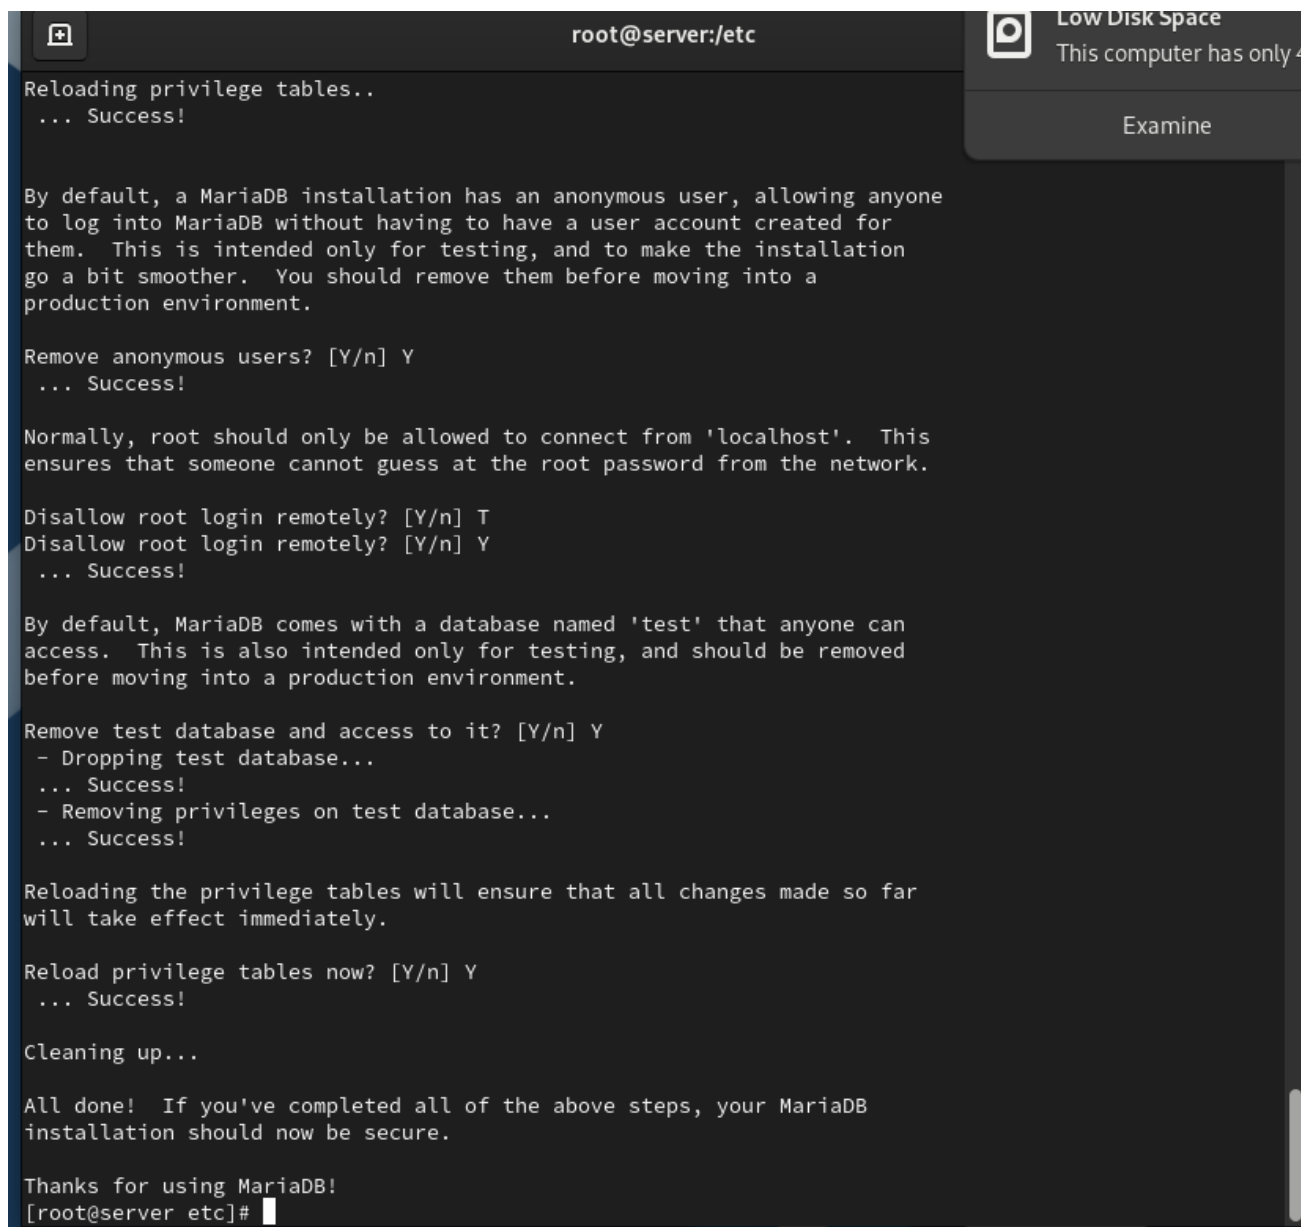

```
root@server:/etc
Reloading privilege tables..
... Success!

By default, a MariaDB installation has an anonymous user, allowing anyone
to log into MariaDB without having to have a user account created for
them. This is intended only for testing, and to make the installation
go a bit smoother. You should remove them before moving into a
production environment.

Remove anonymous users? [Y/n] Y
... Success!

Normally, root should only be allowed to connect from 'localhost'. This
ensures that someone cannot guess at the root password from the network.

Disallow root login remotely? [Y/n] T
Disallow root login remotely? [Y/n] Y
... Success!

By default, MariaDB comes with a database named 'test' that anyone can
access. This is also intended only for testing, and should be removed
before moving into a production environment.

Remove test database and access to it? [Y/n] Y
- Dropping test database...
... Success!
- Removing privileges on test database...
... Success!

Reloading the privilege tables will ensure that all changes made so far
will take effect immediately.

Reload privilege tables now? [Y/n] Y
... Success!

Cleaning up...

All done! If you've completed all of the above steps, your MariaDB
installation should now be secure.

Thanks for using MariaDB!
[root@server etc]#
```

Рис. 7: Этап 7

В каталоге /etc/my.cnf.d создадим файл utf8.cnf. Откроем его на редактирование и укажем в нём конфигурацию для поддержки UTF-8 (рис. @fig-8):

Перезапустим MariaDB для применения изменений (рис. @fig-9):

Войдём повторно в базу данных с правами администратора и посмотрим статус MariaDB для проверки изменений (рис. @fig-10):

```
Server version: 10.5.29-MariaDB MariaDB Server

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> \h

General information about MariaDB can be found at
http://mariadb.org

List of all client commands:
Note that all text commands must be first on line and end with ';'
?          (?) Synonym for 'help'.
charset    (\C) Switch to another charset. Might be needed for processing binlog with multi-byte char
sets.
clear      (\c) Clear the current input statement.
connect    (\r) Reconnect to the server. Optional arguments are db and host.
delimiter  (\d) Set statement delimiter.
edit       (\e) Edit command with $EDITOR.
ego        (\G) Send command to MariaDB server, display result vertically.
exit       (\q) Exit mysql. Same as quit.
go         (\g) Send command to MariaDB server.
help       (\h) Display this help.
nopager    (\n) Disable pager, print to stdout.
notee      (\t) Don't write into outfile.
nowarning  (\w) Don't show warnings after every statement.
pager      (\P) Set PAGER [to_pager]. Print the query results via PAGER.
print      (\p) Print current command.
prompt     (\R) Change your mysql prompt.
quit       (\q) Quit mysql.
rehash     (\#) Rebuild completion hash.
sandbox    (\-) Disallow commands that access the file system (except \P without an argument and \e).
source     (\.) Execute an SQL script file. Takes a file name as an argument.
status     (\s) Get status information from the server.
system     (\!) Execute a system shell command.
tee        (\T) Set outfile [to_outfile]. Append everything into given outfile.
use        (\u) Use another database. Takes database name as argument.
warnings   (\W) Show warnings after every statement.

For server side help, type 'help contents'

MariaDB [(none)]>
```

Рис. 8: Этап 8

```
For server side help, type 'help contents'

MariaDB [(none)]> SHOW DATABASES
-> SHOW DATABASES;
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your
MariaDB server version for the right syntax to use near 'SHOW DATABASES' at line 2
MariaDB [(none)]> SHOW DATABASES;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
+-----+
3 rows in set (0.014 sec)

MariaDB [(none)]>
```

Рис. 9: Этап 9

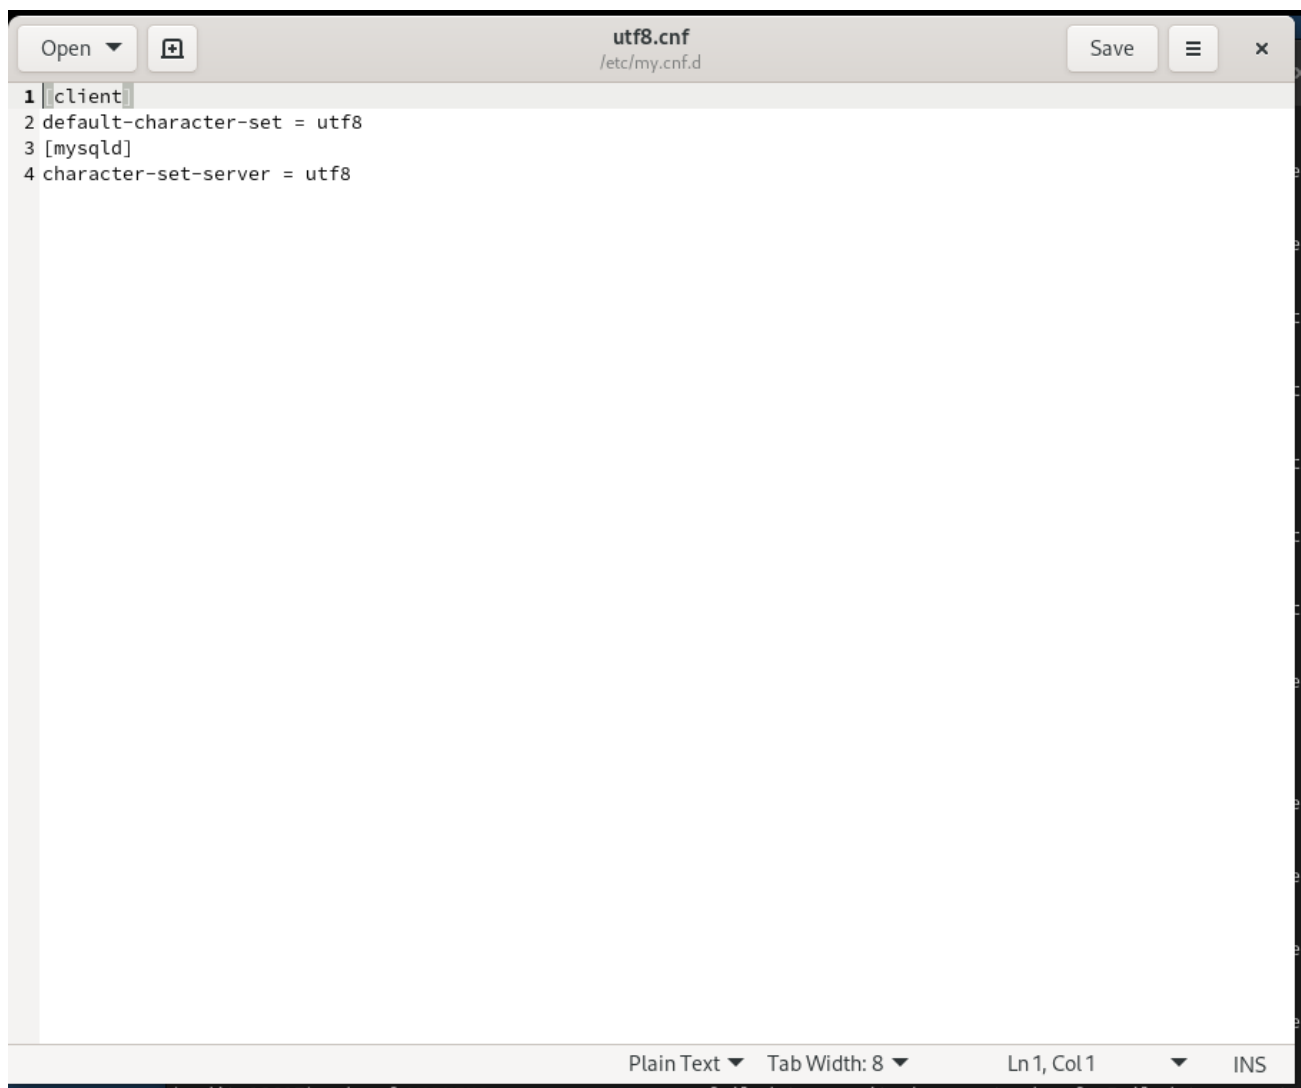


Рис. 10: Этап 10

Войдём в базу данных с правами администратора. Создадим базу данных с именем `addressbook`. Теперь перейдём к базе данных `addressbook`. Отообразим имеющиеся в базе данных `addressbook` таблицы. Создадим таблицу `city` с полями `name` и `city`. Заполним несколько строк таблицы некоторыми данными (рис. @fig-11):

```
(gedit:18481): dconf-WARNING **: 09:10:12.511: failed to commit changes to dconf: Failed to execute
child process "dbus-launch" (No such file or directory)
[root@server my.cnf.d]# systemctl restart mariadb
[root@server my.cnf.d]# gedit utf8.cnf

(gedit:18617): dconf-WARNING **: 09:10:55.372: failed to commit changes to dconf: Failed to execute
child process "dbus-launch" (No such file or directory)

(gedit:18617): dconf-WARNING **: 09:10:55.376: failed to commit changes to dconf: Failed to execute
child process "dbus-launch" (No such file or directory)

(gedit:18617): dconf-WARNING **: 09:10:55.578: failed to commit changes to dconf: Failed to execute
child process "dbus-launch" (No such file or directory)

(gedit:18617): dconf-WARNING **: 09:10:55.579: failed to commit changes to dconf: Failed to execute
child process "dbus-launch" (No such file or directory)

(gedit:18617): dconf-WARNING **: 09:10:55.580: failed to commit changes to dconf: Failed to execute
child process "dbus-launch" (No such file or directory)

** (gedit:18617): WARNING **: 09:11:08.717: Set document metadata failed: Setting attribute metadata
::gedit-position not supported

(gedit:18617): dconf-WARNING **: 09:11:08.766: failed to commit changes to dconf: Failed to execute
child process "dbus-launch" (No such file or directory)
[root@server my.cnf.d]# systemctl restart mariadb
[root@server my.cnf.d]# mysql -u root -p
Enter password:
```

Рис. 11: Этап 11

Сделаем MySQL-запрос для просмотра данных. Теперь создадим пользователя для работы с базой данных `addressbook` и зададим для него пароль. Предоставим права доступа созданному пользователю на действия с базой данных `addressbook`. Обновим привилегии базы данных `addressbook`. Просмотрим общую информацию о таблице `city`. Выйдем из окружения MariaDB (рис. @fig-12):

Посмотрим список баз данных. Отдельно посмотрим список таблиц базы данных `addressbook` (рис. @fig-13):

На виртуальной машине `server` создадим каталог для резервных копий. Сделаем резервную копию базы данных `addressbook`. Сделаем сжатую резервную копию базы данных `addressbook`. Сделаем сжатую резервную копию базы данных `addressbook` с указанием даты создания копии. Восстановим базу данных `addressbook` из резервной копии. Восстановим базу данных `addressbook` из сжатой резервной копии (рис. @fig-14):

```

(gedit:18617): dconf-WARNING **: 09:11:08.766: failed to commit changes to dconf: Failed to execute
child process "dbus-launch" (No such file or directory)
[root@server my.cnf.d]# systemctl restart mariadb
[root@server my.cnf.d]# mysql -u root -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 3
Server version: 10.5.29-MariaDB MariaDB Server

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> status
-----
mysql Ver 15.1 Distrib 10.5.29-MariaDB, for Linux (x86_64) using EditLine wrapper

Connection id:          3
Current database:
Current user:           root@localhost
SSL:                    Not in use
Current pager:          stdout
Using outfile:          ''
Using delimiter:        ;
Server:                 MariaDB
Server version:         10.5.29-MariaDB MariaDB Server
Protocol version:      10
Connection:             Localhost via UNIX socket
Server characterset:    latin1
Db      characterset:    latin1
Client characterset:    utf8
Conn.  characterset:    utf8
UNIX socket:            /var/lib/mysql/mysql.sock
Uptime:                 12 min 24 sec

Threads: 1  Questions: 4  Slow queries: 0  Opens: 17  Open tables: 10  Queries per second avg: 0.005
-----

MariaDB [(none)]>

```

Рис. 12: Этап 12

```
root@server:/etc/my.cnf.d

SSL:                Not in use
Current pager:      stdout
Using outfile:      ''
Using delimiter:    ;
Server:             MariaDB
Server version:     10.5.29-MariaDB MariaDB Server
Protocol version:   10
Connection:         Localhost via UNIX socket
Server characterset: latin1
Db characterset:    latin1
Client characterset: utf8
Conn. characterset: utf8
UNIX socket:        /var/lib/mysql/mysql.sock
Uptime:             12 min 24 sec

Threads: 1  Questions: 4  Slow queries: 0  Opens: 17  Open tables: 10  Queries per second avg: 0.005
-----

MariaDB [(none)]> CREATE DATABASE addressbook CHARACTER SET utf8 COLLATE utf8_general_ci;
Query OK, 1 row affected (0.001 sec)

MariaDB [(none)]> USE addressbook;
Database changed
MariaDB [addressbook]> SHOW TABLES;
Empty set (0.003 sec)

MariaDB [addressbook]> CREATE TABLE city(name VARCHAR(40), city VARCHAR(40));
Query OK, 0 rows affected (0.097 sec)

MariaDB [addressbook]> NSERT INTO city(name,city) VALUES ('Иванов','Москва');
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your
MariaDB server version for the right syntax to use near 'NSERT INTO city(name,city) VALUES ('Иванов'
,'Москва')' at line 1
MariaDB [addressbook]> INSERT INTO city(name,city) VALUES ('Иванов','Москва');
Query OK, 1 row affected (0.026 sec)

MariaDB [addressbook]> INSERT INTO city(name,city) VALUES ('Петров','Сочи');
Query OK, 1 row affected (0.014 sec)

MariaDB [addressbook]> INSERT INTO city(name,city) VALUES ('Сидоров','Дубна');
Query OK, 1 row affected (0.013 sec)

MariaDB [addressbook]> 
```

Рис. 13: Этап 13

```

Threads: 1  Questions: 4  Slow queries: 0  Opens: 17  Open tables: 10  Queries per second avg: 0.005
-----

MariaDB [(none)]> CREATE DATABASE addressbook CHARACTER SET utf8 COLLATE utf8_general_ci;
Query OK, 1 row affected (0.001 sec)

MariaDB [(none)]> USE addressbook;
Database changed
MariaDB [addressbook]> SHOW TABLES;
Empty set (0.003 sec)

MariaDB [addressbook]> CREATE TABLE city(name VARCHAR(40), city VARCHAR(40));
Query OK, 0 rows affected (0.097 sec)

MariaDB [addressbook]> NSERT INTO city(name,city) VALUES ('Иванов','Москва');
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your
MariaDB server version for the right syntax to use near 'NSERT INTO city(name,city) VALUES ('Иванов'
,'Москва')' at line 1
MariaDB [addressbook]> INSERT INTO city(name,city) VALUES ('Иванов','Москва');
Query OK, 1 row affected (0.026 sec)

MariaDB [addressbook]> INSERT INTO city(name,city) VALUES ('Петров','Сочи');
Query OK, 1 row affected (0.014 sec)

MariaDB [addressbook]> INSERT INTO city(name,city) VALUES ('Сидоров','Дубна');
Query OK, 1 row affected (0.013 sec)

MariaDB [addressbook]> SELECT * FROM city;
+-----+-----+
| name      | city    |
+-----+-----+
| Иванов    | Москва  |
| Петров    | Сочи    |
| Сидоров   | Дубна   |
+-----+-----+
3 rows in set (0.001 sec)

MariaDB [addressbook]>

```

Рис. 14: Этап 14

На виртуальной машине server перейдём в каталог для внесения изменений в настройки внутреннего окружения, создадим в нём каталог `mysql`, в который поместим в соответствующие подкаталоги конфигурационные файлы `MariaDB` и резервную копию базы данных `addressbook`. В каталоге создадим исполняемый файл `mysql.sh`. Откроем его на редактирование и пропишем скрипт. Для отработки созданного скрипта во время загрузки виртуальных машин в конфигурационном файле `Vagrantfile` добавим соответствующую запись (рис. @fig-15):

```
MariaDB [addressbook]> CREATE USER user@%' IDENTIFIED BY 'password';
Query OK, 0 rows affected (0.012 sec)

MariaDB [addressbook]> GRANT SELECT,INSERT,UPDATE,DELETE ON addressbook.* TO frank@'%';
ERROR 1133 (28000): Can't find any matching row in the user table
MariaDB [addressbook]> GRANT SELECT,INSERT,UPDATE,DELETE ON addressbook.* TO user'%';
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your
MariaDB server version for the right syntax to use near '%%' at line 1
MariaDB [addressbook]> GRANT SELECT,INSERT,UPDATE,DELETE ON addressbook.* TO user"";
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your
MariaDB server version for the right syntax to use near '""' at line 1
MariaDB [addressbook]> GRANT SELECT,INSERT,UPDATE,DELETE ON addressbook.* TO user"";
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your
MariaDB server version for the right syntax to use near '""' at line 1
MariaDB [addressbook]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.001 sec)

MariaDB [addressbook]> DESCRIBE city;
+-----+-----+-----+-----+-----+
| Field | Type          | Null | Key | Default | Extra |
+-----+-----+-----+-----+-----+
| name  | varchar(40)   | YES  |     | NULL    |       |
| city  | varchar(40)   | YES  |     | NULL    |       |
+-----+-----+-----+-----+-----+
2 rows in set (0.002 sec)

MariaDB [addressbook]> quit
Bye
[root@server my.cnf.d]# mysqlshow -u root -p
Enter password:
+-----+
| Databases |
+-----+
| addressbook |
| information_schema |
| mysql |
| performance_schema |
+-----+
[root@server my.cnf.d]#
```

Рис. 15: Этап 15

Этап выполнения работы №16

Этап выполнения работы №17

Этап выполнения работы №18

Выводы

В ходе выполнения лабораторной работы были приобретены практические навыки

```
root@server:/etc/my.cnf.d

| city | varchar(40) | YES | | NULL | |
+-----+-----+-----+-----+
2 rows in set (0.002 sec)

MariaDB [addressbook]> quit
Bye
[root@server my.cnf.d]# mysqlshow -u root -p
Enter password:
+-----+
| Databases |
+-----+
| addressbook |
| information_schema |
| mysql |
| performance_schema |
+-----+
[root@server my.cnf.d]# mysqlshow -u root -p addressbook
Enter password:
Database: addressbook
+-----+
| Tables |
+-----+
| city |
+-----+
[root@server my.cnf.d]# mysqlshow -u user -p addressbook
Enter password:
mysqlshow: Access denied for user 'user'@'localhost' (using password: YES)
[root@server my.cnf.d]# mysqlshow -u user -p addressbook
Enter password:
mysqlshow: Access denied for user 'user'@'localhost' (using password: YES)
[root@server my.cnf.d]# mkdir -p /var/backup
[root@server my.cnf.d]# mysqldump -u root -p addressbook > /var/backup/addressbook.sql
Enter password:
[root@server my.cnf.d]# mysqldump -u root -p addressbook | gzip > /var/backup/addressbook.sql.gz
Enter password:
[root@server my.cnf.d]# mysqldump -u root -p addressbook | gzip > $(date +%Y%m%d.%H%M%S).sql.gz)
-bash: date +%Y%m%d.%H%M%S.sql.gz: No such file or directory
-bash: $(date +%Y%m%d.%H%M%S.sql.gz): ambiguous redirect
Enter password:
mysqldump: Got errno 32 on write
[root@server my.cnf.d]#
```

Рис. 16: Этап 16

```

MariaDB [addressbook]> GRANT SELECT,INSERT,UPDATE,DELETE ON addressbook.* TO user'%';
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your
MariaDB server version for the right syntax to use near '%' at line 1
MariaDB [addressbook]> GRANT SELECT,INSERT,UPDATE,DELETE ON addressbook.* TO user"%";
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your
MariaDB server version for the right syntax to use near '%" at line 1
MariaDB [addressbook]> GRANT SELECT,INSERT,UPDATE,DELETE ON addressbook.* TO user"%";
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your
MariaDB server version for the right syntax to use near '%" at line 1
MariaDB [addressbook]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.001 sec)

MariaDB [addressbook]> DESCRIBE city;
+-----+-----+-----+-----+-----+
| Field | Type          | Null | Key | Default | Extra |
+-----+-----+-----+-----+-----+
| name  | varchar(40)   | YES  |     | NULL    |       |
| city  | varchar(40)   | YES  |     | NULL    |       |
+-----+-----+-----+-----+-----+
2 rows in set (0.002 sec)

MariaDB [addressbook]> quit
Bye
[root@server my.cnf.d]# mysqlshow -u root -p
Enter password:
+-----+
| Databases |
+-----+
| addressbook |
| information_schema |
| mysql |
| performance_schema |
+-----+
[root@server my.cnf.d]# mysqlshow -u root -p addressbook
Enter password:
Database: addressbook
+-----+
| Tables |
+-----+
| city |
+-----+
[root@server my.cnf.d]# mysqlshow -u user -p addressbook

```

Рис. 17: Этап 17

```

Try `gzip --help' for more information.

mysqldump: Got errno 32 on write
[root@server my.cnf.d]# mysql -u root -p addressbook < /var/backup/addressbook.sql
Enter password:
[root@server my.cnf.d]# zcat /var/backup/addressbook.sql.gz | mysql -u root -p addressbook
Enter password:
[root@server my.cnf.d]# mkdir -p /var/backup
[root@server my.cnf.d]# mysqldump -u root -p addressbook > /var/backup/addressbook.sql
Enter password:
[root@server my.cnf.d]# mysqldump -u root -p addressbook | gzip > /var/backup/addressbook.sql.gz
Enter password:
[root@server my.cnf.d]# cd /vagrant/provision/server
[root@server server]# mkdir -p /vagrant/provision/server/mysql/etc/my.cnf.d
[root@server server]# mkdir -p /vagrant/provision/server/mysql/var/backup
[root@server server]# cp -R /etc/my.cnf.d/utf8.cnf /vagrant/provision/server/mysql/etc/my.cnf.d
[root@server server]# cp -R /var/backup/* /vagrant/provision/server/mysql/var/backup/
[root@server server]# cd /vagrant/provision/server
[root@server server]# touch mysql.sh
[root@server server]# chmod +x mysql.sh
[root@server server]# gedit mysql.sh

(gedit:18973): dconf-WARNING **: 10:25:53.744: failed to commit changes to dconf: Failed to
child process "dbus-launch" (No such file or directory)

(gedit:18973): dconf-WARNING **: 10:25:53.751: failed to commit changes to dconf: Failed to
child process "dbus-launch" (No such file or directory)

(gedit:18973): dconf-WARNING **: 10:25:53.979: failed to commit changes to dconf: Failed to
child process "dbus-launch" (No such file or directory)

(gedit:18973): dconf-WARNING **: 10:25:53.980: failed to commit changes to dconf: Failed to
child process "dbus-launch" (No such file or directory)

(gedit:18973): dconf-WARNING **: 10:25:53.980: failed to commit changes to dconf: Failed to
child process "dbus-launch" (No such file or directory)

** (gedit:18973): WARNING **: 10:26:21.627: Set document metadata failed: Setting attribute
::gedit-spell-language not supported

** (gedit:18973): WARNING **: 10:26:21.632: Set document metadata failed: Setting attribute
::gedit-encoding not supported

```

Рис. 18: Этап 18

Спасибо за внимание!

Вопросы?