

EmbeddingRWKV: State-Centric Retrieval with Reusable States

Haowen Hou* and Jie Yang⁺

*Guangdong Laboratory of Artificial Intelligence and Digital Economy (SZ), Shenzhen, China

⁺Shenzhen Yuanshi Intelligence Co., Ltd, Shenzhen, China

houhaowen@gm1.ac.cn

Abstract

Current Retrieval-Augmented Generation (RAG) systems typically employ a traditional two-stage pipeline: an embedding model for initial retrieval followed by a reranker for refinement. However, this paradigm suffers from significant inefficiency due to the lack of shared information between stages, leading to substantial redundant computation. To address this limitation, we propose **State-Centric Retrieval**, a unified retrieval paradigm that utilizes "states" as a bridge to connect embedding models and rerankers. First, we perform state representation learning by fine-tuning an RWKV-based LLM, transforming it into **EmbeddingRWKV**, a unified model that serves as both an embedding model and a state backbone for extracting compact, reusable states. Building upon these reusable states, we further design a state-based reranker to fully leverage precomputed information. During reranking, the model processes only query tokens, decoupling inference cost from document length and yielding a $5.4\times-44.8\times$ speedup. Furthermore, we observe that retaining all intermediate layer states is unnecessary; with a uniform layer selection strategy, our model maintains 98.62% of full-model performance using only 25% of the layers. Extensive experiments demonstrate that State-Centric Retrieval achieves high-quality retrieval and reranking results while significantly enhancing overall system efficiency. Code is available at [our GitHub repository](#).

1 Introduction

Retrieval-Augmented Generation (RAG) has emerged as a common paradigm in modern Large Language Models (LLMs) (Brown et al., 2020; Wu et al., 2025), enabling models to incorporate external knowledge beyond parametric memory (Lewis et al., 2020). Most RAG systems adopt a two-stage retrieval pipeline (Glass et al., 2022): an embedding model is first used to efficiently recall candi-

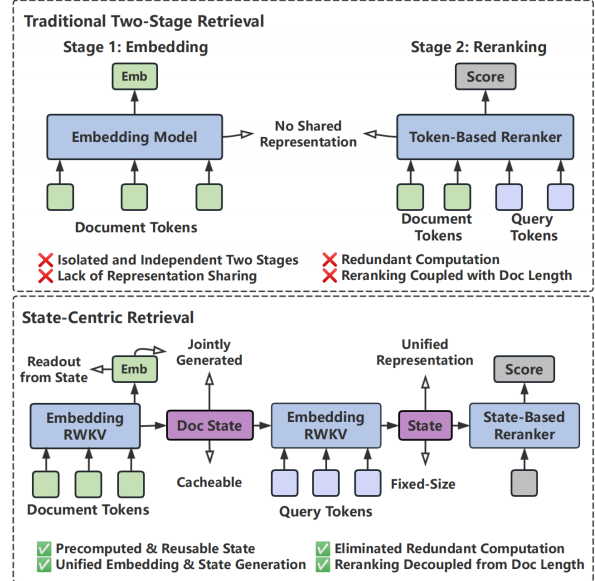


Figure 1: **Traditional vs. State-Centric Retrieval.** (Top) The traditional two-stage retrieval is fundamentally disjointed, suffering from redundant computation as the reranker re-encodes full document tokens. (Bottom) Our **State-Centric Retrieval** unifies the two stages into an efficient system via a shared, reusable state. By jointly generating embeddings and compact states, it enables offline state-based reranking that decouples inference cost from document length, **yielding $5.4\times-44.8\times$ speedup**.

date documents, followed by a reranker that performs refinement (Li et al., 2025). Within this pipeline, rerankers play a critical role in improving the quality of retrieved contexts, thereby directly impacting the downstream generation performance of LLMs (Zhao et al., 2025).

Despite its effectiveness, the prevailing two-stage retrieval paradigm suffers from fundamental efficiency limitations arising from both model architecture and pipeline design. *First*, most state-of-the-art embedding models and rerankers are predominantly built on Transformer architectures (Zhang et al., 2025; Günther et al., 2023).

While powerful, Transformers incur quadratic computational complexity with respect to sequence length and exhibit rapidly growing memory consumption due to the linearly expanding key-value (KV) cache, making them increasingly inefficient in both computation and storage as context length grow. *Second*, the two-stage pipeline itself introduces additional inefficiency due to the lack of shared representations across stages as shown in Figure 1. As embedding models and rerankers operate as isolated modules, they independently encode the same documents without any information reuse, resulting in substantial redundant computation.

In this work, we propose **State-Centric Retrieval**, a novel retrieval paradigm that improves efficiency from both the architectural and pipeline perspectives. *At the model architecture level*, we adopt RWKV (Peng et al., 2023, 2024, 2025), a linear RNN with matrix-valued hidden states that achieves linear computational complexity with respect to sequence length and constant space complexity. Compared to Transformer-based models, RWKV offers substantially improved efficiency in both computation and space. *At the pipeline level*, we introduce a unified retrieval framework (Fig. 1) that leverages reusable states as a shared representation across the retrieval and reranking stages, enabling information reuse and eliminating redundant computation.

We instantiate this paradigm through two synergistic contributions: *learning reusable states* and *efficiently utilizing these states for reranking*.

First, we observe that directly utilizing RWKV-based LLMs to extract state representations results in significant information loss. To address this, we conduct state representation learning by fine-tuning RWKV-based LLMs, transforming them into unified models that serve as both embedding models and state backbones for extracting effective state representations. Specifically, we employ a single-stage domain-aware curriculum strategy to enhance data efficiency. This approach achieves competitive performance on MTEB benchmarks while requiring only 5% of the training data typically consumed by conventional multi-stage pipelines. This approach outperforms conventional multi-stage training pipelines on MTEB benchmarks while using only 5% of the training data. Importantly, for a sequence of length T , the resulting states require only $32/T$ of the memory footprint of a full Transformer’s KV cache, making large-scale state caching feasible in practice.

Second, building upon cached states, we design a state-based reranker that fully exploits the pre-computed information stored in states. During inference, the reranker processes only query tokens together with cached document states, completely decoupling inference cost from document length. Furthermore, we observe that retaining states from all intermediate layers is unnecessary. With a uniform layer selection strategy, our model preserves 98.62% of full-model performance while using only 25% of the layers, enabling further reductions in memory footprint and inference latency.

In summary, our contributions are as follows:

- We propose **State-Centric Retrieval**, a unified framework that synergizes embedding-based retrieval and reranking through reusable states, effectively eliminating redundant computation.
- We introduce a domain-aware curriculum strategy for state representation learning, achieving competitive performance with only 5% of the standard training data.
- We design a state-based reranker that significantly reduces computational overhead and memory footprint while maintaining high reranking effectiveness.

2 Related Work

Two-Stage Retrieval for Text Embeddings.

Most retrieval-augmented generation systems adopt a two-stage retrieval paradigm, where dense embedding models are used for initial retrieval and rerankers are applied for relevance refinement (Reimers and Gurevych, 2019). Text embedding models have evolved from early BERT-based encoders (Devlin et al., 2019; Hou et al., 2024a) to large language model backbones, with recent systems such as NV-Emb (Lee et al., 2024), E5-Mistral (Wang et al., 2024c), and GTE (Zhang et al., 2024) achieving strong performance on benchmarks like MTEB (Muennighoff et al., 2023a; Xiao et al., 2023). Despite these advances, embedding models and rerankers are typically trained and deployed as independent components. Each stage encodes the same documents separately, without sharing representations or intermediate information, resulting in duplicated encoding and redundant computation across the retrieval pipeline. This design contrasts with our state-centric retrieval framework,

which enables representation reuse across retrieval stages.

Multi-Stage Training Recipes. State-of-the-art embedding models commonly rely on multi-stage training pipelines that combine large-scale pre-training with successive fine-tuning stages. These pipelines often include supervised fine-tuning and hard-negative mining to progressively refine retrieval-specific representations. For instance, BGE (Chen et al., 2024a) employs RetroMAE pre-training followed by contrastive learning and instruction tuning with hard negatives. Jina Embeddings (Sturua et al., 2024) adopts a two-stage data-centric approach that combines large-scale data filtering with triplet-based training. Arctic-Embed (Yu et al., 2024) follows a coarse-to-fine strategy, transitioning from billion-scale pre-training to high-precision fine-tuning on curated datasets. While effective, existing multi-stage pipelines depend on massive datasets and complex training workflows, which limit data efficiency. By contrast, our domain-aware curriculum strategy consolidates training into a single stage with reduced data usage, enabling a simpler and more data-efficient training process.

From Transformers to Linear RNNs. The majority of pioneering embedding models and rerankers are built on Transformer architectures (Zhang et al., 2025; Vera et al., 2025). However, Transformers face inherent scalability issues: *quadratic computational complexity* and a *linearly growing KV cache* memory footprint (Vaswani et al., 2017). These limitations make long-context retrieval and large-scale reranking prohibitively expensive. To address this, our work leverages RWKV, a member of the *Linear RNNs with Matrix-valued States* family. Unlike Transformers, RWKV achieves *linear computational complexity* and *constant spatial complexity*, offering a more efficient architectural backbone for dense retrieval without sacrificing the expressive power required for complex semantic matching.

Linear RNNs with Matrix-valued States. While linear RNNs like Mamba (Gu and Dao, 2023) and RWKV-4 (Peng et al., 2023) reduce complexity to $O(N)$, they often suffer from a *state capacity gap* due to compressing context into fixed-size vectors. To bridge this gap, recent advancements have focused on scaling hidden states into matrices. Since the explicit transition to matrix-

valued states in RWKV-5 and RWKV-6 (Peng et al., 2024), the architecture has demonstrated an enhanced ability to maintain rich historical context. Most recently, RWKV-7 (Peng et al., 2025) further refined this with *dynamic state evolution* mechanisms. By adopting this architecture, our framework enables the caching of high-capacity states that are both compact and highly representative across the retrieval pipeline.

3 State-Centric Retrieval

State-Centric Retrieval takes states as the primary representation. A precise definition of the state is therefore necessary, as it forms the basis of the entire framework and directly affects model architecture and pipeline design.

3.1 Background: Matrix-valued States

In recurrent models, a *state* summarizes past inputs and serves as the carrier of contextual information. Conventional RNNs (Hochreiter and Schmidhuber, 1997; Cho et al., 2014) represent the state as a fixed-length vector, which limits the amount of information that can be preserved over long sequences.

Matrix-valued states generalize this formulation by representing the recurrent state as a matrix rather than a vector, allowing the model to maintain a richer and more structured memory. Formally, given a matrix-valued state S_t and the current input x_t , the recurrent update takes the form (Hou et al., 2025):

$$S_t = S_{t-1}W_t + v_t k_t^\top, \quad (1)$$

where $S_t \in \mathbb{R}^{d \times d}$, $W_t \in \mathbb{R}^{d \times d}$, and $v_t, k_t \in \mathbb{R}^d$ are column vectors computed from x_t . Under this formulation, S_t acts as a dynamic associative memory that incrementally accumulates outer products of keys and values, while selectively retaining or discarding past information through W_t .

In the case of RWKV-7 (Peng et al., 2025), the transition matrix W_t is further refined through dynamic evolution, typically expressed by diagonalizing a vector w_t and incorporating a low-rank update:

$$W_t = \text{diag}(w_t) - \hat{\kappa}_t (a_t \odot \hat{\kappa}_t)^\top \quad (2)$$

where $\hat{\kappa}_t$ and a_t are fast weights (Schlag et al., 2021) that enhance the model’s ability to selectively update its internal memory.

Importantly, the matrix-valued state can be updated incrementally in constant memory, without storing the full token history. This property allows

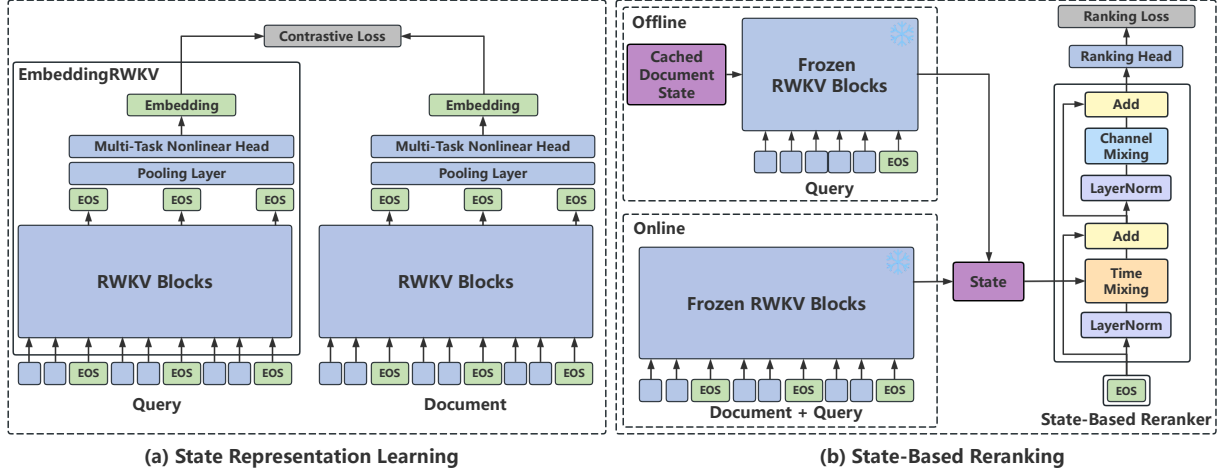


Figure 2: (a) **State Representation Learning**: illustrates the process of “Learning the State.” (b) **State-Based Reranking**: demonstrates the paradigm of “Utilizing the State” by directly reusing the cached state for inference, thereby avoiding redundant re-computation.

the model to process arbitrarily long sequences with linear-time computation and constant space complexity, while retaining strong contextual modeling capacity.

3.2 State Representation Learning

State representation learning aims to adapt RWKV-based language models into unified backbones that can simultaneously produce high-quality embeddings and reusable states.

Model Architecture. To realize state representation learning, we introduce *EmbeddingRWKV*, whose architecture is illustrated in Fig. 2(a). *EmbeddingRWKV* consists of RWKV blocks, a pooling layer, and a nonlinear head. Multiple end-of-sequence (EOS) tokens are inserted into the input sequence, and the corresponding output representations are extracted. These representations are averaged by the pooling layer and projected by the nonlinear head to produce the final embedding.

Training and Data Recipe. We introduce a *Domain-Aware Curriculum Strategy* for efficient state representation learning. Data samples from the same domain share similar semantic subspaces and thus naturally form hard negatives for contrastive learning. In contrast, randomly mixed batches across heterogeneous domains often produce easy negatives that contribute limited training signal.

To exploit this property, we organize training batches by domain in a distributed manner. Specifically, we first partition the training dataset $\mathcal{D}$ into domain-specific subsets $\{\mathcal{D}_1, \mathcal{D}_2, \dots, \mathcal{D}_K\}$. Dur-

ing distributed training on N GPUs, each GPU processes a micro-batch sampled from a single domain. Different GPUs are assigned different domains at the same training step.

As a result, samples within the same domain naturally form hard negatives within each GPU’s local batch. This simple scheduling strategy enables effective hard-negative training without explicit mining.

Learning Objective. We train state representations using a contrastive objective, referred to as the loss L_{state} . we adopt a standard InfoNCE loss (Oord et al., 2018) with in-batch negatives. Given a batch of B training instances, the loss is defined as:

$$L_{\text{state}} = -\frac{1}{B} \sum_{i=1}^B \log \frac{e^{s(q_i, d_i^+)/\tau}}{Z_i}, \quad (3)$$

where $s(\cdot, \cdot)$ denotes the cosine similarity between the embeddings produced by the pooling layer and nonlinear head for the query and document, and τ is the temperature parameter. The normalization term $Z_i = \sum_{j=1}^B e^{s(q_i, d_j)/\tau}$ aggregates the scores across the positive pair and all in-batch negatives.

3.3 State-Based Reranking

State-based reranking aims to efficiently utilize learned states for reranking.

Model Architecture. The state-based RWKV-Reranker consists of RWKV blocks followed by a ranking head, as illustrated in Fig. 2(b). It takes the matrix-valued state as input and outputs a relevance score. There are two modes for using the

state-based RWKV-Reranker: offline mode and online mode.

In offline mode, document states S_d are precomputed and cached. We initialize the EmbeddingRWKV with the cached document state S_d and then feed only the query tokens $\{x_t^q\}_{t=1}^{T_q}$ into the **frozen** EmbeddingRWKV to obtain the updated state S' . The updated state S' is fed into the state-based reranker to produce the relevance score.

In online mode, the document and query are processed jointly by the same **frozen** EmbeddingRWKV to produce the state on the fly for reranking. Unless otherwise specified, we freeze all RWKV blocks in EmbeddingRWKV and train only the parameters of the state-based RWKV-Reranker.

Reranking Training Objective. For the reranking task, we formulate the relevance prediction as a binary classification problem and optimize the model using the Binary Cross-Entropy (BCE) loss:

$$L_{\text{reranking}} = -[y \log s + (1 - y) \log(1 - s)], \quad (4)$$

where $y \in \{0, 1\}$ denotes the ground truth label. $s = s(q, d)$ represents the predicted relevance probability for the query-document pair, derived from the state-based reranker’s output.

Computational Cost Analysis. Transformer-based rerankers rely on full attention between query and document tokens, resulting in a quadratic computational complexity. This cost grows rapidly with document length and becomes a major bottleneck for long-document reranking.

In contrast, our state-based reranker caches document states and processes only query tokens at inference time. This design decouples inference latency from document length and achieves linear-time computation with respect to the query length.

Memory Footprint Analysis. We compare the memory cost of caching representations using Transformer’s KV caches and our matrix-valued states. The ratio between their memory footprints is given by

$$\frac{\text{Bytes}_{\text{token}}}{\text{Bytes}_{\text{state}}} = \frac{2LHSTb}{LH S^2 b} = \frac{2T}{S}.$$

Here, L denotes the number of layers, H the number of heads, S the per-head state dimension, T the sequence length, and b the number of bytes per element. For RWKV-7 with $S = 64$, this ratio becomes $T/32$. In other words, the KV cache of

a Transformer requires $T/32$ times more memory than a single state. While the Transformer memory footprint grows linearly with sequence length T , the RWKV state remains constant, making it significantly more memory-efficient for long-document reranking.

4 Experiments

4.1 Retrieval Experiments and Results

We trained our embedding models (EmbeddingRWKV) using contrastive learning on our self-curated open-source dataset (Details are in Appendix C). We report the performance of our models on the MTEB English benchmark (Muennighoff et al., 2023b).

EmbeddingRWKV is competitive. Table 1 shows that EmbeddingRWKV delivers strong retrieval quality across three model scales (0.1B, 0.4B, and 1.4B parameters), with performance improving monotonically as model capacity increases. In the base-size regime, EmbeddingRWKV-0.1B achieves competitive mean scores on MTEB English, matching or surpassing widely adopted open-source baselines of similar scale. At the medium scale, EmbeddingRWKV-0.4B further advances performance and remains competitive with strong Transformer-based embedding models in the same parameter range. When scaled to 1.4B parameters, EmbeddingRWKV-1.4B reaches near-parity with top-performing large embedding models and commercial APIs on the overall MTEB mean, while exhibiting particularly strong results on classification-oriented subsets, suggesting that the learned state representations capture discriminative semantic structure effectively. Overall, these results indicate that RWKV-based backbones can serve as a competitive alternative to Transformer models for dense retrieval, without sacrificing embedding quality.

Curriculum training is data-efficient. Table 2 compares our single-stage domain-aware curriculum training with a conventional multi-stage pipeline (pretraining followed by SFT). The multi-stage baseline uses 132.1M training samples in total, while our curriculum uses only 6.7M samples (about 5%). Despite this large reduction in data and a simpler training recipe, the curriculum-trained EmbeddingRWKV achieves higher MTEB English performance than the multi-stage baseline, i.e., Curriculum (6.7M) > Multi-stage (132.1M). These

Table 1: Comparison of embedding models on MTEB (English, v2). ^γTaken from (Lee et al., 2025). For other compared models, the scores are retrieved from MTEB online [leaderboard](#).

Model	Size	Mean	Classification	Clustering	Reranking	Retrieval	STS	Summ.
e5-base-v2 (Wang et al., 2024a)	109M	62.67	75.48	45.20	45.13	49.67	80.64	34.26
e5-base (Wang et al., 2023)	109M	61.79	75.20	43.77	44.86	47.70	80.70	33.38
gte-base (Li et al., 2023a)	109M	63.90	75.04	47.74	47.17	51.90	82.17	30.90
jina-embedding-b-en-v1 (Günther et al., 2023)	110M	59.76	72.06	39.95	46.98	46.38	80.00	27.15
granite-embedding-english-r2 (Awasthy et al., 2025b)	149M	62.84	70.71	47.20	49.10	56.43	78.12	29.31
granite-embedding-125m-english (Awasthy et al., 2025a)	125M	62.08	68.29	47.18	49.35	55.65	77.56	29.34
nomie-embed-text-v1.5 (Nussbaum et al., 2024)	137M	62.20	75.71	47.55	46.01	47.97	78.70	28.56
snowflake-arctic-embed-m-v1.5 (Merrick, 2024a)	109M	61.51	70.71	44.65	45.90	58.05	72.96	29.89
mmlw-roberta-base (Dadas et al., 2023a)	124M	61.15	77.67	46.26	46.69	40.15	81.81	30.83
EmbeddingRWKV-0.1B	144M	63.06	81.01	46.21	46.07	48.06	80.30	25.13
SearchMap-Preview (Team, 2025)	435M	64.08	74.97	48.47	47.90	52.21	81.56	33.25
bilingual-embedding-large (Thakur et al., 2024b)	559M	63.77	77.17	46.53	46.25	46.86	86.00	32.95
mmlw-e5-large (Dadas et al., 2024)	559M	62.32	79.63	48.30	47.63	41.37	81.35	34.07
gte-large (Li et al., 2023b)	335M	64.77	75.47	48.20	47.84	53.29	83.27	32.90
snowflake-arctic-embed-l (Merrick, 2024b)	335M	62.04	69.59	45.70	44.71	59.04	75.42	20.38
mmlw-roberta-large (Dadas et al., 2023b)	434M	61.80	79.66	47.89	47.56	39.69	81.20	34.97
e5-large-v2 (Wang et al., 2024b)	335M	62.79	76.44	45.23	45.72	49.31	80.67	32.34
EmbeddingRWKV-0.4B	389M	64.86	86.21	47.78	46.92	49.42	79.58	31.37
sentence-croissant-alpha-v0.4 (Reimers and Gurevych, 2020)	1B	57.71	70.34	43.22	44.65	43.18	75.34	28.46
gte-Qwen2-1.5B-instruct (Li et al., 2023c)	1.5B	67.20	85.84	53.54	49.25	50.25	82.51	33.94
^γ OpenAI Commercial APIs: text-embedding-3-large	-	66.43	-	-	-	-	-	-
^γ Cohere Commercial APIs: cohere-embed-multilingual-v3.0	-	66.01	-	-	-	-	-	-
EmbeddingRWKV-1.4B	1.4B	66.41	87.52	48.16	48.22	52.43	81.04	32.73

results indicate that curriculum training provides a stronger and more data-efficient way to learn reusable state representations, which not only improves retrieval but also supplies high-quality states for the subsequent state-based reranking stage.

Table 2: Comparison of retrieval performance between standard Multi-stage training and Single-stage Domain-Aware Curriculum training. The curriculum method achieves higher scores using only $\sim 5\%$ of the baseline’s total training data.

Model	Stage	Size	Sample Size	MTEB-E	MTEB-C
<i>Multi-stage Training</i>					
EmbeddingRWKV	Pretrain	144M	123.2M	53.85	51.47
EmbeddingRWKV	SFT	144M	8.9M	59.60	54.37
EmbeddingRWKV	Pretrain	389M	123.2M	54.88	53.69
EmbeddingRWKV	SFT	389M	8.9M	60.85	55.17
<i>Single-stage Curriculum Training</i>					
EmbeddingRWKV	SFT	144M	6.7M	63.06	57.12
EmbeddingRWKV	SFT	389M	6.7M	64.86	58.68

4.2 Reranking Experiments and Results

We freeze EmbeddingRWKV and train the state-based RWKV-Reranker with supervised learning. We report reranking results on NanoBEIR, MTEB (English, v2) Retrieval, and MTEB (Chinese, v1) Retrieval.

State representation learning is necessary. A natural question is whether we can directly reuse states from a base RWKV language model for reranking, without retrieval-oriented state representation learning. Table 3 shows that this is not the case: initializing the reranker with states from the

base LM consistently underperforms using states from EmbeddingRWKV across all evaluated metrics and benchmarks. We attribute this gap to the mismatch in training objectives. Reranking requires fine-grained relevance matching and a retrieval-specific representation geometry, whereas base LMs primarily learn generative language modeling signals that are not aligned with retrieval supervision. Therefore, explicitly learning retrieval-aligned state representations is crucial for effective state-based reranking.

Table 3: Comparison of state-based reranking performance using states generated by RWKV-7 LM and EmbeddingRWKV on NanoBEIR.

State Backbone	Size	MAP	MRR@10	NDCG@10
RWKV-7 LM	190M	48.58	59.37	54.78
EmbeddingRWKV	144M	58.29	69.50	63.41

State-based reranking is effective. A central question in our design is whether the state-based mechanism compromises ranking quality compared to traditional architectures. To investigate this, we trained a standard RWKV-based single-tower reranker under an identical configuration (0.1B parameters) to our proposed model. As shown in Table 4, the state-based reranker demonstrates that our model achieves performance parity with single-tower baseline on NanoBEIR, MTEB-E (eng, v2), and MTEB-C (cmn, v1). Furthermore, scaling the model from 90M to 1.3B parameters yields monotonic quality improvements, validating

the favorable scaling behavior of the state-based reranker.

We additionally compare against three Transformer-based rerankers, including ModernBERT (Warner et al., 2024), EuroBERT (Boizard et al., 2025), and the Jina reranker (Wang et al., 2025). Overall, our state-based reranker exhibits only a small gap to strong single-tower Transformer rerankers, while maintaining performance parity with these Transformer baselines on the NanoBEIR benchmark.

Table 4: State-Based Reranker performance on NanoBEIR (NDCG@10) and MTEB-E (English, v2) Retrieval, MTEB-C (Chinese, v1) Retrieval. Scores are scaled by 100 (higher is better).

Model	Size	NanoBEIR	MTEB-E-Retr	MTEB-C-Retr
EmbeddingRWKV	0.1B	59.10	48.06	57.26
<i>Traditional Single-Tower Reranker</i>				
RWKV-Reranker	90M	64.88	49.31	58.16
EuroBERT	210M	47.38	-	-
ModernBERT	395M	64.18	-	-
Jina Reranker	278M	70.68	-	-
<i>State-Based Reranker</i>				
RWKV-Reranker	90M	63.41	47.78	58.42
RWKV-Reranker	317M	68.60	53.22	63.60
RWKV-Reranker	1.3B	71.58	56.44	66.30

State-based reranking is efficient. As shown in Figure 3, our offline state-based reranker delivers substantial acceleration over a strong Transformer reranker with FlashAttention-2 (Dao, 2023; Li et al., 2025), with speedup increasing from $5.4\times$ at a document length of 512 to $44.8\times$ at 4096, while also using markedly less GPU memory. The key mechanism is that offline reranking processes only query tokens together with cached document states; thus inference cost is independent of document length. This decoupling is reflected by the scaling curves: Transformer-based rerankers exhibit rapidly degrading throughput as document length increases, whereas the RWKV offline reranker remains nearly flat across lengths. Similarly, peak VRAM usage for attention-based baselines grows sharply with longer documents, while our approach stays stable due to constant-size state. Moreover, even in the online setting, the state-based reranker is more memory-efficient than Transformer-based rerankers: its peak VRAM scales more slowly with sequence length, consistent with RWKV’s linear memory scaling. Additional efficiency breakdowns across model sizes are provided in Appendix B.1 and Table 8.

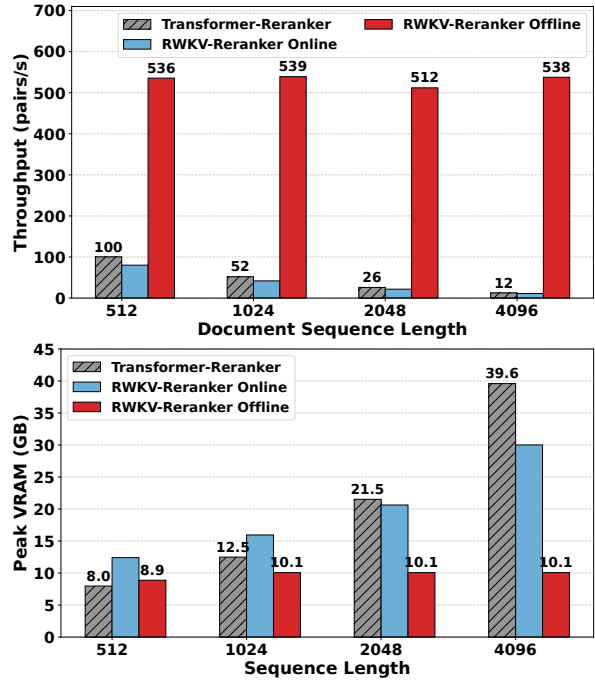


Figure 3: Performance benchmarking across various sequence lengths. Baseline: mxbai-rerank-large-v2 (1.5B) (Li et al., 2025) with FlashAttention-2 vs. Ours: EmbeddingRWKV-1.4B + RWKV-Reranker-1.3B. Top: Throughput comparison (pair/s), where higher is better. Bottom: Peak VRAM usage (GB), where lower is better.

State is redundant. An important practical question is how many states to cache and which layers to keep, i.e., where the compression boundary lies. Table 5 shows substantial redundancy across layers: keeping only a small subset of layer states preserves most of the full-depth performance. For example, using 50% of the layers already retains 99.59% of the performance, and even more aggressive configurations with only a few uniformly selected layers can still achieve 97.70%–98.62% relative performance. These results suggest that reranking signals are highly compressible, with overlapping information distributed across model depth rather than concentrated in a single layer.

Importantly, we find that layer choice matters more than layer count. With the same three-layer budget, a top-heavy selection leads to a sharp drop (85.99%), whereas a uniformly distributed selection recovers performance to 98.62%. This indicates that effective reranking relies on combining multi-level signals spanning early to late layers. Based on this observation, we adopt uniform stride layer selection as the default strategy in our state caching design.

Table 5: Ablation on state-based reranker layer selection strategies. **Mean** is the average of NanoBEIR, MTEB-E-Retr, and MTEB-C-Retr scores. **Ratio** indicates performance retention relative to the best configuration in the same model group. **Uniform** selection strategies (e.g., 1, 6, 10) significantly outperform contiguous top-layer strategies.

Strategy	Layers	Layer Index	Size	NanoBEIR	MTEB-E-Retr	MTEB-C-Retr	Mean	Ratio
<i>RWKV-Reranker-0.1B (Full Depth: 12 Layers)</i>								
Top-heavy	3	9-11	23.1M	56.94	38.86	50.07	48.62	85.99%
Uniform	3	0, 5, 11	23.1M	61.85	44.82	55.71	54.13	95.74%
Uniform	3	1, 6, 10	23.1M	62.35	48.05	56.88	55.76	98.62%
Top-heavy	6	6-11	45.8M	62.01	46.99	57.65	55.55	98.25%
Uniform	6	0, 3, 5, 7, 9, 11	45.8M	64.08	47.52	57.32	56.31	99.59%
Full	12	0-11	90.0M	63.41	47.78	58.42	56.54	100.0%
<i>RWKV-Reranker-1.3B (Full Depth: 24 Layers)</i>								
Top-heavy	1	23	54M	50.02	35.55	45.10	43.56	67.25%
Uniform	3	1,11,22	161M	70.33	54.92	64.58	63.28	97.70%
Top-heavy	6	18-23	318M	69.01	51.43	64.39	61.61	95.12%
Uniform	6	1,6,11,15,19,22	318M	71.19	55.10	65.51	63.93	98.70%
Full	24	0-23	1.3B	71.58	56.44	66.30	64.77	100.0%

Sharing state fails catastrophically. Although layer pruning suggests substantial redundancy, compression is not arbitrary. As a counterexample, Table 6 shows that forcing all layers to share a single state from the final layer leads to a marked performance degradation. This result clarifies that redundancy does not imply that all useful signals can be collapsed into one state.

We attribute this failure to the functional specialization across depth. Intermediate-layer states tend to preserve fine-grained matching cues and local evidence, while the final-layer state is more abstract and task-agnostic. Hard sharing therefore removes the multi-scale signals required for accurate relevance estimation, resulting in catastrophic degradation in reranking quality.

Table 6: Ablation on sharing a single state across layers in RWKV-Reranker 0.1B.

States	Layers	NanoBEIR	MTEB-E-Retr	MTEB-C-Retr
All states	12	63.41	47.78	58.42
One shared state	12	51.23	11.00	5.62

Why not cache Transformer KV for reranking?

A natural question is whether a similar idea can be applied to Transformers: can we cache document KV caches to accelerate reranking? The answer is no, for a simple reason—the KV cache is prohibitively large. For a document of 2000 tokens, a Transformer reranker with comparable parameter scale would require $62.5\times$ more storage to cache its KV states than our matrix-valued state. This makes KV-based caching impractical at scale, especially when reranking requires caching states for

large corpora. In contrast, RWKV-style models maintain a constant-size matrix-valued state, which is exactly the architectural property we aim to exploit: we design the reranking pipeline around this compact, reusable representation to achieve efficient inference. A detailed discussion are provided in Appendix B.3.

5 Conclusion

We propose a state-centric retrieval paradigm, leveraging states as a bridge to achieve architectural synergy between embedding and reranking stages. This approach enables rerankers to reuse cached states, achieving high-quality results with improved efficiency. Beyond retrieval, our results suggest that direct modeling over states is both feasible and promising. This paradigm opens up opportunities for extending state-centric modeling to a broader range of scenarios, including state-based value models, verifiers, and reward models. We believe that state-centric modeling has significant potential to generalize to diverse application scenarios, particularly in the development of intelligent agents, where it may be naturally integrated into traditional reinforcement learning frameworks.

Limitations

Despite its strong empirical performance and efficiency benefits, our work has several limitations that warrant further investigation. Although our state-based reranking reduces the dependence on document length at inference time, the overall pipeline still requires running and maintaining two models. This introduces additional resource. Our

reranker operates on cached matrix-valued states, which are a compressed summary of the document. For extremely long or highly detailed documents, this compression may discard fine-grained evidence, potentially leading to accuracy degradation.

Acknowledgments

We thank Yuanshi Intelligence Co. for providing the computational resources and infrastructure support that made this research possible.

References

- Parul Awasthy, Aashka Trivedi, Yulong Li, Mihaela Bornea, David Cox, Abraham Daniels, Martin Franz, Gabe Goodhart, Bhavani Iyer, Vishwajeet Kumar, Luis Lastras, Scott McCarley, Rudra Murthy, Vignesh P, Sara Rosenthal, Salim Roukos, Jaydeep Sen, Sukriti Sharma, Avirup Sil, and 3 others. 2025a. [Granite embedding models](#). Hugging Face. Accessed: 2025-11-07.
- Parul Awasthy, Aashka Trivedi, Yulong Li, Meet Doshi, Riyaz Bhat, Vignesh P, Vishwajeet Kumar, Yushu Yang, Bhavani Iyer, Abraham Daniels, Rudra Murthy, Ken Barker, Martin Franz, Madison Lee, Todd Ward, Salim Roukos, David Cox, Luis Lastras, Jaydeep Sen, and Radu Florian. 2025b. [Granite embedding r2 models](#). Hugging Face. Accessed: 2025-11-07.
- Nicolas Boizard, Hippolyte Gisserot-Boukhlef, Duarte M. Alves, André Martins, Ayoub Hammal, Caio Corro, C’eline Hudelot, Emmanuel Malherbe, Etienne Malaboeuf, Fanny Jourdan, Gabriel Hautreux, João Alves, Kevin El-Haddad, Manuel Fayssse, Maxime Peyrard, Nuno M. Guerreiro, Patrick Fernandes, Ricardo Rei, and Pierre Colombo. 2025. [Eurobert: Scaling multilingual encoders for european languages](#). *ArXiv*, abs/2503.05500.
- Vera Boteva, Demian Gholipour Ghalandari, Artem Sokolov, and Stefan Riezler. 2016. [A full-text learning to rank dataset for medical information retrieval](#). In *Advances in Information Retrieval - 38th European Conference on IR Research, ECIR 2016, Padua, Italy, March 20-23, 2016. Proceedings*, volume 9626 of *Lecture Notes in Computer Science*, pages 716–722. Springer.
- Samuel R. Bowman, Gabor Angeli, Christopher Potts, and Christopher D. Manning. 2015. [A large annotated corpus for learning natural language inference](#). In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing, EMNLP 2015, Lisbon, Portugal, September 17-21, 2015*, pages 632–642. The Association for Computational Linguistics.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, and 1 others. 2020. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901.
- Jianlv Chen, Shitao Xiao, Peitian Zhang, Kun Luo, Defu Lian, and Zheng Liu. 2024a. [Bge m3-embedding: Multi-lingual, multi-functionality, multi-granularity text embeddings through self-knowledge distillation](#). *arXiv preprint arXiv:2402.03216*. Key mapped to ‘li2025’ as requested for BGE. Actual paper is Chen et al. (2024).
- Jianlv Chen, Shitao Xiao, Peitian Zhang, Kun Luo, Defu Lian, and Zheng Liu. 2024b. [BGE m3-embedding: Multi-lingual, multi-functionality, multi-granularity text embeddings through self-knowledge distillation](#). *CoRR*, abs/2402.03216.
- Kyunghyun Cho, Bart van Merriënboer, Dzmitry Bahdanau, and Yoshua Bengio. 2014. [On the properties of neural machine translation: Encoder–decoder approaches](#). In *SSST@EMNLP*.
- Marta R. Costa-jussà, James Cross, Onur Çelebi, Maha Elbayad, Kenneth Heafield, Kevin Heffernan, Elahe Kalbassi, Janice Lam, Daniel Licht, Jean Mailard, Anna Y. Sun, Skyler Wang, Guillaume Wenzek, Al Youngblood, Bapi Akula, Loïc Barrault, Gabriel Mejia Gonzalez, Prangthip Hansanti, John Hoffman, and 19 others. 2022. [No language left behind: Scaling human-centered machine translation](#). *CoRR*, abs/2207.04672.
- Sławomir Dadas, Michał Perelkiewicz, and Rafał Poświata. 2023a. [PIRB: A comprehensive benchmark of polish dense and hybrid text retrieval methods](#). Hugging Face. Accessed: 2025-11-07.
- Sławomir Dadas, Michał Perelkiewicz, and Rafał Poświata. 2023b. [PIRB: A comprehensive benchmark of polish dense and hybrid text retrieval methods](#). Hugging Face. Accessed: 2025-11-07.
- Sławomir Dadas, Michał Perelkiewicz, and Rafał Poświata. 2024. [PIRB: A comprehensive benchmark of polish dense and hybrid text retrieval methods](#). Hugging Face. Accessed: 2025-11-07.
- Tri Dao. 2023. Flashattention-2: Faster attention with better parallelism and work partitioning. *arXiv preprint arXiv:2307.08691*.
- DataCanary, hilfalkaff, Lili Jiang, Meg Risdal, Nikhil Dandekar, and tomtung. 2017. [Quora question pairs](#).
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. Bert: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of NAACL-HLT*.
- Matthew Dunn, Levent Sagun, Mike Higgins, V. Ugur Güney, Volkan Cirik, and Kyunghyun Cho. 2017. [Searchqa: A new q&a dataset augmented with context from a search engine](#). *CoRR*, abs/1704.05179.

- Anthony Fader, Luke Zettlemoyer, and Oren Etzioni. 2014. [Open question answering over curated and extracted knowledge bases](#). In *The 20th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, KDD '14, New York, NY, USA - August 24 - 27, 2014*, pages 1156–1165. ACM.
- Angela Fan, Yacine Jernite, Ethan Perez, David Grangier, Jason Weston, and Michael Auli. 2019. [ELI5: long form question answering](#). In *Proceedings of the 57th Conference of the Association for Computational Linguistics, ACL 2019, Florence, Italy, July 28- August 2, 2019, Volume 1: Long Papers*, pages 3558–3567. Association for Computational Linguistics.
- Wikimedia Foundation. 2024. [Wikimedia downloads](#). Accessed: 2024-05-01.
- Tianyu Gao, Xingcheng Yao, and Danqi Chen. 2021. [Simcse: Simple contrastive learning of sentence embeddings](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing, EMNLP 2021, Virtual Event / Punta Cana, Dominican Republic, 7-11 November, 2021*, pages 6894–6910. Association for Computational Linguistics.
- Michael Glass, Gaetano Rossiello, Md Faisal Mahbub Chowdhury, Ankita Naik, Pengshan Cai, and Alfio Gliozzo. 2022. Re2g: Retrieve, rerank, generate. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 2701–2715.
- Albert Gu and Tri Dao. 2023. Mamba: Linear-time sequence modeling with selective state spaces. *arXiv preprint arXiv:2312.00752*.
- Michael Günther, Louis Milliken, Jonathan Geuter, Georgios Mastrapas, Bo Wang, and Han Xiao. 2023. [Jina embeddings: A novel set of high-performance sentence embedding models](#). Hugging Face. Accessed: 2025-11-07.
- Felix Hamborg, Norman Meuschke, Corinna Breiting, and Bela Gipp. 2017. [news-please - A generic news crawler and extractor](#). In *Everything Changes, Everything Stays the Same? Understanding Information Spaces. Proceedings of the 15th International Symposium of Information Science, ISI 2017, Berlin, Germany, March 13-15, 2017*, volume 70 of *Schriften zur Informationswissenschaft*, pages 218–223. Verlag Werner Hülsbusch.
- Tahmid Hasan, Abhik Bhattacharjee, Md. Saiful Islam, Kazi Samin Mubasshir, Yuan-Fang Li, Yong-Bin Kang, M. Sohel Rahman, and Rifat Shahriyar. 2021. [Xl-sum: Large-scale multilingual abstractive summarization for 44 languages](#). In *Findings of the Association for Computational Linguistics: ACL/IJCNLP 2021, Online Event, August 1-6, 2021*, volume ACL/IJCNLP 2021 of *Findings of ACL*, pages 4693–4703. Association for Computational Linguistics.
- Sepp Hochreiter and Jürgen Schmidhuber. 1997. [Long short-term memory](#). *Neural Computation*, 9:1735–1780.
- Doris Hoogeveen, Karin M. Verspoor, and Timothy Baldwin. 2015. Cqadupstack: A benchmark data set for community question-answering research. In *ADCS*, pages 3:1–3:8. ACM.
- Haowen Hou, Fei Ma, Zihang Li, and Fei Richard Yu. 2025. [Visualrwkv-hm: Enhancing linear visual-language models via hybrid mixing](#). *Inf. Fusion*, 124:103336.
- Haowen Hou, Xiaopeng Yan, and Yigeng Zhang. 2024a. Bagformer: Better cross-modal retrieval via bag-wise interaction. *Engineering Applications of Artificial Intelligence*, 136:108912.
- Yupeng Hou, Jiacheng Li, Zhankui He, An Yan, Xiusi Chen, and Julian J. McAuley. 2024b. [Bridging language and items for retrieval and recommendation](#). *CoRR*, abs/2403.03952.
- Hamel Husain, Ho-Hsiang Wu, Tiferet Gazit, Miltiadis Allamanis, and Marc Brockschmidt. 2019. [Code-searchnet challenge: Evaluating the state of semantic code search](#). *CoRR*, abs/1909.09436.
- Qiao Jin, Bhuwan Dhingra, Zhengping Liu, William W. Cohen, and Xinghua Lu. 2019. [Pubmedqa: A dataset for biomedical research question answering](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing, EMNLP-IJCNLP 2019, Hong Kong, China, November 3-7, 2019*, pages 2567–2577. Association for Computational Linguistics.
- Mandar Joshi, Eunsol Choi, Daniel S. Weld, and Luke Zettlemoyer. 2017. [Triviaqa: A large scale distantly supervised challenge dataset for reading comprehension](#). In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics, ACL 2017, Vancouver, Canada, July 30 - August 4, Volume 1: Long Papers*, pages 1601–1611. Association for Computational Linguistics.
- Daniel Khashabi, Amos Ng, Tushar Khot, Ashish Sabharwal, Hannaneh Hajishirzi, and Chris Callison-Burch. 2021. [Gooaq: Open question answering with diverse answer types](#). In *Findings of the Association for Computational Linguistics: EMNLP 2021, Virtual Event / Punta Cana, Dominican Republic, 16-20 November, 2021*, pages 421–433. Association for Computational Linguistics.
- Yuta Koreeda and Christopher D. Manning. 2021. [Contractnli: A dataset for document-level natural language inference for contracts](#). In *Findings of the Association for Computational Linguistics: EMNLP 2021, Virtual Event / Punta Cana, Dominican Republic, 16-20 November, 2021*, pages 1907–1919. Association for Computational Linguistics.

- Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur P. Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, Kristina Toutanova, Llion Jones, Matthew Kelcey, Ming-Wei Chang, Andrew M. Dai, Jakob Uszkoreit, Quoc Le, and Slav Petrov. 2019. [Natural questions: a benchmark for question answering research](#). *Trans. Assoc. Comput. Linguistics*, 7:452–466.
- Chankyu Lee, Rajarshi Roy, Mengyao Xu, Jonathan Raiman, Mohammad Shoneybi, Bryan Catanzaro, and Wei Ping. 2024. Nv-embed: Improved techniques for training llms as generalist embedding models. *arXiv preprint arXiv:2405.17428*. NV-Emb Model.
- Jinhyuk Lee, Feiyang Chen, Sahil Dua, Daniel Cer, Madhuri Shanbhogue, Iftexhar Naim, Gustavo Hernández Ábrego, Zhe Li, Kaifeng Chen, Henrique Schechter Vera, and 1 others. 2025. Gemini embedding: Generalizable embeddings from gemini. *arXiv preprint arXiv:2503.07891*.
- Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, and 1 others. 2020. Retrieval-augmented generation for knowledge-intensive nlp tasks. *Advances in neural information processing systems*, 33:9459–9474.
- Patrick S. H. Lewis, Yuxiang Wu, Linqing Liu, Pasquale Minervini, Heinrich Küttler, Aleksandra Piktus, Pontus Stenetorp, and Sebastian Riedel. 2021. [PAQ: 65 million probably-asked questions and what you can do with them](#). *Trans. Assoc. Comput. Linguistics*, 9:1098–1115.
- Xianming Li, Aamir Shakir, Rui Huang, Julius Lipp, and Jing Li. 2025. Prorank: Prompt warmup via reinforcement learning for small language models reranking. *arXiv preprint arXiv:2506.03487*.
- Yudong Li, Yuqing Zhang, Zhe Zhao, Linlin Shen, Weijie Liu, Wei-quan Mao, and Hui Zhang. 2022. [CSL: A large-scale chinese scientific literature dataset](#). In *Proceedings of the 29th International Conference on Computational Linguistics, COLING 2022, Gyeongju, Republic of Korea, October 12-17, 2022*, pages 3917–3923. International Committee on Computational Linguistics.
- Zehan Li, Xin Zhang, Yanzhao Zhang, Dingkun Long, Pengjun Xie, and Meishan Zhang. 2023a. [Towards general text embeddings with multi-stage contrastive learning](#). Hugging Face. Accessed: 2025-11-07.
- Zehan Li, Xin Zhang, Yanzhao Zhang, Dingkun Long, Pengjun Xie, and Meishan Zhang. 2023b. [Towards general text embeddings with multi-stage contrastive learning](#). Hugging Face. Accessed: 2025-11-07.
- Zehan Li, Xin Zhang, Yanzhao Zhang, Dingkun Long, Pengjun Xie, and Meishan Zhang. 2023c. [Towards general text embeddings with multi-stage contrastive learning](#). Hugging Face. Accessed: 2025-11-07.
- Macedo Maia, Siegfried Handschuh, André Freitas, Brian Davis, Ross McDermott, Manel Zarrouk, and Alexandra Balahur. 2018. [Www’18 open challenge: Financial opinion mining and question answering](#). In *Companion of the The Web Conference 2018 on The Web Conference 2018, WWW 2018, Lyon , France, April 23-27, 2018*, pages 1941–1942. ACM.
- Chaitanya Malaviya, Subin Lee, Sihao Chen, Elizabeth Sieber, Mark Yatskar, and Dan Roth. 2024. [Expertqa: Expert-curated questions and attributed answers](#). In *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers), NAACL 2024, Mexico City, Mexico, June 16-21, 2024*, pages 3025–3045. Association for Computational Linguistics.
- Luke Merrick. 2024a. [Embedding and clustering your data can improve contrastive pretraining](#). Hugging Face. Accessed: 2025-11-07.
- Luke Merrick. 2024b. [Embedding and clustering your data can improve contrastive pretraining](#). Hugging Face. Accessed: 2025-11-07.
- Niklas Muennighoff, Hongjin Su, Liang Wang, Nan Yang, Furu Wei, Tao Yu, Amanpreet Singh, and Douwe Kiela. 2024. [Generative representational instruction tuning](#). *CoRR*, abs/2402.09906.
- Niklas Muennighoff, Nouamane Tathi, Marjan Ebrahimi, and Kexin Luo. 2023a. Mteb: Massive text embedding benchmark. In *Proceedings of EACL*.
- Niklas Muennighoff, Nouamane Tazi, Loic Magne, and Nils Reimers. 2023b. [MTEB: Massive text embedding benchmark](#). In *Proceedings of the 17th Conference of the European Chapter of the Association for Computational Linguistics*, pages 2014–2037, Dubrovnik, Croatia. Association for Computational Linguistics.
- Niklas Muennighoff, Thomas Wang, Lintang Sutawika, Adam Roberts, Stella Biderman, Teven Le Scao, M. Saiful Bari, Sheng Shen, Zheng Xin Yong, Hailey Schoelkopf, Xiangru Tang, Dragomir Radev, Alham Fikri Aji, Khalid Almubarak, Samuel Al-banie, Zaid Alyafeai, Albert Webson, Edward Raff, and Colin Raffel. 2023c. [Crosslingual generalization through multitask finetuning](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL 2023, Toronto, Canada, July 9-14, 2023*, pages 15991–16111. Association for Computational Linguistics.
- Subhabrata Mukherjee, Arindam Mitra, Ganesh Jawahar, Sahaj Agarwal, Hamid Palangi, and Ahmed Awadallah. 2023. [Orca: Progressive learning from complex explanation traces of GPT-4](#). *CoRR*, abs/2306.02707.
- Reiichiro Nakano, Jacob Hilton, Suchir Balaji, Jeff Wu, Long Ouyang, Christina Kim, Christopher Hesse,

- Shantanu Jain, Vineet Kosaraju, William Saunders, Xu Jiang, Karl Cobbe, Tyna Eloundou, Gretchen Krueger, Kevin Button, Matthew Knight, Benjamin Chess, and John Schulman. 2021. [Webgpt: Browser-assisted question-answering with human feedback](#). *CoRR*, abs/2112.09332.
- Tri Nguyen, Mir Rosenberg, Xia Song, Jianfeng Gao, Saurabh Tiwary, Rangan Majumder, and Li Deng. 2016. [MS MARCO: A human generated machine reading comprehension dataset](#). In *Proceedings of the Workshop on Cognitive Computation: Integrating neural and symbolic approaches 2016 co-located with the 30th Annual Conference on Neural Information Processing Systems (NIPS 2016), Barcelona, Spain, December 9, 2016*, volume 1773 of *CEUR Workshop Proceedings*. CEUR-WS.org.
- Zach Nussbaum, John X. Morris, Brandon Duderstadt, and Andriy Mulyar. 2024. [Nomic embed: Training a reproducible long context text embedder](#). Hugging Face. Accessed: 2025-11-07.
- Aaron van den Oord, Yazhe Li, and Oriol Vinyals. 2018. Representation learning with contrastive predictive coding. *arXiv preprint arXiv:1807.03748*.
- Bo Peng, Eric Alcaide, Quentin Anthony, Alon Albalak, Samuel Arcadinho, Stella Biderman, Huanqi Cao, Xin Cheng, Michael Chung, Leon Derczynski, and 1 others. 2023. [Rwkv: Reinventing rnns for the transformer era](#). In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 14048–14077.
- Bo Peng, Daniel Goldstein, Quentin Anthony, Alon Albalak, Eric Alcaide, Stella Biderman, Eugene Cheah, Xingjian Du, Teddy Ferdinan, Haowen Hou, and 1 others. 2024. [Eagle and finch: Rwkv with matrix-valued states and dynamic recurrence](#). *arXiv preprint arXiv:2404.05892*.
- Bo Peng, Ruichong Zhang, Daniel Goldstein, Eric Alcaide, Xingjian Du, Haowen Hou, Jiaju Lin, Jiaxing Liu, Janna Lu, William Merrill, Guangyu Song, Kaifeng Tan, Saiteja Utpala, Nathan Wilce, Johan S. Wind, Tianyi Wu, Daniel Wuttke, and Christian Zhou-Zheng. 2025. [Rwkv-7 "goose" with expressive dynamic state evolution](#). *Preprint*, arXiv:2503.14456.
- Pranav Rajpurkar, Robin Jia, and Percy Liang. 2018. [Know what you don't know: Unanswerable questions for squad](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics, ACL 2018, Melbourne, Australia, July 15-20, 2018, Volume 2: Short Papers*, pages 784–789. Association for Computational Linguistics.
- Chandan K. Reddy, Lluís Màrquez, Fran Valero, Nikhil Rao, Hugo Zaragoza, Sambaran Bandyopadhyay, Arnab Biswas, Anlu Xing, and Karthik Subbian. 2022. [Shopping queries dataset: A large-scale ESCI benchmark for improving product search](#). *CoRR*, abs/2206.06588.
- Nils Reimers and Iryna Gurevych. 2019. [Sentence-bert: Sentence embeddings using siamese bert-networks](#). In *Proceedings of EMNLP-IJCNLP*.
- Nils Reimers and Iryna Gurevych. 2020. [Making monolingual sentence embeddings multilingual using knowledge distillation](#). Hugging Face. Accessed: 2025-11-07.
- Imanol Schlag, Kazuki Irie, and Jürgen Schmidhuber. 2021. [Linear transformers are secretly fast weight programmers](#). In *International Conference on Machine Learning*.
- Shivalika Singh, Freddie Vargus, Daniel D'souza, Börje Karlsson, Abinaya Mahendiran, Wei-Yin Ko, Herumb Shandilya, Jay Patel, Deividas Matciunas, Laura O'Mahony, Mike Zhang, Ramith Hettiarachchi, Joseph Wilson, Marina Machado, Luisa Souza Moura, Dominik Krzeminski, Hakimeh Fadaei, Irem Ergün, Ifeoma Okoh, and 14 others. 2024. [Aya dataset: An open-access collection for multilingual instruction tuning](#). In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), ACL 2024, Bangkok, Thailand, August 11-16, 2024*, pages 11521–11567. Association for Computational Linguistics.
- Saba Sturua, Isabelle Mohr, Mohammad Kalim Akram, Michael Günther, Bo Wang, Markus Krimmel, Feng Wang, Georgios Mastrapas, Andreas Koukounas, Nan Wang, and Han Xiao. 2024. [jina-embeddings-v3: Multilingual embeddings with task lora](#). *arXiv preprint arXiv:2409.10173*. Jina Embeddings v3.
- Maosong Sun, Jingyang Li, Zhipeng Guo, Yu Zhao, Yabin Zheng, Xiance Si, and Zhiyuan Liu. 2016. [Thuctc: An efficient chinese text classifier](#). Accessed: 2024-05-01.
- VectorPath Research Team. 2025. [Searchmap: Conversational e-commerce search embedding model](#). Hugging Face. Accessed: 2025-11-07.
- Nandan Thakur, Jianmo Ni, Gustavo Hernández Ábrego, John Wieting, Jimmy Lin, and Daniel Cer. 2024a. [Leveraging llms for synthesizing training data across many languages in multilingual dense retrieval](#). In *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers), NAACL 2024, Mexico City, Mexico, June 16-21, 2024*, pages 7699–7724. Association for Computational Linguistics.
- Nandan Thakur, Nils Reimers, Johannes Daxenberger, and Iryna Gurevych. 2024b. [Augmented sbert: Data augmentation method for improving bi-encoders for pairwise sentence scoring tasks](#). Hugging Face. Accessed: 2025-11-07.
- Nandan Thakur, Nils Reimers, Andreas Rücklé, Abhishek Srivastava, and Iryna Gurevych. 2021. [BEIR: A heterogeneous benchmark for zero-shot evaluation](#)

- of information retrieval models. In *Proceedings of the Neural Information Processing Systems Track on Datasets and Benchmarks 1, NeurIPS Datasets and Benchmarks 2021, December 2021, virtual*.
- James Thorne, Andreas Vlachos, Christos Christodoulopoulos, and Arpit Mittal. 2018. [FEVER: a large-scale dataset for fact extraction and verification](#). In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2018, New Orleans, Louisiana, USA, June 1-6, 2018, Volume 1 (Long Papers)*, pages 809–819. Association for Computational Linguistics.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. *Advances in neural information processing systems*, 30.
- Henrique Schechter Vera, Sahil Dua, Biao Zhang, Daniel Salz, Ryan Mullins, Sindhu Raghuram Panayam, Sara Smoot, Iftekhar Naim, Joe Zou, Feiyang Chen, and 1 others. 2025. Embeddinggemma: Powerful and lightweight text representations. *arXiv preprint arXiv:2509.20354*.
- Ellen M. Voorhees, Tasmeer Alam, Steven Bedrick, Dina Demner-Fushman, William R. Hersh, Kyle Lo, Kirk Roberts, Ian Soboroff, and Lucy Lu Wang. 2020. [TREC-COVID: constructing a pandemic information retrieval test collection](#). *SIGIR Forum*, 54(1):1:1–1:12.
- David Wadden, Shanchuan Lin, Kyle Lo, Lucy Lu Wang, Madeleine van Zuylen, Arman Cohan, and Hannaneh Hajishirzi. 2020. [Fact or fiction: Verifying scientific claims](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing, EMNLP 2020, Online, November 16-20, 2020*, pages 7534–7550. Association for Computational Linguistics.
- Feng Wang, Yuqing Li, and Hang Xiao. 2025. [jina-reranker-v3: Last but not late interaction for listwise document reranking](#).
- Liang Wang, Nan Yang, Xiaolong Huang, Binxing Jiao, Linjun Yang, Daxin Jiang, Rangan Majumder, and Furu Wei. 2023. [Text embeddings by weakly-supervised contrastive pre-training](#). Hugging Face. Accessed: 2025-11-07.
- Liang Wang, Nan Yang, Xiaolong Huang, Binxing Jiao, Linjun Yang, Daxin Jiang, Rangan Majumder, and Furu Wei. 2024a. [Text embeddings by weakly-supervised contrastive pre-training](#). Hugging Face. Accessed: 2025-11-07.
- Liang Wang, Nan Yang, Xiaolong Huang, Binxing Jiao, Linjun Yang, Daxin Jiang, Rangan Majumder, and Furu Wei. 2024b. [Text embeddings by weakly-supervised contrastive pre-training](#). Hugging Face. Accessed: 2025-11-07.
- Liang Wang, Nan Yang, Xiaolong Huang, Linjun Yang, and Furu Wei. 2024c. Improving text embeddings with large language models. *arXiv preprint arXiv:2401.00368*. E5-Mistral Model.
- Benjamin Warner, Antoine Chaffin, Benjamin Clavié, Orion Weller, Oskar Hallström, Said Taghadouini, Alexis Gallagher, Raja Biswas, Faisal Ladhak, Tom Aarsen, Nathan Cooper, Griffin Adams, Jeremy Howard, and Iacopo Poli. 2024. [Smarter, better, faster, longer: A modern bidirectional encoder for fast, memory efficient, and long context finetuning and inference](#). *ArXiv*, abs/2412.13663.
- Adina Williams, Nikita Nangia, and Samuel R. Bowman. 2018. [A broad-coverage challenge corpus for sentence understanding through inference](#). In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2018, New Orleans, Louisiana, USA, June 1-6, 2018, Volume 1 (Long Papers)*, pages 1112–1122. Association for Computational Linguistics.
- Xinwei Wu, Haojie Li, Hongyu Liu, Xinyu Ji, Ruohan Li, Yule Chen, and Yigeng Zhang. 2025. Uncovering the fragility of trustworthy llms through chinese textual ambiguity. *arXiv preprint arXiv:2507.23121*.
- Shitao Xiao, Zheng Liu, Peitian Zhang, and Niklas Muennighoff. 2023. C-pack: Packaged resources to advance general chinese embedding. *arXiv preprint arXiv:2309.07597*. Corresponds to the C-MTEB/C-Pack citation.
- Xiaohui Xie, Qian Dong, Bingning Wang, Feiyang Lv, Ting Yao, Weinan Gan, Zhijing Wu, Xiangsheng Li, Haitao Li, Yiqun Liu, and Jin Ma. 2023. [T2ranking: A large-scale chinese benchmark for passage ranking](#). In *Proceedings of the 46th International ACM SIGIR Conference on Research and Development in Information Retrieval, SIGIR 2023, Taipei, Taiwan, July 23-27, 2023*, pages 2681–2690. ACM.
- Yinfei Yang, Yuan Zhang, Chris Tar, and Jason Baldridge. 2019. [PAWS-X: A cross-lingual adversarial dataset for paraphrase identification](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing, EMNLP-IJCNLP 2019, Hong Kong, China, November 3-7, 2019*, pages 3685–3690. Association for Computational Linguistics.
- Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William W. Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. 2018. [Hotpotqa: A dataset for diverse, explainable multi-hop question answering](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing, Brussels, Belgium, October 31 - November 4, 2018*, pages 2369–2380. Association for Computational Linguistics.
- Puxuan Yu, Luke Merrick, Gaurav Nuti, and Daniel Campos. 2024. Arctic-embed 2.0: Multilingual

- retrieval without compromise. *arXiv preprint arXiv:2412.04506*. Key mapped to ‘hu2025’ for Arctic-Embed. Actual paper is Yu et al. (2024).
- Sha Yuan, Hanyu Zhao, Zhengxiao Du, Ming Ding, Xiao Liu, Yukuo Cen, Xu Zou, Zhilin Yang, and Jie Tang. 2021. [Wudaocorpora: A super large-scale chinese corpora for pre-training language models](#). *AI Open*, 2:65–68.
- Xin Zhang, Zehan Li, and 1 others. 2024. Gte-multilingual: A multilingual text embedding model. *arXiv preprint*. Placeholder for updated GTE work.
- Xinyu Zhang, Xueguang Ma, Peng Shi, and Jimmy Lin. 2021. [Mr. tydi: A multi-lingual benchmark for dense retrieval](#). *CoRR*, abs/2108.08787.
- Xinyu Zhang, Nandan Thakur, Odunayo Ogundepo, Ehsan Kamalloo, David Alfonso-Hermelo, Xiaoguang Li, Qun Liu, Mehdi Rezagholizadeh, and Jimmy Lin. 2023. [MIRACL: A multilingual retrieval dataset covering 18 diverse languages](#). *Trans. Assoc. Comput. Linguistics*, 11:1114–1131.
- Yanzhao Zhang, Mingxin Li, Dingkun Long, Xin Zhang, Huan Lin, Baosong Yang, Pengjun Xie, An Yang, Dayiheng Liu, Junyang Lin, Fei Huang, and Jingren Zhou. 2025. [Qwen3 embedding: Advancing text embedding and reranking through foundation models](#). *arXiv preprint arXiv:2506.05176*.
- Xinping Zhao, Xinshuo Hu, Zifei Shan, Shouzheng Huang, Yao Zhou, Xin Zhang, Zetian Sun, Zhenyu Liu, Dongfang Li, Xinyuan Wei, and 1 others. 2025. Kalm-embedding-v2: Superior training techniques and data inspire a versatile embedding model. *arXiv preprint arXiv:2506.20923*.
- Tianyu Zheng, Ge Zhang, Tianhao Shen, Xueling Liu, Bill Yuchen Lin, Jie Fu, Wenhui Chen, and Xiang Yue. 2024. Opencodeinterpreter: Integrating code generation with execution and refinement. In *ACL (Findings)*, pages 12834–12859. Association for Computational Linguistics.

A Implementation Details

Evaluation Setup We evaluate our method on MTEB (eng, v2) for embeddings, and on NanoBEIR, MTEB (eng, v2), and MTEB (cmn, v1) for reranking tasks. We adopt a standard two-stage retrieval pipeline, utilizing an initial retriever to generate candidates followed by a reranker for fine-grained sorting, ensuring an optimal trade-off between retrieval latency and precision. Specifically, we employ a 0.1B EmbeddingRWKV model to retrieve the top-100 document candidates, which are subsequently re-ranked by the reranker.

Hyperparameters We show the training hyperparameters for both EmbeddingRWKV models and RWKV-Reranker models in Table 7.

Hyperparameter	EmbeddingRWKV-0.1B	EmbeddingRWKV-0.4B	EmbeddingRWKV-1.4B	RWKV-Reranker-0.1B	RWKV-Reranker-0.3B	RWKV-Reranker-1.3B
batch size	1024	1024	512	512	512	512
lr init	1e-5	1e-5	1e-5	1e-5	1e-5	1e-5
lr end	1e-5	1e-5	1e-5	5e-6	5e-6	5e-6
lr schedule	constant	constant	constant	cosine decay	cosine decay	cosine decay
lr warmup ratio	0	0	0	0	0	0
weight decay	0	0	0	0	0	0
epoch	1	1	1	1	1	1
optimizer	AdamW	AdamW	AdamW	AdamW	AdamW	AdamW
DeepSpeed stage	1	1	1	1	1	1

Table 7: **Hyperparameters** of EmbeddingRWKV and RWKV-Reranker.

B Additional Results and Discussions

B.1 Efficiency Analysis of State-Based Reranking

We analyze Table 8, comparing RWKV-Reranker (Online/Offline) with attention-based baselines across Large ($\approx 1.5B$), Base ($\approx 0.4B$), and Small ($\approx 0.1B$) model regimes.

Throughput and sequence-length scaling The key advantage appears in RWKV Offline, where document states/embeddings are pre-computed and reused.

- **Large models (1.5B):** The attention baseline throughput degrades sharply with length (97.3 pairs/s at 512 $\rightarrow$ 11.9 pairs/s at 4096), while RWKV Offline stays nearly constant at **$\sim 500+$ pairs/s** across lengths.
- **Small models (0.1B):** FlashAttention remains fast at short contexts but still slows down markedly at long contexts. In contrast, RWKV Offline sustains **~ 2440 pairs/s** up to 4096 tokens, reaching a **$75.6\times$** speedup at the longest setting.

Memory efficiency (VRAM) RWKV’s linear-state computation avoids the quadratic activation/memory growth of attention. At 4096 tokens, Standard Attention peaks at **39.59 GB** VRAM, whereas RWKV Offline requires only **10.07 GB**, i.e., an $\approx 4\times$ reduction. This substantially lowers deployment barriers and enables larger inference batch sizes.

Online vs. Offline modes RWKV Online processes the full sequence on-the-fly and is therefore bounded by serial state updates; it primarily improves memory scaling rather than throughput. The intended operating point of our design is **split processing (Offline)**, which decouples document encoding from query interaction and reduces reranking to the lightweight query-stage computation (e.g., **~ 38 ms** for large models).

Table 8: Performance comparison of Attention mechanisms vs RWKV-Reranker (Online/Offline) across various sequence lengths (Query Len = 64, Batch Size = 100).

Mode	Doc Len	Total (ms)	Embed (ms)	Rerank (ms)	Peak VRAM	Throughput (pair/s)	Speedup
<i>Baseline: mxbai-rerank-large-v2 (1.5B) vs. Ours: EmbeddingRWKV-1.4B + RWKV-Reranker-1.3B</i>							
Standard Attention	512	1027.48	-	-	7.97 GB	97.3	1.0x
Flash Attention	512	997.66	-	-	7.97 GB	100.2	1.0x
RWKV-Reranker Online	512	1247.90	1209.66	38.21	12.41 GB	80.1	0.8x
RWKV-Reranker Offline	512	186.70	148.67	38.02	8.88 GB	535.6	5.5x
Standard Attention	1024	1988.10	-	-	12.49 GB	50.3	1.0x
Flash Attention	1024	1926.90	-	-	12.49 GB	51.9	1.0x
RWKV-Reranker Online	1024	2394.71	2356.14	38.55	15.95 GB	41.8	0.8x
RWKV-Reranker Offline	1024	185.46	148.50	36.94	10.07 GB	539.2	10.7x
Standard Attention	2048	4026.59	-	-	21.52 GB	24.8	1.0x
Flash Attention	2048	3860.74	-	-	21.52 GB	25.9	1.0x
RWKV-Reranker Online	2048	4598.01	4560.24	37.74	20.63 GB	21.7	0.9x
RWKV-Reranker Offline	2048	195.35	147.95	47.37	10.07 GB	511.9	20.6x
Standard Attention	4096	8410.25	-	-	39.59 GB	11.9	1.0x
Flash Attention	4096	8024.71	-	-	39.59 GB	12.5	1.0x
RWKV-Reranker Online	4096	9003.55	8965.33	38.20	30.01 GB	11.1	0.9x
RWKV-Reranker Offline	4096	185.99	147.52	38.45	10.07 GB	537.7	45.2x
<i>Baseline: mxbai-rerank-base-v2 (0.5B) vs. Ours: EmbeddingRWKV-0.4B + RWKV-Reranker-0.3B</i>							
Standard Attention	512	381.15	-	-	3.55 GB	262.4	1.0x
Flash Attention	512	360.84	-	-	3.55 GB	277.1	1.1x
RWKV-Reranker Online	512	479.16	444.06	35.08	5.02 GB	208.7	0.8x
RWKV-Reranker Offline	512	96.07	59.55	36.50	3.26 GB	1040.9	4.0x
Standard Attention	1024	723.18	-	-	5.87 GB	138.3	1.0x
Flash Attention	1024	687.43	-	-	5.87 GB	145.5	1.1x
RWKV-Reranker Online	1024	913.71	878.26	35.43	6.79 GB	109.4	0.8x
RWKV-Reranker Offline	1024	94.10	59.66	34.43	3.85 GB	1062.7	7.7x
Standard Attention	2048	1461.67	-	-	10.51 GB	68.4	1.0x
Flash Attention	2048	1385.56	-	-	10.51 GB	72.2	1.1x
RWKV-Reranker Online	2048	1747.95	1712.42	35.51	9.14 GB	57.2	0.8x
RWKV-Reranker Offline	2048	94.53	59.88	34.64	3.85 GB	1057.8	15.5x
Standard Attention	4096	3098.93	-	-	19.79 GB	32.3	1.0x
Flash Attention	4096	2946.56	-	-	19.79 GB	33.9	1.1x
RWKV-Reranker Online	4096	3424.99	3388.77	36.19	13.82 GB	29.2	0.9x
RWKV-Reranker Offline	4096	95.42	60.05	35.34	3.85 GB	1048.0	32.5x
<i>Baseline: gte-reranker-modernbert-base (0.1B) vs. Ours: EmbeddingRWKV-0.1B + RWKV-Reranker-0.1B</i>							
Standard Attention	512	171.85	-	-	1.16 GB	581.9	1.0x
Flash Attention	512	110.02	-	-	1.00 GB	908.9	1.6x
RWKV-Reranker Online	512	178.52	160.77	17.74	2.34 GB	560.2	1.0x
RWKV-Reranker Offline	512	41.00	23.34	17.65	1.24 GB	2438.9	4.2x
Standard Attention	1024	387.41	-	-	2.14 GB	258.1	1.0x
Flash Attention	1024	212.34	-	-	1.62 GB	470.9	1.8x
RWKV-Reranker Online	1024	333.24	315.05	18.18	3.45 GB	300.1	1.2x
RWKV-Reranker Offline	1024	40.98	23.41	17.56	1.46 GB	2440.0	9.5x
Standard Attention	2048	1009.89	-	-	4.68 GB	99.0	1.0x
Flash Attention	2048	443.68	-	-	2.87 GB	225.4	2.3x
RWKV-Reranker Online	2048	620.39	602.03	18.33	5.21 GB	161.2	1.6x
RWKV-Reranker Offline	2048	40.83	23.37	17.45	1.46 GB	2449.3	24.7x
Standard Attention	4096	3098.45	-	-	12.11 GB	32.3	1.0x
Flash Attention	4096	991.55	-	-	5.38 GB	100.9	3.1x
RWKV-Reranker Online	4096	1214.92	1196.54	18.36	8.73 GB	82.3	2.6x
RWKV-Reranker Offline	4096	40.99	23.42	17.55	1.46 GB	2439.8	75.6x

B.2 Computational Complexity of Backbone

Unlike Transformer-based embedding models (e.g., BERT, GPT) which suffer from quadratic time complexity $O(L^2)$ due to the global self-attention mechanism, EmbeddingRWKV adopts RWKV as its backbone, which employs a linear attention formulation. This results in a time complexity of $O(L)$ and a

constant memory footprint $O(1)$ regarding the sequence state during inference, irrespective of the input sequence length.

As shown in Table 9, this property allows our model to scale efficiently to long-context tasks where traditional transformers typically encounter memory bottlenecks.

Table 9: Computational complexity comparison between Transformer-based backbones and RWKV during inference. L denotes the sequence length, and d denotes the hidden dimension.

Architecture	Attention Mechanism	Time Complexity	Space Complexity	Max Context
BERT / GPT	$O(L^2)$ (Global)	$O(L^2)$	$O(L^2 + Ld)$	Finite
FlashAttention*	$O(L^2)$ (Tiled)	$O(L^2)$	$O(L)$	Finite
RWKV	$O(L)$ (Linear)	$O(L)$	$O(1)$[†]	Infinite

[†] Note: RWKV maintains a fixed-size hidden state (RNN-mode) regardless of history length L , whereas Transformers must store the Attention Matrix or KV Cache.

B.3 Memory Footprint Usage

Analytical Memory Cost We compare the per-document cache footprint of RWKV document states against Transformer KV caches under the same precision setting (FP16). For RWKV, each layer stores a document state with shape (H, S, S) (one state per head), hence the cache size is $\text{Bytes}_{\text{RWKV}} = L \times H \times S^2 \times 2$, where L is the number of layers, H the number of heads, S the state size, and 2 accounts for FP16 bytes.

For Transformers, the document-side cache is the concatenated Key/Value tensors. Per layer it stores (K, V) with total width $2d_{\text{model}}$ over T cached tokens, giving $\text{Bytes}_{\text{KV}} = L \times (2d_{\text{model}}) \times T \times 2$. To make the comparison interpretable, we use the common RWKV state-KV equivalence $T_{\text{eq}} = S/2$. With $S = 64$, this yields $T_{\text{eq}} = 32$, meaning one RWKV document state per layer is roughly comparable to caching ~ 32 Transformer tokens (KV) per layer.

Per-document Cache Usage Comparison Table 10 reports the per-document cache size for RWKV states (with $S = 64$) and Transformer KV caches at $T = 2000$. A key observation is that the ratio stays constant at $2000/32 = 62.5\times$ across model sizes: when S and T are fixed, both RWKV and KV scale linearly with L , while the dominant difference comes from RWKV being *token-length independent* (state cache does not grow with T), whereas Transformer KV grows linearly with T . Concretely, RWKV requires only 1–16 MB per document in the configurations shown, while Transformer KV reaches 70–1000 MB at $T = 2000$. This gap translates directly into higher cache density (more documents stored per GPU/CPU memory budget) and substantially lower retrieval-system memory pressure when large-scale document caching is required.

Table 10: Per-document cache usage for RWKV states vs. Transformer KV cache at $T = 2000$ (FP16). RWKV uses $S = 64$ and $T_{\text{eq}} = S/2 = 32$, leading to a constant ratio $T/T_{\text{eq}} = 62.5\times$ under fixed S and T .

Model Size	L	d_{model}	H	S	RWKV State (MB)	Transformer KV @ T=2000 (MB)	Ratio (Trans/RWKV)
0.1B	12	768	12	64	1.12	70.31	$62.5\times$
0.4B	24	1024	16	64	3.00	187.50	$62.5\times$
1.5B	24	2048	32	64	6.00	375.00	$62.5\times$
$\sim 3\text{B}$	32	2560	40	64	10.00	625.00	$62.5\times$
$\sim 7\text{B}$	32	4096	64	64	16.00	1000.00	$62.5\times$

C Data Details

C.1 Pre-training Data Construction

To build a robust and versatile embedding model, we curated a large-scale pre-training mixture of approximately 470M text pairs. The collection strategy targets (i) linguistic diversity, (ii) broad domain coverage, and (iii) multiple levels of text granularity. As summarized in Table 11, the pre-training sources fall into three coarse groups: multilingual corpora, Chinese-focused corpora, and English (including code) resources.

Multilingual corpora provide the backbone for cross-lingual semantic alignment. We include large unstructured resources such as *CC-News* (100M pairs) and *Wikipedia* (100M pairs) to capture general knowledge and multilingual semantics. To strengthen instruction following and IR-oriented matching, we incorporate curated query–document style datasets including *xP3* (Muennighoff et al., 2023c) and the *SWIM-IR* suite (Thakur et al., 2024a). We further leverage parallel corpora such as *NLLB* to anchor representations across distant language families.

Given the unique challenges of Chinese semantic modeling, we explicitly up-weight high-quality Chinese sources. *Wudao* (Yuan et al., 2021) serves as a primary component (44M pairs) for high-coverage web text, complemented by vertical-domain corpora such as *CSL* (scientific literature), *THUCNews* (news), and *Zhihu-KOL* (community Q&A). This combination improves robustness across both formal registers and colloquial discourse.

English and code data are included to reinforce general semantic reasoning and technical coverage. We use *Reddit* (100M pairs) and *StackExchange* (14M pairs) for conversational and QA-style semantics, together with *S2ORC* (41M pairs) and *CodeSearchNet* for scientific and programming-oriented content. We additionally include *PAQ* (Lewis et al., 2021) to improve retrieval behavior via probable questions derived from Wikipedia.

Overall, this mixture is designed to be complementary along three axes. First, it spans diverse *granularity*, from short texts (e.g., reviews, tweets) to long documents (e.g., Wudao, S2ORC), enabling the model to handle varying lengths and information densities. Second, it improves *domain generalization* by combining formal sources (papers, news) with informal sources (forums, Q&A), reducing style overfitting. Third, the large multilingual portion acts as an *alignment anchor*, allowing English- and Chinese-specific knowledge to transfer more effectively to lower-resource languages.

Table 11: List of pre-training data sources. The list now includes SkyPile and Falcon datasets.

Source	Language	Pairs
Amazon-Reviews (Hou et al., 2024b)	Multilingual	23M
CC-News (Hamborg et al., 2017)	Multilingual	100M
NLLB (Costa-jussà et al., 2022)	Multilingual	2M
Wikipedia (Foundation, 2024)	Multilingual	100M
xP3 (Muennighoff et al., 2023c)	Multilingual	19M
XL-Sum (Hasan et al., 2021)	Multilingual	1M
SWIM-IR (Mono) (Thakur et al., 2024a)	Multilingual	3M
SWIM-IR (Cross) (Thakur et al., 2024a)	Multilingual	15M
CSL (Li et al., 2022)	Chinese	0.4M
Wudao (Yuan et al., 2021)	Chinese	44M
SkyPile	Chinese	81M
THUCNews (Sun et al., 2016)	Chinese	0.8M
Zhihu-KOL	Chinese	0.8M
CodeSearchNet (Husain et al., 2019)	English	1M
Falcon	English	128M
PAQ (Lewis et al., 2021)	English	9M
Reddit	English	100M
StackExchange	English	14M
S2ORC	English	41M

C.2 Fine-tuning Data Curation

To align the pre-trained model with instruction-following behavior and downstream objectives, we construct a fine-tuning mixture spanning over 70 high-quality corpora. Table 12 summarizes the datasets, which cover three primary task families: retrieval, semantic textual similarity (STS), and classification. The curation balances English, Chinese, and multilingual coverage while preserving task heterogeneity.

Retrieval data constitutes the core of the fine-tuning stage, focusing on query–passage matching (s2p). We include established English benchmarks such as *MSMARCO* (Nguyen et al., 2016) and *Natural Questions*, together with large-scale Chinese retrieval corpora such as *T2Ranking* (Xie et al., 2023) and *mMARCO*. For cross-lingual retrieval, we incorporate *MIRACL* and *Mr. TyDi*, which provide high-quality query–passage pairs across diverse languages.

To improve sensitivity to fine-grained semantic nuances, we add STS-style datasets including *STS Benchmark*, *Quora Question Pairs*, and *AFQMC*. These typically follow an s2s format and encourage the model to separate semantically equivalent from non-equivalent pairs.

We further include classification and clustering corpora (e.g., *AmazonPolarity*, *TNews*, *Reddit-Clustering*) to encourage linearly separable semantic structure in the embedding space, improving representation geometry beyond pure pair matching.

Quality control is critical at this stage. As indicated by the “Pairs (filtered)” column in Table 12, we apply a filtering pipeline that removes duplicates, filters low-overlap positives, and discards samples that are too short or noisy. For example, in *Reddit-P2P*, aggressive filtering reduces the data from $\sim 12\text{M}$ to $\sim 42\text{k}$ pairs, mitigating noise-induced degeneration and improving training efficiency.

Table 12: List of fine-tuning datasets. The datasets are grouped by language and categorized by task type (Retrieval, STS, Classification). Columns show the original pair count and the count after filtering.

Source	Type	Categ.	Pairs	Pairs (Filt.)
English Resources				
CodeFeedback (Zheng et al., 2024)	Retrieval	s2p	50,000	49,090
ELI5 (Fan et al., 2019)	Retrieval	s2p	100,000	76,408
ExpertQA (Malaviya et al., 2024)	Retrieval	s2p	1,261	1,252
GooAQ (Khashabi et al., 2021)	Retrieval	s2p	50,000	49,833
MEDI2BGE (Muennighoff et al., 2024)	Retrieval	s2p	100,000	71,790
OpenOrca (Mukherjee et al., 2023)	Retrieval	s2p	40,000	38,623
PAQ (Lewis et al., 2021)	Retrieval	s2p	50,000	49,849
PubMedQA (Jin et al., 2019)	Retrieval	s2p	80,000	79,954
SearchQA (Dunn et al., 2017)	Retrieval	s2p	10,000	9,988
arxiv_qa	Retrieval	s2p	23,397	17,927
CC-News (Hamborg et al., 2017)	Retrieval	s2p	30,000	28,246
TREC-COVID (Voorhees et al., 2020)	Retrieval	s2p	50,000	48,517
DBpedia-Entity (Thakur et al., 2021)	Retrieval	s2p	100,000	96,792
ESCI (Reddy et al., 2022)	Retrieval	s2p	30,000	26,043
FEVER (Thorne et al., 2018)	Retrieval	s2p	87,855	87,216
FiQA (Maia et al., 2018)	Retrieval	s2p	5,490	4,689
HotpotQA (Yang et al., 2018)	Retrieval	s2p	184,057	150,153
MLDR (Chen et al., 2024b)	Retrieval	s2p	41,434	31,097
MSMARCO (Nguyen et al., 2016)	Retrieval	s2p	175,133	174,190
MSMARCO-v2 (Nguyen et al., 2016)	Retrieval	s2p	277,144	258,617
NFCorpus (Boteva et al., 2016)	Retrieval	s2p	10,824	10,471
rag-dataset-12k	Retrieval	s2p	9,590	9,272
SciFact (Wadden et al., 2020)	Retrieval	s2p	809	794
SQuAD 2.0 (Rajpurkar et al., 2018)	Retrieval	s2p	130,217	125,816

Continued on next page...

Table 12: Fine-tuning data list (continued)

Source	Type	Categ.	Pairs	Pairs (Filt.)
TriviaQA (Joshi et al., 2017)	Retrieval	s2p	52,886	44,442
WebGPT Comp. (Nakano et al., 2021)	Retrieval	s2p	19,242	18,924
Natural Questions (Kwiatkowski et al., 2019)	Retrieval	s2p	58,622	56,377
Yahoo Answers	Retrieval	s2p	30,000	21,724
CQADupStack (Hoogeveen et al., 2015)	Retrieval	s2p	24,045	7,356
ContractNLI (Koreeda and Manning, 2021)	STS	s2s	3,195	628
MultiNLI (Williams et al., 2018)	STS	s2s	64,674	63,701
NLLB (Costa-jussà et al., 2022)	STS	s2s	36,000	26,504
Quora (DataCanary et al., 2017)	STS	s2s	92,674	89,558
WikiAnswers (Fader et al., 2014)	STS	s2s	50,000	47,686
SimCSE NLI (Gao et al., 2021)	STS	s2s	252,397	217,099
SNLI (Bowman et al., 2015)	STS	s2s	24,686	16,480
arXiv	Classification	s2s, p2s	15,000	14,529
Biorxiv	Classification	s2s, p2s	6,862	6,787
Medrxiv	Classification	s2s, p2s	2,012	1,999
Reddit-Clustering	Classification	s2s	128,000	25,600
Reddit-P2P	Classification	p2s	12,704,958	42,480
Stack-Clustering	Classification	s2s	1,014,826	50,530
Stack-P2P	Classification	p2s	25,333,327	48,800
20Newsgroups	Classification	s2s	11,314	6,233
AmazonPolarity	Classification	s2s	10,000	9,007
IMDB	Classification	s2s	10,000	8,575
Banking77	Classification	s2s	10,000	9,937
Emotion	Classification	s2s	10,000	10,000
TweetSentiment	Classification	s2s	10,000	10,000
ToxicConversations	Classification	s2s	7,916	7,800
Chinese Resources				
AdvertiseGen	Retrieval	s2p	20,000	17,526
CHEF	Retrieval	s2p	4,952	4,824
ChatMed	Retrieval	s2p	20,000	18,608
CMRC 2018	Retrieval	s2p	10,000	9,753
DRCDD	Retrieval	s2p	5,000	4,714
LCSTS	Retrieval	s2p	20,000	19,535
LIMA	Retrieval	s2p	2,058	1,991
Multi-CPR	Retrieval	s2p	287,881	234,587
PAWS-X (zh)	Retrieval	s2p	49,401	19,289
RefGPT	Retrieval	s2p	50,000	49,896
T2Ranking	Retrieval	s2p	199,412	188,606
THUCNews	Retrieval	s2p	20,000	19,288
UMETRIP-QA	Retrieval	s2p	2,647	2,537
WebCPM	Retrieval	s2p	1,605	1,602
cCOVID-News	Retrieval	s2p	5,000	4,727
cMedQA-V2.0	Retrieval	s2p	223,851	88,109
CSL	Retrieval	s2p	20,000	19,945
DuReader	Retrieval	s2p	80,416	79,229
DuReader _{checklist}	Retrieval	s2p	99,992	97,764
law-gpt	Retrieval	s2p	500	500

Continued on next page...

Table 12: Fine-tuning data list (continued)

Source	Type	Categ.	Pairs	Pairs (Filt.)
lawzhidao	Retrieval	s2p	8,000	6,784
mMARCO (zh)	Retrieval	s2p	400,000	379,870
retrieval_data_llm	Retrieval	s2p	32,768	32,551
webqa	Retrieval	s2p	5,000	4,988
AFQMC	STS	s2s	4,041	3,876
ATEC	STS	s2s	62,477	11,387
BQ	STS	s2s	100,000	10,000
CAIL2019-SCM	STS	s2s	5,102	648
CINLID	STS	s2s	5,000	2,883
ChineseSTS	STS	s2s	2,500	2,497
CMNLI	STS	s2s	125,356	119,029
nli_zh	STS	s2s	218,887	185,787
OCNLI	STS	s2s	13,464	11,937
QBQTC	STS	s2s	51,620	47,223
SimCLUE	STS	s2s	344,038	290,699
XNLI (zh)	STS	s2s	80,000	74,252
CSL	Classification	s2s, p2s	15,000	12,249
THUCNews	Classification	s2s	10,000	9,690
TNews	Classification	s2s	10,000	6,762
JDReview	Classification	s2s	1,232	1,232
IFlyTek	Classification	s2s	10,000	8,221
OnlineShopping	Classification	s2s	7,852	7,600
Waimai	Classification	s2s	7,384	7,376
Multilingual Resources				
Aya Dataset (Singh et al., 2024)	Retrieval	s2p	30,000	26,292
MIRACL (Zhang et al., 2023)	Retrieval	s2p	40,151	39,946
Mr. TyDi (Zhang et al., 2021)	Retrieval	s2p	48,729	46,997
PAWS-X (Yang et al., 2019)	STS	s2s	128,435	128,398
AmazonReviews	Classification	s2s	10,000	7,721
AmazonCounterfactual	Classification	s2s	10,000	8,323
MultiSentiment	Classification	s2s	10,000	9,804
Amazon Massive	Classification	s2s	10,000	7,832
Amazon Scenario	Classification	s2s	10,000	7,078
MTOPDomain	Classification	s2s	10,000	9,610
MTOPIntent	Classification	s2s	10,000	7,952

C.3 Unified Instruction Templates for MTEB Evaluation

Table 13 summarizes the instruction templates used across MTEB (eng, v2). Although MTEB covers heterogeneous capabilities—classification, clustering, semantic similarity, retrieval, reranking, and summarization—a large fraction of tasks can be expressed using a small family of instruction patterns. This enables a unified instruction-driven evaluation without per-dataset prompt engineering.

For label-centric tasks such as *Classification* and *Clustering*, we use task-specific natural language descriptions that encode dataset semantics (e.g., emotion, intent, topic). This formulation maps the original objective into a consistent “Instruct/Query” interface.

For semantic matching tasks—including *Retrieval*, *Reranking*, *Pair Classification*, and *STS*—we use shared templates due to their closely aligned objectives. As indicated by the asterisks in Table 13, the same instruction is applied to all remaining tasks of each type. Only a small number of datasets require overrides

to better reflect dataset intent (e.g., duplicate question detection in QuoraRetrieval or StackExchange-style tasks).

This unified design offers two practical benefits: it reduces the mismatch between instruction-tuned behavior and embedding-style evaluation, and it provides a principled way to inject task intent into continuous representations, yielding a more standardized and interpretable evaluation pipeline.

Table 13: Detailed task instruction list for MTEB evaluation. Pair Classification*, Reranking*, Retrieval*, and STS* indicate we use the same instructions for all the respective remaining tasks.

Task Name	Instruction
<i>Classification</i>	
AmazonCounterfactual	Instruct: Given an Amazon review, judge whether it is counterfactual. \n Query: {query}
AmazonPolarity	Instruct: Classify Amazon reviews into positive or negative sentiment. \n Query: {query}
AmazonReviews	Instruct: Classify the given Amazon review into its appropriate rating category. \n Query: {query}
Banking77	Instruct: Given an online banking query, find the corresponding intents. \n Query: {query}
Emotion	Instruct: Classify the emotion expressed in the given Twitter message into one of the six emotions: anger, fear, joy, love, sadness, and surprise. \n Query: {query}
Imdb	Instruct: Classify the sentiment expressed in the given movie review text from the IMDB dataset. \n Query: {query}
MassiveIntent	Instruct: Given a user utterance as query, find the user intents. \n Query: {query}
MassiveScenario	Instruct: Given a user utterance as query, find the user scenarios. \n Query: {query}
MTOPDomain	Instruct: Classify the intent domain of the given utterance in task-oriented conversation. \n Query: {query}
MTOPIntent	Instruct: Classify the intent of the given utterance in task-oriented conversation. \n Query: {query}
ToxicConversations	Instruct: Classify the given comments as either toxic or not toxic. \n Query: {query}
TweetSentiment	Instruct: Classify the sentiment of a given tweet as either positive, negative, or neutral. \n Query: {query}
TNews	Instruct: Categorize the given news title. \n Query: {query}
IFlyTek	Instruct: Given an App description text, find the appropriate fine-grained category. \n Query: {query}
MultilingualSentiment	Instruct: Classify sentiment of the customer review into positive, neutral, or negative. \n Query: {query}
JDReview	Instruct: Classify sentiment of the customer review for iPhone into positive or negative. \n Query: {query}
OnlineShopping	Instruct: Classify sentiment of the customer review into positive or negative. \n Query: {query}
Waimai	Instruct: Classify the customer review from a food takeaway platform into positive or negative. \n Query: {query}
<i>Clustering</i>	
ArxivClusteringP2P	Instruct: Identify the main and secondary category of Arxiv papers based on the titles and abstracts. \n Query: {query}
ArxivClusteringS2S	Instruct: Identify the main and secondary category of Arxiv papers based on the titles. \n Query: {query}
BiorxivClusteringP2P	Instruct: Identify the main category of Biorxiv papers based on the titles and abstracts. \n Query: {query}
BiorxivClusteringS2S	Instruct: Identify the main category of Biorxiv papers based on the titles. \n Query: {query}
MedrxivClusteringP2P	Instruct: Identify the main category of Medrxiv papers based on the titles and abstracts. \n Query: {query}
MedrxivClusteringS2S	Instruct: Identify the main category of Medrxiv papers based on the titles. \n Query: {query}
RedditClustering	Instruct: Identify the topic or theme of Reddit posts based on the titles. \n Query: {query}
RedditClusteringP2P	Instruct: Identify the topic or theme of Reddit posts based on the titles and posts. \n Query: {query}
StackExchangeClustering	Instruct: Identify the topic or theme of StackExchange posts based on the titles. \n Query: {query}
StackExchangeP2P	Instruct: Identify the topic or theme of StackExchange posts based on the given paragraphs. \n Query: {query}
TwentyNewsgroups	Instruct: Identify the topic or theme of the given news articles. \n Query: {query}
CLSClusteringS2S	Instruct: Identify the main category of scholar papers based on the titles. \n Query: {query}
CLSClusteringP2P	Instruct: Identify the main category of scholar papers based on the titles and abstracts. \n Query: {query}
ThuNewsClusteringS2S	Instruct: Identify the topic or theme of the given news articles based on the titles. \n Query: {query}
ThuNewsClusteringP2P	Instruct: Identify the topic or theme of the given news articles based on the titles and contents. \n Query: {query}
<i>Pair Classification</i>	
Pair Classification*	Instruct: Retrieve semantically similar text. \n Query: {query}
SprintDuplicateQuestions	Instruct: Retrieve semantically similar questions. \n Query: {query}
<i>Reranking</i>	
Reranking*	Instruct: Given a query, retrieve documents that answer the query. \n Query: {query}
AskUbuntuDupQuestions	Instruct: Retrieve semantically similar questions. \n Query: {query}
StackOverflowDupQuestions	Instruct: Retrieve semantically similar questions. \n Query: {query}
SciDocsRR	Instruct: Retrieve relevant paper titles. \n Query: {query}
<i>Retrieval</i>	
Retrieval*	Instruct: Given a query, retrieve documents that answer the query. \n Query: {query}
QuoraRetrieval	Instruct: Retrieve semantically similar questions. \n Query: {query}
CQADupstack	Instruct: Given a question, retrieve detailed question descriptions from StackExchange that are duplicates to the given question. \n Query: {query}
<i>STS</i>	
STS*	Instruct: Retrieve semantically similar text. \n Query: {query}
<i>Summarization</i>	
SummEval	Instruct: Retrieve semantically similar summaries. \n Query: {query}