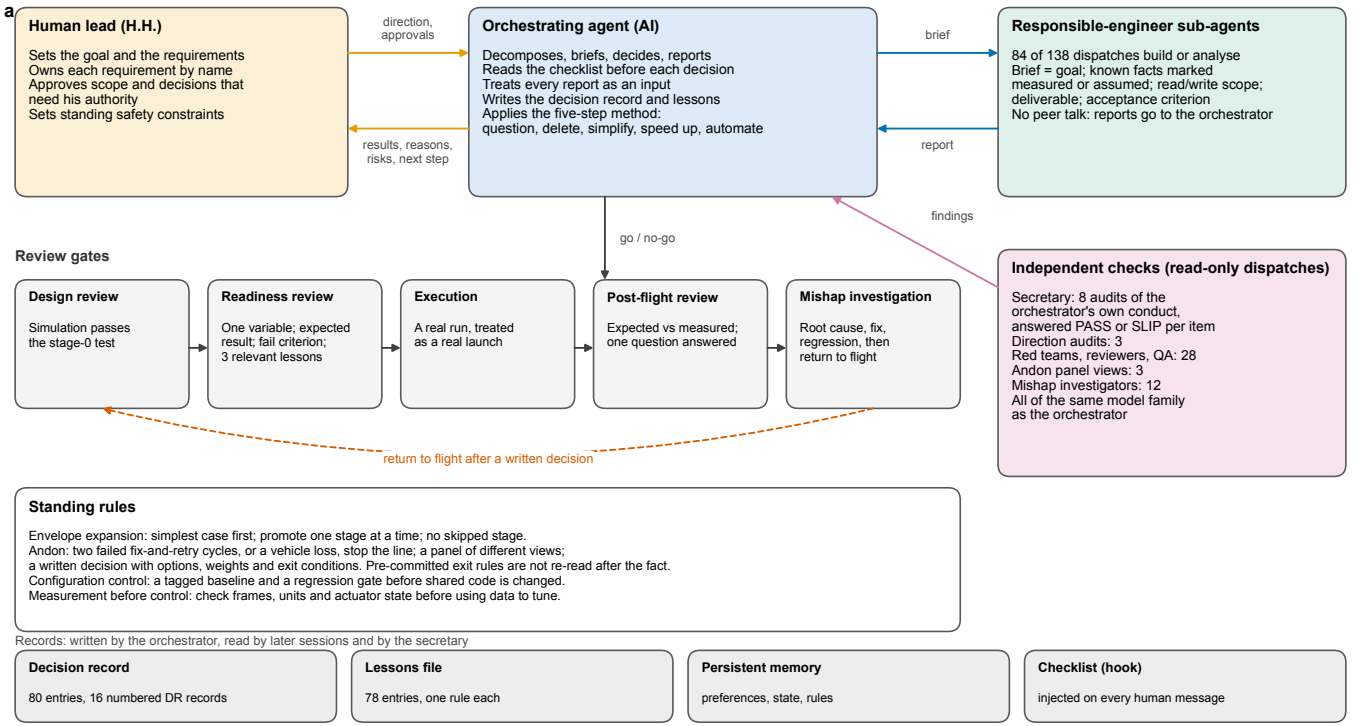
a
Human lead (H.H.)
Sets the goal and the requirements
Owns each requirement by name
Approves scope and decisions that need his authority
Sets standing safety constraints
direction, approvals
results, reasons, risks, next step
Orchestrating agent (AI)
Decomposes, briefs, decides, reports
Reads the checklist before each decision
Treats every report as an input
Writes the decision record and lessons
Applies the five-step method:
question, delete, simplify, speed up, automate
brief
report
Responsible-engineer sub-agents
84 of 138 dispatches build or analyse
Brief = goal; known facts marked measured or assumed; read/write scope; deliverable; acceptance criterion
No peer talk: reports go to the orchestrator
go / no-go
findings
Review gates
Design review
Simulation passes the stage-0 test
Readiness review
One variable; expected result; fail criterion; 3 relevant lessons
Execution
A real run, treated as a real launch
Post-flight review
Expected vs measured; one question answered
Mishap investigation
Root cause, fix, regression, then return to flight
return to flight after a written decision
Independent checks (read-only dispatches)
Secretary: 8 audits of the orchestrator's own conduct, answered PASS or SLIP per item
Direction audits: 3
Red teams, reviewers, QA: 28
Andon panel views: 3
Mishap investigators: 12
All of the same model family as the orchestrator
Standing rules
Envelope expansion: simplest case first; promote one stage at a time; no skipped stage.
Andon: two failed fix-and-retry cycles, or a vehicle loss, stop the line; a panel of different views; a written decision with options, weights and exit conditions. Pre-committed exit rules are not re-read after the fact.
Configuration control: a tagged baseline and a regression gate before shared code is changed.
Measurement before control: check frames, units and actuator state before using data to tune.
Records: written by the orchestrator, read by later sessions and by the secretary
Decision record
80 entries, 16 numbered DR records
Lessons file
78 entries, one rule each
Persistent memory
preferences, state, rules
Checklist (hook)
injected on every human message