



OGC POINTS OF INTEREST (POI) CONCEPTUAL MODEL STANDARD

STANDARD
Implementation

DRAFT

Version: 1.1

Submission Date: 2024-07-10

Approval Date: 2024-03-20

Publication Date: 2024-03-20

Editor: Charles Heazel, Matthew Purss, Howard Trickey, Christine Perey

Notice for Drafts: This document is not an OGC Standard. This document is distributed for review and comment. This document is subject to change without notice and may not be referred to as an OGC Standard.

Recipients of this document are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

License Agreement

Use of this document is subject to the license agreement at <https://www.ogc.org/license>

Suggested additions, changes and comments on this document are welcome and encouraged. Such suggestions may be submitted using the online change request form on OGC web site: <http://ogc.standardstracker.org/>

Copyright notice

Copyright © 2024 Open Geospatial Consortium

To obtain additional rights of use, visit <https://www.ogc.org/legal>

Note

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. The Open Geospatial Consortium shall not be held responsible for identifying any or all such patent rights.

Recipients of this document are requested to submit, with their comments, notification of any relevant patent claims or other intellectual property rights of which they may be aware that might be infringed by any implementation of the standard set forth in this document, and to provide supporting documentation.

CONTENTS

- I. ABSTRACTvi
- II. KEYWORDSvi
- III. PREFACEvii
- IV. SECURITY CONSIDERATIONSviii
- V. SUBMITTING ORGANIZATIONSix
- 1. SCOPE2
- 2. CONFORMANCE4
 - 2.1. OGC Implementation Specifications4
 - 2.2. Implementations4
 - 2.3. Conformance Classes4
 - 2.4. Primitive Data Types5
- 3. NORMATIVE REFERENCES7
- 4. TERMS AND DEFINITIONS9
- 5. CONVENTIONS13
 - 5.1. Identifiers13
 - 5.2. UML Notation13
 - 5.3. International Text16
- 6. POI MODEL CORE REQUIREMENTS18
 - 6.1. ISO Foundation19
 - 6.2. POI ISO Extensions23
 - 6.3. POI Class Model28
 - 6.4. POI Payload32
 - 6.5. POI Data Dictionary35
- ANNEX A (INFORMATIVE) ABSTRACT TEST SUITE (NORMATIVE)42
 - A.1. Conformance Class Core42
- ANNEX B (INFORMATIVE) REVISION HISTORY60
- BIBLIOGRAPHY62

LIST OF TABLES

| | |
|-----------------|----|
| Table 1 | 35 |
| Table 2 | 36 |
| Table 3 | 36 |
| Table 4 | 37 |
| Table 5 | 38 |
| Table 6 | 38 |
| Table 7 | 38 |
| Table 8 | 39 |
| Table 9 | 39 |
| Table 10 | 39 |
| Table 11 | 40 |
| Table B.1 | 60 |

LIST OF FIGURES

| | |
|--|----|
| Figure 1 – UML notation (see ISO TS 19103, Geographic information - Conceptual schema language). | 14 |
| Figure 2 – Example UML diagram demonstrating the UML notation and coloring scheme used throughout the POI Standard. | 16 |
| Figure 3 – Feature Model | 20 |
| Figure 4 – Geometry Model | 22 |
| Figure 5 – POI UML Model - ISO Extensions | 24 |
| Figure 6 – POI UML Model - Core | 28 |
| Figure 7 – POI UML Model - Payload | 33 |

LIST OF RECOMMENDATIONS

| | |
|---|----|
| REQUIREMENTS CLASS 1: CORE REQUIREMENTS CLASS | 18 |
| REQUIREMENT 1: REQUIREMENT – GENERAL FEATURE MODEL | 21 |
| REQUIREMENT 2: REQUIREMENT – GEOMETRY | 23 |
| REQUIREMENT 3: REQUIREMENT – ABSTRACT FEATURE | 24 |
| REQUIREMENT 4: REQUIREMENT – ABSTRACT FEATURE DESCRIPTION | 25 |
| REQUIREMENT 5: REQUIREMENT – ABSTRACT FEATURE FEATURE ID | 25 |

| | |
|--|----|
| REQUIREMENT 6: REQUIREMENT – ABSTRACT FEATURE IDENTIFIER | 26 |
| REQUIREMENT 7: REQUIREMENT – ABSTRACT FEATURE NAME | 26 |
| REQUIREMENT 8: REQUIREMENT – FEATURE WITH LIFESPAN | 26 |
| REQUIREMENT 9: REQUIREMENT – FEATURE WITH LIFESPAN CREATION DATE | 27 |
| REQUIREMENT 10: REQUIREMENT – FEATURE WITH LIFESPAN TERMINATION DATE | 27 |
| REQUIREMENT 11: REQUIREMENT – FEATURE WITH LIFESPAN VALID FROM | 27 |
| REQUIREMENT 12: REQUIREMENT – FEATURE WITH LIFESPAN VALID TO | 28 |
| REQUIREMENT 13: REQUIREMENT – ABSTRACT POI | 29 |
| REQUIREMENT 14: REQUIREMENT – POI CONTACT INFORMATION | 29 |
| REQUIREMENT 15: REQUIREMENT – POI FEATURE OF INTEREST | 30 |
| REQUIREMENT 16: REQUIREMENT – POI METADATA | 30 |
| REQUIREMENT 17: REQUIREMENT – POI KEYWORDS | 30 |
| REQUIREMENT 18: REQUIREMENT – POI RIGHTS | 31 |
| REQUIREMENT 19: REQUIREMENT – POI SYMBOLOGY | 31 |
| REQUIREMENT 20: REQUIREMENT – POI HAS PAYLOAD | 31 |
| REQUIREMENT 21: REQUIREMENT – LINK CLASS | 32 |
| REQUIREMENT 22: REQUIREMENT – POI CLASS | 32 |
| REQUIREMENT 23: REQUIREMENT – POI-PAYLOAD | 34 |
| REQUIREMENT 24: REQUIREMENT – POI PAYLOAD HAS FEATURE OF INTEREST | 34 |
| REQUIREMENT 25: REQUIREMENT – POI PAYLOAD HAS DEFINITION | 34 |
| REQUIREMENT 26: REQUIREMENT – POI PAYLOAD USES SCHEMA | 35 |
| CONFORMANCE CLASS A.1 | 42 |



ABSTRACT

The OGC Points of Interest (POI) Conceptual Model is an open data model for representing information about POI. The model is defined using a Unified Modeling Language (UML) object model. This UML model extends the ISO Technical Committee 211 (TC211) conceptual model standards for spatial and temporal data. Building on the ISO foundation assures that the features described in the POI Model share the same spatiotemporal universe as described by related standards (e.g., CityGML).

The goal for developing the OGC POI Conceptual Model is to reach a common definition of the basic entities, attributes, and relations of “points of interest.” In the broadest terms, a POI is a location about which information of general interest is available. A POI can be as simple as a set of coordinates and an identifier, or more complex such as a three-dimensional model of a building with names in various languages, information about open and closed hours, and a civic address.



KEYWORDS

The following are keywords to be used by search engines and document catalogues.

ogcdoc, OGC document, Point of Interest, POI, Feature



PREFACE

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. The Open Geospatial Consortium shall not be held responsible for identifying any or all such patent rights.

Recipients of this document are requested to submit, with their comments, notification of any relevant patent claims or other intellectual property rights of which they may be aware that might be infringed by any implementation of the standard set forth in this document, and to provide supporting documentation.



SECURITY CONSIDERATIONS

The POI Conceptual Model defines a POI as a type of Feature. By building on the same Feature Model as other OGC Feature models, POI implementations inherit the security controls and vulnerabilities of their associated Feature Dataset. They are a Feature like any other.

This document defines a Conceptual Model Standard. Implementations of this Standard (Implementation Specification) are free to add additional details and content necessary to enable implementation-specific security controls. In the event that anything in this Standard prevents implementation of needed controls, implementors are requested to notify the POI Standards Working Group (SWG) and help devise a solution.



SUBMITTING ORGANIZATIONS

The following organizations submitted this Document to the Open Geospatial Consortium (OGC):

- Digital Flanders
- Google
- HeazelTech
- Pangaea Innovations
- PEREY Research and Consulting
- US Army Geospatial Center



1

SCOPE

The OGC Points of Interest Conceptual Model Standard (this document) describes a conceptual model for representing information about points of interest (POI).

In the broadest terms, a “point of interest” is a location about which information of general interest is available. A POI can be as simple as a set of coordinates and an identifier, or more complex such as a three-dimensional model of a building with names in various languages, information about open and closed hours, and a civic address.

POI data has many uses including navigation systems, mapping, geocaching, location-based social networking games, and augmented reality browsers.

POI data has traditionally been exchanged in proprietary formats by various transport mechanisms. This document defines a flexible, lightweight, extensible POI data model. This will enable content publishers to effectively describe and efficiently serve and exchange POI data.

To achieve these goals, this document describes a generic data model that may be instantiated in a variety of serializations, including XML, JSON, and RDF. The data model is designed to be extended with POI information specific to the geospatial data it represents.



2

CONFORMANCE

This Standard defines a Conceptual Model which is independent of any encoding or formatting techniques. The Standardization Target for this Standard is technology-specific POI Implementation Specifications.

2.1. OGC Implementation Specifications

Implementation Specifications define how a Conceptual Model should be implemented using a specific technology. Conformant Implementation Specifications provide evidence that they are an accurate representation of the Conceptual Model. This evidence should include implementations of the abstract tests specified in Annex A (normative) of this document.

Since this Standard is implementing technology agnostic, the specific techniques to be used for conformance testing cannot be specified. Implementation Specifications need to provide evidence of conformance which is appropriate for the implementing technologies. This evidence should be provided as Annex A to the Implementation Specification document.

2.2. Implementations

POI implementations will typically be a simplified representation of a more complex dataset. Implementors may want to extend the POI model to include properties specific to that dataset. These extensions are accomplished using the POI Payload mechanism described in POI Payload. Since the POI Payload has its own definition of syntax and semantics, conformance with the POI Standard cannot ensure payload conformance.

2.3. Conformance Classes

This Standard identifies one “Core” conformance class. This conformance class defines the conformance criteria for the requirements defined in one “Core” requirements class. The tests this conformance class are documented in Annex A. These tests are organized by Requirements Class. So an implementation of the Core conformance class must pass all tests specified in Annex A for the Core Requirements Class.

The POI Conceptual Model is defined by the POI UML model. This Standard is a representation of that UML model in document form. In the case of a discrepancy between the UML model and this document, the UML model takes precedence.

2.4. Primitive Data Types

The Primitive Data Types (CharacterString, Integer, DateTime, etc.) are defined in ISO 19103. These Data Types are universal concepts. Therefore, no explicit conformance testing for these concepts is needed. Testing for conformance with the technology-specific implementation of these concepts should be documented in the corresponding Implementation Specification.



3

NORMATIVE REFERENCES

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO: ISO 19101-1:2014, *Geographic information – Reference model – Part 1: Fundamentals*. International Organization for Standardization, Geneva (2014). <https://www.iso.org/standard/59164.html>.

ISO: ISO 19103, *Geographic information – Conceptual schema language*. International Organization for Standardization, Geneva <https://www.iso.org/standard/56734.html>.

ISO: ISO 19107:2003, *Geographic information – Spatial schema*. International Organization for Standardization, Geneva (2003). <https://www.iso.org/standard/26012.html>.

ISO: ISO 19109:2015, *Geographic information – Rules for application schema*. International Organization for Standardization, Geneva (2015). <https://www.iso.org/standard/59193.html>.

ISO: ISO 19115-1:2014, *Geographic information – Metadata – Part 1: Fundamentals*. International Organization for Standardization, Geneva (2014). <https://www.iso.org/standard/53798.html>.

ISO: ISO 19507:2012, ISO (2012).

Arliss Whiteside Jim Greenwood: OGC 06-121r9, *OGC Web Service Common Implementation Specification*. Open Geospatial Consortium (2010).

Policy SWG: OGC 08-131r3, *The Specification Model – Standard for Modular specifications*. Open Geospatial Consortium (2009).

Open Geospatial Consortium. *OGC Definitions Register*. <https://www.opengis.net/def/glossary>

Object Management Group (OMG), *Unified Modeling Language (UML)*, Version 2.5.1, December 2017, <https://www.omg.org/spec/UML/2.5.1>



4

TERMS AND DEFINITIONS

This document uses the terms defined in OGC Policy Directive 49, which is based on the ISO/IEC Directives, Part 2, Rules for the structure and drafting of International Standards. In particular, the word “shall” (not “must”) is the verb form used to indicate a requirement to be strictly followed to conform to this document and OGC documents do not use the equivalent phrases in the ISO/IEC Directives, Part 2.

This document also uses terms defined in the OGC Standard for Modular specifications (OGC 08-131r3), also known as the ‘ModSpec’. The definitions of terms such as standard, specification, requirement, and conformance test are provided in the ModSpec.

For the purposes of this document, the following additional terms and definitions apply.

4.1. class::

description of a set of *objects* that share the same *attributes*, *operations*, methods, relationships, and semantics

Note 1 to entry: A *class* may use a set of interfaces to specify collections of *operations* it provides to its environment. The term was first used in this way in the general theory of object-oriented programming, and later adopted for use in this same sense in UML.

[**SOURCE:** ISO 19103, Clause 4.27, modified — Note 1 to entry has been added from ISO 19117:2012, 4.2]

4.2. concept::

unit of knowledge created by a unique combination of characteristics

Note 1 to entry: *Concepts* (Clause 4.2) are not necessarily bound to particular languages. They are, however, influenced by the social or cultural background which often leads to different categorizations.

[**SOURCE:** ISO 1087-1, Clause 3.2.1]

4.3. conceptual model::

model that defines *concepts* (Clause 4.2) of a universe of discourse

[SOURCE: ISO 19101-1:2014, Clause 4.1.5]

4.4. conformance class::

a class of conformance tests. A conformant implementation must pass all the tests in the class.

[SOURCE: OGC Definitions Register]

4.5. feature::

abstraction of real-world phenomena

Note 1 to entry: A *feature* (Clause 4.5) may occur as a type or an instance. In this document, *feature* (Clause 4.5) instance is meant unless otherwise specified.

[SOURCE: ISO 19101-1:2014, Clause 4.1.11, modified — Note 1 to entry has been added from ISO 19156, 4.6]

4.6. feature type::

class (Clause 4.1) of *features* (Clause 4.5) having common characteristics

[SOURCE: ISO 19156:2011, Clause 4.7]

4.7. implementation specification::

guidance for software engineers that is so specific that any two independent software implementations of the specification can “plug and play” for each other.

[SOURCE: OGC Definitions Register]

4.8. requirements class::

a class of requirements, comprising a logical grouping of normative statements that shall be satisfied as a group in conformant implementations. May have dependencies on other *requirements classes* (Clause 4.8) , but there should be no circular dependencies else the classes must always be satisfied together so are functionally one class.

[SOURCE: OGC Definitions Register]

4.9. standardization target::

entity to which some requirements of a standard apply

| | |
|------|---|
| NOTE | The standardization target is the entity which may receive a certificate of conformance for a requirements class. |
|------|---|

[SOURCE: OGC 08-131r3]



5

CONVENTIONS

5.1. Identifiers

The normative provisions in this document are denoted by the URI:

<http://www.opengis.net/spec/poi/1.0>

All requirements and conformance tests that appear in this document are denoted by partial URIs relative to this base.

5.2. UML Notation

The POI Conceptual Model (CM) Standard is documented as a Unified Modeling Language (UML) model. The model is presented in this document through diagrams using the UML static structure diagram. The UML notations used in this standard are described in the diagram in Figure 1.

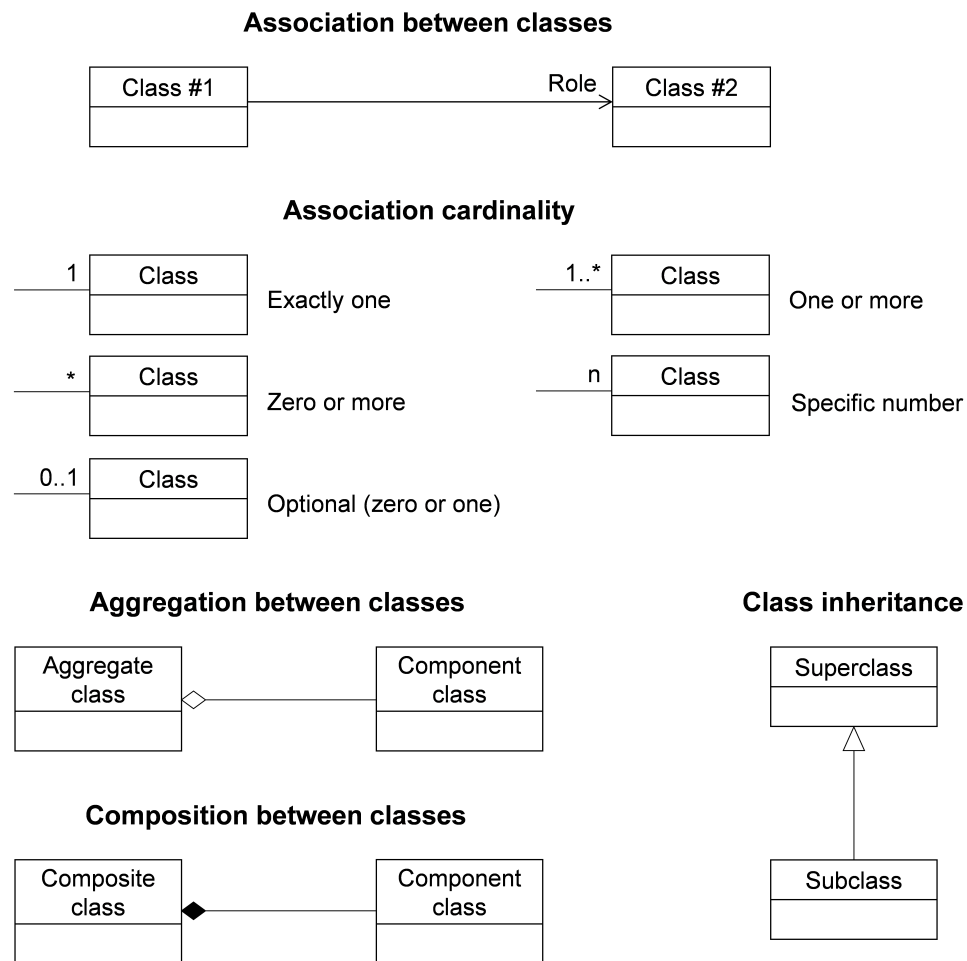


Figure 1 – UML notation (see ISO TS 19103, Geographic information - Conceptual schema language).

All associations between model elements in the POI Conceptual Model are unidirectional. Thus, associations in the model are navigable in only one direction. The direction of navigation is depicted by an arrowhead. In general, the context an element takes within the association is indicated by its role. The role is displayed near the target of the association. If the graphical representation is ambiguous though, the position of the role must be drawn to the element the association points to.


Aggregations are a form of association where the Component Class is treated as an attribute of the Aggregate Class. However, the Component Class is not an integral part of the Aggregate Class. A Component Class can be aggregated by more than one Aggregate Class.

Compositions are a form of association where the Component Class is treated as an attribute of the Composite Class. Component Classes are an integral part of the Composite Class and cannot be shared by multiple Composite Classes. No Compositions are used in this Standard.


The following stereotypes are used in this model:

- «*Abstract*» a class that doesn't include a complete implementation. Therefore, abstract classes can't be directly instantiated; they have to be specialized (inherited).
- «*DataType*» defines a set of properties that lack identity. A data type is a classifier with no operations, whose primary purpose is to hold information.
- «*FeatureType*» represents features that are similar and exhibit common characteristics. Features are abstractions of real-world phenomena and have an identity.
- «*Metaclass*» (Optional) a profile class and packageable element which may be extended through one or more stereotypes, which defines how an existing metaclass may be extended as part of a profile.
- «*Property*» denotes attributes and association roles. This stereotype does not add further semantics to the conceptual model but is required to be able to add tagged values to the attributes and association roles that are relevant for the encoding.
- «*Type*» denotes classes that are not directly instantiable, but are used as an abstract collection of operation, attribute, and relation signatures. The stereotype is used in the POI Conceptual Model only for classes that are imported from the ISO standards 19103, 19107, 19109, and 19115.


To enhance the readability of the POI UML diagrams, classes are depicted in different colors. The following coloring scheme is applied:

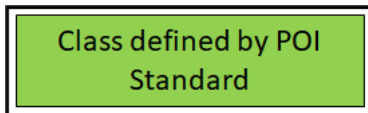

Classes painted in green belong to the POI Requirements Class.

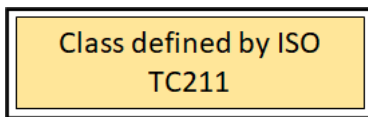

Classes painted in tan are defined in the ISO standards 19107, 19109, or 19115. Class names are preceded by the UML package name in which the class is defined.

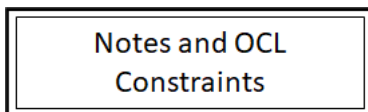

The color white is used for notes and Object Constraint Language (OCL) constraints that are provided in the UML diagrams.

The example UML diagram in Figure 2 demonstrates the UML notation and coloring scheme used throughout this standard. The generalization, link, and instance associations are also illustrated.

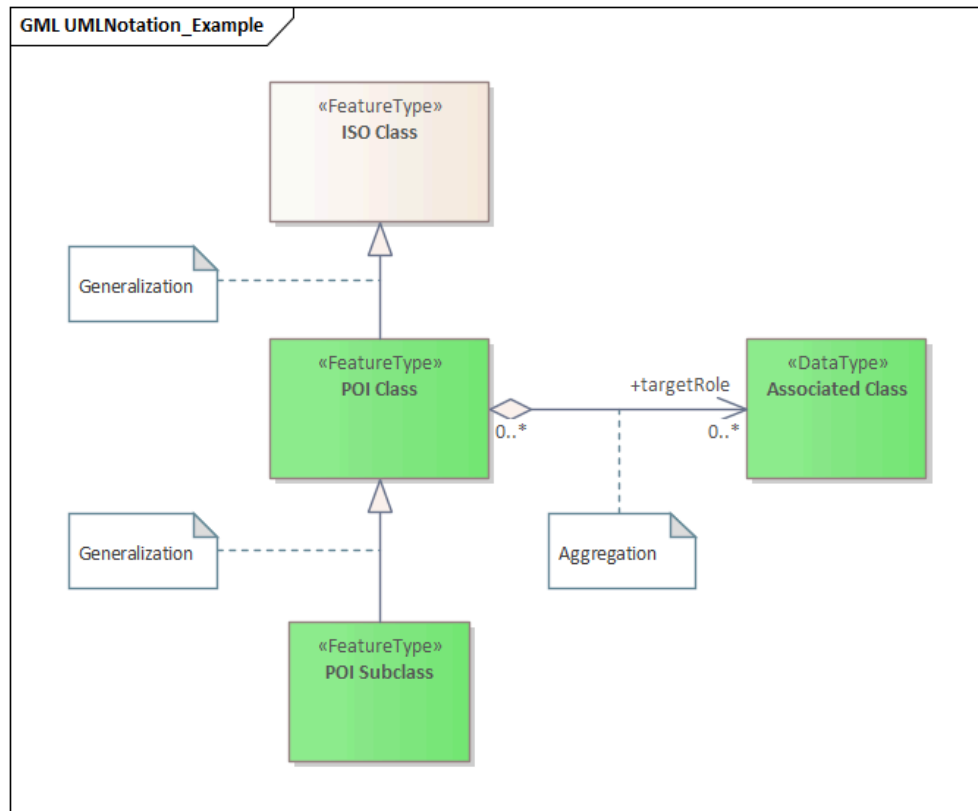


Figure 2 — Example UML diagram demonstrating the UML notation and coloring scheme used throughout the POI Standard.

5.3. International Text

Not all users will speak the same language. Therefore a POI Standard should support international text. While internationalization techniques are specific to the implementing technology, this Conceptual Standard should provide some guidance on the desired characteristics of such an implementation.

To that end, this Standard recommends the following conventions for implementing internationalized text in an Implementation Specification:

- All text strings should have cardinality greater than one.
- Text strings can have an associated language attribute.
- These language attributes should be populated with an international language code.



6

POI MODEL CORE REQUIREMENTS

REQUIREMENTS CLASS 1: CORE REQUIREMENTS CLASS

| | |
|----------------------|--|
| IDENTIFIER | <code>http://www.opengis.net/spec/poi/1.0/req/core</code> |
| CONFORMANCE CLASS | Conformance class A.1: <code>http://www.opengis.net/spec/poi/1.0/conf/core</code> |
| NORMATIVE STATEMENTS | <p>Requirement 1: <code>/req/core/generalfeaturemodel</code></p> <p>Requirement 2: <code>/req/core/geometry</code></p> <p>Requirement 3: <code>/req/core/abstractfeature</code></p> <p>Requirement 4: <code>/req/core/abstractfeature-description</code></p> <p>Requirement 5: <code>/req/core/abstractfeature-featureid</code></p> <p>Requirement 6: <code>/req/core/abstractfeature-identifier</code></p> <p>Requirement 7: <code>/req/core/abstractfeature-name</code></p> <p>Requirement 8: <code>/req/core/featurewithlifespan</code></p> <p>Requirement 9: <code>/req/core/featurewithlifespan-creationdate</code></p> <p>Requirement 10: <code>/req/core/featurewithlifespan-terminationdate</code></p> <p>Requirement 11: <code>/req/core/featurewithlifespan-validfrom</code></p> <p>Requirement 12: <code>/req/core/featurewithlifespan-validto</code></p> <p>Requirement 13: <code>/req/core/abstract-poi</code></p> <p>Requirement 1-14: <code>/req/core/poi-contactinfo</code></p> <p>Requirement 15: <code>/req/core/poi-featureofinterest</code></p> <p>Requirement 16: <code>/req/core/poi-metadata</code></p> <p>Requirement 17: <code>/req/core/poi-keywords</code></p> <p>Requirement 18: <code>/req/core/poi-rights</code></p> <p>Requirement 19: <code>/req/core/poi-symbolology</code></p> <p>Requirement 20: <code>/req/core/poi-haspayload</code></p> <p>Requirement 21: <code>/req/core/link</code></p> <p>Requirement 22: <code>/req/core/poi</code></p> <p>Requirement 23: <code>/req/core/poi_payload</code></p> <p>Requirement 24: <code>/req/core/poi_payload-hasfeatureofinterest</code></p> <p>Requirement 25: <code>/req/core/poi_payload-hasdefinition</code></p> <p>Requirement 26: <code>/req/core/poi_payload-usesschema</code></p> |
| DESCRIPTION | <p>Requirements Class POI Core. A POI Implementation Specification SHALL be a valid representation of the POI UML model. This includes conformance with:</p> <p>ISO Core Requirements:</p> <ul style="list-style-type: none"> • <code>/req/core/generalfeaturemodel</code> • <code>/req/core/geometry</code> <p>POI Extensions to ISO:</p> <ul style="list-style-type: none"> • <code>/req/core/abstractfeature</code> |

REQUIREMENTS CLASS 1: CORE REQUIREMENTS CLASS

- /req/core/featurewithlifespan

POI Class Model:

- /req/core/abstract-poi
- /req/core/poi-payload
- /req/core/poi

6.1. ISO Foundation

The POI Standard builds on a base of ISO Standards maintained by ISO Technical Committee 211 (TC211).

6.1.1. ISO Feature Model

A Point of Interest (POI) is a Feature. Therefore, it is important to understand what a POI inherits from the ISO Feature model.

The ISO TC211 Feature Model is defined in ISO 19109:2015. A UML model showing applicable portions of the ISO Feature Model is provided in Figure 3.

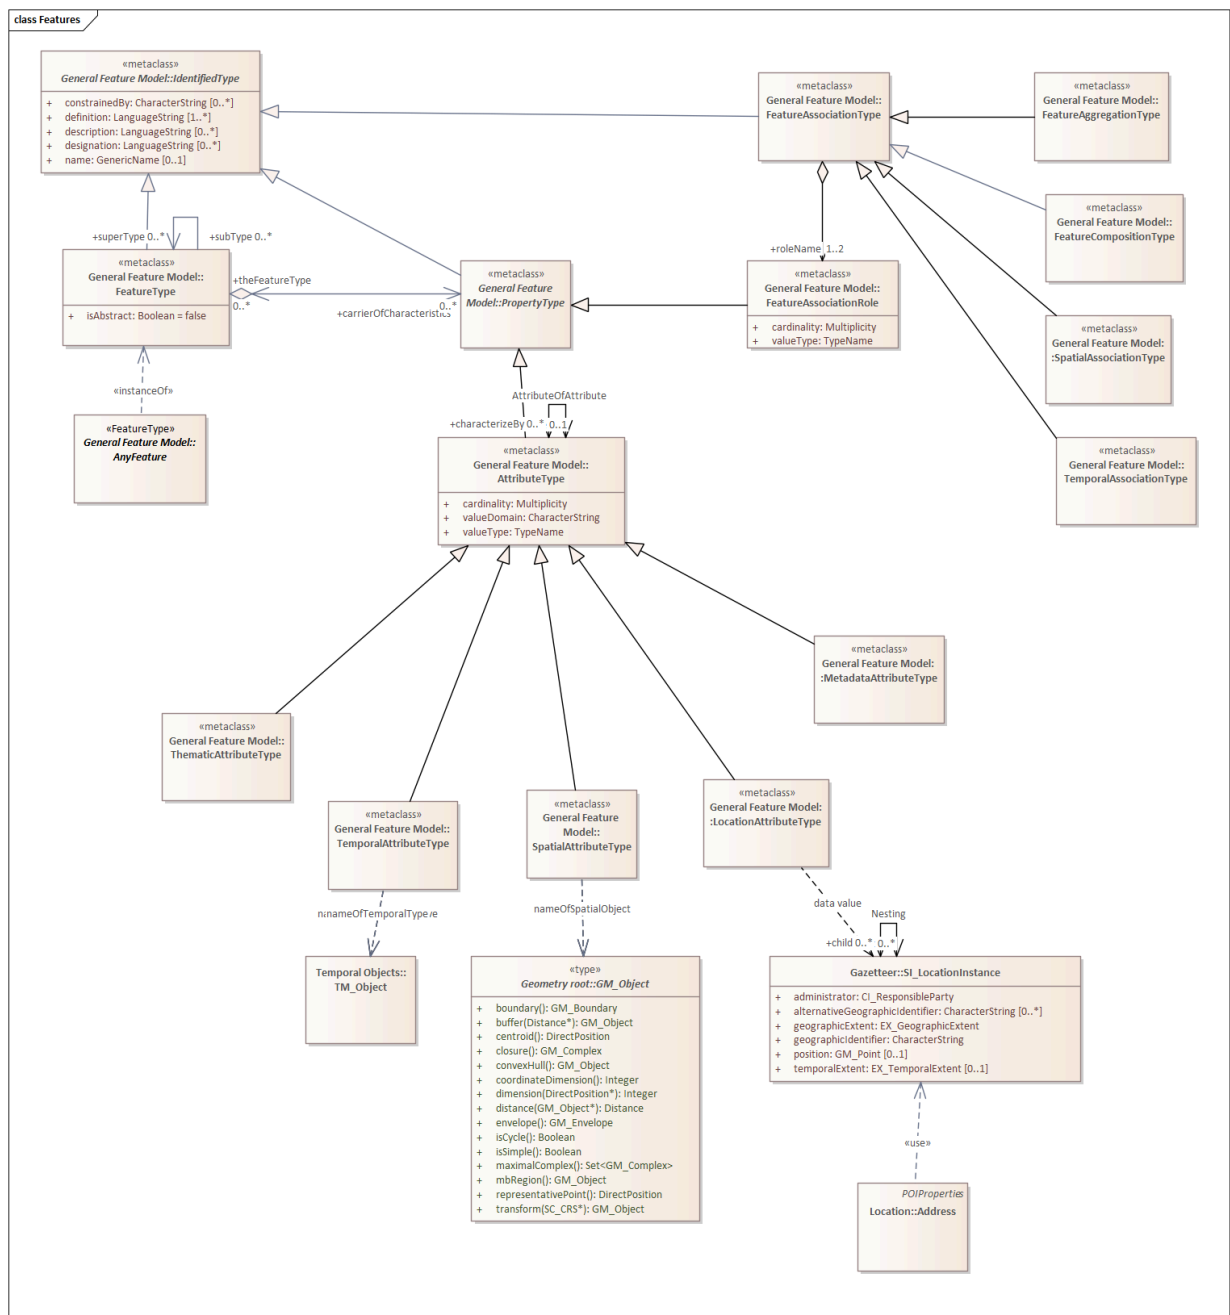


Figure 3 — Feature Model

The most relevant classes defined by this model are described below:

FeatureType: This class describes how a feature class shall be constructed in an Application Schema. In accordance with the conformance clause of the standard, instances of this class are instantiated as feature classes in an Application Schema

AnyFeature: The class AnyFeature is an instance of the «metaclass» FeatureType. It represents the set of all classes which are feature types.

In an implementation, this abstract class shall be substituted by a concrete class representing a feature type from an application schema associated with a domain of discourse.

REQUIREMENT 1: REQUIREMENT – GENERAL FEATURE MODEL

| | |
|-------------|---|
| IDENTIFIER | /req/core/generalfeaturemodel |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An encoding of the POI Conceptual Model SHALL be compliant with the General Feature Model defined in ISO 19109. |

6.1.2. ISO Geometry Model

The ISO TC211 Geometry Model is defined in ISO 19107:2003. While there is a new version of this standard, it has not been widely implemented. Therefore, the 2003 version has been used in this Standard.

The ISO Geometry Model can represent very complex geometries. Much more complex than needed for expressing a POI. Therefore, POI geometry types are restricted to Points, Lines, and Polygons. Figure 4 provides a UML model of the classes from ISO 19107 which are applicable to POIs.

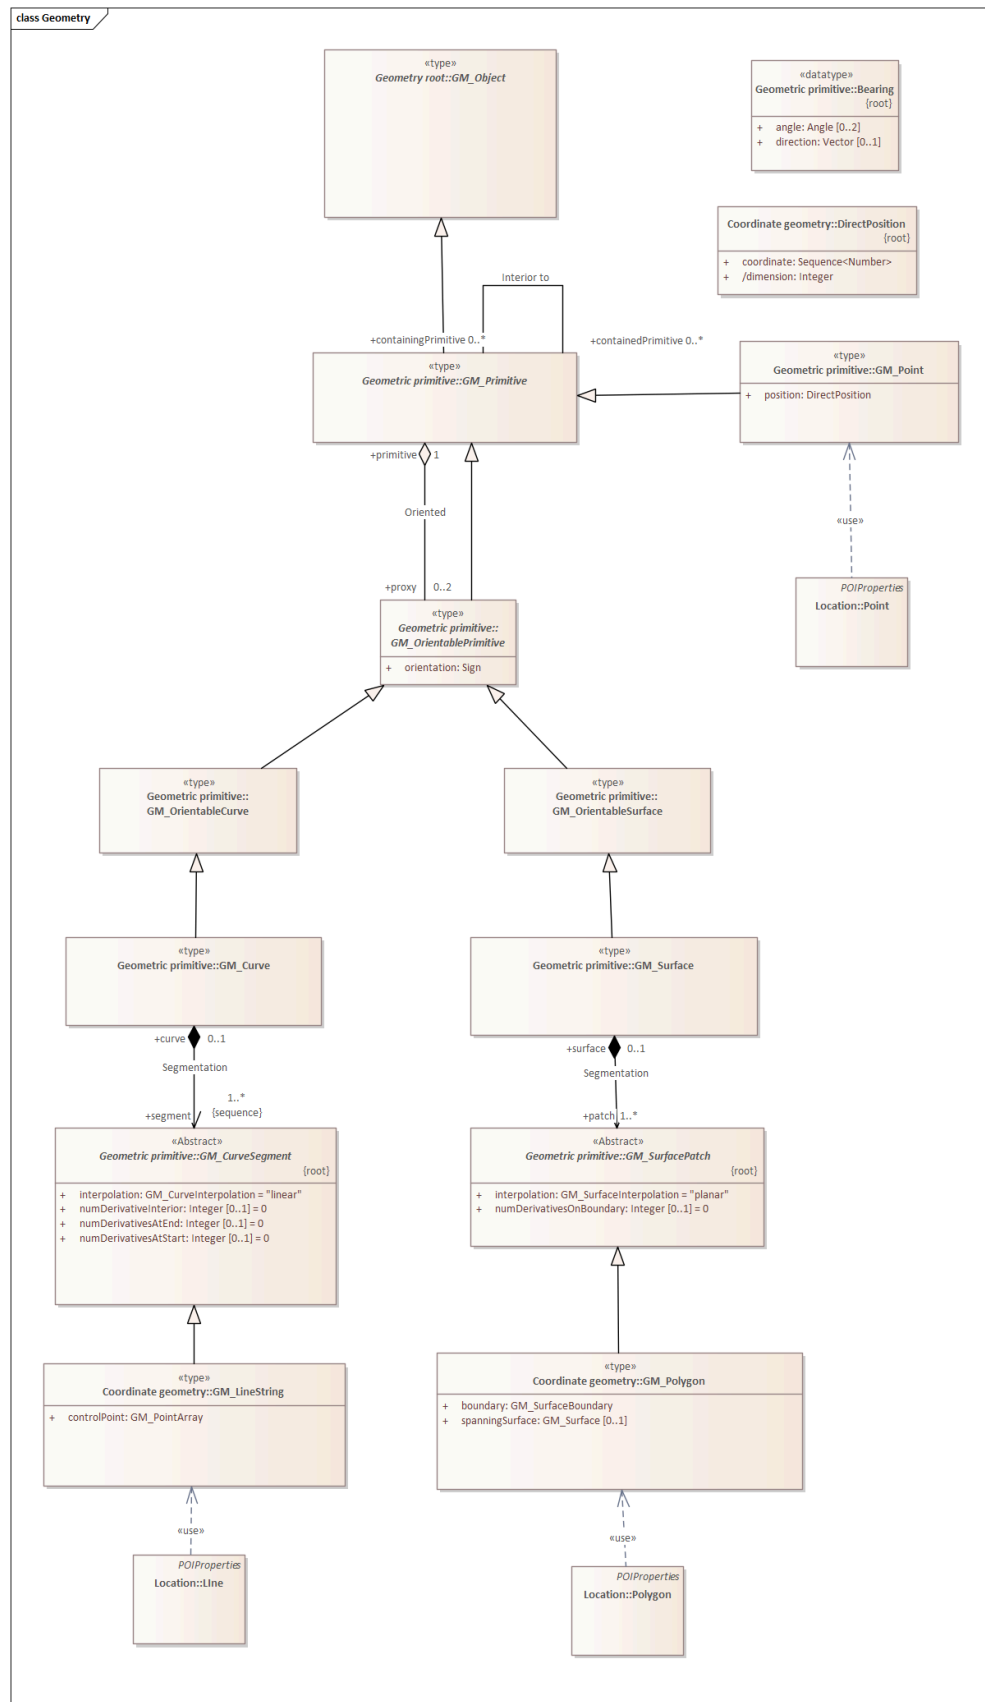


Figure 4 – Geometry Model

The key classes described in this figure are:

GM_Object: Root class for all OGC geometry types.

GM_Point: The geometric primitive for Points

GM_LineString: The geometric primitive for line strings.

GM_Polygon: The geometric primitive for areas.

| Requirement 2: Requirement – Geometry | |
|---------------------------------------|--|
| IDENTIFIER | /req/core/geometry |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | The POI Conceptual Model spatial geometry properties SHALL be compliant with the Geometry Model defined in ISO 19107 with the following restrictions: |
| A | A POI instance SHALL include a spatial geometry property using the SpatialAttributeType attribute type. |
| B | The spatial geometry properties of all POI instances SHALL be defined using one or more of the following classes: <ol style="list-style-type: none">1. GM_Point2. GM_LineString3. GM_Polygon |

6.2. POI ISO Extensions

This Standard extends the OGC Feature Model to support the concept of a Point of Interest. These extensions are illustrated in Figure 5.

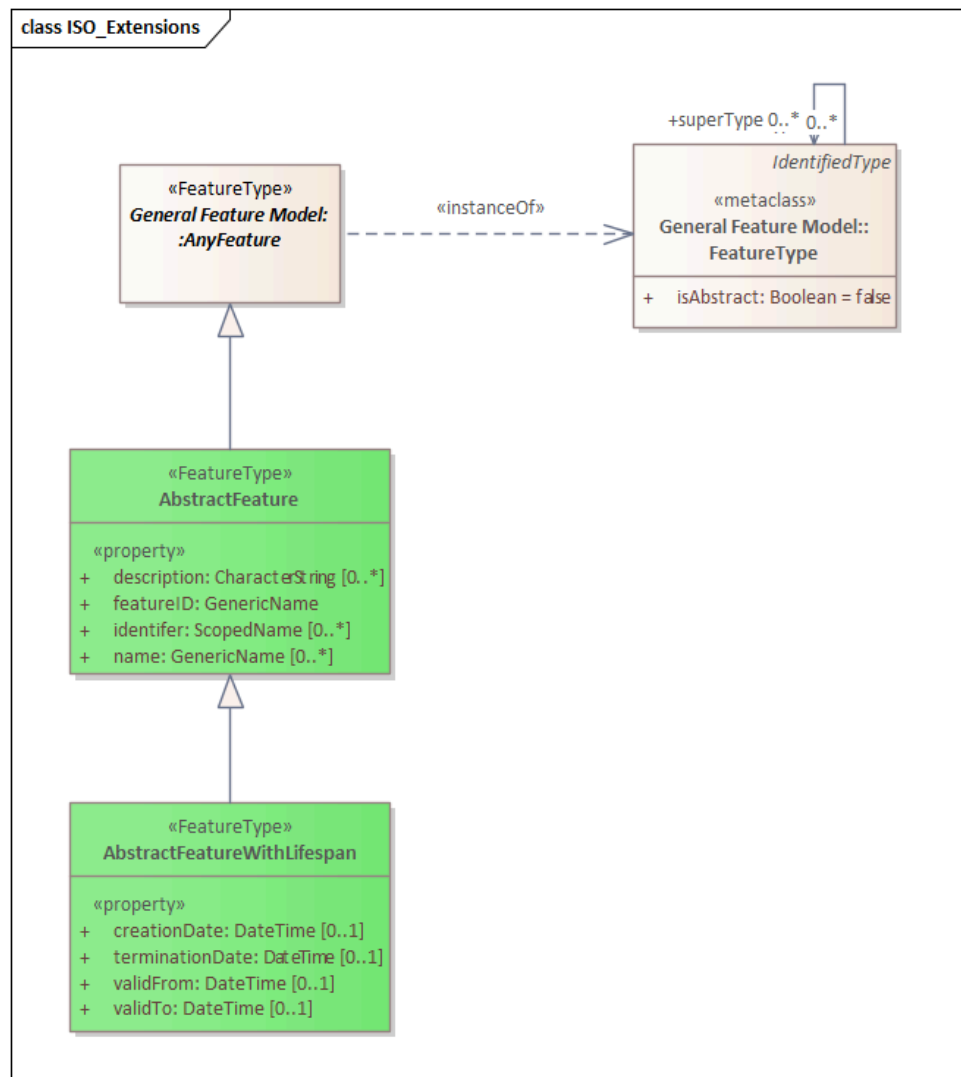


Figure 5 – POI UML Model - ISO Extensions

These extensions include further refinement of the *AnyFeature* class through the addition of identification and temporal validity attributes.

AbstractFeature: The root Feature class for this Standard. This class has been borrowed from the CityGML 3.0 Conceptual Model. *AbstractFeature* adds descriptive and identifying properties to *AnyFeature*. **AbstractFeatureWithLifespan:** Adds temporality to *AbstractFeature*. This class was also borrowed from the CityGML 3.0 Conceptual Model.

6.2.1. Abstract Feature

REQUIREMENT 3: REQUIREMENT – ABSTRACT FEATURE

| | |
|------------|---------------------------|
| IDENTIFIER | /req/core/abstractfeature |
|------------|---------------------------|

REQUIREMENT 3: REQUIREMENT – ABSTRACT FEATURE

| | |
|-------------|---|
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An instantiation of the AbstractFeature class SHALL be an accurate representation of the UML model for that class. |
| A | An encoding of the AbstractFeature class SHALL be a compliant extension of the Any Feature class defined in ISO 19109. |
| B | An encoding of the AbstractFeature class SHALL comply with requirement /req/core/abstractfeature-description. |
| C | An encoding of the AbstractFeature class SHALL comply with requirement /req/core/abstractfeature-featureid. |
| D | An encoding of the AbstractFeature class SHALL comply with requirement /req/core/abstractfeature-identifier. |
| E | An encoding of the AbstractFeature class SHALL comply with requirement /req/core/abstractfeature-name. |

REQUIREMENT 4: REQUIREMENT – ABSTRACT FEATURE DESCRIPTION

| | |
|-------------|---|
| IDENTIFIER | /req/core/abstractfeature-description |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An instantiation of the AbstractFeature class SHALL comply with the following criteria: |
| A | An encoding of the AbstractFeature class SHALL include zero or one description attributes. |

REQUIREMENT 5: REQUIREMENT – ABSTRACT FEATURE FEATURE ID

| | |
|-------------|---|
| IDENTIFIER | /req/core/abstractfeature-featureid |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An instantiation of the AbstractFeature class SHALL comply with the following criteria: |
| A | An encoding of the AbstractFeature class SHALL include one featureID attributes. |

REQUIREMENT 6: REQUIREMENT – ABSTRACT FEATURE IDENTIFIER

| | |
|-------------|---|
| IDENTIFIER | /req/core/abstractfeature-identifier |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An instantiation of the AbstractFeature class SHALL comply with the following criteria: |
| A | An encoding of the AbstractFeature class SHALL include zero or one identifier attributes. |

REQUIREMENT 7: REQUIREMENT – ABSTRACT FEATURE NAME

| | |
|-------------|---|
| IDENTIFIER | /req/core/abstractfeature-name |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An instantiation of the AbstractFeature class SHALL comply with the following criteria: |
| A | An encoding of the AbstractFeature class SHALL include zero or more name attributes. |

6.2.2. Abstract Feature with Lifespan

REQUIREMENT 8: REQUIREMENT – FEATURE WITH LIFESPAN

| | |
|-------------|--|
| IDENTIFIER | /req/core/featurewithlifespan |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An instantiation of the AbstractFeatureWithLifespan class SHALL be an accurate representation of the UML model for that class. |
| A | An encoding of the AbstractFeatureWithLifespan class SHALL comply with requirement / req/core/abstractfeature. |
| B | An encoding of the AbstractFeatureWithLifespan class SHALL comply with requirement / req/core/featurewithlifespan-creationdate. |
| C | An encoding of the AbstractFeatureWithLifespan class SHALL comply with requirement / req/core/featurewithlifespan-terminationdate. |
| D | An encoding of the AbstractFeatureWithLifespan class SHALL comply with requirement / req/core/featurewithlifespan-validfrom. |

REQUIREMENT 8: REQUIREMENT – FEATURE WITH LIFESPAN

E

An encoding of the AbstractFeatureWithLifespan class SHALL comply with requirement /req/core/featurewithlifespan-validto.

REQUIREMENT 9: REQUIREMENT – FEATURE WITH LIFESPAN CREATION DATE

IDENTIFIER

/req/core/featurewithlifespan-creationdate

INCLUDED IN

Requirements class 1: <http://www.opengis.net/spec/poi/1.0/req/core>

STATEMENT

An instantiation of the AbstractFeatureWithLifespan class SHALL comply with the following criteria:

A

An encoding of the AbstractFeatureWithLifespan class SHALL include zero or one creationDate attributes.

REQUIREMENT 10: REQUIREMENT – FEATURE WITH LIFESPAN TERMINATION DATE

IDENTIFIER

/req/core/featurewithlifespan-terminationdate

INCLUDED IN

Requirements class 1: <http://www.opengis.net/spec/poi/1.0/req/core>

STATEMENT

An instantiation of the AbstractFeatureWithLifespan class SHALL comply with the following criteria:

A

An encoding of the AbstractFeatureWithLifespan class SHALL include zero or one terminationDate attributes.

REQUIREMENT 11: REQUIREMENT – FEATURE WITH LIFESPAN VALID FROM

IDENTIFIER

/req/core/featurewithlifespan-validfrom

INCLUDED IN

Requirements class 1: <http://www.opengis.net/spec/poi/1.0/req/core>

STATEMENT

An instantiation of the AbstractFeatureWithLifespan class SHALL comply with the following criteria:

A

An encoding of the AbstractFeatureWithLifespan class SHALL include zero or one validFrom attributes.

REQUIREMENT 12: REQUIREMENT – FEATURE WITH LIFESPAN VALID TO

| | |
|-------------|---|
| IDENTIFIER | /req/core/featurewithlifespan-validto |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An instantiation of the AbstractFeatureWithLifespan class SHALL comply with the following criteria: |
| A | An encoding of the AbstractFeatureWithLifespan class SHALL include zero or one validTo attributes. |

6.3. POI Class Model

The following classes form the core of the POI model. These classes are the same for all POIs.

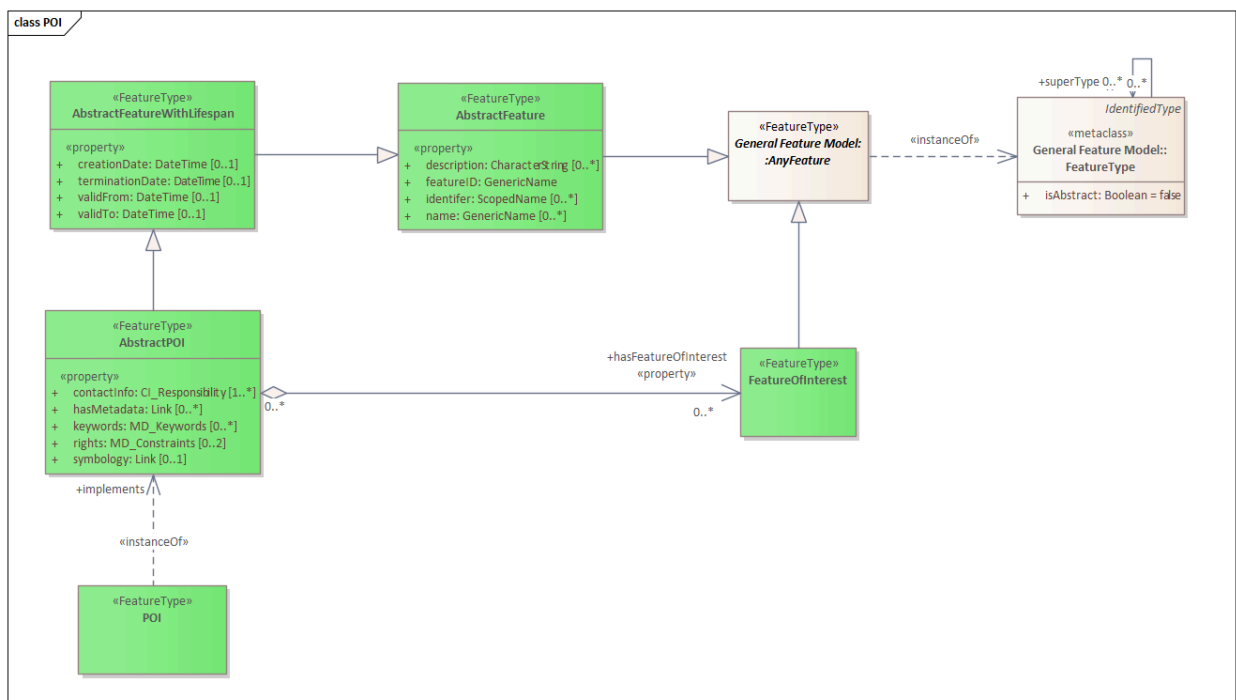


Figure 6 – POI UML Model - Core

- **AbstractPOI:** The abstract model for a Point of Interest. All POI instances will contain these attributes.
- **POI:** A POI instance.
- **FeatureOfInterest:** This is an OGC Feature which has been defined independently from the POI. Conceptually, the purpose of the POI is to provide a user friendly synopsis of this Feature.

6.3.1. Abstract POI

REQUIREMENT 13: REQUIREMENT – ABSTRACT POI

| | |
|-------------|---|
| IDENTIFIER | /req/core/abstract-poi |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An instantiation of the Abstract POI class SHALL be an accurate representation of the UML model for that class. |
| A | An instantiation of the Abstract POI class SHALL comply with requirement /req/core/poi-feature-with-lifespan. |
| B | An instantiation of the Abstract POI class SHALL comply with requirement /req/core/poi-contactinfo. |
| C | An instantiation of the Abstract POI class SHALL comply with requirement /req/core/poi-featureofinterest. |
| D | An instantiation of the Abstract POI class SHALL comply with requirement /req/core/poi-metadata. |
| E | An instantiation of the Abstract POI class SHALL comply with requirement /req/core/poi-keywords. |
| F | An instantiation of the Abstract POI class SHALL comply with requirement /req/core/poi-rights. |
| G | An instantiation of the Abstract POI class SHALL comply with requirement /req/core/poi-symbolology. |
| H | An instantiation of the Abstract POI class SHALL comply with requirement /req/core/poi-haspayload. |

REQUIREMENT 14: REQUIREMENT – POI CONTACT INFORMATION

| | |
|------------|---|
| IDENTIFIER | /req/core/poi-contactInfo |
| STATEMENT | An instantiation of the Abstract POI class SHALL comply with the following criteria: |
| A | An encoding of the Abstract POI class SHALL include one or more contactInfo attributes. |
| B | Encodings of the contactInfo attribute SHALL be a valid implementation of the CL_Responsibility class from ISO 19115-1:2014 |

REQUIREMENT 15: REQUIREMENT – POI FEATURE OF INTEREST

| | |
|-------------|---|
| IDENTIFIER | /req/core/poi-featureofinterest |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An instantiation of the Abstract POI class SHALL comply with the following criteria: |
| A | An encoding of the Abstract POI class SHALL include zero or more associated instances of the FeatureOfInterest class. |
| B | The target of the hasFeatureOfInterest aggregation SHALL be a valid implementation of the Feature class from ISO 19109:2015 |

REQUIREMENT 16: REQUIREMENT – POI METADATA

| | |
|-------------|---|
| IDENTIFIER | /req/core/poi-metadata |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An instantiation of the Abstract POI class SHALL comply with the following criteria: |
| A | An encoding of the Abstract POI class SHALL include zero or more metadata attributes. |
| B | An implementation of the metadata association SHALL comply with requirement /req/core/link. |

REQUIREMENT 17: REQUIREMENT – POI KEYWORDS

| | |
|-------------|---|
| IDENTIFIER | /req/core/poi-keywords |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An instantiation of the Abstract POI class SHALL comply with the following criteria: |
| A | An encoding of the Abstract POI class SHALL include zero or more keywords attributes. |
| B | Encodings of the keywords attribute SHALL be a valid implementation of the MD_Keywords class from ISO 19115-1:2014. |

REQUIREMENT 18: REQUIREMENT – POI RIGHTS

| | |
|-------------|---|
| IDENTIFIER | /req/core/poi-rights |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An instantiation of the Abstract POI class SHALL comply with the following criteria: |
| A | An encoding of the Abstract POI class SHALL include zero, one, or two rights attributes. |
| B | Encodings of the rights attribute SHALL be a valid implementation of the MD_Constraints class from ISO 19115-1:2014. |

REQUIREMENT 19: REQUIREMENT – POI SYMBOLOGY

| | |
|-------------|---|
| IDENTIFIER | /req/core/poi-symbology |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An instantiation of the Abstract POI class SHALL comply with the following criteria: |
| A | An encoding of the Abstract POI class SHALL include zero or one symbology attributes. |
| B | Encodings of a symbology attribute SHALL comply with requirement /req/core/link. |

REQUIREMENT 20: REQUIREMENT – POI HAS PAYLOAD

| | |
|-------------|---|
| IDENTIFIER | /req/core/poi-haspayload |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An instantiation of the Abstract POI class SHALL comply with the following criteria: |
| A | An encoding of the Abstract POI class SHALL include zero or more associated instances of the POI_Payload class. |
| B | The associated POI_Payload classes SHALL comply with requirement /req/core/poi-payload. |

REQUIREMENT 21: REQUIREMENT – LINK CLASS

| | |
|-------------|---|
| IDENTIFIER | /req/core/link |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | The encoding of the Link class SHALL be implemented using a hyperlink approach appropriate for implementing technology. |

6.3.2. POI

REQUIREMENT 22: REQUIREMENT – POI CLASS

| | |
|-------------|---|
| IDENTIFIER | /req/core/poi |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An encoding of the POI class SHALL comply with requirement /req/core/req-poi-abstract-poi. |

6.4. POI Payload

A POI is a representation of a Feature. The POI class provides a standard way to identify and manage a POI. However, it does not provide any information about the Feature it is representing. This information is difficult to standardize since it is dependent on the data model of the Feature store being described.

Therefore, the POI model is designed to be extended with properties specific to a Feature or a Feature Collection. The POI Payload is a container for representations of Feature properties. The syntax of those representations is provided by the Payload Schema class. Where appropriate, semantics can also be provided through the Payload Definition class. Since the schema and definitions may be the same for a large number of Features, these classes should be instantiated as referenceable resources, allowing one instance to be used by a number of POIs.

both JSON and YAML encodings. The POI abstract model allows a POI Payload to have multiple usesSchema aggregations in order to support this practice.

The hasDefinition aggregation is provided in anticipation of the future use of ontologies to associate meaning (semantics) with the structure (syntax) of the POI Payload. Use of the hasDefinition aggregation is optional.

REQUIREMENT 23: REQUIREMENT – POI-PAYLOAD

| | |
|-------------|---|
| IDENTIFIER | /req/core/poi_payload |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An instantiation of the POI_Payload class SHALL be an accurate representation of the UML model for that class. |
| A | An instantiation of the POI_Payload class SHALL comply with requirement /req/core/poi_payload-hasfeatureofinterest. |
| B | An instantiation of the POI_Payload class SHALL comply with requirement /req/core/poi_payload-hasdefinition. |
| C | An instantiation of the POI_Payload class SHALL comply with requirement /req/core/poi_payload-usesschema. |

REQUIREMENT 24: REQUIREMENT – POI PAYLOAD HAS FEATURE OF INTEREST

| | |
|-------------|---|
| IDENTIFIER | /req/core/poi_payload-hasfeatureofinterest |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An instantiation of the POI_Payload class SHALL comply with the following criteria: |
| A | An encoding of the Abstract POI_Payload class SHALL include zero or more hasFeatureOfInterest aggregations. |
| B | The target of a hasFeatureOfInterest aggregation SHALL be a valid implementation of the Feature class from ISO 19109:2015 |

REQUIREMENT 25: REQUIREMENT – POI PAYLOAD HAS DEFINITION

| | |
|-------------|---|
| IDENTIFIER | /req/core/poi_payload-hasdefinition |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An instantiation of the POI_Payload class SHALL comply with the following criteria: |

REQUIREMENT 25: REQUIREMENT – POI PAYLOAD HAS DEFINITION

| | |
|---|--|
| A | An encoding of the Abstract POI_Payload class SHALL include no more than one hasDefinition aggregations. |
| B | The target of a hasDefinition aggregation SHALL be a valid ontology for the implementing technology |

REQUIREMENT 26: REQUIREMENT – POI PAYLOAD USES SCHEMA

| | |
|-------------|---|
| IDENTIFIER | /req/core/poi_payload-usesschema |
| INCLUDED IN | Requirements class 1: http://www.opengis.net/spec/poi/1.0/req/core |
| STATEMENT | An instantiation of the POI_Payload class SHALL comply with the following criteria: |
| A | An encoding of the Abstract POI_Payload class SHALL include one or more usesSchema aggregations. |
| B | The target of a usesSchema aggregation SHALL be a valid schema for the implementing technology. |

6.5. POI Data Dictionary

The POI UML model is the normative definition of the POI Conceptual Model. The Data Dictionary tables in this section were software generated from the UML model. As such, this section provides a normative representation of the POI Conceptual Model.

Table 1

| AbstractFeature | |
|-----------------|---|
| Definition: | AbstractFeature is the abstract superclass of all feature types within the Poi Model. |
| Subclass of: | AnyFeature |
| Stereotype: | «FeatureType» |

| ATTRIBUTE | VALUE TYPE AND MULTIPLICITY | DEFINITION |
|---------------------------|-----------------------------|---|
| description «property» | CharacterString [0..*] | Provides further information on the feature. |
| featureID «property» | GenericName [1..1] | Specifies the unique identifier of the feature that is valid in the instance document within which it occurs. |
| identifer «property» | ScopedName [0..*] | Specifies the unique identifier of the feature that is valid globally. |
| name «property» | GenericName [0..*] | Specifies the name of the feature. |

Table 2

| AbstractFeatureWithLifespan | | |
|------------------------------------|--|--|
| Definition: | AbstractFeatureWithLifespan is the base class for all Poi features. This class allows the optional specification of the real-world and database times for the existence of each feature. | |
| Subclass of: | AbstractFeature | |
| Stereotype: | «FeatureType» | |
| ATTRIBUTE | VALUE TYPE AND MULTIPLICITY | DEFINITION |
| creationDate «property» | DateTime [0..1] | Indicates the date at which a POI feature was added to the containing model. |
| terminationDate «property» | DateTime [0..1] | Indicates the date at which a POI feature was removed from the containing model. |
| validFrom «property» | DateTime [0..1] | Indicates the date at which a POI feature started to exist in the real world. |
| validTo «property» | DateTime [0..1] | Indicates the date at which a POI feature ceased to exist in the real world. |

Table 3

| | |
|--------------------|---|
| AbstractPOI | |
| Definition: | A Point of Interest (POI) is a Feature which provides a concise summary of one or more associated Features. Its purpose is to provide easy access to key information about one or |

| | | |
|--------------|---|--|
| | more real-world objects without the need to access or understand the underlying Feature data set. | |
| Subclass of: | AbstractFeatureWithLifespan | |
| Stereotype: | «FeatureType» | |

| ROLE NAME | TARGET CLASS AND MULTIPLICITY | DEFINITION |
|--|-------------------------------|---|
| hasPayload «property» | POI_Payload [0..*] | Indicates a payload associated with this POI. |
| hasFeature OfInterest «property» | FeatureOfInterest [0..*] | One or more Features which are represented by this POI. |

| ATTRIBUTE | VALUE TYPE AND MULTIPLICITY | DEFINITION |
|---------------------------|-----------------------------|---|
| contactInfo «property» | CI_Responsibility [1..*] | Contact information for the creators and maintainers of this POI. |
| hasMetadata «property» | Link [0..*] | An association with zero or more metadata records providing additional information about this POI and/or the associated Features of Interest. |
| keywords «property» | MD_Keywords [0..*] | Keywords used to aid in discovery of POIs of interest. |
| rights «property» | MD_Constraints [0..2] | Legal and security constraints applicable to this POI. |
| symbology «property» | Link [0..1] | A reference to information about rendering this POI. |

Table 4

| FeatureOfInterest | |
|-------------------|--|
| Definition: | The thing whose property is being estimated or calculated in the course of an Observation to arrive at a Result, or whose property is being manipulated by an Actuator, or which is being sampled or transformed in an act of Sampling. (SOSA) |
| Subclass of: | AnyFeature |
| Stereotype: | «FeatureType» |

Table 5

| PayloadDefinition | |
|-------------------|--|
| Definition: | The semantic model (ontology) for a POI payload. |
| Subclass of: | none |
| Stereotype: | «DataType» |

Table 6

| PayloadSchema | |
|---------------|---|
| Definition: | A model of the syntax of the POI payload. |
| Subclass of: | none |
| Stereotype: | «DataType» |

Table 7

| POI | | |
|--------------|---|---|
| Definition: | An instance of a POI. Implements the AbstractPOI class. | |
| Subclass of: | none | |
| Stereotype: | «FeatureType» | |
| ROLE NAME | TARGET CLASS AND MULTIPLICITY | DEFINITION |
| implements | AbstractPOI [1..1] | Identifies the abstract POI implemented by this POI |

Table 8

| POI_Payload | | |
|--|--|--|
| Definition: | A representation of properties of the Fol which are to be included in the POI. | |
| Subclass of: | none | |
| Stereotype: | «DataType» | |
| ROLE NAME | TARGET CLASS AND MULTIPLICITY | DEFINITION |
| hasDefinition «property» | PayloadDefinition [0..1] | A reference to the semantic model of this POI payload. |
| hasFeature OfInterest «property» | FeatureOfInterest [0..*] | Indicates the Feature of Interest which is being summarized in this payload. |
| usesSchema «property» | PayloadSchema [1..*] | A reference to the schema for this POI payload. |

6.5.1. POI Data Types

The following data types are used in the POI UML model.

Table 9

| CharacterString | |
|-----------------|--|
| Definition: | CharacterString is a family of datatypes which represent strings of symbols from standard character-sets. The semantics of CharacterString is in accordance with ISO/IEC 11404:2007 clause 10.1.5. (ISO 19103) |
| Subclass of: | none |
| Stereotype: | «Type» |

Table 10

| Integer |
|---------|
|---------|

| | |
|--------------|--|
| Definition: | An exact integer value, with no fractional part. (ISO 19103) |
| Subclass of: | none |
| Stereotype: | «Type» |

Table 11

| Link | | |
|--------------|--|---|
| Definition: | A link is a typed connection between two resources. This class is based on the Web Linking model defined in IETF RFC 8288. | |
| Subclass of: | none | |
| Stereotype: | «Type» | |
| ATTRIBUTE | VALUE TYPE AND MULTIPLICITY | DEFINITION |
| href | CharacterString [1..1] | Supplies the URI to a remote resource (or resource fragment). |
| hreflang | CharacterString [0..*] | The “hreflang” attribute is a hint indicating what the language of the result of dereferencing the link should be. Note that this is only a hint. Multiple hreflang attributes on a single link-value indicate that multiple languages are available from the indicated resource. |
| rel | CharacterString [1..1] | A link relation (rel) attribute identifies the semantics (meaning) of a link. The relation type values should come from either the IANA or OGC relation type registries. |
| title | CharacterString [0..1] | The “title” attribute is used to label the destination of a link such that it can be used as a human-readable identifier (e.g., a menu entry). |
| type | CharacterString [0..1] | The “type” attribute is a hint indicating what the media type of the result of dereferencing the link should be. Note that this is only a hint. |



A

ANNEX A (INFORMATIVE) ABSTRACT TEST SUITE (NORMATIVE)



ANNEX A

(INFORMATIVE)

ABSTRACT TEST SUITE (NORMATIVE)

The following Abstract Test Suite is independent of any implementing technology. It is not to be used to assess conformance of a POI implementation. Rather, it is intended for use by developers of Implementation Specifications. It provides a baseline to be extended with the technology-specific details necessary to create an Executable Test Script. It is the technology-specific Executable Test Scripts which are used to assess conformance of POI implementations.

A.1. Conformance Class Core

| CONFORMANCE CLASS A.1 | |
|-----------------------|--|
| IDENTIFIER | <code>http://www.opengis.net/spec/poi/1.0/conf/core</code> |
| REQUIREMENTS CLASS | Requirements class 1: <code>http://www.opengis.net/spec/poi/1.0/req/core</code> |
| TARGET TYPE | Implementation Specification |
| CONFORMANCE TESTS | <div>Abstract test A.1: <code>/conf/core/generalfeaturemodel</code> Abstract test A.2: <code>/conf/core/geometry</code> Abstract test A.3: <code>/conf/core/abstractfeature</code> Abstract test A.4: <code>/conf/core/abstractfeature-description</code> Abstract test A.5: <code>/conf/core/abstractfeature-featureid</code> Abstract test A.6: <code>/conf/core/abstractfeature-identifier</code> Abstract test A.7: <code>/conf/core/abstractfeature-name</code> Abstract test A.8: <code>/conf/core/featurewithlifespan</code> Abstract test A.9: <code>/conf/core/featurewithlifespan-creationdate</code> Abstract test A.10: <code>/conf/core/featurewithlifespan-terminationdate</code> Abstract test A.11: <code>/conf/core/featurewithlifespan-validfrom</code> Abstract test A.12: <code>/conf/core/featurewithlifespan-validto</code> Abstract test A.13: <code>/conf/core/abstract-poi</code> Abstract test A.14: <code>/conf/core/poi-contactinfo</code> Abstract test A.15: <code>/conf/core/poi-featureofinterest</code> Abstract test A.16: <code>/conf/core/poi-metadata</code> Abstract test A.17: <code>/conf/core/poi-keywords</code></div> |

CONFORMANCE CLASS A.1

Abstract test A.18: /conf/core/poi-rights
Abstract test A.19: /conf/core/poi-symbology
Abstract test A.20: /conf/core/poi-haspayload
Abstract test A.21: /conf/core/link
Abstract test A.22: /conf/core/poi_payload
Abstract test A.23: /conf/core/poi_payload-usesschema
Abstract test A.24: /conf/core/poi_payload-hasdefinition
Abstract test A.25: /conf/core/poi_payload-hasfeatureofinterest
Abstract test A.26: /conf/core/poi

A.1.1. General Feature Model

ABSTRACT TEST A.1

| | |
|------------------|---|
| IDENTIFIER | /conf/core/generalfeaturemodel |
| REQUIREMENT | Requirement 1: /req/core/generalfeaturemodel |
| TARGET TYPE | Implementation Specification |
| NOTE | If the Implementation Specification is based on a Standard known to be conformant with ISO 19109 (ex: GML), then conformance with that Standard is sufficient to show conformance with ISO 19109. |
| TEST PURPOSE | Validate that the POI Implementation Specification is conformant with the ISO 19109 General Feature Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Inspect the POI Implementation Specification for the following: |
| A | Validate that the Implementation Specification includes an Abstract Test Suite (Annex A). |
| B | Validate that the Abstract Test Suite tests for conformance with the General Feature Model defined in ISO 19109. |

A.1.2. Geometry

ABSTRACT TEST A.2

| | |
|------------|---------------------|
| IDENTIFIER | /conf/core/geometry |
|------------|---------------------|

ABSTRACT TEST A.2

| | |
|------------------|---|
| REQUIREMENT | Requirement 2: /req/core/geometry |
| TARGET TYPE | Implementation Specification |
| NOTE | If the Implementation Specification is based on a Standard known to be conformant with ISO 19107 (ex: GML), then conformance with that Standard is sufficient to show conformance with ISO 19107. |
| TEST PURPOSE | To validate that the POI Implementation Specification is conformant with the ISO 19107 Geometry Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Inspect the POI Implementation Specification for the following: |
| A | Validate that the Implementation Specification includes an Abstract Test Suite (Annex A). |
| B | Validate that all geometries used in the Implementation Specification conform with the geometry model defined in ISO 19107. |
| C | Validate that the Abstract Test Suite tests each POI Feature for the presence of a SpatialAttributeType property of type GM_Point, GM_LineString, or GM_Polygon. |

A.1.3. Abstract Feature

ABSTRACT TEST A.3

| | |
|------------------|---|
| IDENTIFIER | /conf/core/abstractfeature |
| REQUIREMENT | Requirement 3: /req/core/abstractfeature |
| PREREQUISITES | Abstract test A.1: /conf/core/generalfeaturemodel Abstract test A.2: /conf/core/geometry |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the AbstractFeature Class as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Inspect the POI Implementation Specification to validate that the AbstractFeature class is properly implemented. |

ABSTRACT TEST A.3

| | |
|---|--|
| A | Validate that the implementation of the <code>AbstractFeature</code> class is also a valid implementation of the <code>AnyFeature</code> class defined in the ISO 19109 General Feature Model. |
| B | Validate correct implementation of the <code>description</code> attribute using test <code>/conf/core/abstractfeature-description</code> . |
| C | Validate correct implementation of the <code>featureId</code> attribute using test <code>/conf/core/abstractfeature-featureid</code> . |
| D | Validate correct implementation of the <code>identifier</code> attribute using test <code>/conf/core/abstractfeature-identifier</code> . |
| E | Validate correct implementation of the <code>name</code> attribute using test <code>/conf/core/abstractfeature-name</code> . |

A.1.3.1. Abstract Feature-Description

ABSTRACT TEST A.4

| | |
|------------------|--|
| IDENTIFIER | <code>/conf/core/abstractfeature-description</code> |
| REQUIREMENT | Requirement 4: <code>/req/core/abstractfeature-description</code> |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the <code>description</code> attribute as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate the cardinality and type of the <code>description</code> attribute. |
| A | Validate that zero, one, or more 'description' attributes are allowed in an <code>AbstractFeature</code> class. |
| B | Validate that the <code>description</code> attribute is a valid implementation of the <code>CharacterString</code> class from ISO 19103. |

A.1.3.2. Abstract Feature-FeatureId

ABSTRACT TEST A.5

| | |
|------------|---|
| IDENTIFIER | <code>/conf/core/abstractfeature-featureid</code> |
|------------|---|

ABSTRACT TEST A.5

| | |
|------------------|---|
| REQUIREMENT | Requirement 5: /req/core/abstractfeature-featureid |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the featureId attribute as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate the cardinality and type of the featureId attribute. |
| A | Validate that one 'featureId' attribute is required in an AbstractFeature class. |
| B | Validate that more than one 'featureId' attributes are allowed in an AbstractFeature class. |
| C | Validate that the featureId attribute is a valid implementation of the GenericName class from ISO 19103. |

A.1.3.3. Abstract Feature-Identifier

ABSTRACT TEST A.6

| | |
|------------------|--|
| IDENTIFIER | /conf/core/abstractfeature-identifier |
| REQUIREMENT | Requirement 6: /req/core/abstractfeature-identifier |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the identifier attribute as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate the cardinality and type of the identifier attribute. |
| A | Validate that zero, one, or more 'identifier' attributes are allowed in an AbstractFeature class. |
| B | Validate that the identifier attribute is a valid implementation of the ScopedName class from ISO 19103. |

A.1.3.4. Abstract Feature-Name

| ABSTRACT TEST A.7 | |
|-------------------|--|
| IDENTIFIER | /conf/core/abstractfeature-name |
| REQUIREMENT | Requirement 7: /req/core/abstractfeature-name |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the name attribute as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate the cardinality and type of the name attribute. |
| A | Validate that zero, one, or more 'name' attributes are allowed in an AbstractFeature class. |
| B | Validate that the name attribute is a valid implementation of the GenericName class from ISO 19103. |

A.1.4. Abstract Feature with Lifespan

| ABSTRACT TEST A.8 | |
|-------------------|---|
| IDENTIFIER | /conf/core/featurewithlifespan |
| REQUIREMENT | Requirement 8: /req/core/featurewithlifespan |
| PREREQUISITE | Abstract test A.3: /conf/core/abstractfeature |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the AbstractFeaturewithLifespan Class as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Inspect the POI Implementation Specification to validate that the AbstractFeatureWithLifespan class is properly implemented. |

ABSTRACT TEST A.8

| | |
|---|--|
| A | Validate that the implementation of the AbstractFeatureWithLifespan class is also a valid implementation of the AbstractFeature class using test /conf/core/abstractfeature. |
| B | Validate correct implementation of the creationDate attribute using test /conf/core/featurewithlifespan-creationdate. |
| C | Validate correct implementation of the terminationDate attribute using test /conf/core/featurewithlifespan-terminationdate. |
| D | Validate correct implementation of the validFrom attribute using test /conf/core/featurewithlifespan-validfrom. |
| E | Validate correct implementation of the validTo attribute using test /conf/core/featurewithlifespan-validto. |

A.1.4.1. Creation Date

ABSTRACT TEST A.9

| | |
|------------------|--|
| IDENTIFIER | /conf/core/featurewithlifespan-creationdate |
| REQUIREMENT | Requirement 9: /req/core/featurewithlifespan-creationdate |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the creationDate attribute as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate the cardinality and type of the creationDate attribute. |
| A | Validate that no more than one creationDate attribute is allowed in an AbstractFeatureWithLifespan class. |
| B | Validate that the creationDate attribute is a valid implementation of the DateTime type from ISO 19103. |

A.1.4.2. Termination Date

ABSTRACT TEST A.10

| | |
|------------|--|
| IDENTIFIER | /conf/core/featurewithlifespan-terminationdate |
|------------|--|

ABSTRACT TEST A.10

| | |
|------------------|---|
| REQUIREMENT | Requirement 10: /req/core/featurewithlifespan-terminationdate |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the terminationDate attribute as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate the cardinality and type of the terminationDate attribute. |
| A | Validate that no more than one terminationDate attribute is allowed in an AbstractFeatureWithLifespan class. |
| B | Validate that the terminationDate attribute is a valid implementation of the DateTime type from ISO 19103. |

A.1.4.3. Valid From

ABSTRACT TEST A.11

| | |
|------------------|---|
| IDENTIFIER | /conf/core/featurewithlifespan-validfrom |
| REQUIREMENT | Requirement 11: /req/core/featurewithlifespan-validfrom |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the validFrom attribute as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate the cardinality and type of the validFrom attribute. |
| A | Validate that no more than one validFrom attribute is allowed in an AbstractFeatureWithLifespan class. |
| B | Validate that the validFrom attribute is a valid implementation of the DateTime type from ISO 19103. |

A.1.4.4. Valid To

ABSTRACT TEST A.12

| | |
|------------------|---|
| IDENTIFIER | /conf/core/featurewithlifespan-validto |
| REQUIREMENT | Requirement 12: /req/core/featurewithlifespan-validto |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the validTo attribute as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate the cardinality and type of the validTo attribute. |
| A | Validate that no more than one 'validTo' attribute is allowed in an AbstractFeatureWithLifespan class. |
| B | Validate that the validTo attribute is a valid implementation of the DateTime type from ISO 19103. |

A.1.5. Abstract POI

ABSTRACT TEST A.13

| | |
|------------------|--|
| IDENTIFIER | /conf/core/abstract-poi |
| REQUIREMENT | Requirement 13: /req/core/abstract-poi |
| PREREQUISITE | Abstract test A.8: /conf/core/featurewithlifespan |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | To validate that the Implementation Specification implements the AbstractPOI class as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate that the Implementation Specification correctly implements the AbstractPOI class: |
| A | Validate that the implementation of the AbstractPOI class is also a valid implementation of the AbstractFeatureWithLifespan class using test /conf/core/featurewithlifespan. |
| B | Validate correct implementation of the contactInfo attribute using test /conf/core/poi-contactinfo. |

ABSTRACT TEST A.13

| | |
|---|--|
| C | Validate correct implementation of the hasFeatureOfInterest aggregation using the test /conf/core/poi-featureofinterest. |
| D | Validate correct implementation of the hasMetadata association using the test /conf/core/poi-metadata. |
| E | Validate correct implementation of the keywords attribute using the test /conf/core/poi-keywords. |
| F | Validate correct implementation of the rights attribute using the test /conf/core/poi-rights. |
| G | Validate correct implementation of the symbology association using the test /conf/core/poi-symbology. |
| H | Validate correct implementation of the hasPayload association using the test /conf/core/poi-haspayload. |

A.1.5.1. Abstract POI ContactInfo

ABSTRACT TEST A.14

| | |
|------------------|---|
| IDENTIFIER | /conf/core/poi-contactinfo |
| REQUIREMENT | Requirement 14: /req/core/poi-contactInfo |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the contactInfo attribute as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate the cardinality and type of the contactInfo attribute. |
| A | Validate that zero or more contactInfo attributes are allowed in an AbstractPOI class. |
| B | Validate that the contactInfo attribute is a valid implementation of the CI_Responsibility class from ISO 19115-1:2014. |

A.1.5.2. Abstract POI Feature Of Interest

ABSTRACT TEST A.15

| | |
|------------------|--|
| IDENTIFIER | /conf/core/poi-featureofinterest |
| REQUIREMENT | Requirement 15: /req/core/poi-featureofinterest |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the hasFeatureOfInterest aggregation as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate the cardinality and target class of the hasFeatureOfInterest aggregation. |
| A | Validate that zero or more hasFeatureOfInterest aggregations are allowed in an Abstract POI class. |
| B | Validate that the target of the hasFeatureOfInterest aggregation is a valid implementation of the Feature class from ISO 19109:2015. |

A.1.5.3. Abstract POI Metadata

ABSTRACT TEST A.16

| | |
|------------------|---|
| IDENTIFIER | /conf/core/poi-metadata |
| REQUIREMENT | Requirement 16: /req/core/poi-metadata |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the hasMetadata association as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate the cardinality and encoding of the hasMetadata association. |
| A | Validate that zero or more hasMetadata associations are allowed in an AbstractPOI class. |
| B | Validate that the hasMetadata association is implemented as described in the Conceptual Model using the /conf/core/link test. |

A.1.5.4. Abstract POI Keywords

| ABSTRACT TEST A.17 | |
|--------------------|--|
| IDENTIFIER | /conf/core/poi-keywords |
| REQUIREMENT | Requirement 17: /req/core/poi-keywords |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the keywords attribute as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate the cardinality and type of the keywords attribute. |
| A | Validate that zero or more keywords attributes are allowed in an AbstractPOI class. |
| B | Validate that the keywords attribute is a valid implementation of the MD_Keywords class from ISO 19115-1:2014. |

A.1.5.5. Abstract POI Rights

| ABSTRACT TEST A.18 | |
|--------------------|--|
| IDENTIFIER | /conf/core/poi-rights |
| REQUIREMENT | Requirement 18: /req/core/poi-rights |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the rights attribute as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate the cardinality and type of the rights attribute. |
| A | Validate that zero, one, or two rights attributes are allowed in an AbstractPOI class. |

ABSTRACT TEST A.18

| | |
|---|---|
| B | Validate that the <code>rights</code> attribute is a valid implementation of the <code>MD_Constraints</code> class from ISO 19115-1:2014. |
|---|---|

A.1.5.6. Abstract POI Symbology

ABSTRACT TEST A.19

| | |
|------------------|---|
| IDENTIFIER | <code>/conf/core/poi-symbology</code> |
| REQUIREMENT | Requirement 19: <code>/req/core/poi-symbology</code> |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the <code>symbology</code> association as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate the cardinality and encoding of the <code>symbology</code> association. |
| A | Validate that zero or one <code>symbology</code> associations are allowed in an <code>AbstractPOI</code> class. |
| B | Validate that the <code>symbology</code> association is implemented as described in the Conceptual Model using the <code>/conf/core/link</code> test. |

A.1.5.7. Abstract POI Payload Association

ABSTRACT TEST A.20

| | |
|------------------|---|
| IDENTIFIER | <code>/conf/core/poi-haspayload</code> |
| REQUIREMENT | Requirement 20: <code>/req/core/poi-haspayload</code> |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the <code>hasPayload</code> aggregation as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |

ABSTRACT TEST A.20

| | |
|-------------|--|
| DESCRIPTION | Validate the cardinality and target class of the hasPayload aggregation. |
| A | Validate that zero or more hasPayload aggregations are allowed in an AbstractPOI class. |
| B | Validate that the target of the hasPayload aggregation is a valid implementation of the POI_Payload class using the /conf/core/poi-payload test. |

A.1.5.8. Link

ABSTRACT TEST A.21

| | |
|------------------|---|
| IDENTIFIER | /conf/core/link |
| REQUIREMENT | Requirement 21: /req/core/link |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the Link class as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate that the association being tested uses a hyperlink approach appropriate for the implementing technology. |

A.1.6. POI Payload

ABSTRACT TEST A.22

| | |
|------------------|--|
| IDENTIFIER | /conf/core/poi_payload |
| REQUIREMENT | Requirement 23: /req/core/poi_payload |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | To validate that the Implementation Specification implements the POI_Payload Class as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |

ABSTRACT TEST A.22

| | |
|-------------|---|
| DESCRIPTION | Validate that the Implementation Specification correctly implements the POI_Payload class: |
| A | Validate correct implementation of the usesSchema aggregation using the test /conf/core/poi_payload-usschema. |
| B | Validate correct implementation of the hasDefinition aggregation using the test /conf/core/poi_payload-hasdefinition. |
| C | Validate correct implementation of the hasFeatureOfInterest aggregation using the test /conf/core/poi_payload-hasfeatureofinterest. |

A.1.6.1. POI_Payload Uses Schema

ABSTRACT TEST A.23

| | |
|------------------|--|
| IDENTIFIER | /conf/core/poi_payload-usschema |
| REQUIREMENT | Requirement 26: /req/core/poi_payload-usschema |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the usesSchema aggregation as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate the cardinality and target class of the usesSchema aggregation. |
| A | Validate that at least one usesSchema aggregation is required in a POI_Payload class. |
| B | Validate that the target of the usesSchema aggregation is a valid schema for the implementing technology. |

A.1.6.2. POI_Payload Has Definition

ABSTRACT TEST A.24

| | |
|-------------|---|
| IDENTIFIER | /conf/core/poi_payload-hasdefinition |
| REQUIREMENT | Requirement 25: /req/core/poi_payload-hasdefinition |

ABSTRACT TEST A.24

| | |
|------------------|--|
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the <code>hasDefinition</code> aggregation as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate the cardinality and target class of the <code>hasDefinition</code> aggregation. |
| A | Validate that no more than one <code>hasDefinition</code> aggregation is allowed in a <code>POI_Payload</code> class. |
| B | Validate that the target of the <code>hasDefinition</code> aggregation is a valid ontology for the implementing technology. |

A.1.6.3. POI_Payload Feature Of Interest

ABSTRACT TEST A.25

| | |
|------------------|--|
| IDENTIFIER | <code>/conf/core/poi_payload-hasfeatureofinterest</code> |
| REQUIREMENT | Requirement 24: <code>/req/core/poi_payload-hasfeatureofinterest</code> |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | Validate that the Implementation Specification implements the <code>hasFeatureOfInterest</code> aggregation as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate the cardinality and target class of the <code>hasFeatureOfInterest</code> aggregation. |
| A | Validate that zero or more <code>hasFeatureOfInterest</code> aggregations are allowed in a <code>POI_Payload</code> class. |
| B | Validate that the target of the <code>hasFeatureOfInterest</code> aggregation is a valid implementation of the <code>Feature</code> class from ISO 19109:2015. |

A.1.7. POI

ABSTRACT TEST A.26

| | |
|------------------|--|
| IDENTIFIER | /conf/core/poi |
| REQUIREMENT | Requirement 22: /req/core/poi |
| PREREQUISITE | Abstract test A.13: /conf/core/abstract-poi |
| TARGET TYPE | Implementation Specification |
| TEST PURPOSE | To validate that the Implementation Specification implements the POI Class as defined in the POI Conceptual Model. |
| TEST-METHOD-TYPE | Manual Inspection |
| DESCRIPTION | Validate that the Implementation Specification correctly implements the POI class: |
| A | Validate that the implementation of the POI class is also a valid implementation of the Abstract_POI class using test /conf/core/abstract-poi. |



B

ANNEX B (INFORMATIVE) REVISION HISTORY



ANNEX B

(INFORMATIVE)

REVISION HISTORY

Table B.1

| DATE | RELEASE | EDITOR | PRIMARY CLAUSES MODIFIED | DESCRIPTION |
|------------|---------|---------------|-----------------------------|-----------------------------------|
| 2021-06-17 | 0.0.1 | Matthew Purss | all | initial version |
| 2024-02-15 | 1.0.0 | Chuck Heazel | all | POI draft standard for OAB review |



BIBLIOGRAPHY





BIBLIOGRAPHY

- [1] ISO: ISO 1087-1, *Terminology work – Vocabulary – Part 1: Theory and application*. International Organization for Standardization, Geneva <https://www.iso.org/standard/20057.html>.
- [2] ISO/IEC: ISO/IEC 2382, *Information technology – Vocabulary*. International Organization for Standardization, International Electrotechnical Commission, Geneva <https://www.iso.org/standard/63598.html>.
- [3] ISO: ISO 11404:2007, ISO (2007).
- [4] ISO: ISO 19104, *Geographic information – Terminology*. International Organization for Standardization, Geneva <https://www.iso.org/standard/63541.html>.
- [5] ISO: ISO 19111:2019, *Geographic information – Referencing by coordinates*. International Organization for Standardization, Geneva (2019). <https://www.iso.org/standard/74039.html>.
- [6] ISO: ISO 19112, *Geographic information – Spatial referencing by geographic identifiers*. International Organization for Standardization, Geneva <https://www.iso.org/standard/70742.html>.
- [7] ISO: ISO 19117:2012, *Geographic information – Portrayal*. International Organization for Standardization, Geneva (2012). <https://www.iso.org/standard/46226.html>.
- [8] ISO: ISO 19118, *Geographic information – Encoding*. International Organization for Standardization, Geneva <https://www.iso.org/standard/44212.html>.
- [9] ISO: ISO 19119:2016, *Geographic information – Services*. International Organization for Standardization, Geneva (2016). <https://www.iso.org/standard/59221.html>.
- [10] ISO: ISO 19133, *Geographic information – Location-based services – Tracking and navigation*. International Organization for Standardization, Geneva <https://www.iso.org/standard/32551.html>.
- [11] ISO: ISO 19136-1, *Geographic information – Geography Markup Language (GML) – Part 1: Fundamentals*. International Organization for Standardization, Geneva <https://www.iso.org/standard/75676.html>.
- [12] ISO: ISO 19143, *Geographic information – Filter encoding*. International Organization for Standardization, Geneva <https://www.iso.org/standard/42137.html>.
- [13] ISO: ISO 19150-1, *Geographic information – Ontology – Part 1: Framework*. International Organization for Standardization, Geneva .. ISO
- [14] ISO: ISO 19150-2, *Geographic information – Ontology – Part 2: Rules for developing ontologies in the Web Ontology Language (OWL)*. International Organization for Standardization, Geneva <https://www.iso.org/standard/57466.html>.

- [15] ISO: ISO 19150-4, *Geographic information – Ontology – Part 4: Service ontology*. International Organization for Standardization, Geneva <https://www.iso.org/standard/72177.html>.
- [16] ISO: ISO 19155, *Geographic information – Place Identifier (PI) architecture*. International Organization for Standardization, Geneva <https://www.iso.org/standard/32573.html>.
- [17] ISO: ISO 19156:2011, *Geographic information – Observations and measurements*. International Organization for Standardization, Geneva (2011). <https://www.iso.org/standard/32574.html>.
- [18] ISO: ISO 19160-4, *Addressing – Part 4: International postal address components and template language*. International Organization for Standardization, Geneva <https://www.iso.org/standard/83470.html>.
- [19] ISO/IEC: ISO/IEC 19501, *Information technology – Open Distributed Processing – Unified Modeling Language (UML) Version 1.4.2*. International Organization for Standardization, International Electrotechnical Commission, Geneva <https://www.iso.org/standard/32620.html>.
- [20] Object Management Group, *Model Driven Architecture Guide rev. 2.0*