


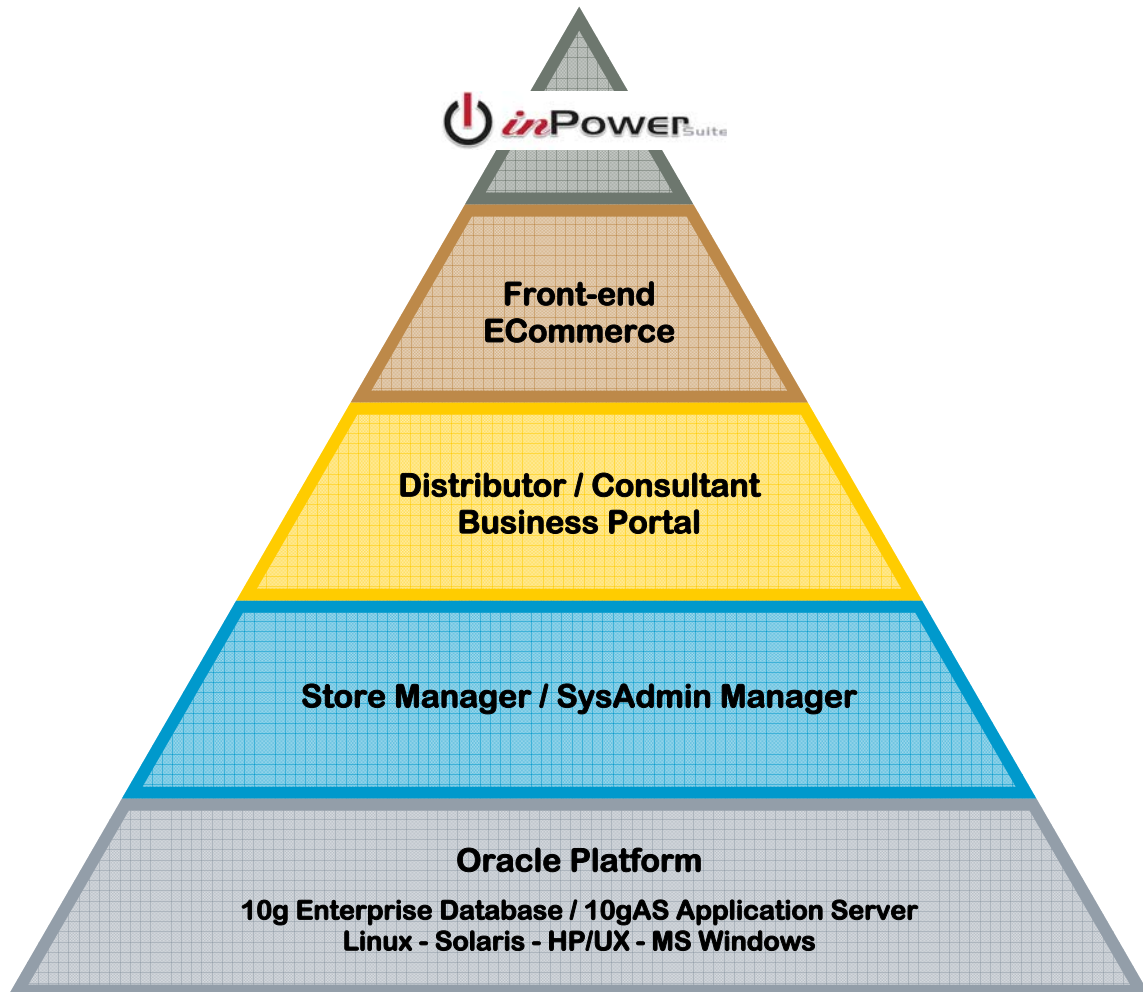

Overview

inPowerSuite is a 100% internet-based application that was built exclusively with Oracle technology. Both the frontend and backend applications are designed with a "thin tier" interface using only HTML and Javascript. All webpages are dynamically built using Oracle "mod_plsql" application server technology, which enjoys all the scalability features built in Oracle's award-winning database and application server products.

Supported Operating Systems

- ☐ Red Hat Linux Enterprise 3.0
- ☐ HP Unix 11
- ☐ Sun Solaris 9/10
- ☐ Microsoft Windows 2000/2003 Server

Oracle Leveraged Features

High Availability

- ❑ Oracle Data Guard
- ❑ Rolling Upgrades – Patch Set, Database and O/S
- ❑ Fast-start selectable recovery time
- ❑ Comprehensive online schema reorganization/redefinition
- ❑ Online system changes – CPU, disk, memory
- ❑ Flashback Table
- ❑ Block-level media recovery
- ❑ Incremental backup and recovery
- ❑ Parallel backup and recovery
- ❑ Point-in-time tablespace recovery

Scalability

- ❑ PL/SQL native compilation

Security

- ❑ Encryption toolkit
- ❑ Virtual Private Database

Development Platform

- ❑ Java support
- ❑ Database Web Services
- ❑ Comprehensive XML support in the database
- ❑ Objects and extensibility
- ❑ Regular Expressions
- ❑ PL/SQL stored procedures and triggers

Manageability

- ❑ Oracle Enterprise Manager - Database Control, automatic configuration
- ❑ Automatic memory management
- ❑ Automatic Storage Management
- ❑ Automatic undo management
- ❑ Automatic statistics management
- ❑ Server managed backup and recovery
- ❑ Automatic Backup/Recovery to Flash Recovery Area, including out of the box configuration
- ❑ Duplexed backup sets
- ❑ Server-generated Alerts
- ❑ End-to-End Application Tracing
- ❑ Database Resource Manager

VLDB, Data Warehousing, Business Intelligence

- ❑ Oracle Partitioning
- ❑ Data Compression
- ❑ Analytic functions
- ❑ Bitmapped index and bitmapped join index
- ❑ Function-based index
- ❑ Parallel Query/DML
- ❑ Parallel statistics gathering
- ❑ Parallel index build/scans

- ❑ Parallel Data Pump Export/Import
- ❑ Transportable tablespaces, including cross-platform
- ❑ Sample scan
- ❑ Summary management – Materialized View Query Rewrite
- ❑ Direct Path Load API
- ❑ External tables

Integration

- ❑ Advanced Queuing

Networking

- ❑ Connection pooling

Content Management


- ❑ Oracle Spatial
- ❑ Parallel text index creation
- ❑ interMedia
- ❑ Oracle Text
- ❑ LOB (large object) support

mod_plsql Description

Oracle Application Server consolidates Oracle's middle-tier products into a single solution for the deployment of Web applications. mod_plsql provides support for deploying PL/SQL-based database applications on the World Wide Web. It is part of Oracle HTTP Server (OHS), which ships with Oracle Application Server and Oracle Database. As part of the Oracle HTTP Server, it is the job of mod_plsql to interpret a URL sent by a Web browser to a Web server, call the appropriate PL/SQL subprograms to treat the browser request, then return the generated response to the browser. Typically, mod_plsql responds to a Web browser HTTP request by constructing an HTML page to display.

As a plug-in to Oracle HTTP Server, mod_plsql causes stored procedures to be executed in response to HTTP requests. For each URL that is processed, mod_plsql either uses a database session from its connection pool, or creates a new session on the fly and pools it.

The following scenario provides an overview of what steps occur when a server receives a client request:

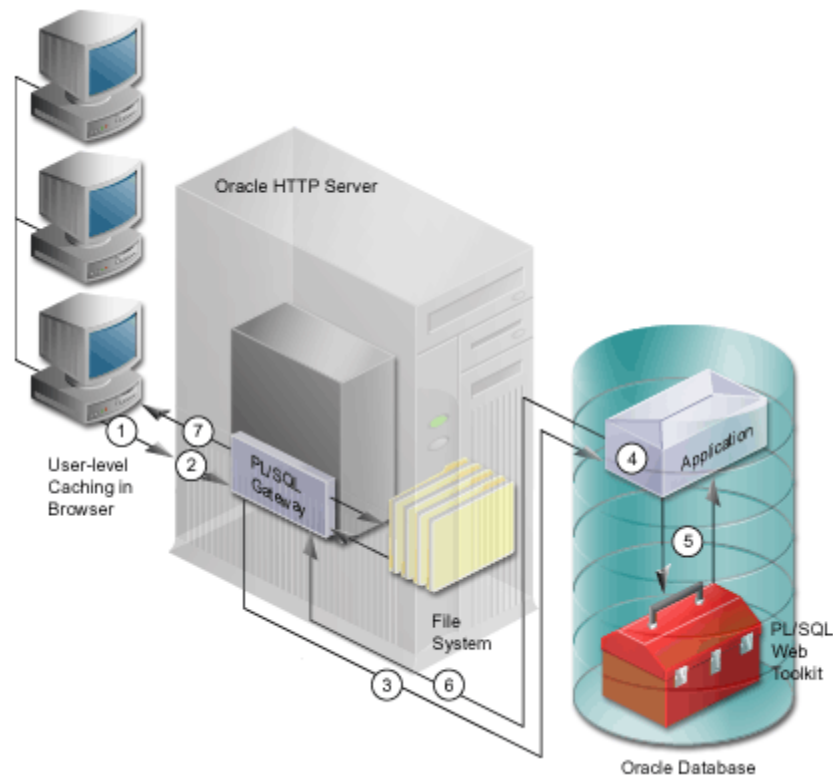

The Oracle HTTP Server receives a request containing a virtual path, which is configured to be serviced by `mod_plsql`.

1. The Oracle HTTP Server routes the request to `mod_plsql`.
2. By using the configuration information stored in your DAD, `mod_plsql` connects to the database. The request is forwarded by `mod_plsql` to the Oracle Database.
3. `mod_plsql` prepares the call parameters, and invokes the PL/SQL procedure in the application.
4. The PL/SQL procedure generates an HTML page using data and the PL/SQL Web Toolkit* accessed from the database.
5. The response is returned to `mod_plsql`.
6. The Oracle HTTP Server sends the response to the client browser.

The procedure that `mod_plsql` invokes returns the HTTP response to the client. To simplify this task, `mod_plsql` includes the PL/SQL Web Toolkit, which contains a set of packages called the owa packages. Use these packages in your stored procedure to get information about the request, construct HTML tags, and return header information to the client. Install the toolkit in a common schema so that all users can access it.

* To develop the stored procedures that are executed by `mod_plsql` at runtime, you use the PL/SQL Web Toolkit: a set of PL/SQL packages that can be used to obtain information about an HTTP request; specify HTTP response headers, such as cookies, content-type, and mime-type, for HTTP headers; set cookies; and generate standard HTML tags for creating HTML pages.