


FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	login_feature	2	0	2	0	0.063 s

SCENARIOS SUMMARY -- 3 --

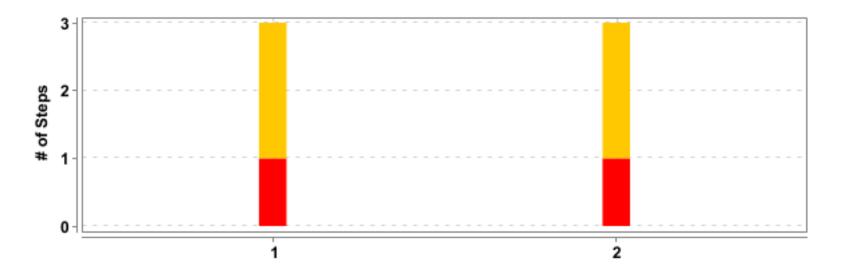


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	login_feature	TC_01_admin_login	3	0	1	2	0.033 s
2	login_feature	TC_02_employee_login	3	0	1	2	0.005 s

DETAILED SECTION -- 4 --

(F)- login_feature

FAILED	DURATION - 0.063 s	Scenarios		Steps	
		Total - 2		Total - 6	
/ 10:32:34.908 F	PM // 10:32:34.971 PM /	Pass - 0	2	Pass - 0	6
		Fail - 2		Fail - 2	
		Skip - 0		Skip - 4	

(S)- TC_01_admin_login

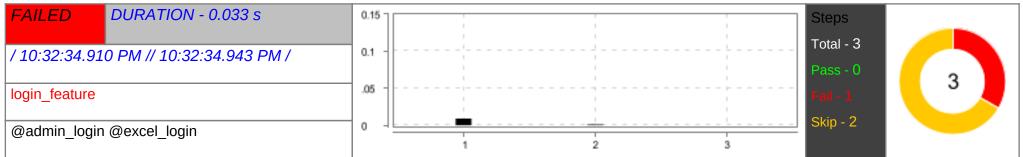


#	Step / Hook Details	Status	Duration
1	Given user login with excel as "admin"	FAILED	0.009 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdefinitions.ExcelStepDefs		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)		
	at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)		
	at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)		
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:57)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:95)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)		
	$at\ io. cucumber. core. runtime. Cucumber Execution Context. lambda \$run Test Case \$3 (Cucumber Execution Context. java: 151)$		
	$at\ io. cucumber. core. runtime. Rethrowing Throwable Collector. execute And Throw (Rethrowing Throwable Collector. java: 23)$		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:151)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266)		
	at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281)		
	at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233)		
	at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at org.junit.runner.JUnitCore.run(JUnitCore.java:137)		
	at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69)		
	at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38)		
	at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11)		
	at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35)		
	at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:235)		
	at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54)		
	Caused by: java.lang.reflect.InvocationTargetException		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)		
	46 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "utilities.Driver.		
	driver" is null		
	at utilities.Driver.getDriver(Driver.java:55)		
	at pages.LoginPage. <init>(LoginPage.java:14)</init>		
	at stepdefinitions.ExcelStepDefs. <init>(ExcelStepDefs.java:25)</init>		

#	Step / Hook Details	Status	Duration
2	Then capture the screenshot	SKIPPED	0.001 s
3	Then close the application	SKIPPED	0.000 s
	AFTER - Hooks.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.002 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "utilities.Driver.driver" is null at utilities.Driver.getDriver(Driver.java:55) at Hooks.Hooks.tearDown(Hooks.java:21)		

(S)- TC_02_employee_login

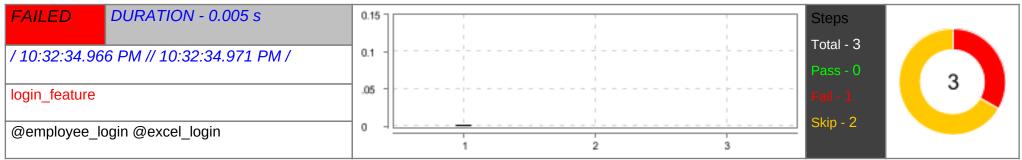

#	Step / Hook Details	Status	Duration
1	Given user login with excel as "employee"	FAILED	0.002 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class stepdefinitions.ExcelStepDefs		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)		
	at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)		
	at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)		
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:57)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:95)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)		
	$at\ io. cucumber. core. runtime. Cucumber Execution Context. lambda \$run Test Case \$3 (Cucumber Execution Context. java: 151)$		
	$at\ io. cucumber. core. runtime. Rethrowing Throwable Collector. execute And Throw (Rethrowing Throwable Collector. java: 23)$		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:151)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266)		
	at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281)		
	at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233)		
	at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at org.junit.runner.JUnitCore.run(JUnitCore.java:137)		
	at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69)		
	at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38)		
	at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11)		
	at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35)		
	at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:235)		
	at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54)		
	Caused by: java.lang.reflect.InvocationTargetException		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)		
	46 more Caused by: java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "utilities.Driver.		
	driver" is null		
	at utilities.Driver.getDriver(Driver.java:55)		
	at pages.LoginPage. <init>(LoginPage.java:14)</init>		
	at stepdefinitions.ExcelStepDefs. <init>(ExcelStepDefs.java:25)</init>		
	Then capture the screenshot	SKIPPED	0.000 s

DETAILED SECTION -- 8 --

#	Step / Hook Details	Status	Duration
3	Then close the application	SKIPPED	0.000 s
	AFTER - Hooks.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.000 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because "utilities.Driver.driver" is null at utilities.Driver.getDriver(Driver.java:55) at Hooks.Hooks.tearDown(Hooks.java:21)		