

Integration mRUBiS with external Controller

Slides based on Paul Wullenweber Kim-Pascal Borchart August 3rd, 2021

Machine Learning-based Control of Dynamical Systems

Requirements



- Launch mRUBiS
- Communicate from external process
- Observe mRubis states
- Assign the order of fix execution

Controlling mRUBiS from Python

Communication – observing states



Issues handled individually

Encapsulation

Complex Architecture


→ quick solutions:

- persist required data to disk (json)
- copy individual issue flow

mRUBiS

Communication – initial connection



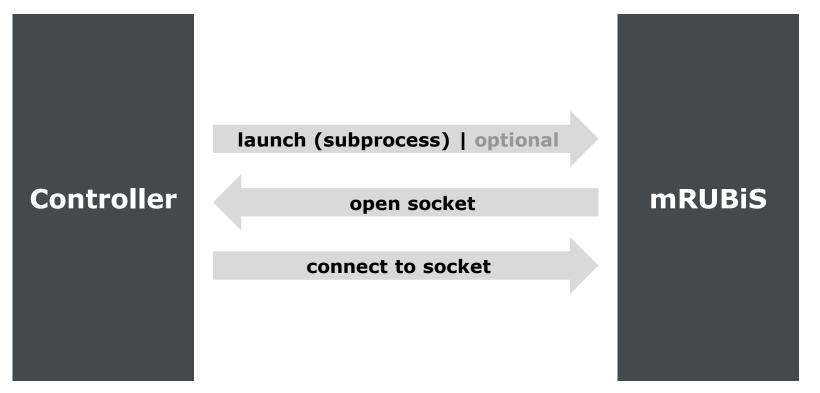

Communication – initial states

Controller



QUERY(total # of shops)

RESPONSE(total # of shops)

QUERY(initial state per shop)

RESPONSE(initial state per shop)

mRUBiS

Chart 5

Communication – within run





of issues in current run

current issue, available actions

pick action for issue (lowest cost)


specify order of execution (utility)

update fixed components

mRUBiS

Sequence Diagram



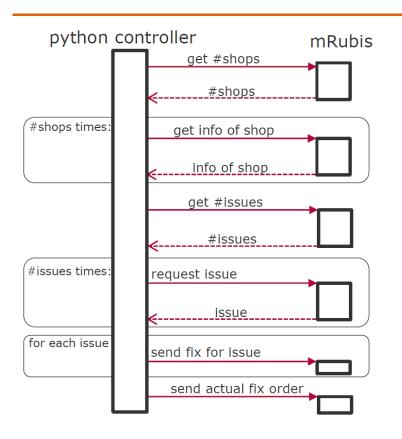

GitHub Repo:

https://github.com/hpi-sam/MachineLearningControl

Presentation Title

Kim-Pascal Bochart

Chart 7

Executing Control Strategies



- Which action to take?
 - Compare available actions per issue
- Which issue to address first?
 - Compare components within and between shops

Controlling mRUBiS from Python

Three Control Strategies




- 1. Random issue ordering
- 2. Cost-based issue ordering
- 3. Predicted-utility-based issue ordering

Controlling mRUBiS from Python

Issue ranking – example run



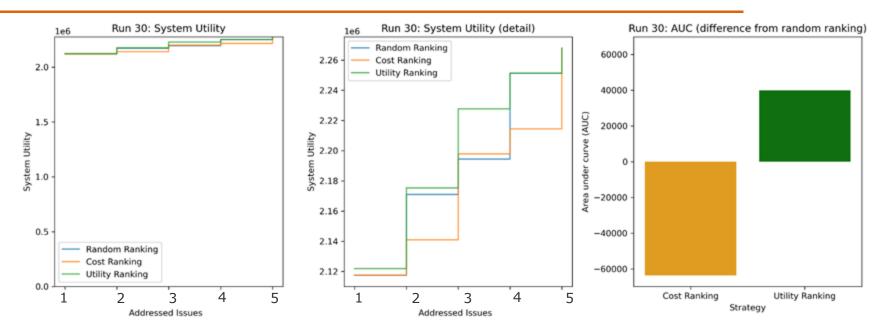



End