

General overview

Corpus	Analytics date	Language
tt_1.jsonl.tsv	3/17/2024	Tatar (tt)


Volumes

Docs	Segments	Unique segments	Tokens	Size
65,152	8,571,604	18,193 (0.21 %)	102M	909.93 MB


Type-Token Ratio

Tatar (tt)
0.02

Documents size (in segments)

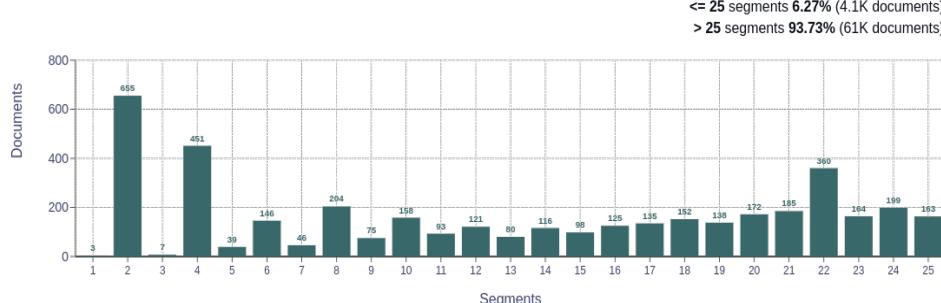


Documents by collection




Language Distribution


Number of segments

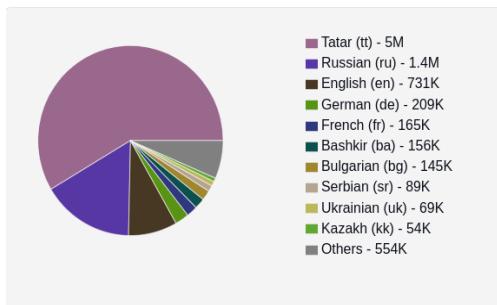


Percentage of segments in Tatar (tt) inside documents

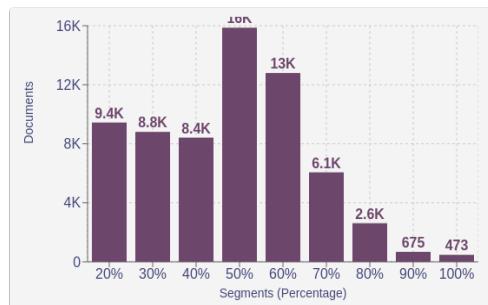


Distribution of segments by fluency score

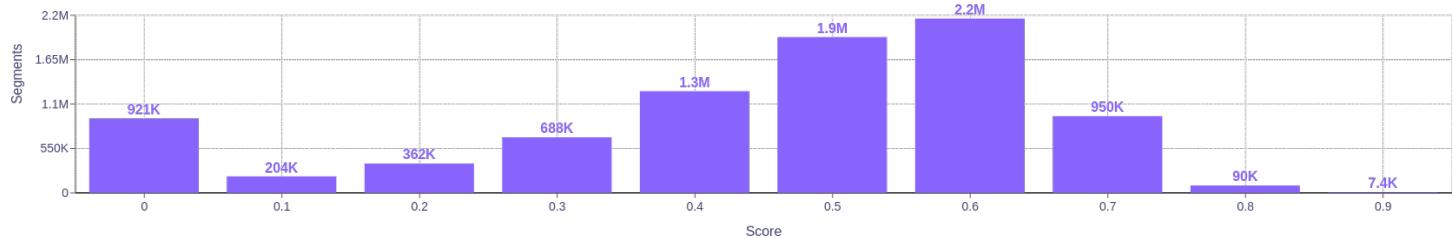


Distribution of documents by average fluency score

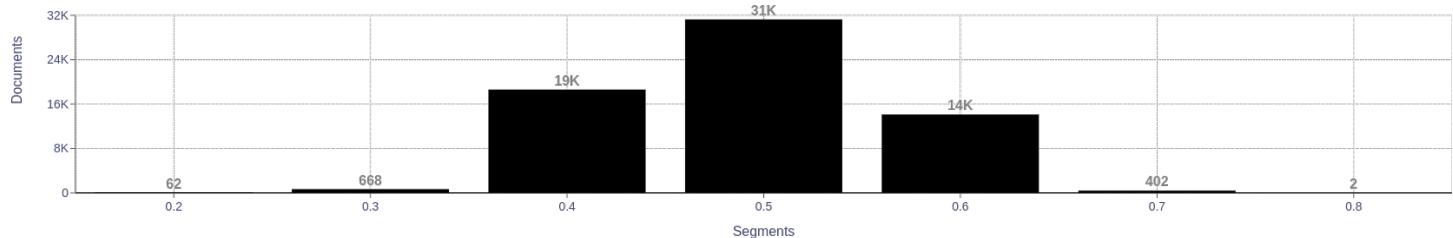

Segment length distribution by token

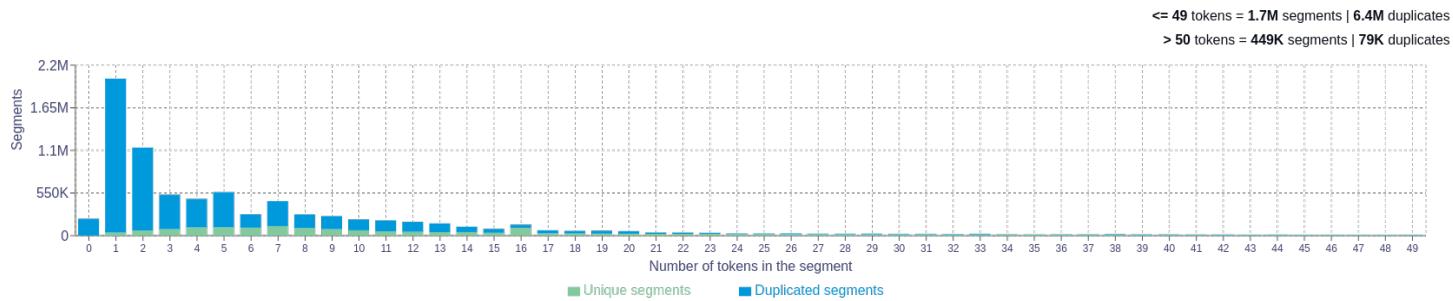

Segment noise distribution

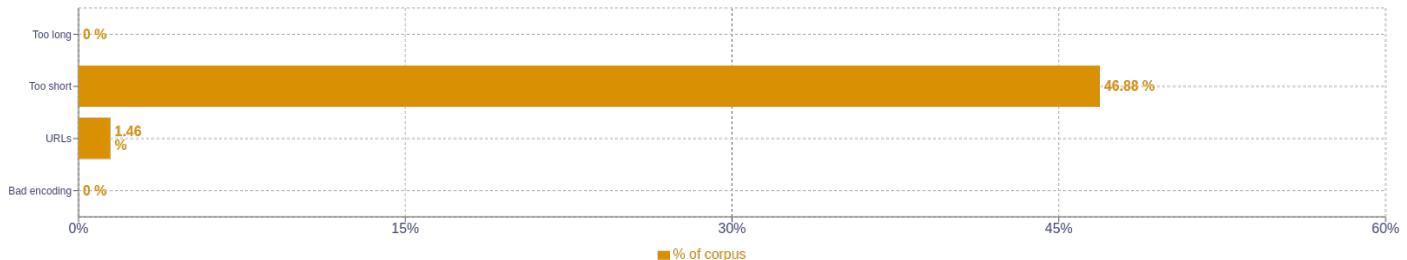

Frequent n-grams

Size	n-grams
1	(татар 311276), (в 215765), (и 207035), (татарстан 140509), (яна 139566)
2	(на сайте 55449), (татарстан республикасы 25753), (татар теле 23243), (авыл хужалыгы 21971), (все права 19957)
3	(все права эзищены 19854), (размещенные на сайте 19382), (только с письменного 19369), (с письменного согласия 19361), (размещенной на сайте 19268)
4	(только с письменного согласия 19360), (в любом объеме информации 19265), (с письменного согласия редакций 19250), (письменного согласия редакций сми 19250) (возможна только с письменного 19250)
5	(только с письменного согласия редакций 19250), (с письменного согласия редакций сми 19250), (возможна только с письменного согласия 19250) (распространение в любом объеме информации 19229), (и распространение в любом объеме 19229)

About HPLT Analytics

Volumes - Segments

Segments correspond to paragraph and list boundaries as defined by HTML elements (<p>, , , etc.) replaced by newlines.

Volumes - Tokens

Tokenized with <https://github.com/hplt-project/data-analytics-tool/blob/main/tokenizers-info.md>

Type-Token Ratio

Lexical variety computed as "number of types (uniques)/number of tokens", after removing punctuation (<https://www.sltinfo.com/wp-content/uploads/2014/01/type-token-ratio.pdf>).

Document size (in segments)

Segments correspond to paragraph and list boundaries as defined by HTML elements (<p>, , , etc.) replaced by newlines.

Language distribution

Language identified with FastSpell (<https://github.com/mabanon/fastspell>).

Distribution of segments by fluency score

Obtained with Monocleaner (<https://github.com/bitextor/monocleaner>).

Distribution of documents by average fluency score

Obtained with Monocleaner (<https://github.com/bitextor/monocleaner>).

Segment length distribution by token

Tokenized with <https://github.com/hplt-project/data-analytics-tool/blob/main/tokenizers-info.md>

Segment noise distribution

Obtained with Bicleaner Hardrules.

Frequent n-grams

Tokenized with <https://github.com/hplt-project/data-analytics-tool/blob/main/tokenizers-info.md>, after removing n-grams starting or ending in a stopword. Stopwords from <https://github.com/hplt-project/data-analytics-tool/blob/main/scripts/resources/README.txt>