




This presentation has *not* been brought up-to-date with the changes made after the April 22 committee meeting.

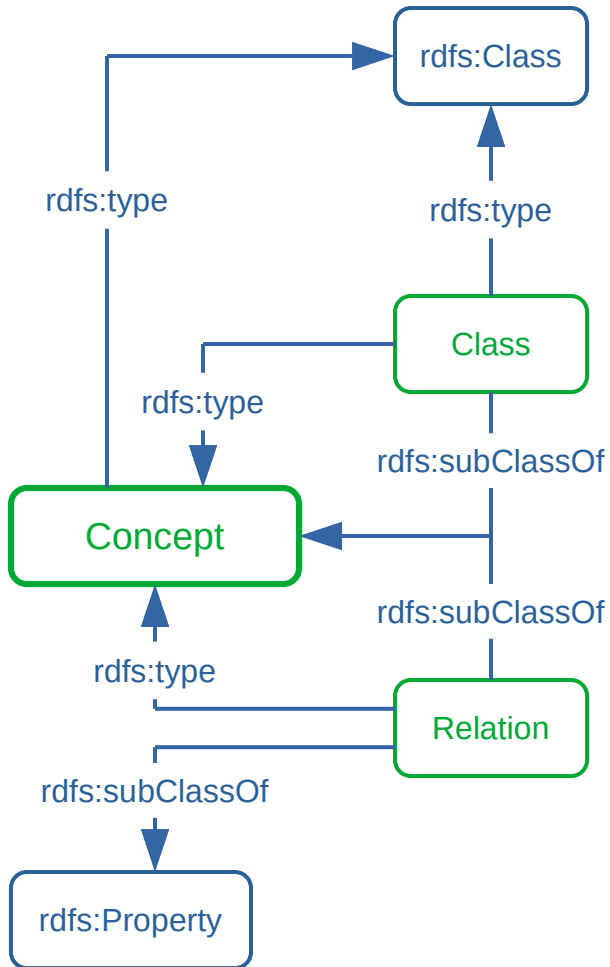


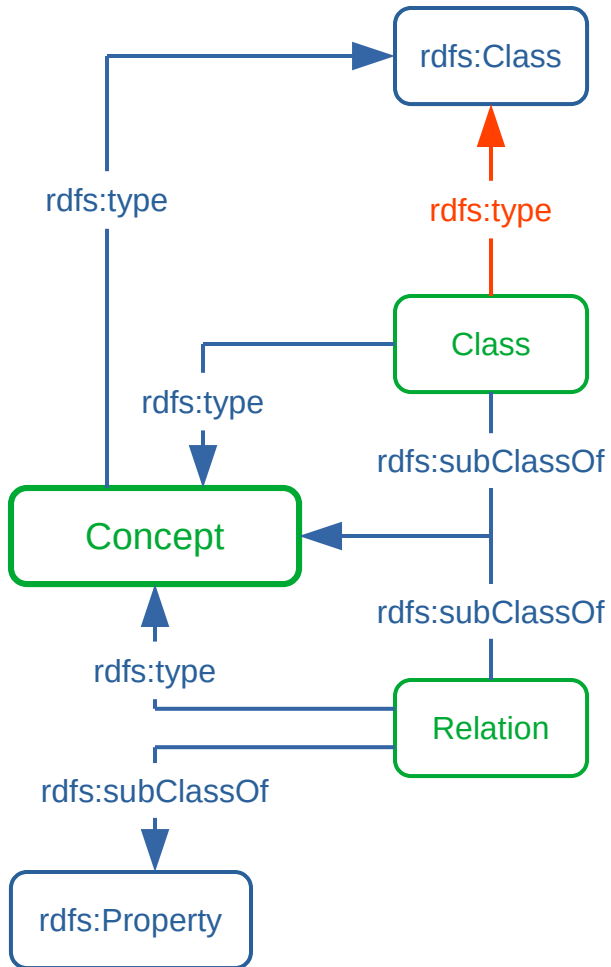

This means **s223:Class** is an **rdfs:Class**, the set of all of the classes defined in the standard.

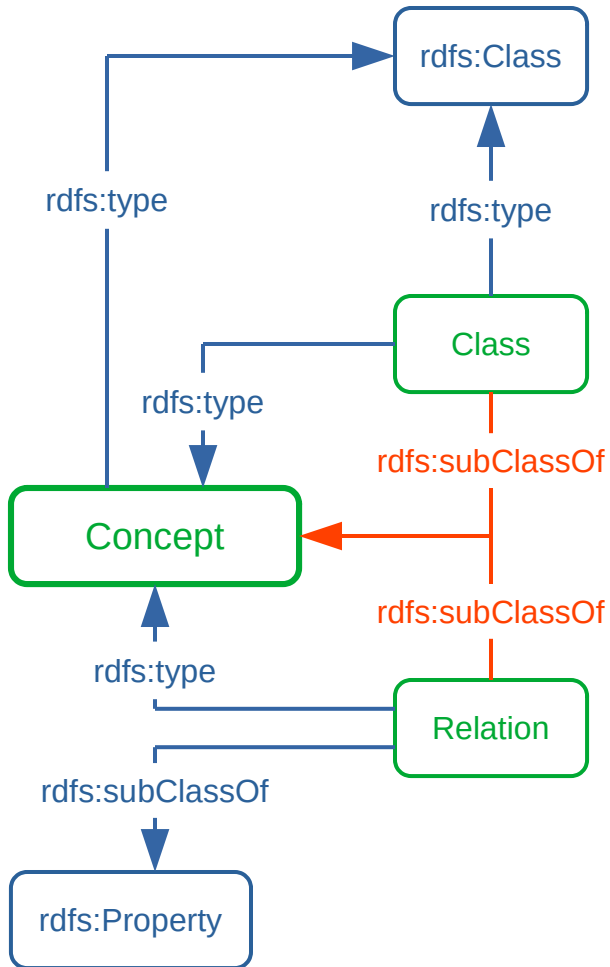


s223:Concept is a “top level class” which seems to be a requirement of some tools. There are two subclasses of concepts we define, classes and relations.

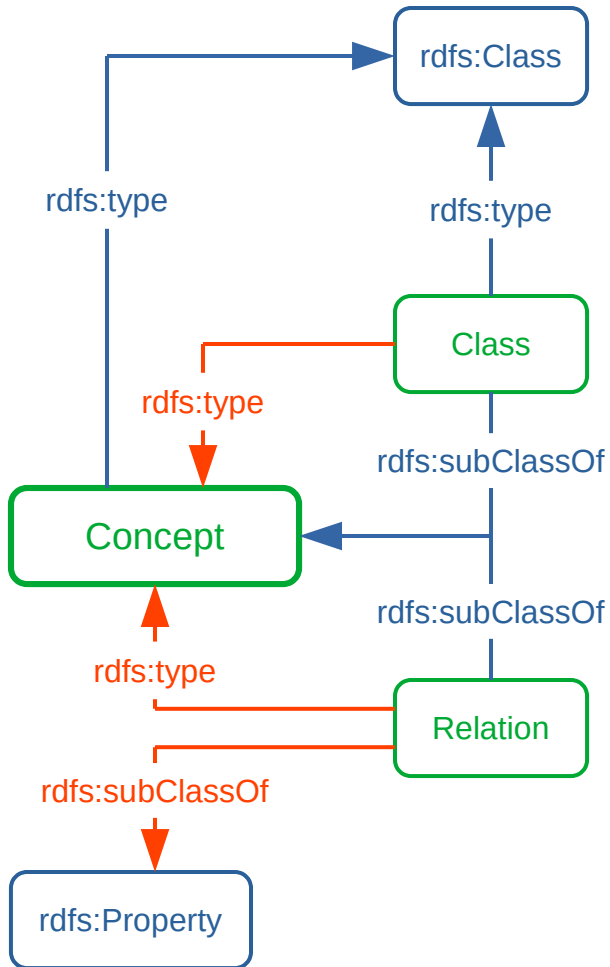

Not only are instances of an `s223:Class` an instance of an `s223:Concept`, the `s223:Class` itself is an `s223:Concept`.

Similarly the `s223:Relation` thing is an `s223:Concept`.


Relations are RDFS properties, a.k.a. RDF predicates. By the nature of appearing as the subject of an `rdfs:subClassOf` relation, it is also an `rdfs:Class`, but that's way deep in the weeds.

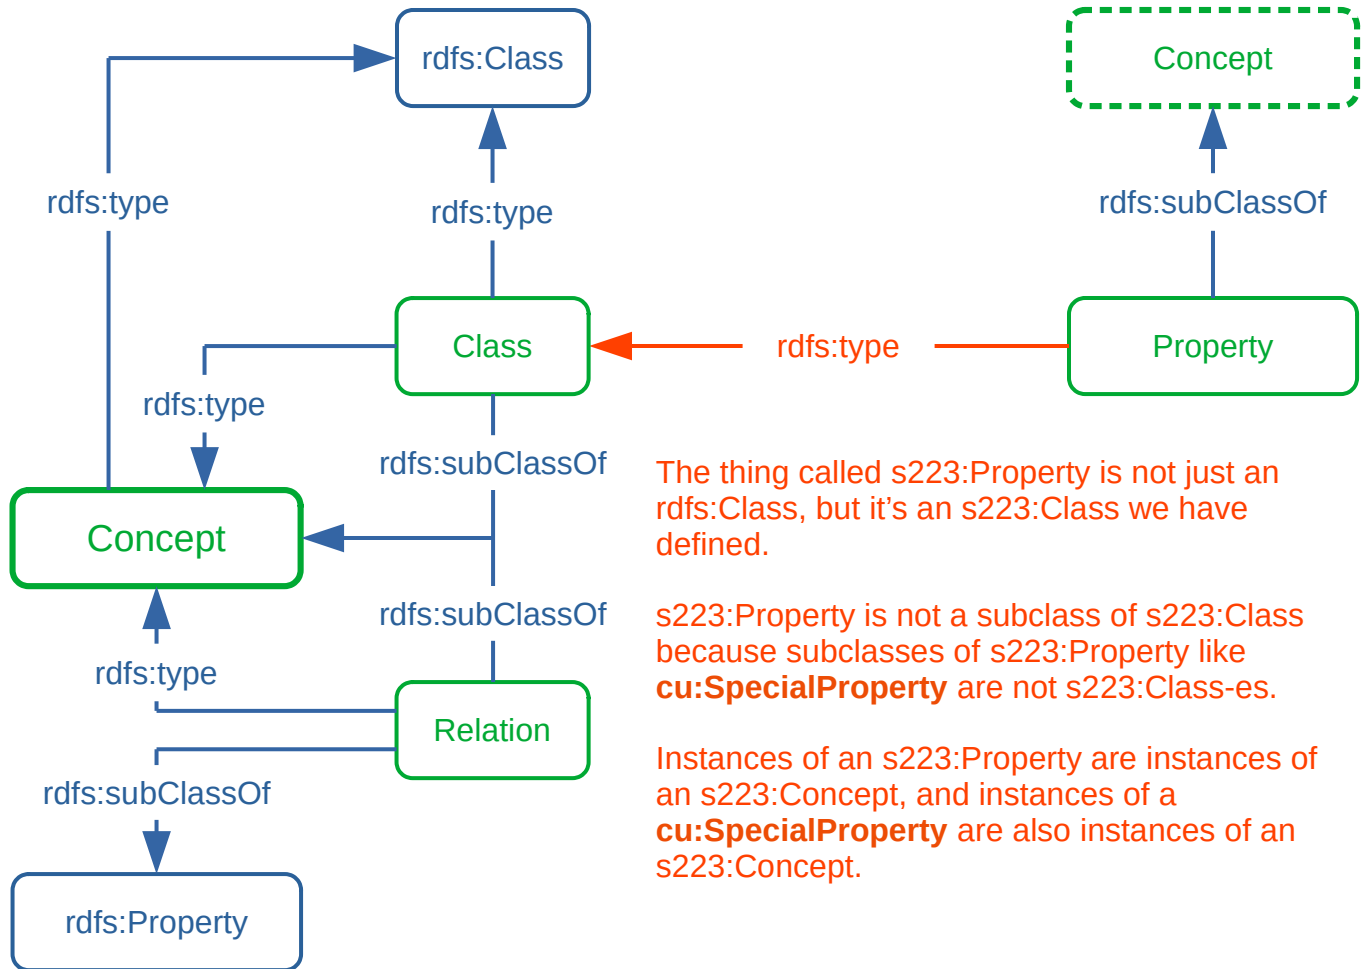

The thing called `s223:Property` is not just an `rdfs:Class`, but it's an `s223:Class` we have defined.

`s223:Property` is not a subclass of `s223:Class` because subclasses of `s223:Property` like **`cu:SpecialProperty`** are not `s223:Class`-es.

Instances of an `s223:Property` are instances of an `s223:Concept`, and instances of a **`cu:SpecialProperty`** are also instances of an `s223:Concept`.

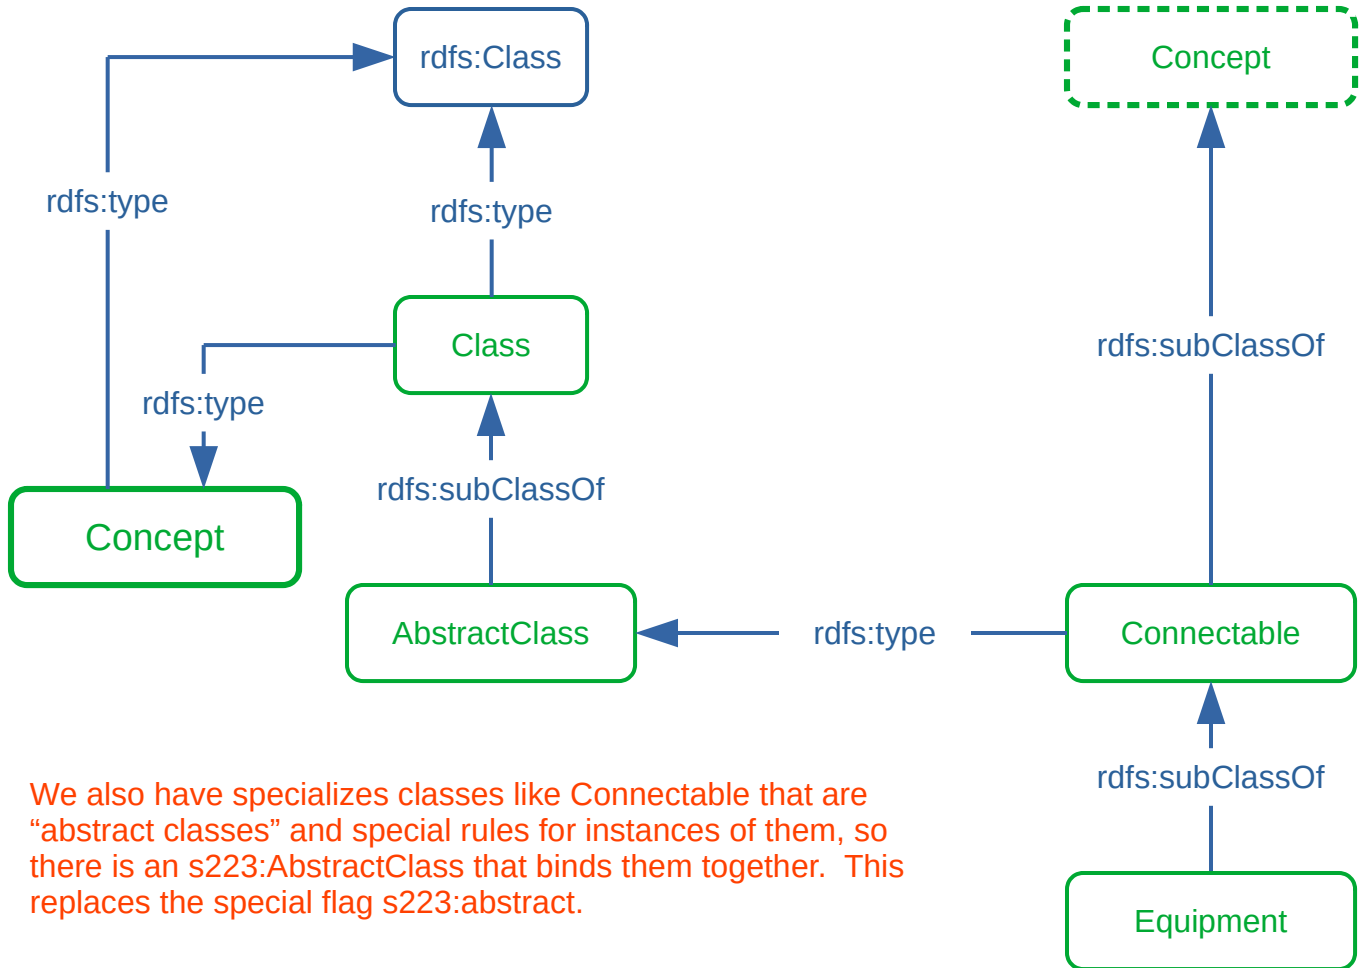

We also have specializes classes like **Connectable** that are “abstract classes” and special rules for instances of them, so there is an **s223:AbstractClass** that binds them together. This replaces the special flag **s223:abstract**.

