① Trajectories


two tasks and one probe, in the same app

Task 1 (model): create note “shopping”




then A3 Type “shopping”, Save

Task 2 (model): delete note “Old Notes”




Exploration during Task 2’s reasoning

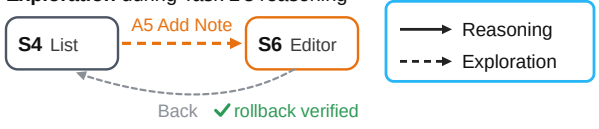

② Merge actions


key = the control, not the tap position

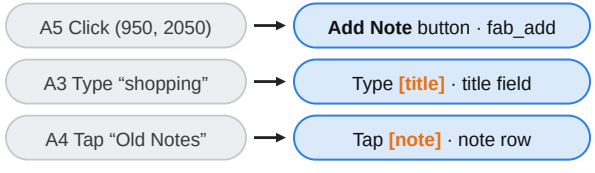

same control in another task or a probe → same edge

③ Merge states

same structure → one state; content kept per visit



in the key

app + activity
controls outside lists:
class · id · flags
titles, button labels


outlined

not in the key

list rows (number, text)
field text, checkboxes
numbers, dates, clock


shaded: kept per visit

reached by different actions

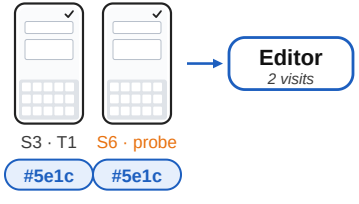


not merged

same activity, other controls



④ Cross-task Mix-Trajectory Graph

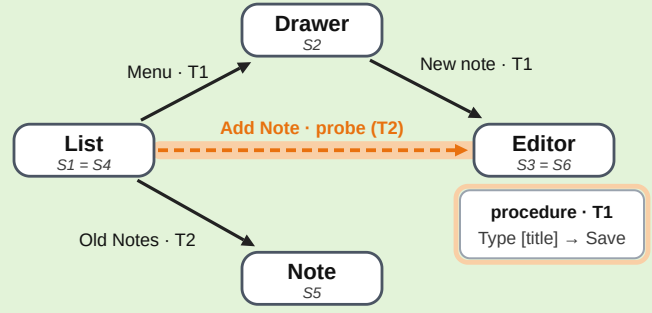

New task: add note “groceries”

List ⇢ Editor via the probe’s edge (T2), then T1’s procedure

a route that no single trajectory contains

state List

key Notes · Main · #a3f9
visit T1: 4 notes, screen
visit T2: 5 notes, screen
contents stay per visit

edge Add Note

List → Editor, seen 1×
origin probe · T2
rollback verified
tap (950, 2050)