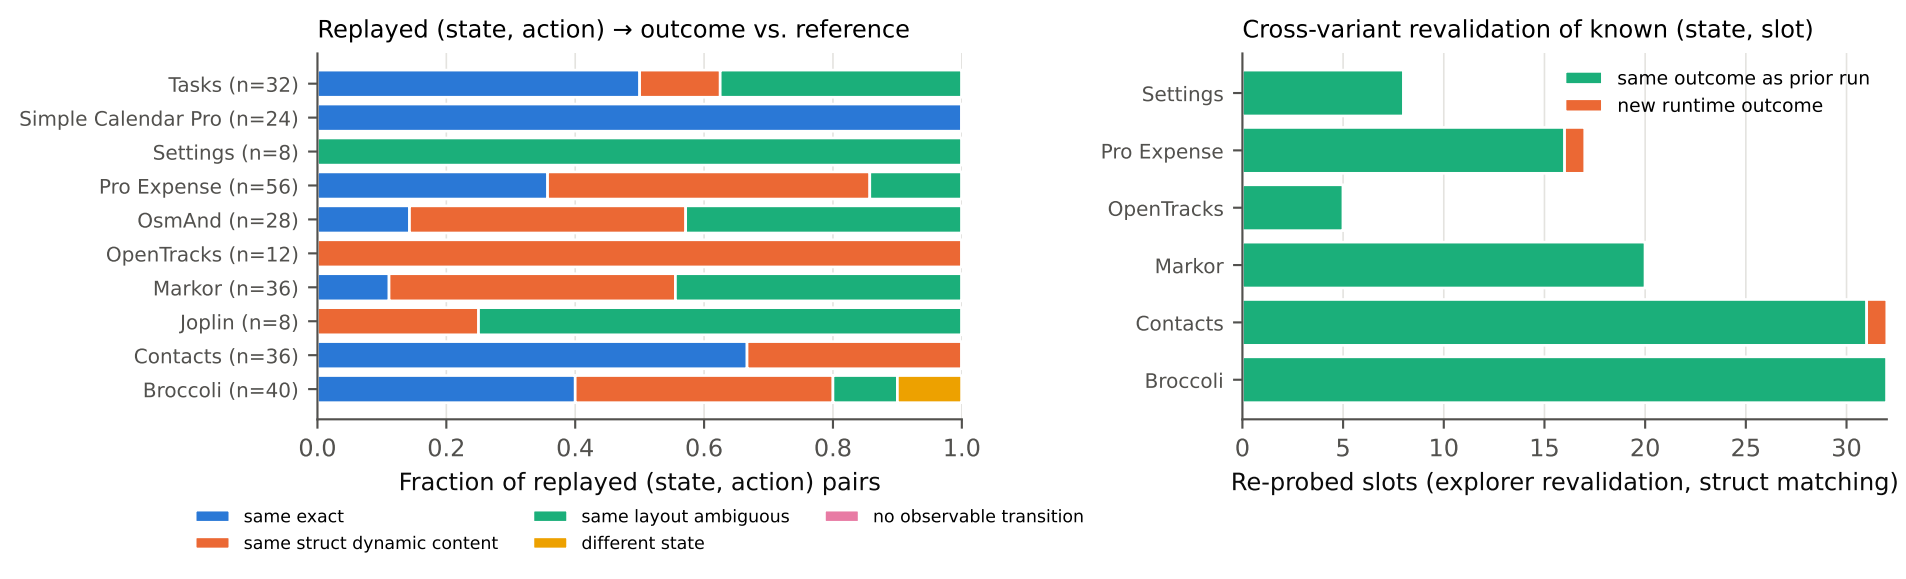
Replayed (state, action) → outcome vs. reference
Tasks (n=32)
Simple Calendar Pro (n=24)
Settings (n=8)
Pro Expense (n=56)
OsmAnd (n=28)
OpenTracks (n=12)
Markor (n=36)
Joplin (n=8)
Contacts (n=36)
Broccoli (n=40)
0.0
0.2
0.4
0.6
0.8
1.0
Fraction of replayed (state, action) pairs
same exact
same struct dynamic content
same layout ambiguous
different state
no observable transition
Cross-variant revalidation of known (state, slot)
same outcome as prior run
new runtime outcome
Settings
Pro Expense
OpenTracks
Markor
Contacts
Broccoli
0
5
10
15
20
25
30
Re-probed slots (explorer revalidation, struct matching)