
State *i* and task

Task B: Add a note named "groceries"
parameter title = groceries

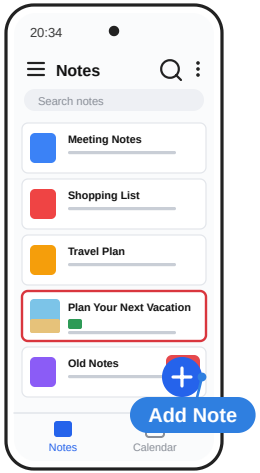


state key:
(Notes, NotesList, layout)

① Retrieve

query: state key + task goal

Mix-Trajectory Graph

route toward the goal from this state

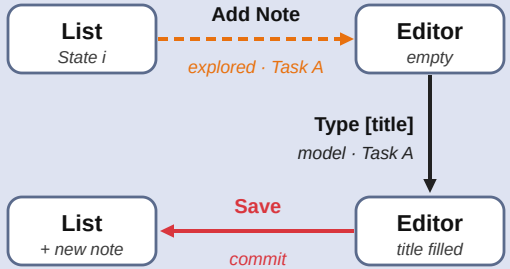

from exploration — from model execution

one route, two sources: a mixed trajectory

② Bind & ground

on the live UI

- ✓ **[title] ← "groceries"** *from the task*
- ✓ **"Add Note" found** *on State i*
- ✓ **title field found** *after landing on Editor*
- ✗ **"Save" is a commit** *left to the model*

③ Execute & verify

model calls saved

Model only

reason	reason	reason
Add Note	*type*	*Save*

With reuse

execute ✓	execute ✓	reason
Add Note	*type*	*Save*

3 → 1 model calls

verify each landing against the record
mismatch → stop, the model reasons

executed steps join the history;
the model continues from the new state

Exploration → reuse: the editor was first reached by a probe (Fig. 7), so a route to it exists

Reuse → reasoning: steps the graph already knows run without a model call;
the model keeps the decisions that need judgment (commits, unknown pages)