USER GUIDE

MCP Server

Hryvinskyi_McpServer

Connect an AI assistant such as Claude to your store, and decide what it may read and change.

MODULE VERSION	MAGENTO	PHP	PUBLISHED
1.4.2	2.4.6 – 2.4.9	8.1 – 8.5	2026-11-09

Magento Open Source and Adobe Commerce

© 2026 Hryvinskyi

Contents

1 **Start here** 4

2 **Getting started** 5
- 2.1 Turn on the server 5
- 2.2 Let the store accept integration keys 6
- 2.3 Create an integration for Claude 7
- 2.4 Connect Claude Desktop 9
- 2.5 Ask your first question 10

3 **How-to guides** 11
- 3.1 Refresh the cache after a change 11
- 3.2 Give each person or app its own integration 12
- 3.3 Connect Cursor or VS Code 12
- 3.4 Choose what the assistant may read 13
- 3.5 Let the assistant change data 14
- 3.6 Switch off a whole area of the store 15
- 3.7 Stop the assistant from using one action 16
- 3.8 Make the assistant ask you first 17
- 3.9 Let the assistant see customer details for one action 18
- 3.10 Give a colleague access to the MCP Server page 18
- 3.11 Take access away 19
- 3.12 Give an assistant a new access token 20
- 3.13 Find out what the assistant can do 21
- 3.14 Turn the server off 22

4 **How it works** 23
- 4.1 What the assistant does in your store 23
- 4.2 Who the assistant acts as 23
- 4.3 The rules on top of permissions 23
- 4.4 Personal data 24

5 **Screens and settings** 25
- 5.1 MCP Server settings 25
- 5.2 The MCP Server page 26
- 5.3 Permissions 29

6 **Troubleshooting and FAQ** 31
- 6.1 Claude says the MCP server is disabled 31
- 6.2 Claude cannot connect to the store at all 31
- 6.3 The MCP Server page says integration tokens are not accepted 31
- 6.4 Picking an integration shows a note instead of filling the token 31
- 6.5 A button or the MCP Server menu entry is missing 32

© 2026 Hryvinskyi · github.com/hryvinskyi/magento2-mcp-server

6.6 Claude says read-only mode is on 32
6.7 Claude says its role lacks a permission 33
6.8 Claude says an action is on the deny-list 33
6.9 Claude says an action is not exposed (section_off) 33
6.10 Claude says an action is open to anonymous callers 33
6.11 Names and e-mail addresses arrive as [personal data] 33
6.12 Claude asks me to confirm before it does something 33
6.13 Add to Cursor and Install in VS Code do not appear 33
6.14 Download for Claude Desktop shows an error instead of a file 34
6.15 Questions 34

7 Glossary 35

Appendix A — Document history 36

Open questions 37

1 Start here

MCP Server connects an AI assistant, such as Claude, to your Magento Open Source or Adobe Commerce store. You ask the assistant a question in your own words, for example which products changed this week, and it looks the answer up in your store. You decide what the assistant may see, and whether it may change anything.

This guide is for store owners and the people who run the store in the Magento admin. It needs no programming. Installing the module is a developer's task, described in the Developer Guide that comes with it.

Before you start, you need:

- **The module, installed.** If **Stores** > **Settings** has no **MCP Server** entry, ask your administrator for access to it, or your developer to install the module.
- **An admin account that may change the configuration, create integrations and open the MCP Server page.** The Administrators role has all of this. *Give a colleague access to the MCP Server page* lists the permissions one by one.
- **Claude Desktop** on your computer. Cursor and VS Code work too (see *Connect Cursor or VS Code*).

YOU WANT TO	READ
Connect Claude for the first time	*Getting started*
Do one particular thing, such as letting the assistant change data	*How-to guides*
Understand why the assistant may or may not do something	*How it works*
Look up a screen or a setting	*Screens and settings*
Fix something that does not work	*Troubleshooting and FAQ*

Table 1. Where to go

2 Getting started

In this chapter you connect Claude Desktop to your store and ask it your first question. Claude will be able to read your products and nothing else. It takes about ten minutes.

2.1 Turn on the server

ADMIN **Stores** > **Settings** > **Configuration** > **MCP Server** > **MCP Server**

1. Go to **Stores** > **Settings** > **Configuration**.
2. In the list on the left, click **MCP Server**, then **MCP Server** below it.
3. Expand **General**.
4. Next to **Enable MCP Server**, clear **Use system value**, then select **Yes**.
5. Leave **Read-only Mode** at **Yes**. While it is on, the assistant can read but not change anything.
6. Click **Save Config**.

The message *You saved the configuration.* appears.

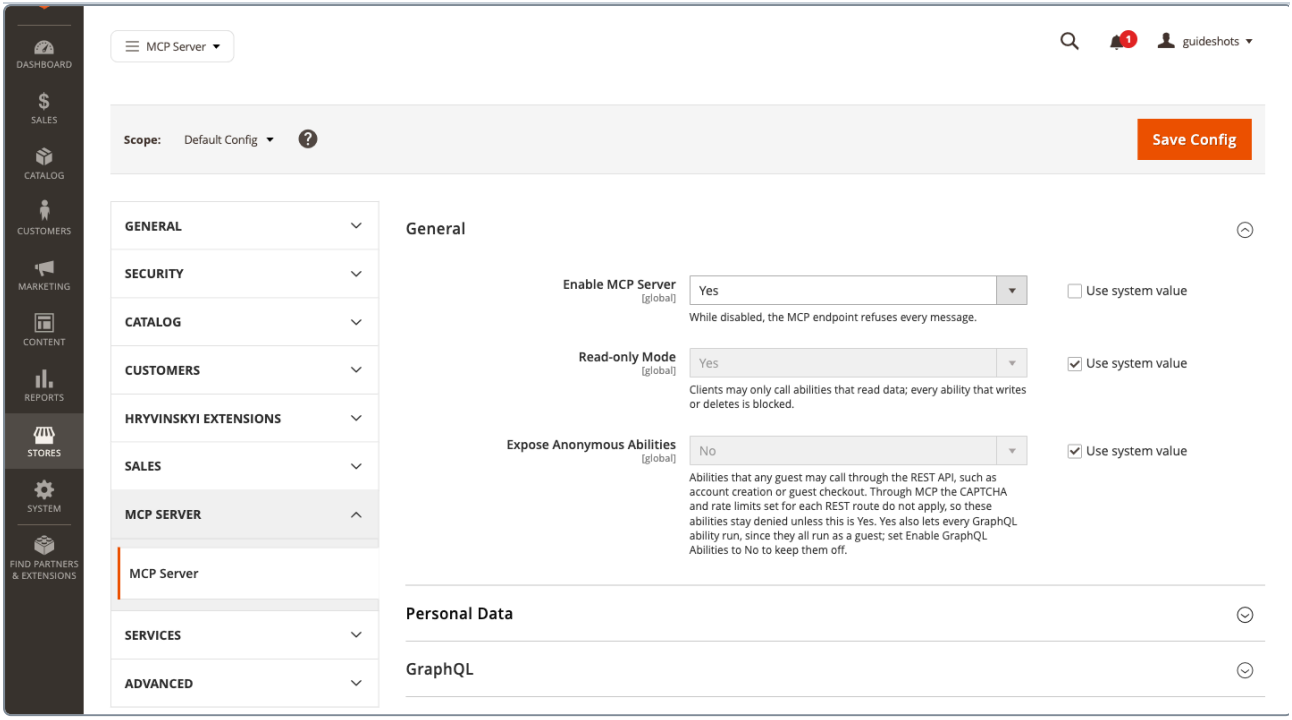


Figure 1. The General settings of MCP Server, with Enable MCP Server set to Yes

> **NOTE**
> If the top of the page then says *One or more of the Cache Types are invalidated*, refresh the cache as described in *Refresh the cache after a change*.

2.2 Let the store accept integration keys

Claude signs in to your store with the key of an integration. Magento refuses such keys until this setting is on. You change it once.

ADMIN **Stores** > **Settings** > **Configuration** > **Services** > **OAuth**

1. Go to **Stores** > **Settings** > **Configuration**.
2. In the list on the left, click **Services**, then **OAuth**.
3. Expand **Consumer Settings**.
4. In **Allow OAuth Access Tokens to be used as standalone Bearer tokens**, select **Yes**.
5. Click **Save Config**.

2.3 Create an integration for Claude

An integration is a key to your store with its own permissions. Claude signs in with it and can do only what its permissions allow. Here it gets one permission to connect and one to read products.

ADMIN **System** > **Extensions** > **Integrations**

1. Go to **System** > **Extensions** > **Integrations** and click **Add New Integration**.
2. In **Name**, enter `Claude`.
3. In **Your Password**, enter the password you use to sign in to the admin.
4. In the list on the left, click **API**. **Resource Access** already shows **Custom**; leave it.
5. In **Resources**, expand **Stores** > **MCP Server** and select **Use the MCP endpoint**.
6. Expand **Catalog** > **Inventory** and select **Products**.
7. Click the arrow next to **Save**, then **Save & Activate**.
8. Magento lists the access you chose. Click **Allow**.
9. Magento shows the integration's keys. Copy the **Access Token**: you paste it into Claude Desktop in the next step. Then click **Done**.

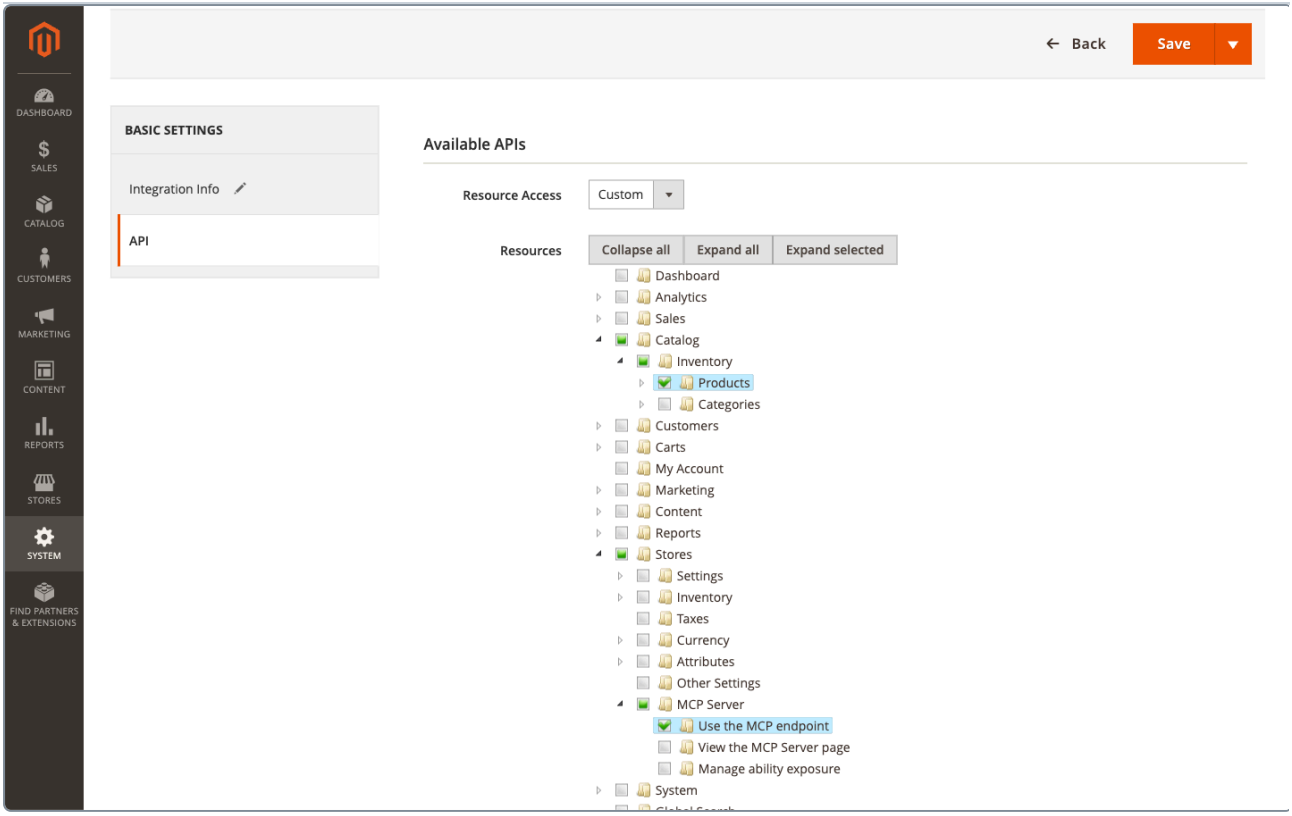


Figure 2. The API tab of the new integration, with Use the MCP endpoint and Products selected

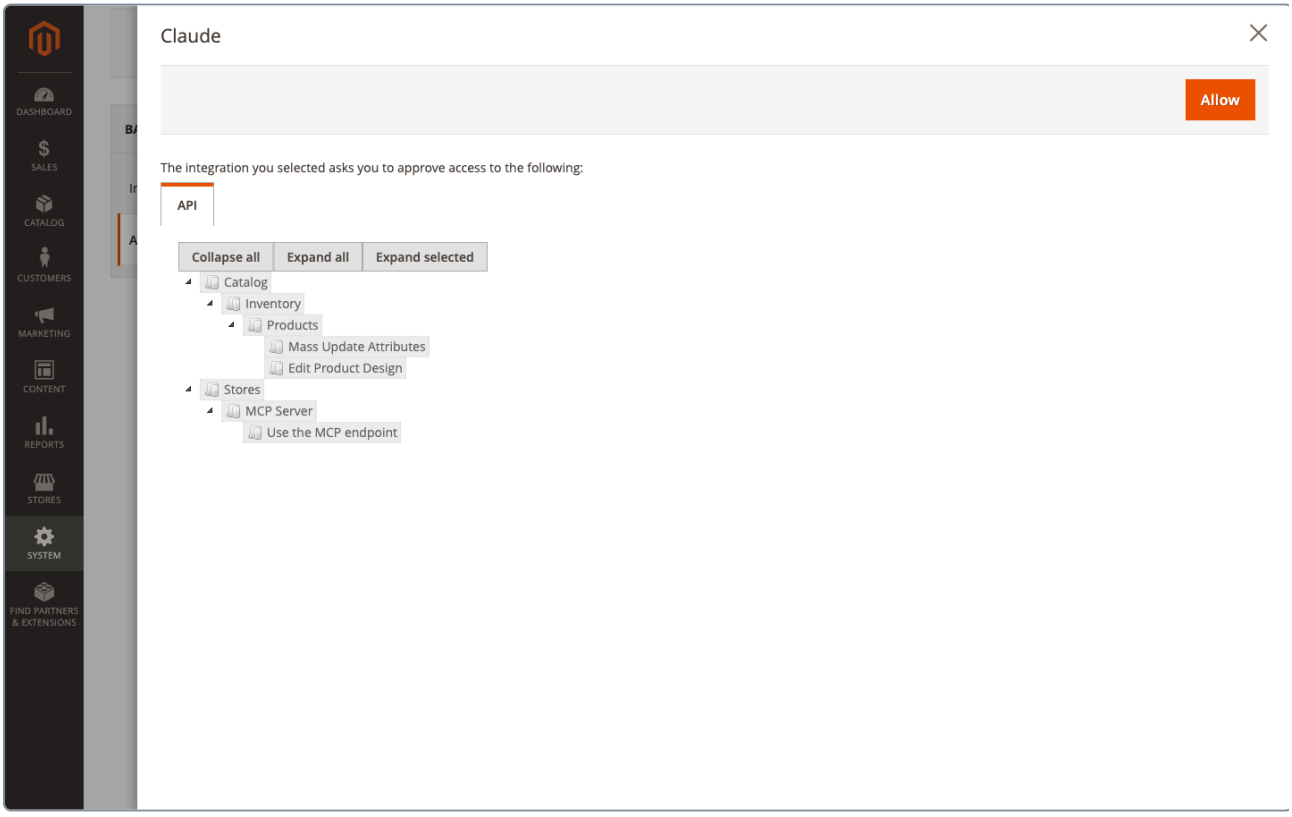


Figure 3. Magento asks you to approve the access the integration asks for

> **IMPORTANT**
> The access token is a key to your store. Keep it like a password: do not send it by e-mail or paste it into a chat.

> **TIP**
> You can copy the access token again later. In **System** > **Extensions** > **Integrations**, click the pencil icon in the **Edit** column of the integration: **Integration Details** shows the **Access Token**.

2.4 Connect Claude Desktop

ADMIN **Stores** > **Settings** > **MCP Server**

1. Go to **Stores** > **Settings** > **MCP Server**.
2. In the **Install** card, click **Download for Claude Desktop (.mcpb)**.
3. Open the downloaded file with Claude Desktop and install the extension.
4. When Claude Desktop asks for the extension's settings, leave **Store endpoint** as it is, and paste the access token you copied into **Access token**.

Claude Desktop keeps the token in your computer's keychain, the place where your computer keeps passwords.

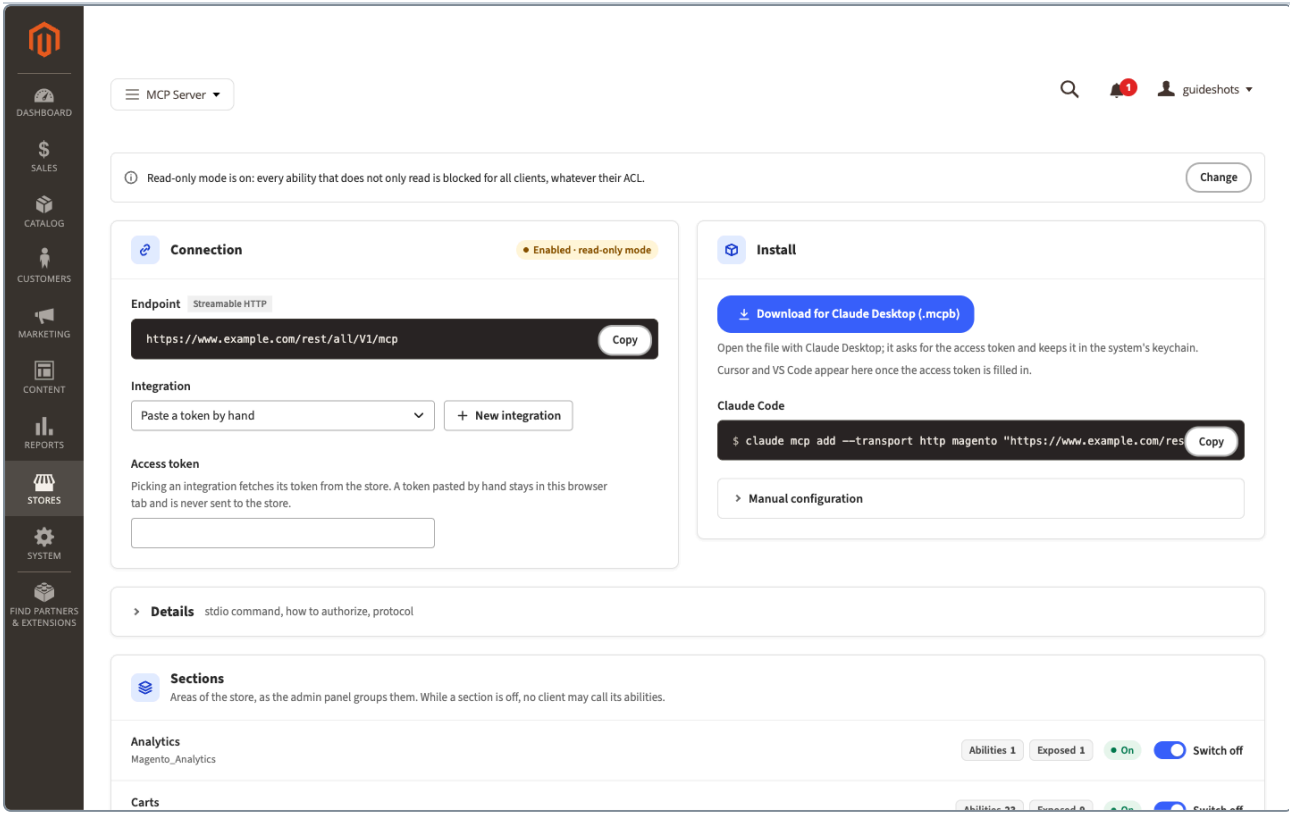


Figure 4. The MCP Server page: the Connection card with your store's address, and the Install card with the download for Claude Desktop

2.5 Ask your first question

In Claude Desktop, start a new chat and ask:

> **NOTE**
>
> Show me the five products in my store that were changed most recently.

Claude looks through the actions your store offers, finds the one that lists products, runs it, and answers with the names and SKUs of five products. Your assistant is connected.

If Claude says that the store refused it, find its answer in *Troubleshooting and FAQ*.

3 How-to guides

3.1 Refresh the cache after a change

Magento sometimes asks you to refresh its cache after you save a setting: the top of the page says *One or more of the Cache Types are invalidated*.

ADMIN **System** > **Tools** > **Cache Management**

1. Go to **System** > **Tools** > **Cache Management**.
2. Select the row of every cache type whose **Status** reads **INVALIDATED**.
3. In **Actions**, select **Refresh**.
4. Click **Submit**.

Magento confirms how many cache types it refreshed, for example *2 cache type(s) refreshed.*

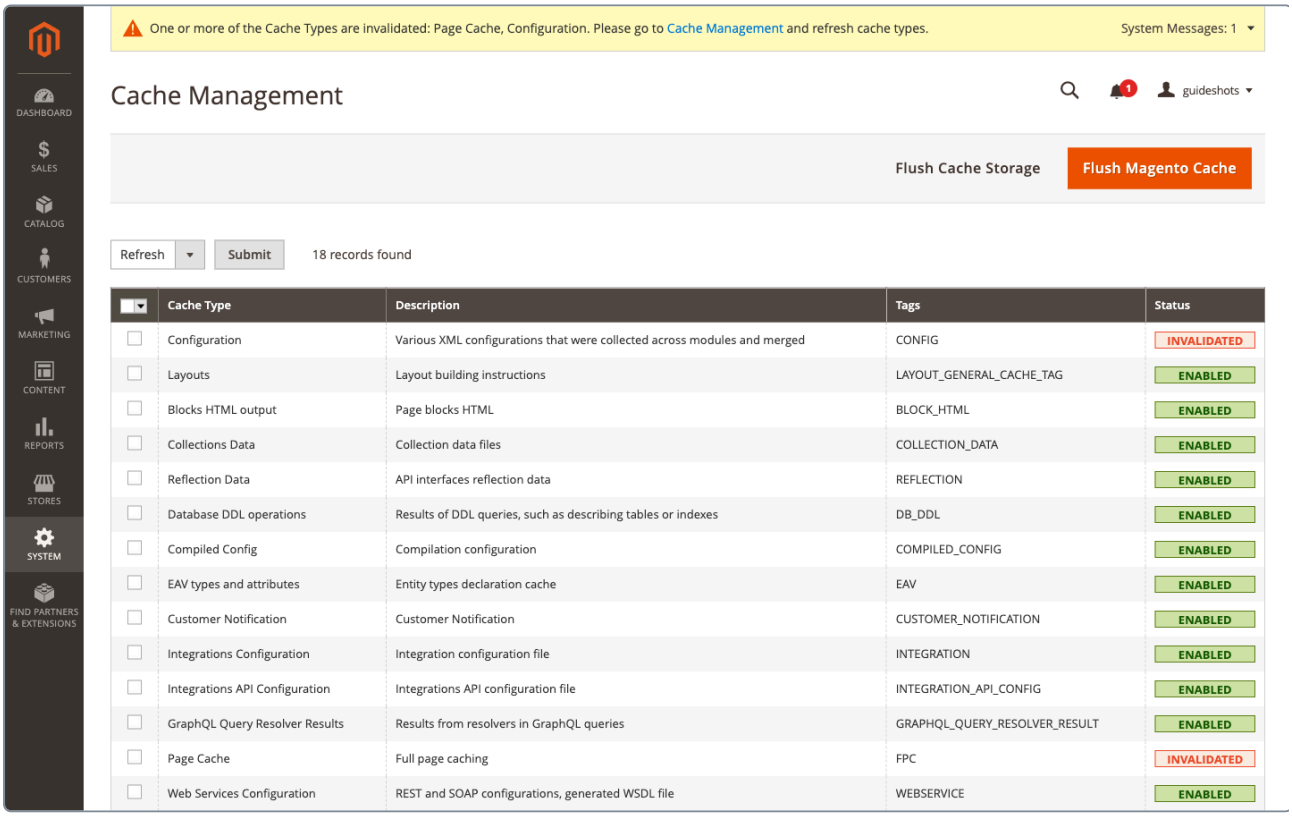


Figure 5. Cache Management with two cache types marked INVALIDATED

3.2 Give each person or app its own integration

Create one integration for each person or app that connects, named after them. You can then take access away from one without touching the others, and give each only the permissions it needs.

1. Create the integration as in *Create an integration for Claude*, with the person's or the app's name.
2. In **Resources**, select **Use the MCP endpoint** and only the areas this person or app needs (see *Choose what the assistant may read*).

3.3 Connect Cursor or VS Code

ADMIN **Stores** > **Settings** > **MCP Server**

1. Go to **Stores** > **Settings** > **MCP Server**.
2. In the **Connection** card, in **Integration**, select the integration for this app. Its access token fills the **Access token** field, shown as dots. If the integration is not in the list, paste its access token into **Access token** instead.
3. In the **Install** card, click **Add to Cursor** or **Install in VS Code**.
4. Confirm the installation in the app that opens.

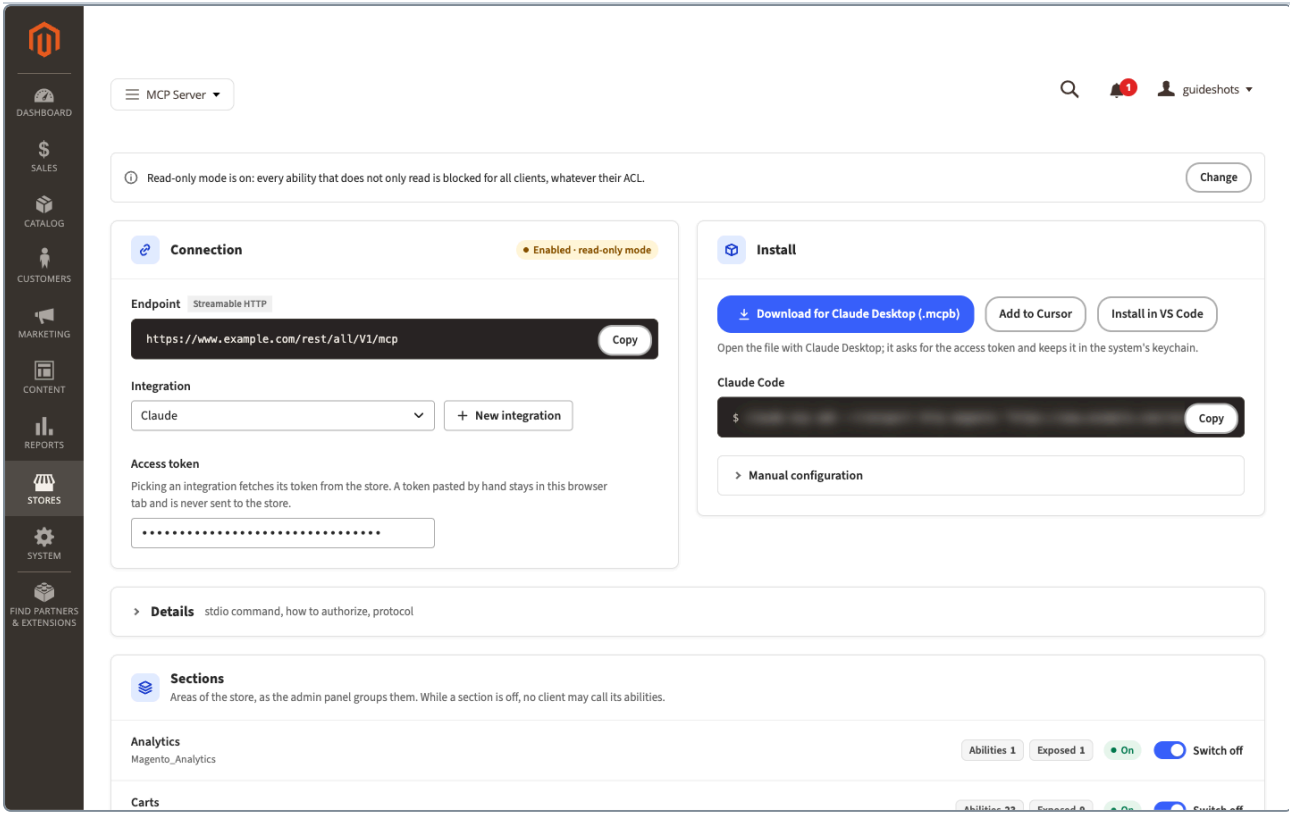


Figure 6. The Connection card with the Claude integration selected; Add to Cursor and Install in VS Code have appeared. The Claude Code command is blurred in this picture because it shows the access token.

> **NOTE**
>
> **Add to Cursor** and **Install in VS Code** appear only once **Access token** holds a token. Cursor and VS Code keep the token in their own settings file, readable by anyone who can open that file on the computer.

The **Integration** list appears only if your admin account may manage integrations. A token you paste by hand stays in your browser tab and is never sent to the store.

3.4 Choose what the assistant may read

The integration's permissions decide what the assistant may do: what the integration may not do, the assistant cannot do either.

ADMIN **System** > **Extensions** > **Integrations**

1. Go to **System** > **Extensions** > **Integrations**.
2. Click the pencil icon in the **Edit** column of the integration.

3. In **Your Password**, enter your admin password.
4. In the list on the left, click **API**.
5. Select the areas from the table below, and clear the ones the assistant should not use.
6. Click **Save**.

The change applies to the assistant's next action.

TO LET THE ASSISTANT READ	SELECT IN RESOURCES
Products	**Catalog** > **Inventory** > **Products**
Categories	**Catalog** > **Inventory** > **Categories**
Orders	**Sales** > **Operations** > **Orders** > **Actions** > **View**
Customers	**Customers**
CMS pages	**Content** > **Elements** > **Pages**
CMS blocks	**Content** > **Elements** > **Blocks**

Table 2. Common permissions

Keep **Use the MCP endpoint** selected: without it, the assistant cannot connect at all.

3.5 Let the assistant change data

Read-only mode is on after installation, so the assistant can only read. Turn it off when you want the assistant to change things, for example to update product descriptions.

> ⚠ **WARNING**
> With read-only mode off, the assistant can change and delete anything its integration's permissions allow. Give the integration only the areas it should change, and consider *Make the assistant ask you first* for actions that change data.

ADMIN **Stores** > **Settings** > **Configuration** > **MCP Server** > **MCP Server**

1. Go to **Stores** > **Settings** > **Configuration**, then **MCP Server** > **MCP Server** in the list on the left.
2. Expand **General**.

3. Next to **Read-only Mode**, clear **Use system value**, then select **No**.
4. Click **Save Config**.

To turn read-only mode back on, select **Yes** again, or select **Use system value**, and click **Save Config**. The **Change** button in the read-only notice at the top of the MCP Server page opens these settings too.

3.6 Switch off a whole area of the store

The **Sections** card lists the areas of your store, as the admin menu groups them: Catalog, Sales, Customers and so on. While an area is switched off, no assistant may use any of its actions, whatever its permissions.

1. Go to **Stores** > **Settings** > **MCP Server**.
2. In the **Sections** card, find the area and click **Switch off**.

The message *The section Customers is switched off: no client may call its abilities.* appears, the area shows **Off**, and its **Exposed** count drops to 0. To undo, click **Switch on**.

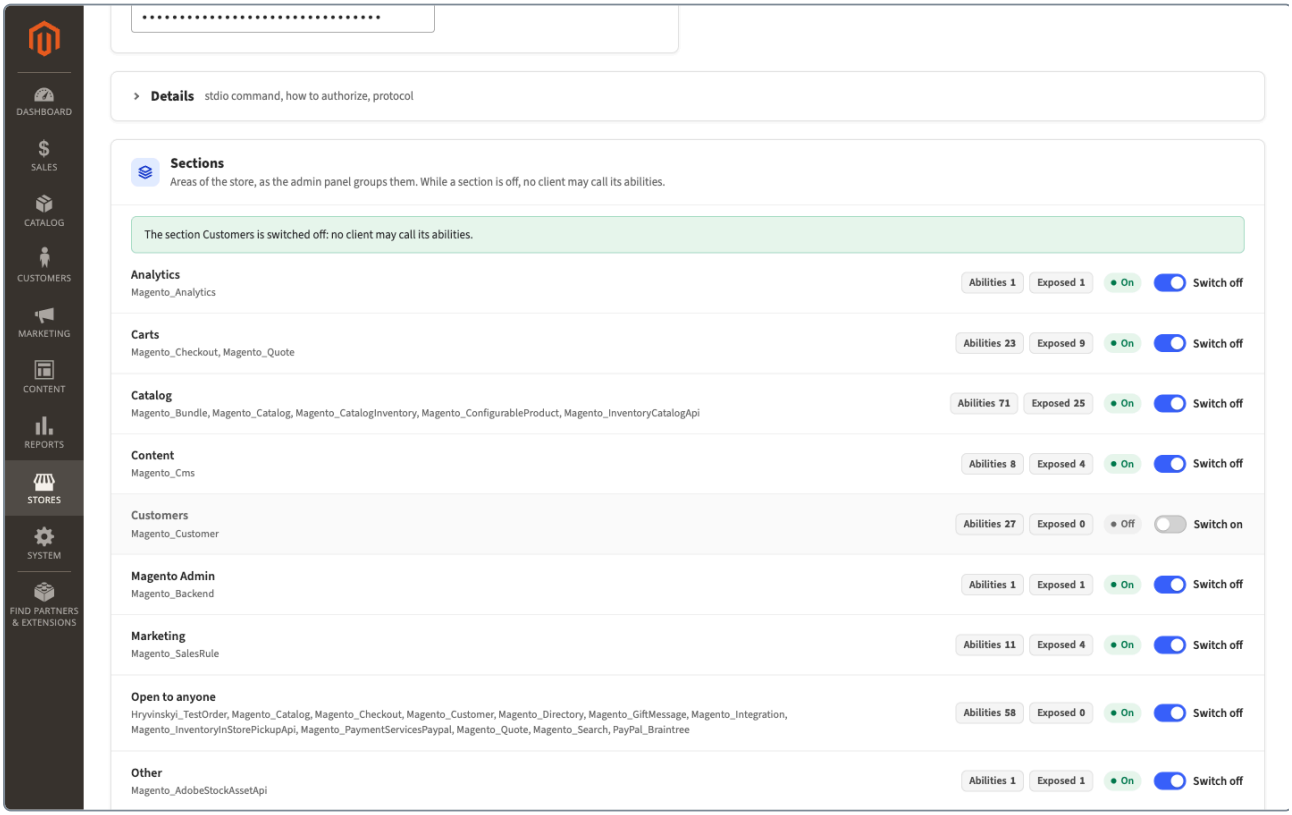


Figure 7. The Sections card with Customers switched off

3.7 Stop the assistant from using one action

Put the action on the deny-list. Find it first in the **Ability catalog** at the bottom of the MCP Server page.

1. Go to **Stores** > **Settings** > **MCP Server** and scroll to **Ability catalog**.
2. In **Search by keyword**, enter part of the action's name, for example `customer_repository`, and press Enter.
3. Select the row of the action.
4. In **Actions**, select **Add to deny-list**.
5. In the *Add to deny-list?* dialog, click **OK**.

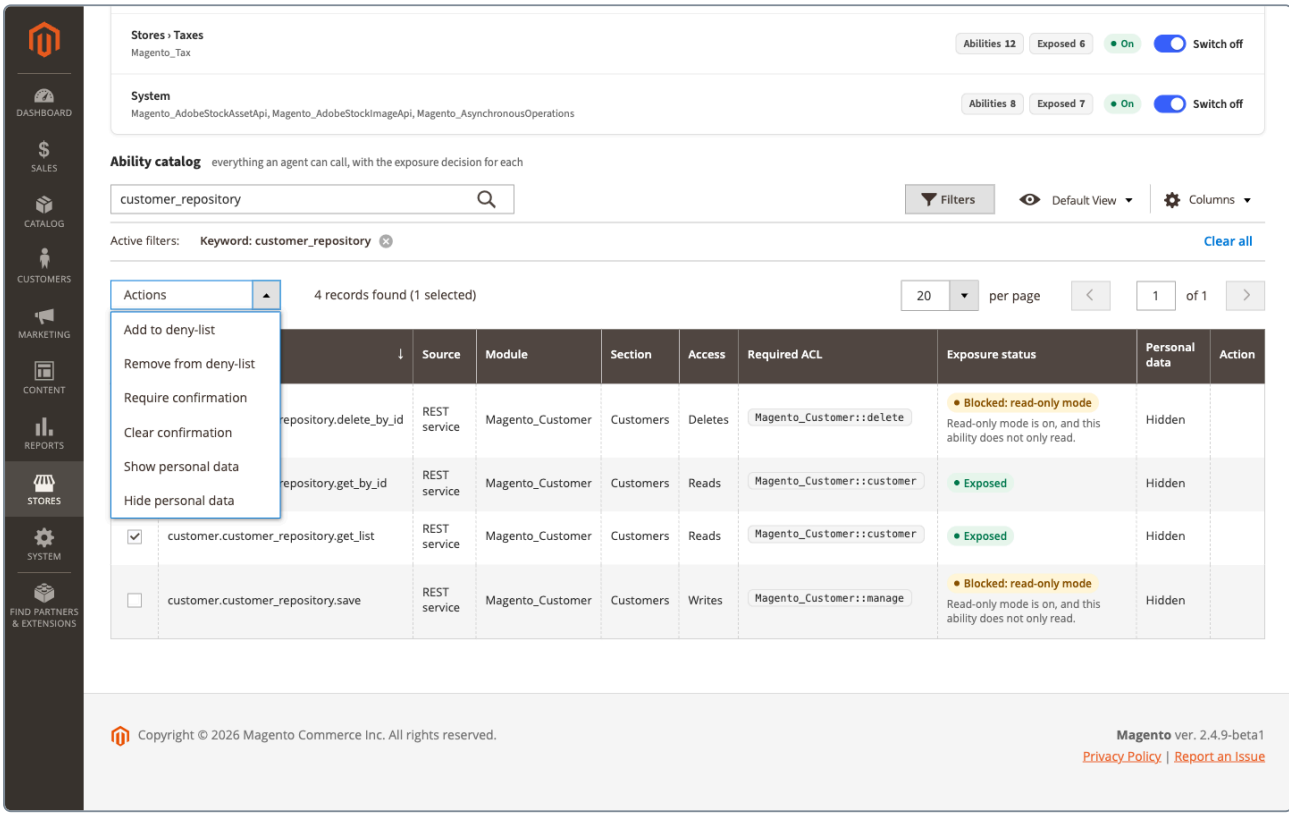


Figure 8. Add to deny-list in the Actions menu of the Ability catalog

The action's **Exposure status** now reads **Denied: deny-list**. To undo, click **Remove from deny-list** in the **Action** column of its row, and click **OK** in the *Remove from deny-list?* dialog.

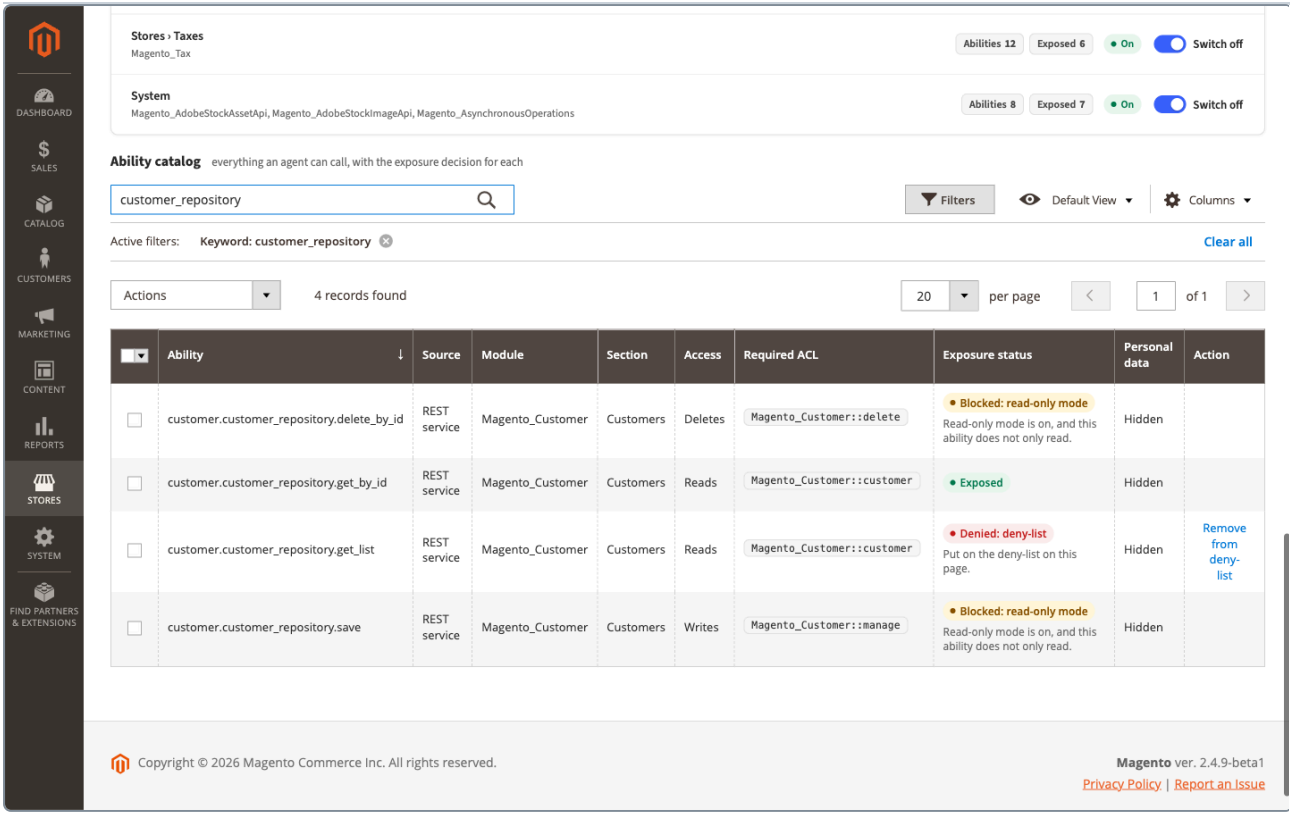


Figure 9. An action on the deny-list, with Remove from deny-list in the Action column

3.8 Make the assistant ask you first

Mark an action as needing confirmation. The assistant then asks you in the chat before each use, and goes ahead only after you agree.

1. Go to **Stores** > **Settings** > **MCP Server** and scroll to **Ability catalog**.
2. Search for the action and select its row.
3. In **Actions**, select **Require confirmation**. It applies at once.

The action's **Exposure status** now reads **Needs confirmation**. To undo, select its row and choose **Clear confirmation** in **Actions**.

> ⚠ **WARNING**
>
> Confirmation relies on the assistant asking you, and well-behaved assistants such as Claude do. It is not a lock: for anything that must never happen without you, use the deny-list or read-only mode instead.

3.9 Let the assistant see customer details for one action

Names, e-mail addresses, phone numbers, addresses and similar details are hidden from the assistant: they reach it as *[personal data]*. You can show them for chosen actions, for example when the assistant should write to customers about their orders.

> **IMPORTANT**
> What the assistant receives goes to the company that runs the AI (for Claude, Anthropic). Show personal data only when your data processing agreement with that company covers it.

1. Go to **Stores** > **Settings** > **MCP Server** and scroll to **Ability catalog**.
2. Search for the action and select its row.
3. In **Actions**, select **Show personal data**.
4. In the *Show personal data?* dialog, click **OK**.

The action's **Personal data** column now reads **Shown**, and a notice at the top of the page reminds you that a data processing agreement must cover it. To undo, select the row and choose **Hide personal data**.

3.10 Give a colleague access to the MCP Server page

ADMIN **System** > **Permissions** > **User Roles**

What a colleague may do in the admin depends on the role of their admin account. Add the MCP Server permissions to that role.

1. Go to **System** > **Permissions** > **User Roles** and click your colleague's role.
2. Click **Role Resources**. If **Resource Access** reads **All**, the role already has every permission, and you are done.
3. Under **Stores** > **MCP Server**, select **View the MCP Server page**, and **Manage ability exposure** if your colleague should change what assistants may do.
4. Under **Stores** > **Settings** > **Configuration**, select **MCP Server Settings** if your colleague should change the settings.

5. Under **System** > **System Extensions**, select **System Integrations** if your colleague should create integrations and pick them on the MCP Server page.

6. Click **Role Info**, and in **Your Password**, enter your admin password.

7. Click **Save Role**.

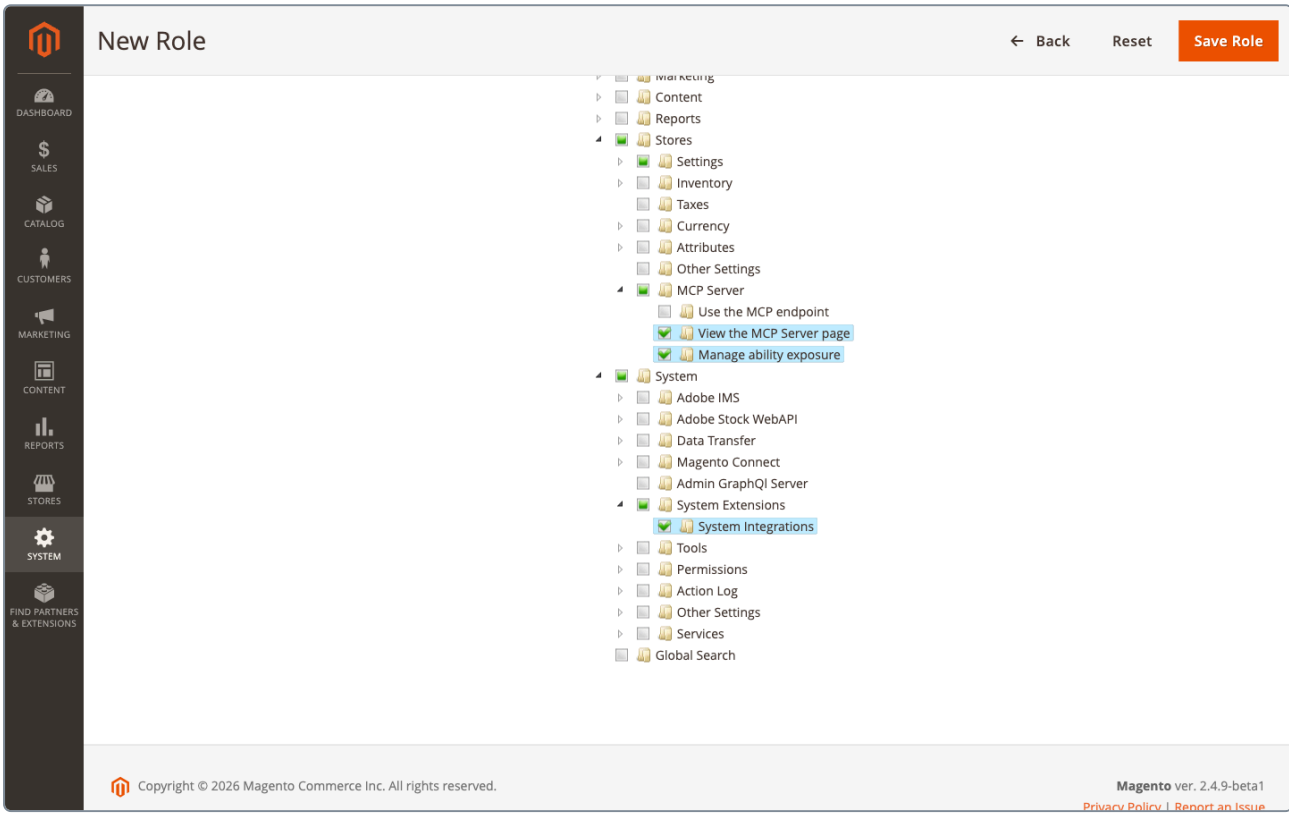


Figure 10. Role Resources with the MCP Server permissions selected

Every admin account with this role gets the permissions. An account has one role only: moving your colleague to another role takes away the permissions of their current one.

Use the MCP endpoint is for integrations: your colleague does not need it to work on the page.

3.11 Take access away

Delete the integration. The assistant that uses it is refused from its next action on, and its access token stops working for good.

ADMIN **System** > **Extensions** > **Integrations**

1. Go to **System** > **Extensions** > **Integrations**.

2. In the row of the integration, click the trash icon in the **Delete** column.

3 In the dialog, click **OK**.

The message *The integration ‘Claude’ has been deleted.* appears, with your integration’s name.

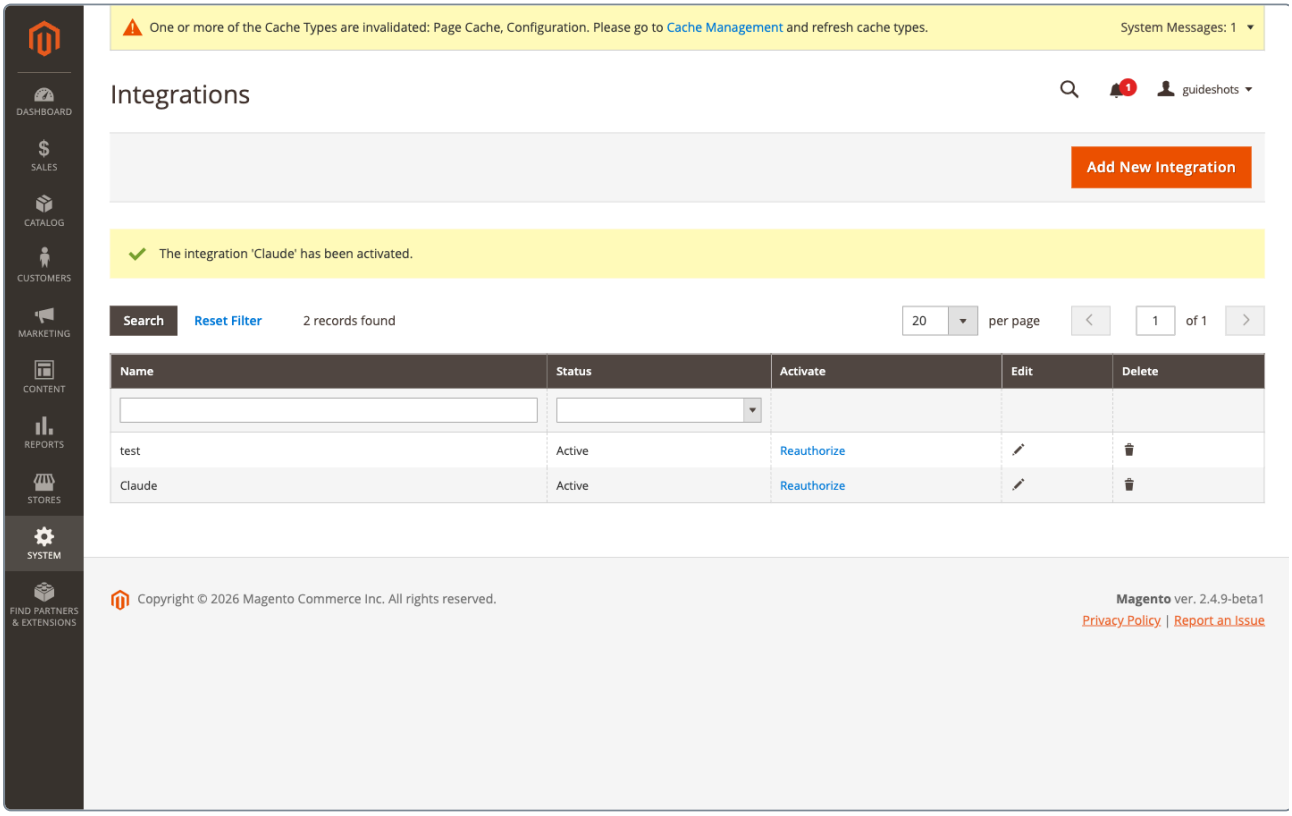


Figure 11. The Integrations list

3.12 Give an assistant a new access token

Replace the token when someone else may have seen it. The integration keeps its permissions, and the old token stops working.

ADMIN **System** > **Extensions** > **Integrations**

1 Go to **System** > **Extensions** > **Integrations**.

2 In the row of the integration, click **Reauthorize**.

3 In the dialog, click **Reauthorize**.

4 Copy the new **Access Token**, then click **Done**.

Then give the new token to every app that used the old one:

APP	WHAT TO DO
Claude Desktop	Open the store's extension in Claude Desktop's settings, and paste the new token into **Access token**.
Cursor, VS Code	On the MCP Server page, select the integration in **Integration**, click **Add to Cursor** or **Install in VS Code** again, and confirm in the app.

Table 3. Where the new token goes

3.13 Find out what the assistant can do

The **Ability catalog** at the bottom of the MCP Server page lists every action an assistant may ask your store to run, and says for each whether it may.

1. Go to **Stores** > **Settings** > **MCP Server** and scroll to **Ability catalog**.
2. In **Search by keyword**, enter a word from the action's name, for example `product`, and press Enter. Or click **Filters** to narrow the list by section, access or exposure.
3. Read **Exposure status**: **Exposed** means an assistant may use the action, as far as its integration's permissions allow.

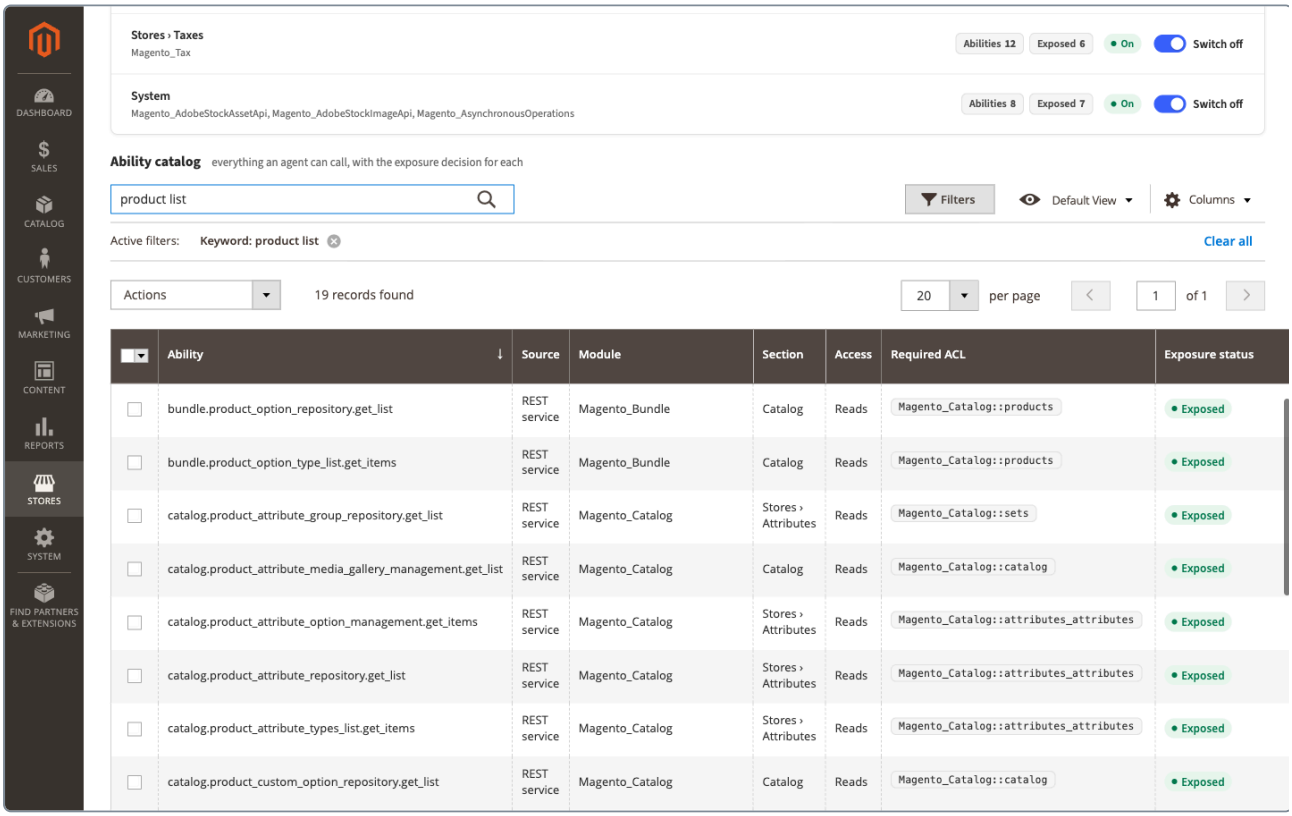


Figure 12. The Ability catalog, searched for "product list"

Screens and settings explains every column.

3.14 Turn the server off

ADMIN **Stores** > **Settings** > **Configuration** > **MCP Server** > **MCP Server**

1. Go to **Stores** > **Settings** > **Configuration**, then **MCP Server** > **MCP Server** in the list on the left.
2. Expand **General**.
3. In **Enable MCP Server**, select **No**.
4. Click **Save Config**.

Every assistant is refused until you turn the server on again, and is told *The MCP server is disabled.* Your integrations and the choices on the MCP Server page stay as they are.

4 How it works

4.1 What the assistant does in your store

The assistant does not receive a copy of your store. It asks your store to run an action, such as *list products*, and receives the answer. The actions are the same operations Magento already offers to other programs, for example to a warehouse system. MCP Server calls them *abilities* and gives each a name, such as `catalog.product_repository.get_list` for listing products. The Ability catalog lists them all.

4.2 Who the assistant acts as

The assistant signs in with an integration’s access token and acts as that integration. Magento checks the integration’s permissions before every action, as it does for any program that connects to the store. What the integration may not do, the assistant cannot do either.

4.3 The rules on top of permissions

The MCP Server page adds rules that apply to every assistant, whatever its integration may do. When several apply to an action, the strictest wins.

RULE	EFFECT
Server turned off	Every assistant is refused.
Built-in deny-list	Some actions are never allowed: anything about integrations and access tokens, passwords, two-factor authentication, and logging in as a customer. You cannot change this.
Deny-list	Actions you put on it are refused.
Section switched off	Every action of that area is refused.
Open to anyone	Actions any visitor of your store may use without signing in, such as creating a customer account, are refused while **Expose Anonymous Abilities** is **No**.
Read-only mode	Actions that change or delete data are refused.
Confirmation	The assistant asks you before the action runs.

Table 4. Rules, from the strictest

Expose Anonymous Abilities stays **No** for a reason. In the storefront, those actions are protected against abuse, for example by CAPTCHA and by limits on repeated requests. Through the assistant, these protections do not apply. Change it only on your developer’s advice.

4.4 Personal data

What an action returns goes to the assistant, and from there to the company that runs the AI, often outside the European Union. That is why personal details are hidden after installation: names, e-mail addresses, phone numbers, street addresses, dates of birth, tax and VAT numbers and similar fields reach the assistant as *[personal data]*. The assistant is told so, and does not ask for them.

Text written freely, such as order comments, is not hidden. If your order comments hold personal details, ask your developer to add the comment fields to **Personal Data Fields**.

5 Screens and settings

5.1 MCP Server settings

ADMIN **Stores** > **Settings** > **Configuration** > **MCP Server** > **MCP Server**

Every setting here applies to the whole store, which the admin shows as *[global]* under the setting's name.

SETTING	WHAT IT DOES	AFTER INSTALLATION
Enable MCP Server	While **No**, every assistant is refused.	**No**
Read-only Mode	While **Yes**, assistants may only use actions that read.	**Yes**
Expose Anonymous Abilities	Whether assistants may use actions open to any visitor of the store (see *How it works*). **Yes** also lets every GraphQL lookup run (see the **GraphQL** settings below); set **Enable GraphQL Abilities** to **No** to keep those off.	**No**
Hide Personal Data	While **Yes**, personal details reach assistants as *[personal data]*. **No** sends them to every action.	**Yes**
Personal Data Fields	The kinds of details to hide, one per line. Shown only while **Hide Personal Data** is **Yes**. Change it only with your developer.	E-mail, names, phone, address, date of birth and similar

Table 5. General and Personal Data

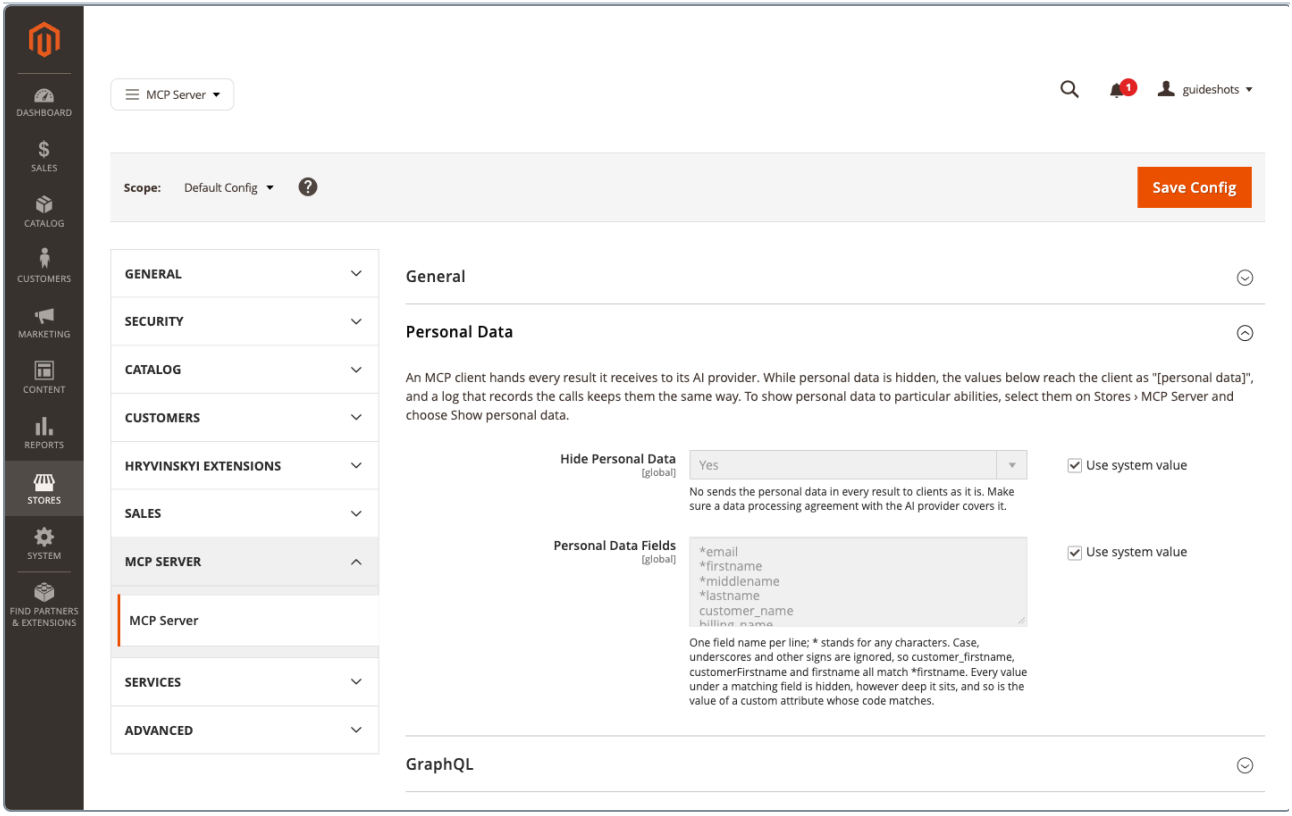


Figure 13. The Personal Data settings

GraphQL is the interface your storefront and apps use to look up products, categories and pages. The **GraphQL** group decides whether assistants may use it too.

SETTING	WHAT IT DOES	AFTER INSTALLATION
Enable GraphQL Abilities	While **Yes**, the lookups of this interface are actions too. They run as a visitor who is not signed in, so they stay refused while **Expose Anonymous Abilities** is **No**.	**Yes**
Expose GraphQL Mutations	While **Yes**, the interface's actions that change data are offered as well. Read-only mode blocks them.	**No**
GraphQL Endpoint URL	The address of the interface. Leave it empty unless your developer gives you one: empty means your store's own address.	Empty
Store View	The store view the lookups run in.	**Default Store View**

Table 6. GraphQL

5.2 The MCP Server page

ADMIN **Stores** > **Settings** > **MCP Server**

Notices at the top of the page: while the server is turned off, one notice says so, with an **Enable in configuration** button. While it is on, notices tell you when read-only mode is on and when some action shows personal data, each with a **Change** button. The buttons open the MCP Server settings, and appear only if your account may change them.

Connection card

ITEM	WHAT IT IS
Status badge	**Enabled · read-only mode**, **Enabled** or **Disabled**.
Endpoint	Your store's address for assistants, with a **Copy** button.
Integration	Pick an integration to fill its access token into **Access token**. **Paste a token by hand** clears the pick. Shown only if your account may manage integrations.
New integration	Opens Magento's form for a new integration in a new tab.
Access token	The token the install buttons use, shown as dots. A token you paste here never leaves your browser tab.
OAuth warning	*Integration tokens are not accepted as Bearer tokens…*, while the store refuses integration keys. Its **Open the OAuth settings** button opens the setting (see *Let the store accept integration keys*).

Table 7. The Connection card

Install card

ITEM	WHAT IT IS
Download for Claude Desktop (.mcpb)	The file that connects Claude Desktop to this store.
Add to Cursor, **Install in VS Code**	Add the store to these apps. They appear once **Access token** holds a token.
Claude Code, **Manual configuration**	For developers; see the Developer Guide.

Table 8. The Install card

Details (folded) holds technical information for developers.

Sections card: each area of the store with the modules in it, **Abilities** (how many actions it has), **Exposed** (how many an assistant may use now), **On** or **Off**, and the **Switch off** or **Switch on** button. Two areas are not part of the admin menu: **Open to anyone** holds actions any visitor may use, and **Other** holds actions that fit no area.

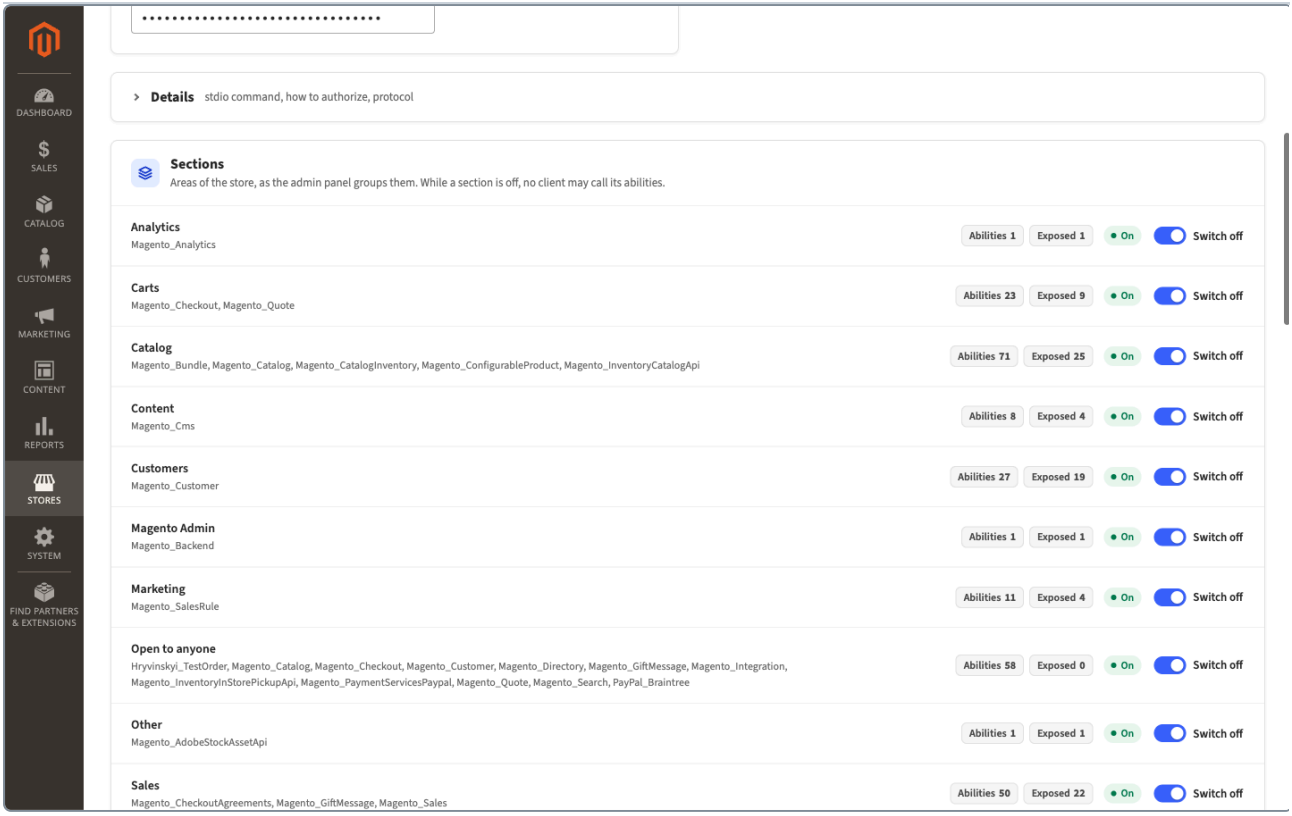


Figure 14. The Sections card

Ability catalog

COLUMN	WHAT IT SHOWS
Ability	The action's name.
Source	Where the action comes from, for example **REST service**: one of the store's own operations.
Module	The part of Magento that provides it.
Section	The area of the store it belongs to.
Access	**Reads**, **Writes** or **Deletes**.
Required ACL	The permission the integration needs, as Magento names it internally. The **Section** column tells you where to find it in the **Resources** tree.
Exposure status	Whether an assistant may use it, and if not, why.
Personal data	**Hidden** or **Shown**.
Action	A change you can make to this one row, such as **Remove from deny-list**.

Table 9. Columns of the Ability catalog

EXPOSURE STATUS	MEANING
Exposed	Assistants may use it, within their integration's permissions.
Needs confirmation	The assistant asks you before each use.
Blocked: read-only mode	It changes data, and read-only mode is on.
Denied: deny-list	You put it on the deny-list.
Denied: built-in deny-list	It is never allowed.
Denied: section off	Its area is switched off.
Denied: open to anyone	It is open to any visitor, and **Expose Anonymous Abilities** is **No**.

Table 10. Exposure statuses

IN ACTIONS	EFFECT
Add to deny-list	Assistants may not use the selected actions. Asks you to confirm.
Remove from deny-list	Takes them off the deny-list.
Require confirmation	The assistant asks you before each use.
Clear confirmation	Removes that.
Show personal data	The selected actions send personal details. Asks you to confirm.
Hide personal data	They hide personal details again.

Table 11. Actions of the Ability catalog

An action that is always denied, or blocked by read-only mode, offers no change: its status does not depend on this page.

5.3 Permissions

The module adds these entries to the **Resources** tree of user roles and integrations.

ENTRY	LETS YOU OR AN INTEGRATION
Stores > **MCP Server** > **Use the MCP endpoint**	Connect an assistant. Every integration for an assistant needs it.
Stores > **MCP Server** > **View the MCP Server page**	Open the MCP Server page and download the Claude Desktop file.

ENTRY	LETS YOU OR AN INTEGRATION
Stores > **MCP Server** > **Manage ability exposure**	Change sections, the deny-list, confirmations and personal data on the page.
Stores > **Settings** > **Configuration** > **MCP Server Settings**	Change the MCP Server settings.

Table 12. Permissions of MCP Server

6 Troubleshooting and FAQ

6.1 Claude says the MCP server is disabled

The server is turned off. Turn it on as in *Turn on the server*. If Claude still says so after you saved, refresh the cache (*Refresh the cache after a change*).

6.2 Claude cannot connect to the store at all

Check, in this order:

1. **Stores** > **Settings** > **Configuration** > **Services** > **OAuth** > **Consumer Settings**: **Allow OAuth Access Tokens to be used as standalone Bearer tokens** must be **Yes**. The MCP Server page warns you while it is not.
2. **System** > **Extensions** > **Integrations**: the integration is still there, and its **Status** is **Active**.
3. The integration's **API** tab has **Use the MCP endpoint** selected.
4. The token you pasted into Claude Desktop is complete. Copy it again from **Integration Details** if in doubt.

6.3 The MCP Server page says integration tokens are not accepted

The page says *Integration tokens are not accepted as Bearer tokens, so the store refuses every MCP client that sends one.* Click **Open the OAuth settings** in the warning, and set **Allow OAuth Access Tokens to be used as standalone Bearer tokens** to **Yes**, as in *Let the store accept integration keys*.

6.4 Picking an integration shows a note instead of filling the token

The note says why the integration cannot be used. Its **Edit integration** button opens the integration in a new tab. The fixes in **System** > **Extensions** > **Integrations**:

NOTE	WHAT TO DO
Not activated yet.	Click **Activate** in its row, then **Allow**, then **Done**.
Its settings changed.	Click **Activate** in its row, then **Reauthorize**. The integration gets a new access token: give it to every app that used the old one (see *Give an assistant a new access token*).

NOTE	WHAT TO DO
Its API resources leave out "Use the MCP endpoint".	Edit the integration, enter your admin password in **Your Password**, select **Use the MCP endpoint** in its **API** tab, and click **Save**.
It has no usable access token.	Give it a new token as in *Give an assistant a new access token*.
The token could not be fetched.	Reload the page and pick again, or paste the token by hand. If it keeps happening, ask your developer.

Table 13. Notes of the Integration list

After a fix, reload the MCP Server page and pick the integration again.

6.5 A button or the MCP Server menu entry is missing

Each part of the page needs a permission in the role of your admin account:

MISSING	PERMISSION YOUR ROLE NEEDS
MCP Server in **Stores** > **Settings**	**Stores** > **MCP Server** > **View the MCP Server page**
The **Actions** menu and the **Action** column of the Ability catalog, **Switch off** and **Switch on**	**Stores** > **MCP Server** > **Manage ability exposure**
Enable in configuration and **Change** in the notices	**Stores** > **Settings** > **Configuration** > **MCP Server Settings**
Integration and **New integration** in the **Connection** card	**System** > **System Extensions** > **System Integrations**
Open the OAuth settings	**Stores** > **Settings** > **Configuration** > **OAuth Configuration**

Table 14. Permissions behind the page

Ask an administrator to add the permission to your role, as in *Give a colleague access to the MCP Server page*.

6.6 Claude says read-only mode is on

Claude reports something like *Read-only mode is on, and the ability "catalog.product_repository.save" changes data.* This is expected while read-only mode is on. If the assistant should change data, see *Let the assistant change data*.

6.7 Claude says its role lacks a permission

Claude reports something like *The ability "sales.order_repository.get_list" needs ACL resources your role lacks: Magento_Sales::actions_view.* The integration does not have the permission this action needs. Add it as in *Choose what the assistant may read*; the table there covers the common cases, and the action's **Section** in the Ability catalog tells you which part of the **Resources** tree to look in.

6.8 Claude says an action is on the deny-list

Claude reports *The ability "…" is on the deny-list of this store.* Someone put it on the deny-list. To allow it again, see *Stop the assistant from using one action*. If the Ability catalog shows **Denied: built-in deny-list**, the action is never allowed.

6.9 Claude says an action is not exposed (section_off)

Claude reports *The ability "…" is not exposed to MCP clients (section_off).* Its area is switched off in the **Sections** card. Click **Switch on** to allow it.

6.10 Claude says an action is open to anonymous callers

Claude reports *The ability "…" is open to anonymous callers, and this store does not expose such abilities.* This is expected; *How it works* explains why.

6.11 Names and e-mail addresses arrive as [personal data]

This is expected while personal data is hidden. To show it for particular actions, see *Let the assistant see customer details for one action*.

6.12 Claude asks me to confirm before it does something

The action is marked **Needs confirmation**. Answer Claude in the chat. To stop the question, see *Make the assistant ask you first*.

6.13 Add to Cursor and Install in VS Code do not appear

They appear only once **Access token** holds a token. Pick the integration in **Integration**, or paste its token.

6.14 Download for Claude Desktop shows an error instead of a file

The MCP Server page shows a message about the store's address instead of the file, for example *The store's endpoint … uses plain http to a host other than this computer, so the extension would send the access token unencrypted and refuses to start.* The extension sends the access token only to an address that starts with `https://`, unless the store runs on your own computer. Ask your developer to give the store a secure address; the message tells them what to change.

6.15 Questions

Does the assistant see everything in my store? No. It sees only what its integration's permissions allow, minus switched-off areas and denied actions, and personal details stay hidden unless you show them.

Can the assistant change prices or delete products? Only after you turn read-only mode off, and only if its integration has the permission to change products.

Does the access token expire? No. It works until you delete the integration or give it a new token (see *Take access away* and *Give an assistant a new access token*).

Where does Claude Desktop keep the token? In your computer's keychain.

Does turning the server off delete my integrations or settings? No. They stay as they are and apply again when you turn the server on.

Where do I get more help? Ask your developer, or open an issue at https://github.com/hryvinskyi/magento2-mcp-server/issues.

7 Glossary

TERM	MEANING
AI assistant	A program you talk to in your own words, such as Claude, that can use your store's actions.
MCP	Model Context Protocol: the common language AI assistants use to connect to other programs. MCP Server makes your store speak it.
Ability	One action the assistant can ask your store to run, such as listing products.
Integration	A key to your store with its own permissions, made in **System** > **Extensions** > **Integrations**.
Access token	The secret text of an integration's key. Whoever holds it acts as the integration.
Endpoint	Your store's address for assistants, shown on the MCP Server page.
Read-only mode	A setting that lets assistants read but not change anything.
Section	An area of the store, such as Catalog or Sales, that you can switch off for assistants.
Deny-list	The list of actions no assistant may use.
Confirmation	A mark that makes the assistant ask you before an action.
Personal data	Details that identify a person, such as a name or an e-mail address.
GraphQL	The interface your storefront and apps use to look up products, categories and pages.
Permission	A right in the **Resources** tree of a role or an integration, such as **Products**. Magento calls them ACL resources.
Cache	Stored copies Magento keeps to be fast. After some changes, Magento asks you to refresh them.
Data processing agreement	A contract with a company that handles personal data for you, required under the GDPR.

Table 15. Glossary

Appendix A — Document history

VERSION	DATE	CHANGES
1.0	2026-11-09	First version, for MCP Server 1.4.2.

Table 16. Document history

Open questions

Not yet tried on a computer with these apps. Remove each item once it is checked.

- *Connect Claude Desktop*, steps 3 and 4: how Claude Desktop installs the file and asks for its settings. Written from the MCP Server page's own hint and the extension's two settings, **Store endpoint** and **Access token**.
- *Connect Cursor or VS Code*, step 4: what Cursor and VS Code ask before they add the store.
- *Give an assistant a new access token*: where Claude Desktop keeps an installed extension's settings, and whether **Add to Cursor** and **Install in VS Code** replace the store's earlier entry or add a second one.