

DRA-PULSE: Tracing Persona Recoverability Across Stages of a Deep Research Agent

Anonymous ACL submission

Abstract

The architecture of a deep research agent—how it routes and re-uses stage artifacts—determines which stages retain recoverable persona signal and which do not. We introduce **DRA-PULSE**, an N-way stage-wise persona attribution diagnostic that recovers the conditioning persona from each intermediate artifact against hard-negative candidates, and apply it to 120 PDR-Bench reports from a four-stage DRA (Gemini 3.6 Flash via `open_deep_research`). Persona recoverability follows a *dip-and-recovery* trajectory: accuracy decreases from Planning (0.808) to Search (0.550), remains low at Compression (0.592), and recovers at Writing (0.800); under a symmetric candidate protocol these values are 0.733/0.542/0.608/0.708. Persona-to-query alignment thins at query execution (MiniLM cosine: 0.269 $\rightarrow$ 0.212), consistent with the Search dip; the Writing prompt’s re-injection of the Planning brief is the structural source of the recoverability advantage over Search. At the report level, 32 runs lose correct attribution between Planning and Search; 24 of these recover by Writing. Injecting a mismatched persona’s brief at Writing drops accuracy from 0.933 to 0.467 ($n=15$); removing the brief entirely yields 0.833 ($n=30$; $\Delta=-0.067$, CI includes zero)—we do not detect a reduction from removing the brief. The trajectory is robust to identity masking, a second LLM matcher, and equal character-budget controls; removing identity information from both artifacts and candidate profiles simultaneously sharpens the stage contrast—Planning (0.575) and Writing (0.617) remain above the artifact-free prior (0.450) while Search and Compression collapse to prior level. We present DRA-PULSE as a process-level diagnostic of how a specific DRA architecture routes recoverable persona information, not a measure of personalization utility or causal influence.

1 Introduction

The architecture of a deep research agent shapes how persona signal propagates across pipeline stages: stages that route rich upstream artifacts directly to their prompts retain recoverability, while stages that transform the conditioning brief into retrieval queries lose it. In `open_deep_research`, the Writing prompt *re-injects the Planning brief* as its top-level instruction, creating an architectural recovery path; query execution at Search, in contrast, strips persona conditioning through progressive semantic thinning. Standard end-to-end personalization metrics cannot detect this internal structure because they observe only the final report. We treat each pipeline stage’s artifact as an observable probe and ask how well an independent evaluator can recover the conditioning persona—a process-level diagnostic we call DRA-PULSE. Throughout this paper, *persona signal* refers operationally to artifact information that supports closed-set recovery of the conditioning persona; the term does not imply causal mediation, personalization utility, or preservation of all persona preferences. The architectural bottleneck at query-reformulation stages is not specific to persona: any structured conditioning input—task specifications, user constraints, or domain requirements—that passes through a brief-to-query transformation may face a similar information loss mechanism. The trajectory we observe is a characterization of this specific DRA architecture, not a general property of deep research agents.

Our contributions are:

- **Diagnostic reframing.** We re-frame multi-stage DRA evaluation as closed-set persona attribution: given a stage artifact, which of N candidate personas generated it? This operationalizes *persona signal* as stage-level recoverability independent of utility, enabling process-level localization of where conditioning signal is lost or recovered across pipeline stages.
- **DRATracer.** A deterministic LangGraph event listener that captures artifacts from parallel subgraphs by parent run-ID without post-hoc reconstruction—reusable instrumentation for LangGraph-based DRA pipelines.
- **Empirical finding.** On 120 reports we document a report-level *loss-and-recovery* process: 32 Planning $\rightarrow$ Search losses, of which

24 recover by Writing, with Search showing the largest single-stage accuracy drop (Planning 0.808 $\rightarrow$ Search 0.550; the Search-Compression gap is smaller and its CI includes zero).

- **Mechanistic analysis.** Shortcut controls (identity masking, shuffled-actionable, candidate-profile masking) jointly locate the signal: late-stage recoverability carries identity-derived discourse features—framing, vocabulary register, topical angle—not verbatim identity leakage. The brief-to-query reformulation at Search is the conditioning bottleneck, compressing structured persona input across all four feature types—a mechanism that may generalize beyond persona to any conditioning input passing through a brief-to-query transformation.

2 Related Work

2.1 Personalized Generation and Deep Research

Personalization in IR has long used user profiles and behavioral histories for re-ranking (Teevan et al., 2005; Robertson and Zaragoza, 2009). LLM personalization benchmarks such as LaMP (Salemi et al., 2023) and LaMP-QA (Salemi and Zamani, 2025) test conditioning on user histories for classification and long-form QA, with growing surveys of personalization methods for large models (Zhang et al., 2024; Salemi et al., 2024; Richardson et al., 2023). **PDR-Bench** (Liang et al., 2025) targets personalized *deep research*: multi-step, long-form report generation conditioned on rich personas (identity plus actionable preferences). Industry deep-research systems similarly emphasize multi-step search and synthesis (OpenAI, 2025; Google DeepMind, 2024), yet evaluation still centers on final reports. These settings largely lack stage-level diagnostics of *where* persona conditioning remains recoverable inside the pipeline—the gap we address with closed-set N-way stage-wise attribution.

2.2 Authorship Attribution, Probing, and Preference Identification

Classical authorship attribution recovers authors from closed candidate sets via stylometric and neural features (Stamatatos, 2009; Shrestha et al., 2017; Rivera-Soto et al., 2021). Probing classifiers similarly test what attributes are linearly readable from representations (Conneau et al., 2018; Belinkov, 2022), and attribute inference raises dual-use privacy concerns (Pan et al., 2020). Mechanistic work further localizes factual associations inside model components (Geva et al., 2021; Meng et al., 2022); we share the *where is the information?* question, but localize recoverability across *pipeline stages and artifacts* rather than weights or activations. Closest to our task, Li and Chaturvedi (2025) propose *comparative personalization* for multi-document summarization as pairwise preference attri-

bution. We differ by (i) N-way simultaneous attribution and (ii) stage-wise localization across a four-stage DRA trajectory, measuring recoverability of the conditioning persona rather than pairwise preference ranking alone.

2.3 Agents, Tool Use, and Process-Level Evaluation

LLM agents combine reasoning and tool use (Yao et al., 2023b; Schick et al., 2023; Wei et al., 2022; Yao et al., 2023a) and are evaluated on interactive suites such as AgentBench (Liu et al., 2024), GAIA (Mialon et al., 2023), and SWE-bench (Jimenez et al., 2024). Multi-hop and retrieval-augmented pipelines further stress intermediate evidence handling (Yang et al., 2018; Lewis et al., 2020; Asai et al., 2024; Press et al., 2023); query-reformulation steps in particular risk losing conditioning constraints embedded in the original brief, a mechanism DRA-PULSE localizes stage-by-stage. Deep research agents such as *open_deep_research* (LangChain AI, 2025) (built on LangGraph (LangChain AI, 2024)) elaborate a query into a brief, run parallel search/compress subgraphs, then synthesize a report—so persona-conditioned information must pass through multiple transformations. **PrefDisco** (Li et al., 2025) shows preference accuracy can degrade in reasoning/content-selection layers of multi-step pipelines. Process supervision argues that intermediate steps, not only outcomes, should be scored (Lightman et al., 2023; Uesato et al., 2022); LLM-as-judge protocols likewise evaluate free-form outputs (Zheng et al., 2023). We connect these threads by treating each DRA stage artifact as a closed-set recoverability probe: a process diagnostic of *where* conditioning remains readable, not a substitute for end-to-end personalization quality, for which we also report non-LLM baselines (BM25, embeddings) (Robertson and Zaragoza, 2009; Reimers and Gurevych, 2019).

3 Method

3.1 Task Formulation

Let P be a DRA pipeline and $\mathcal{C} = \{p_1, \dots, p_N\}$ be a candidate persona set ($N = 3$ in our primary experiments). P is conditioned on one **ground-truth persona** $p^* \in \mathcal{C}$ and a research query q , and produces a sequence of **stage artifacts**:

$$\mathcal{A}(q, p^*) = (a_{\text{plan}}, a_{\text{search}}, a_{\text{compress}}, a_{\text{write}}). \quad (1)$$

The **N-way stage-wise attribution** task is defined as: for each stage artifact $a \in \mathcal{A}$, identify p^* from $\mathcal{C}$:

$$\hat{p} = f(a, \mathcal{C}), \quad \hat{p} \in \mathcal{C}. \quad (2)$$

Attribution accuracy at stage s is $\text{Acc}_s = \mathbb{E}[\mathbf{1}[\hat{p}_s = p^*]]$, with chance level $1/N$. Stage-wise accuracy profiles localize *where* persona recoverability is high or low: a flat profile suggests little stage-specific change;

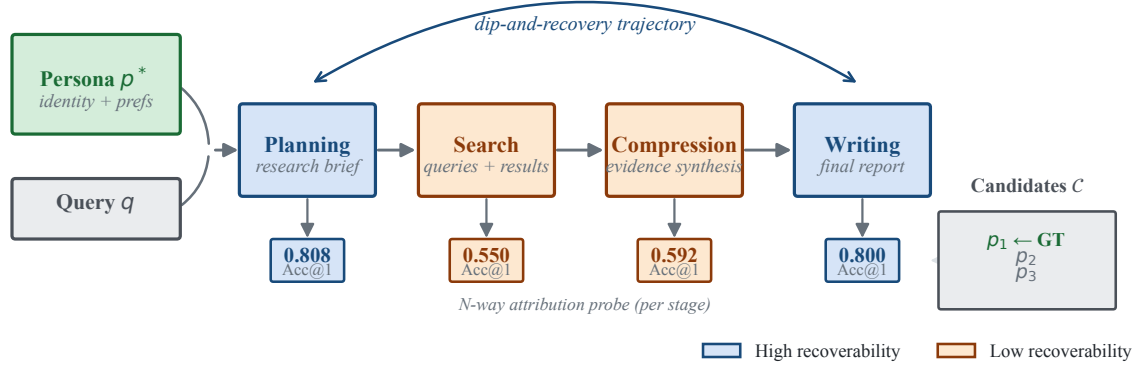


Figure 1: DRA-PULSE framework. A user persona p^* and query q condition a four-stage DRA pipeline (Planning, Search, Compression, Writing). At each stage, an independent N-way attribution probe identifies p^* from a hard-negative candidate set $\mathcal{C}$ using only the stage artifact. Blue stages (Planning, Writing) have high persona recoverability; orange stages (Search, Compression) are low. The dip-and-recovery trajectory (§5) is the core empirical finding.

Stage	Artifact	Content
Planning	a_{plan}	Research brief: scoped topics, angle
Search	a_{search}	Queries + top-3 Serper results each
Compression	a_{compress}	Per-topic synthesis of evidence
Writing	a_{write}	Full long-form research report

Table 1: Four stage artifacts captured per DRA run.

a peak at a_{plan} that falls at Search and recovers at a_{write} localizes a dip-and-recovery pattern in closed-set discriminability.

3.2 DRA Pipeline and Artifact Schema

We use **open_deep_research** (LangChain AI, 2025) as the DRA backbone, instantiated with Gemini 3.6 Flash. The pipeline implements a four-stage LangGraph graph; Table 1 summarizes each stage’s artifact.

DRATracer is our LangGraph v2 event listener that captures all four artifacts deterministically from a single pipeline run (implementation artifact; schema and runner code available upon request). The key challenge is that three researcher subgraphs run concurrently under the supervisor; DRATracer resolves per-artifact topic identity using parent run-ID correlation across `on_chain_start` and `on_chain_end` events. All artifacts are serialized to a versioned JSON schema (`dra_trace_v2`) with SHA-256 prompt hashes and a query/source ledger for reconciliation (schema: Appendix J).

3.3 Attribution Protocol

LLM Matcher. We use Upstage Solar Pro (API model ID: `solar-pro`) as the primary attribution model (temperature = 0, structured output). Given artifact text a and persona set $\mathcal{C}$ (order-shuffled to prevent position bias), the matcher returns a single pre-

dicted persona $\hat{p}$ (full prompt template: Appendix I). Candidate order is deterministically shuffled per run and stage using a SHA-256-derived seed. To bound matcher context consistently, serialized artifacts are truncated to 4,000 characters for Planning, 3,500 for Search, 6,000 for Compression, and 8,000 for Writing; over-length Writing artifacts retain both the opening and tail of the report.

Non-LLM Baselines. We include three baselines: (1) *Random*, uniform over $\mathcal{C}$ (expected accuracy = $1/N$); (2) *BM25* (Robertson and Zaragoza, 2009), Okapi BM25 similarity between artifact and persona text; (3) *Embedding* (Reimers and Gurevych, 2019), cosine similarity via a sentence encoder.

Hard Negatives. We remove identity-field tokens—name, age, occupation, education, residence, and family—from each persona and compute Jaccard similarity over the remaining *actionable-preference* tokens (interests, goals, decision style, and related preference text). For each ground-truth persona, the two most similar same-domain profiles are selected as distractors (≥ 0.2 threshold; deterministic nearest-fallback if fewer than two exceed it). This makes chance-level performance a meaningful baseline and selects distractors by preference content rather than demographic identity. Candidate-set-size sensitivity uses prefixes of the same ranking (top-1 for $N = 2$; top-4 for $N = 5$; construction details: Appendix K).

3.4 Shortcut Controls

High attribution accuracy could arise from **lexical leakage**—name tokens, demographic phrases, or verbatim persona text appearing in an artifact—rather than broader persona-conditioned content selection. We

Condition	Manipulation	Tests
Baseline	Unmodified persona & profiles	Upper bound
Artifact-side masked	NER + identity-phrase masking in artifacts	Surface mentions in artifacts?
Shuffled-actionable	Donor actionable prefs, shell identity	Actionable vs. identity?
Candidate-side masked	Basic Attributes removed from candidates	Identity cues in candidates?
Dual-masked	Both artifact-side and candidate-side	Preference-layer only?

Table 2: Shortcut control conditions executed in this paper. Artifact-side masking is a post-processing pass on existing stage artifacts; shuffled-actionable is a generation-time intervention (30 reports, both seeds); candidate-side and dual-masked conditions re-run the Solar matcher with modified candidate profiles. Two additional generation-time conditions (actionable-only, identity-only) were attempted but did not pass the pre-specified completeness gate (Appendix G).

report five shortcut controls (Table 2): two post-matching candidate-profile ablations (candidate-side masking, dual-masked), one post-processing artifact masking, and one generation-time shuffled-actionable intervention; two additional generation-time ablations were attempted but did not pass the pre-specified completeness gate (Appendix G).

4 Experimental Setup

4.1 Datasets

PDR-Bench (Primary). We use the English split of PDR-Bench (Liang et al., 2025), which provides 25 user personas and 250 query-persona pairs across ten domains (Education, Career, Health, Travel, Finance, Creative, Shopping, Real Estate, Law, and Parenting). We apply domain-stratified largest-remainder sampling to select 20 confirmatory query groups; eligibility filtering removes tasks with fewer than three personas that have at least one actionable token after identity masking. Hard-negative candidate sets are constructed as described in §3. The confirmatory run uses two seeds ($s \in \{0, 1\}$), yielding **120 reports** (20 groups $\times$ 3 personas $\times$ 2 seeds). A 5-group development split (15 reports) serves as an engineering gate and is excluded from all research-question analyses.

4.2 Generation Stack

All reports are generated with open_deep_research (LangChain AI, 2025) using Gemini 3.6 Flash for all pipeline roles. Search is provided by a Serper adapter with a report-level execution cap of 7 attempted web calls (at most 2 per researcher invocation), top-3 organic results each, max 15 unique URLs, and a global hard stop at 2,400 attempted queries. The planner may request more candidate queries across parallel research topics; rejected proposals are logged but only successful executions (status=ok) enter the Search artifact used for attribution. Generation seed is fixed via generation_config.seed; other hyperparameters use model defaults. Every artifact records a full execution_config block including model IDs, seeds, and SHA-256 hashes for reproducibility. The

Stage	Solar	BM25	Embed	Rnd
Planning	0.808	0.633	0.442	0.292
Search	0.550	0.567	0.292	0.367
Compression	0.592	0.567	0.375	0.383
Writing	0.800	0.575	0.475	0.250
Macro avg.	0.688	0.585	0.396	0.323
Chance		0.333		

Table 3: N-way stage-wise attribution Acc@1 on PDR-Bench confirmatory split (seeds 0 and 1, $n = 120$, $N = 3$ hard-negative candidates). Solar = Solar Pro (LLM matcher); BM25 = Okapi BM25; Embed = all-MiniLM-L6-v2 cosine; Rnd = random.

primary analysis includes all schema-valid reports. We separately report a sensitivity analysis restricted to runs with no completeness errors and to runs satisfying all pre-defined success criteria.

Identifier-masked variants are produced by post-processing existing artifacts at zero additional generation cost.

4.3 Evaluation Metrics

Attribution Accuracy (Acc@1). Fraction of reports for which the matcher’s top-1 prediction equals p^* . Reported per stage and macro-averaged across seeds. Chance level: $1/N = 0.33$.

Stage Trajectory. The four-tuple ($\text{Acc}_{\text{plan}}, \text{Acc}_{\text{search}}, \text{Acc}_{\text{compress}}, \text{Acc}_{\text{write}}$) plotted over pipeline depth. A rising trajectory implies increasing recoverability with pipeline depth; a falling then rising pattern is the dip-and-recovery regime we study.

Seed Variance. Std. dev. of Acc@1 across seeds 0 and 1 as a fragility indicator.

5 Results

5.1 Aggregate Stage Trajectory

Table 3 reports the controlled two-seed comparison between Solar Pro and three non-LLM baselines. Solar is strongest overall, but its advantage over BM25 is stage-dependent (Table 3).

Dip-and-recovery. Across both seeds, recoverability drops from Planning (0.808) to Search (0.550, $\Delta = -0.258$, 95% CI $[-0.333, -0.175]$), changes little at Compression (0.592, $\Delta = +0.042$, $[-0.025, 0.108]$), and recovers at Writing (0.800, $\Delta = +0.208$, $[0.142, 0.283]$). Planning and Writing are nearly equal in the aggregate. The trajectory appears in both generation seeds; the largest seed difference is 0.050 at Compression, and every seed-difference interval includes zero.

5.2 Report-Level Loss and Recovery

Table 4 and Figure 2 decompose the aggregate curve for the same reports. Planning→Search is almost purely lossy: 65 stay correct, 32 lose correctness, only 1 gains,

Transition	Lost	Gained	Net
Planning → Search	32	1	−31
Search → Compression	8	13	+5
Compression → Writing	6	31	+25

Table 4: Adjacent-stage lost/gained counts ($n=120$).

Planning→Search transitions ($n=120$)

Plan correct	65	32
Plan wrong	1	22
	Search correct	Search wrong

Figure 2: Planning→Search correctness counts ($n=120$). Almost all change is Plan-correct → Search-wrong (32), not recovery from Plan-wrong (1).

and 22 stay wrong. Compression has 13 gains vs. 8 losses (net unresolved at aggregate level); Writing has 31 gains vs. 6 losses. Of the 32 Plan-correct/Search-wrong reports, 24 (75%) recover by Writing and 8 do not (Appendix F). More broadly, 33 of 54 Search errors (61%) are correct at Writing. Exploratorily, the stage ordering appears in nine of ten domains; Creative is the only exception, while Search reaches chance in Career, Finance, and Real Estate (Appendix D).

5.3 Robustness Checks

Beyond lexical matching. The Solar–BM25 gap varies by stage. Across the paired two-seed reports, Solar exceeds BM25 by 0.175 at Planning (task-bootstrap 95% CI [0.083, 0.258]) and 0.225 at Writing ([0.142, 0.308]). At Search, BM25 is 0.017 higher than Solar, but the paired difference includes zero ([−0.125, 0.092]); the Compression difference is similarly unresolved (+0.025, [−0.058, 0.117]). Importantly, the BM25 Search advantage is seed-0 driven (BM25 0.600 vs. Solar 0.533 in seed 0; direction reverses in seed 1, BM25 0.533 vs. Solar 0.567) and does not replicate (Appendix B). Thus, the LLM evaluator’s advantage is concentrated at Planning and Writing, while the low Search score is shared with a strong lexical baseline. Critically, both non-LLM baselines independently reproduce the Planning-to-Search dip: BM25 drops from 0.633 to 0.567, and Embedding from 0.442 to 0.292. Because these baselines involve no LLM reasoning, the dip pattern reflects artifact-level properties rather than an evaluator-specific bias. The non-replicable element is BM25’s absolute advantage over Solar at Search (+0.067 in seed 0, reversed in seed 1); BM25’s own Planning→Search dip

Protocol / subset	n	Plan	Search	Comp.	Write
Per-GT hard-neg	120	0.808	0.550	0.592	0.800
Symmetric task-shared	120	0.733	0.542	0.608	0.708
Prior-correct subset	54	0.907	0.593	0.593	0.833
Prior-wrong subset	66	0.727	0.515	0.591	0.773
Strict-quality subset	90	0.822	0.567	0.611	0.811

Table 5: Stage Acc@1 under candidate protocols, candidate-only-prior splits, and a strict-quality inclusion filter. Dip-and-recovery holds in every row.

(0.667→0.600 in seed 0; 0.600→0.533 in seed 1) is present in both seeds. Recovery, however, is baseline-asymmetric: BM25 rises only from 0.567 to 0.575 at Writing while Embedding recovers from 0.292 to 0.475, indicating the Writing recovery signal is not driven by lexical overlap alone. The both-evaluator-wrong rate provides a further evaluator-agnostic measure: at Search (seed 0), Solar and GPT-5.4-nano both err simultaneously on 40% of decisions (24 of 60), versus 12% at Writing (7 of 60). This 3.3-fold difference in concurrent evaluator failure is consistent with Search artifacts containing less recoverable persona evidence.

Candidate-construction sensitivity. Because per-ground-truth hard negatives are selected around the target persona, the candidate set can contain a structural prior. An artifact-free heuristic that selects the candidate with the highest mean pairwise actionable-token Jaccard identifies 27 of 60 construction centers (0.450; task-cluster bootstrap 95% CI [0.333, 0.567]). We therefore treat *absolute* hard-negative Acc@1 with caution and treat *paired stage transitions* as the primary scientific target. Importantly, the same report keeps one candidate set across all stages, so a static prior cannot alone generate within-report stage changes. Table 5 summarizes protocol and quality subsets. Symmetric task-shared candidates lower absolute Acc (0.733/0.542/0.608/0.708) but preserve Planning→Search (−0.192, CI excludes 0) and late recovery. Splitting by the candidate-only heuristic: *prior-correct* ($n=54$) and *prior-wrong* ($n=66$) both keep the dip-and-recovery shape, so the trajectory is not confined to prior-solvable reports. A strict-quality subset ($n=90$; all pre-defined success criteria) yields 0.822/0.567/0.611/0.811, ruling out Search dip as a pure completeness/ledger artifact (full policy breakdown: Appendix A). Candidate construction affects absolute levels; it does not create the stage ordering.

Protocol-matched shortcut controls. We mask both spaCy PERSON/ORG/GPE/NORP/FAC entities and exact identity-field phrases derived from all three candidate profiles, including names, ages, occupations, education, residence, and family fields. Applying phrases from all candidates avoids using the ground-truth profile alone to define the transformation. The masked and full conditions have identical candidate sets and SHA-256 orders for all 480 paired decisions. Results are

Stage	Full	Masked	Δ
Planning	0.808	0.725	-0.083
Search	0.550	0.558	+0.008
Compression	0.592	0.575	-0.017
Writing	0.800	0.783	-0.017

Table 6: Solar Acc@1 before and after artifact-side identity masking. Only Planning changes reliably: $\Delta = -0.083$, task-cluster bootstrap 95% CI $[-0.150, -0.025]$. Intervals for the other three deltas include zero.

Stage	Solar	GPT-nano	Agree	κ
Planning	0.800	0.750	0.850	0.837
Search	0.533	0.467	0.717	0.680
Compression	0.567	0.617	0.700	0.673
Writing	0.817	0.850	0.867	0.855
All	0.679	0.671	0.783	0.763

Table 7: Per-stage cross-matcher comparison (seed 0, $n = 60$). Solar = Solar Pro; GPT-nano = GPT-5.4-nano-2026-03-17. Agreement and κ are highest where attribution accuracy is highest (Planning, Writing) and lowest where it is lowest (Search, Compression).

shown in Table 6.

The masked trajectory still drops from Planning to Search (-0.167 , $[-0.258, -0.067]$) and recovers from Compression to Writing ($+0.208$, $[0.100, 0.308]$). Thus, direct identity phrases explain part of Planning recoverability but do not explain the late-stage recovery.

Cross-matcher replication. On the frozen seed-0 cohort, GPT-5.4-nano produces 0.750/0.467/0.617/0.850 across Planning, Search, Compression, and Writing. Its Planning-to-Search drop is -0.283 (task-cluster bootstrap 95% CI $[-0.433, -0.133]$), followed by a Compression-to-Writing gain of $+0.233$ ($[0.083, 0.383]$). Solar and GPT agree on 188 of 240 decisions (0.783; Cohen’s $\kappa = 0.763$). Stage-wise κ mirrors the primary trajectory: highest at Writing (0.855) and Planning (0.837), and lower at Search (0.680) and Compression (0.673)—the two stages with the lowest attribution accuracy. On seed 1, GPT-5.4-nano produces 0.833/0.583/0.600/0.733, agreeing with Solar on 76.7% of decisions ($\kappa = 0.745$); the dip-and-recovery shape is consistent across evaluators and seeds. Notably, GPT-5.4-nano (0.850) exceeds Solar (0.817) at Writing in seed 0, showing that Writing’s recoverability advantage is not Solar-specific. Table 7 gives per-stage detail for seed 0.

Quality and domain sensitivity (exploratory). Restricting analysis to the 90 reports satisfying all pre-defined success criteria yields 0.822/0.567/0.611/0.811; excluding completeness errors yields 0.824/0.571/0.615/0.813 ($n = 91$). Both retain dip-and-recovery. Domain patterns ($n = 12$ per

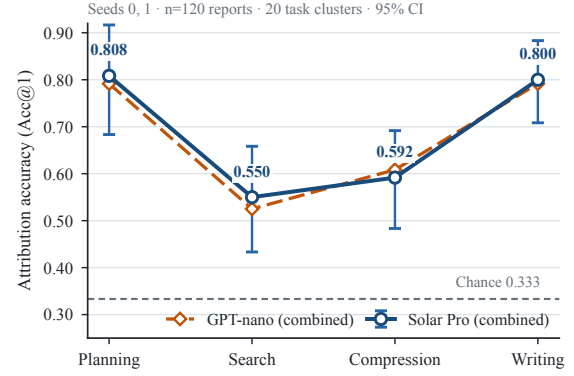


Figure 3: Stage-wise attribution trajectory. Blue (solid): Solar Pro combined ($n = 120$, two seeds) with 95% task-cluster bootstrap intervals. Orange (dashed): GPT-5.4-nano combined mean of the same two seeds. Both evaluators show the same dip-and-recovery shape.

cell) are exploratory and deferred to Appendix D.

Candidate-set-size sensitivity. The trajectory also holds for $N=2$ and $N=5$, with nearly unchanged chance-normalized Planning accuracy (Table 16, Appendix H).

6 Analysis

6.1 Why Does Search Accuracy Dip?

The Search artifact combines executed queries with retrieved titles/snippets and is the lowest-recoverability stage (32 Plan→Search losses vs. 1 gain). A competing explanation is that Search is simply a different textual genre—queries and retrieved snippets—that structurally disfavors persona attribution regardless of conditioning loss. Two results argue against a pure genre effect: (i) queries-only Acc@1 (0.600) exceeds snippets-only (0.533) and full Search (0.550), so the query sub-artifact retains more signal than the combined artifact, and (ii) an equal-budget rematch (seed 0, 3.5k chars for all stages) preserves the dip (§8). Table 8 gives per-seed detail. Cross-seed within-persona URL overlap (0.042) is near cross-persona overlap on the same query (0.034), so retrieved sets show little persona-specific discriminability by URL metrics.

Where persona alignment thins. We probe lexical and embedding-based alignment from persona profiles into Planning briefs and executed Search queries (Figure 4; protocol in Appendix L). Lexically, mean actionable-token retention is already low in briefs (0.068) and near-zero in executed queries (0.008). Under an embedding-based similarity probe (MiniLM cosine), mean persona-brief alignment is 0.269 and falls to 0.212 for persona-query (mean drop 0.057, task-cluster bootstrap 95% CI $[0.042, 0.075]$); brief-query remains higher (0.493), so queries still track the re-

View	Seed 0	Seed 1	Combined
Full Search	0.533	0.567	0.550
Queries only	0.583	0.617	0.600
Snippets only	0.483	0.583	0.533

Table 8: Search Acc@1 by artifact view and generation seed ($n = 60$ per seed; Solar Pro matcher; 240 total decisions, SHA-256 order audit 240/240 pass). The queries-only advantage over full Search is +0.050 in each seed independently.

search topic while losing persona conditioning: retrieval queries optimize topical recall rather than persona specificity, making the conditioning bottleneck a structural feature of this reformulation step. Persona-query similarity is also higher on Search-correct than Search-wrong runs (0.236 vs. 0.182; difference 0.055, CI [0.019, 0.088]). This separation suggests that conditioning-aware query generation—preserving persona cues during brief-to-query reformulation—could narrow the Search dip without restructuring the pipeline.

Which persona features disappear? Section-level token retention (Figure 5) shows the same compression across profile buckets: identity (0.100→0.020), interests (0.081→0.010), goals/constraints (0.075→0.008), and decision style (0.020→0.002). The Planning→Search loss is therefore not explained by a single missing identity string: multiple persona sections thin when the agent reformulates the brief into retrieval queries.

Illustrative compression. On `pilot_task12_User5_seed0`, Planning correctly attributes an engineering graduate seeking a six-month emotion-regulation curriculum. Search collapses to book-title / ISBN lookups (“Feeling Good”, “Mind Over Mood”), persona-query MiniLM similarity drops to 0.115, and attribution flips to User2; Writing recovers User5 after brief re-injection. A second recovery case (AI-education startup) is in Appendix E; extended confusion pairs with a dominant attractor persona are in Appendix C: User10 absorbs misattributions from eight ground-truth personas at Search and Compression, indicating that when stage-level signal is thin the matcher collapses to the most salient profile.

6.2 Why Does Writing Recover?

Structural origin. The Writing prompt re-injects the Planning research brief as its top-level instruction, creating an architectural recoverability path. Table 9: $P(\text{Write}\checkmark \mid \text{Plan}\checkmark) = 0.887$ vs. 0.435 when Planning attribution is incorrect. Stratifying by Search outcome within Plan-correct runs: $P(\text{Write}\checkmark \mid \text{Plan}\checkmark, \text{Search}\checkmark) = 0.954$ (62/65) vs. $P(\text{Write}\checkmark \mid \text{Plan}\checkmark, \text{Search}\times) = 0.750$ (24/32)—Search-wrong runs are associated with lower Writing recoverability

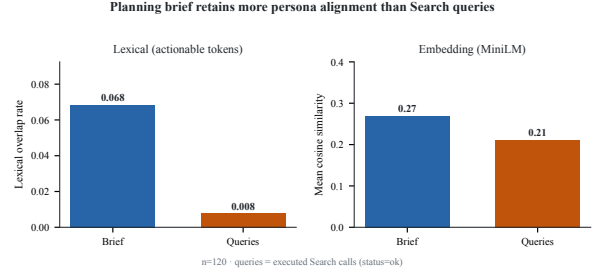


Figure 4: Persona alignment of Planning briefs vs. executed Search queries ($n=120$). Left: lexical overlap of actionable tokens (0.068→0.008). Right: MiniLM cosine similarity (0.269→0.212). Both drop at query execution. Residual persona-query similarity separates Search-correct from Search-wrong runs (0.236 vs. 0.182, CI [0.019, 0.088]).

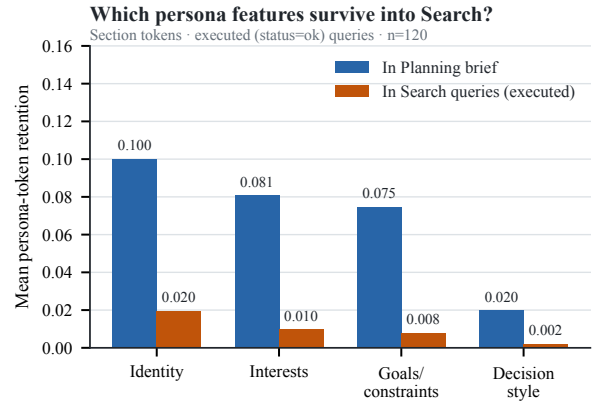


Figure 5: Section-level persona-token retention in Planning briefs vs. executed Search queries ($n=120$). All four profile sections—identity, interests, goals/constraints, and decision style—thin simultaneously; the Search dip is not attributable to a single missing section. Field-to-bucket mapping in Appendix L.

even when the Planning brief is re-injected at Writing. The 43.5% rate when Planning is wrong shows Writing recoverability is not deterministically tied to the Planning attribution outcome.

Write-only brief interventions. We freeze Plan/Search/Compress and rewrite finals (Figure 6). On a 15-report slice (full-brief Writing Acc: 0.933), injecting a mismatched persona’s brief drops accuracy to 0.467 ($\Delta = -0.467$; CI [-0.667, -0.200]); predictions scatter as **GT 7 / Donor 1 / Other 7**, disrupting target recoverability *without* transferring attribution to the donor. A wider write-only no-brief ablation ($n=30$ seed-0 runs; full-brief Writing Acc for this slice: 0.900) yields 0.833 ($\Delta = -0.067$; CI [-0.167, +0.067], includes zero); we do not detect a reduction from removing the brief. Wrong brief content thus disrupts Writing recoverability; re-injection of the brief is not a necessary condition for it.

	Write ✓	Write ×
Plan ✓	86	11
Plan ×	10	13

Table 9: Planning × Writing co-occurrence ($n=120$). Conditional rates: $P(\text{Write} \checkmark \mid \text{Plan} \checkmark) = 0.887$; $P(\text{Write} \checkmark \mid \text{Plan wrong}) = 0.435$.

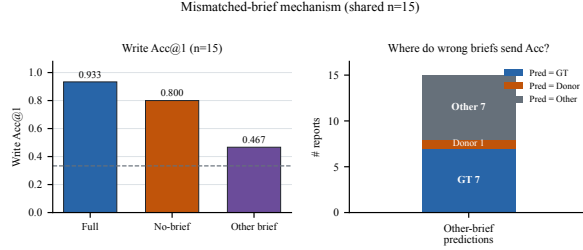


Figure 6: Left: Write Acc@1 under full / no-brief / other-persona brief ($n=15$; all conditions from the same 15-report slice). Right: prediction breakdown under other-brief (GT / Donor / Other).

Attribution vs. personalization utility. A GPT-4o-mini exploratory judge on 120 reports yields mean 4.01/3.65 (content/presentation); Write-correct vs. wrong differs by only 0.10 ($r=0.15$; CI includes 0). Acc@1 is not a utility substitute.

6.3 Shortcut Controls

Identity masking. The strong Planning reduction under masking indicates that early-stage recoverability partly uses direct identity evidence. In contrast, Search, Compression, and Writing change by at most 0.017, and the masked Writing accuracy remains 0.783. This is consistent with later recoverability drawing on evidence beyond exact candidate identity phrases. It does not prove that the remaining evidence corresponds exclusively to actionable preferences: paraphrased identity cues and other lexical shortcuts may remain.

Shuffled-actionable intervention. Across 30 reports (seeds 0–1), we replace each identity shell’s actionable preferences with a donor’s. Table 10: shell dominates donor at Planning (Shell–Donor +0.433, CI [0.100, 0.800]) and Writing (+0.567, [0.267, 0.867]); Search is unresolved (+0.133). Read alongside identity masking ($\Delta = -0.017$ at Writing, masked accuracy 0.783): masking strips verbatim identity strings with almost no accuracy change, yet the identity shell dominates transplanted preferences by +0.567 here. The two controls together locate what late-stage recoverability carries: not verbatim identity leakage, but identity-derived discourse features—framing, vocabulary register, and topical angle—that persist after explicit identity tokens are removed.

Candidate-profile identity masking. A complementary control masks identity sections from the *candidate profiles* rather than the artifacts: removing “Basic

Stage	Shell	Donor	Other	Δ	95% CI
Planning	0.633	0.200	0.167	+0.433	[+0.100, +0.800]
Search	0.433	0.300	0.267	+0.133	[−0.133, +0.567]
Compression	0.500	0.233	0.267	+0.267	[0.000, +0.667]
Writing	0.733	0.167	0.100	+0.567	[+0.267, +0.867]

Table 10: Shuffled-actionable Solar prediction rates ($n=30$). Δ =Shell–Donor; task-cluster bootstrap 95% CI.

Attributes” (identity characteristics, family status, and spatial characteristics) while leaving actionable sections reduces Acc across all four stages (Plan: 0.808 $\rightarrow$ 0.667, $\Delta = -0.142$, CI [−0.242, −0.042]; Search: 0.550 $\rightarrow$ 0.458, $\Delta = -0.092$, CI [−0.175, 0.000]; Compress: 0.592 $\rightarrow$ 0.442, $\Delta = -0.150$, CI [−0.225, −0.075]; Write: 0.800 $\rightarrow$ 0.650, $\Delta = -0.150$, CI [−0.242, −0.050]; $n = 120$). The dip-and-recovery trajectory is preserved but attenuated. This asymmetry—artifact-side identity masking has near-zero Writing impact ($\Delta = -0.017$) while candidate-side identity masking reduces it by 0.150 (CI excludes zero)—localizes the identity dependency: Writing artifacts carry attributable discourse signals without verbatim identity tokens, but the matcher relies on identity-level cues in the candidate profiles to resolve attribution from those signals.

Dual-masked condition. Applying both removals simultaneously (identity-masked artifacts presented with identity-stripped candidate profiles) drops attribution further (Plan: 0.808 $\rightarrow$ 0.575, $\Delta = -0.233$, CI [−0.350, −0.125]; Search: 0.550 $\rightarrow$ 0.450, $\Delta = -0.100$, CI [−0.192, +0.008]; Compress: 0.592 $\rightarrow$ 0.442, $\Delta = -0.150$, CI [−0.250, −0.058]; Write: 0.800 $\rightarrow$ 0.617, $\Delta = -0.183$, CI [−0.258, −0.100]; $n = 120$). The stage pattern sharpens rather than dissolves: Planning (0.575) and Writing (0.617) remain above the artifact-free prior (0.450), while Search (0.450) and Compression (0.442) collapse to approximately prior level—the same gap that defines the dip-and-recovery trajectory, here in its starkest form. This is the most conservative test of the identity-shell concern: the stage contrast between brief-reinjected stages (Planning, Writing) and query-execution stages (Search, Compression) is preserved by preference-layer discourse features alone, without any identity information in artifact or candidate.

7 Conclusion

We introduced N-way stage-wise persona attribution as a process-level diagnostic of *persona recoverability*, with DRATracer capturing intermediate artifacts. On 120 reports, 32 cases lose attribution from Planning to Search and 24 recover by Writing (trajectory 0.808/0.550/0.592/0.800). The shape holds under lexical baselines, a second matcher, artifact-side masking, symmetric candidates, N -sensitivity, and dual-masked conditions (Planning and Writing stay above

the artifact-free prior; Search and Compression collapse to prior level); brief interventions and utility checks bound re-injection and $\text{Acc} \neq \text{utility}$. The location of the accuracy drop also indicates where to intervene: the persona–query alignment gap at Search is a concrete target for conditioning-aware query reformulation. Results characterize one DRA stack, not multi-backbone generality or downstream usefulness.

8 Limitations

Attribution measures whether a matcher can recover the conditioning persona; it does not measure usefulness, factual quality, user satisfaction, or causal influence. MiniLM cosine is an exploratory embedding-based alignment proxy and may miss paraphrased or compositional persona cues; section-level token retention is likewise a surface lexical diagnostic, not a causal feature ablation. Absolute cosine values are not calibrated against a persona-independent reference distribution, so the brief-to-query contrast ($0.269 \rightarrow 0.212$) should be read as a within-pipeline comparison rather than an absolute level of persona alignment.

Single-backbone scope. All results come from one DRA implementation (Gemini 3.6 Flash via `open_deep_research`). The Writing-stage brief re-injection is an architectural feature of this specific pipeline; DRA systems that do not re-inject the planning artifact would likely show a different trajectory shape. A write-only no-brief ablation on 30 seed-0 reports softens the pure tautology reading (Write $\text{Acc}@1$ remains 0.833 without the brief), but does not replace multi-backbone or multi-pipeline replication. The dip-and-recovery pattern as reported here is therefore a characterization of this architecture, not a general property of DRA pipelines.

Identity-shell dominance. The shuffled-actionable control reveals a major limitation of the diagnostic’s construct validity: recoverability is anchored in identity-shell cues rather than transplanted actionable preferences at all four stages (Planning Shell–Donor $+0.433$; Writing $+0.567$). DRA-PULSE measures recoverability of the identity layer reliably, but cannot confirm that attributable signal reflects preference-conditioned content rather than demographic marker leakage. The dual-masked condition (§6.3) substantially mitigates this concern: removing identity from *both* artifact and candidate profiles simultaneously preserves the stage contrast—Planning (0.575) and Writing (0.617) remain above the artifact-free prior (0.450) while Search (0.450) and Compression (0.442) collapse to approximately prior level. The dip-and-recovery pattern is thus preserved by preference-layer discourse features alone, though the absolute accuracy reduction ($\Delta\text{Write} = -0.183$ from baseline) confirms that identity-level cues increase resolution when present. A pre-registered generation-time ablation with actionable-only and identity-only persona conditioning (EXP-011)

failed the completeness gate; the shuffled-actionable result provides the same directional finding without establishing the causal structure EXP-011 would have tested. The matcher system prompt instructs the model to focus on cues “that reflect the user’s **background**, goals, and preferences,” which may additionally bias detection toward identity-layer features; however, a prompt ablation removing this keyword yields negligible differences (all stage CIs include zero; $\Delta\text{Search} = +0.025$ CI $[0.000, +0.050]$, $\Delta\text{Write} = -0.017$ CI $[-0.058, +0.025]$, $\Delta\text{Plan} = \Delta\text{Compress} = 0$; $n = 120$), suggesting that identity-shell dominance is artifact-driven rather than prompt-induced.

Other limitations. Default matcher budgets differ by stage (Search 3.5k / Write 8k chars), but BM25, queries-only Search, and equal-budget rematch (seed 0, 3.5k for all stages: 0.800/0.517/0.600/0.800) each preserves dip-and-recovery. Search already uses a 3.5k budget by default, so the 0.017 gap from the primary seed-0 result comes from residual API non-determinism at temperature 0. Matchers lack human attribution validation; seeds share 20 task clusters; hard-negatives carry a candidate-only prior (absolute Acc caution); Search views are post-hoc; domain/recovery cells and utility scores are exploratory; no correction for multiple comparisons is applied and interval-based claims should be read descriptively. $\text{Acc}@1$ is not causal mediation or utility.

Ethics Statement

Stage-wise persona attribution can be dual-use for profiling system logs. We study synthetic PDR-Bench personas in closed candidate sets only. Recoverability metrics must not be treated as privacy or personalization quality certificates without human review and domain safeguards.

References

- Akari Asai, Zeqiu Wu, Yizhong Wang, Avirup Sil, and Hannaneh Hajishirzi. 2024. [Self-RAG: Learning to retrieve, generate, and critique through self-reflection](#). *Preprint*, arXiv:2310.11511.
- Yonatan Belinkov. 2022. [Probing classifiers: Promises, shortcomings, and advances](#). *Computational Linguistics*, 48(1):207–219.
- Alexis Conneau, German Kruszewski, Guillaume Lample, Loïc Barrault, and Marco Baroni. 2018. [What you can cram into a single \$\&\!*\!\&\!\$ vector: Probing sentence embeddings for linguistic properties](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2126–2136. Association for Computational Linguistics.
- Mor Geva, Roei Schuster, Jonathan Berant, and Omer Levy. 2021. [Transformer feed-forward layers are key-value memories](#). In *Proceedings of the 2021*

737			794
738		Conference on Empirical Methods in Natural Lan-	795
739		guage Processing, pages 5484–5495. Association	796
		for Computational Linguistics.	797
740	Google DeepMind. 2024. Gemini deep research.		
741	https://gemini.google/overview/		
742	deep-research/ . Accessed 2026-08-05.		
743	Carlos E. Jimenez, John Yang, Alexander Wettig,		
744	Shunyu Yao, Kexin Pei, Ofir Press, and Karthik		
745	Narasimhan. 2024. SWE-bench: Can language mod-		
746	els resolve real-world GitHub issues? <i>Preprint</i> ,		
747	arXiv:2310.06770.		
748	LangChain AI. 2024. LangGraph: Build resilient		
749	language agents as graphs. https://github.		
750	com/langchain-ai/langgraph .		
751	LangChain AI. 2025. open_deep_research:		
752	Open-source deep research agent. https:		
753	//github.com/langchain-ai/open_		
754	deep_research .		
755	Patrick Lewis, Ethan Perez, Aleksandra Piktus,		
756	Fabio Petroni, Vladimir Karpukhin, Naman Goyal,		
757	Heinrich Küttler, Mike Lewis, Wen tau Yih,		
758	Tim Rocktäschel, Sebastian Riedel, and Douwe		
759	Kiela. 2020. Retrieval-augmented generation for		
760	knowledge-intensive NLP tasks. In <i>Advances in</i>		
761	<i>Neural Information Processing Systems</i> , volume 33,		
762	pages 9459–9474.		
763	Haoyuan Li and Snigdha Chaturvedi. 2025. Comparative		
764	personalization for multi-document summariza-		
765	tion . <i>Preprint</i> , arXiv:2509.21562.		
766	Shuyue Stella Li, Avinandan Bose, Faeze Brahman,		
767	Simon Shaolei Du, Pang Wei Koh, Maryam Fazel,		
768	and Yulia Tsvetkov. 2025. PrefDisco: Bench-		
769	marking proactive personalized reasoning . <i>Preprint</i> ,		
770	arXiv:2510.00177.		
771	Yuan Liang, Jiaxian Li, Yuqing Wang, Piaohong Wang,		
772	Motong Tian, Pai Liu, Shuofei Qiao, Runnan Fang,		
773	He Zhu, Ge Zhang, Minghao Liu, Yuchen Eleanor		
774	Jiang, Ningyu Zhang, and Wangchunshu Zhou. 2025.		
775	Towards personalized deep research: Benchmarks		
776	and evaluations . <i>Preprint</i> , arXiv:2509.25106.		
777	Hunter Lightman, Vineet Kosaraju, Yuri Burda, Harri		
778	Edwards, Bowen Baker, Teddy Lee, Jan Leike,		
779	John Schulman, Ilya Sutskever, and Karl Cobbe.		
780	2023. Let’s verify step by step . <i>Preprint</i> ,		
781	arXiv:2305.20050.		
782	Xiao Liu, Hao Yu, Hanchen Zhang, Yifan Xu, Xuanyu		
783	Lei, Hanyu Lai, Yu Gu, Hangliang Ding, Kaiwen		
784	Men, Kejuan Yang, Shudan Zhang, Xiang Deng, Ao-		
785	han Zeng, Zhengxiao Du, Chenhui Zhang, Sheng		
786	Shen, Tianjun Zhang, Yu Su, Huan Sun, and 3 oth-		
787	ers. 2024. AgentBench: Evaluating LLMs as agents .		
788	In <i>International Conference on Learning Represen-</i>		
789	<i>tations</i> .		
790	Kevin Meng, David Bau, Alex Andonian, and Yonatan		
791	Belinkov. 2022. Locating and editing factual associ-		
792	ations in GPT. In <i>Advances in Neural Information</i>		
793	<i>Processing Systems</i> , volume 35.		
	Grégoire Mialon, Clémentine Fourrier, Craig Swift,		
	Thomas Wolf, Yann LeCun, and Thomas Scialom.		
	2023. GAIA: A benchmark for general AI assistants .		
	<i>Preprint</i> , arXiv:2311.12983.		
	OpenAI. 2025. Introducing deep re-		
	search. https://openai.com/index/		
	introducing-deep-research/ . Accessed		
	2026-08-05.		
	Xudong Pan, Mi Zhang, Shouling Ji, and Min Yang.		
	2020. Privacy risks of general-purpose language		
	models . In <i>2020 IEEE Symposium on Security and</i>		
	<i>Privacy (SP)</i> , pages 1314–1331. IEEE.		
	Ofir Press, Muru Zhang, Sewon Min, Ludwig Schmidt,		
	Noah A. Smith, and Mike Lewis. 2023. Measuring		
	and narrowing the compositionality gap in language		
	models . <i>Preprint</i> , arXiv:2210.03350.		
	Nils Reimers and Iryna Gurevych. 2019. Sentence-		
	BERT: Sentence embeddings using siamese BERT-		
	networks . In <i>Proceedings of the 2019 Conference on</i>		
	<i>Empirical Methods in Natural Language Processing</i>		
	<i>and the 9th International Joint Conference on Natu-</i>		
	<i>ral Language Processing (EMNLP-IJCNLP)</i> , pages		
	3982–3992. Association for Computational Linguis-		
	tics.		
	Chris Richardson, Yao Zhang, Kellen Gillespie,		
	Sudipta Kar, Arshdeep Singh, Zeynab Raeesy,		
	Omar Zia Khan, and Abhinav Sethy. 2023. Integrat-		
	ing summarization and retrieval for enhanced person-		
	alization via large language models. In <i>Proceedings</i>		
	<i>of the 1st Workshop on Personalized Generative AI</i> .		
	Rafael A. Rivera-Soto, Olivia Elizabeth Miano, Juanita		
	Ordóñez, Barry Y. Chen, Aleem Khan, Marcus		
	Bishop, and Nicholas Andrews. 2021. Learning uni-		
	versal authorship representations . In <i>Proceedings of</i>		
	<i>the 2021 Conference on Empirical Methods in Natu-</i>		
	<i>ral Language Processing</i> , pages 913–919. Associa-		
	tion for Computational Linguistics.		
	Stephen Robertson and Hugo Zaragoza. 2009. The		
	probabilistic relevance framework: BM25 and be-		
	yond . <i>Foundations and Trends in Information Re-</i>		
	<i>trieval</i> , 3(4):333–389.		
	Alireza Salemi, Sheshera Mysore, Michael Bender-		
	sky, and Hamed Zamani. 2023. LaMP: When large		
	language models meet personalization . <i>Preprint</i> ,		
	arXiv:2304.11406.		
	Alireza Salemi, Sheshera Mysore, Michael Bendersky,		
	and Hamed Zamani. 2024. Optimization methods		
	for personalizing large language models through re-		
	trieval augmentation . In <i>Proceedings of the 47th In-</i>		
	<i>ternational ACM SIGIR Conference on Research and</i>		
	<i>Development in Information Retrieval</i> , pages 752–		
	762.		
	Alireza Salemi and Hamed Zamani. 2025. LaMP-QA:		
	A benchmark for personalized long-form question		
	answering . <i>Preprint</i> , arXiv:2506.00137.		

849	Timo Schick, Jane Dwivedi-Yu, Roberto Dessì,	Junda Wu, Xiang Chen, Zichao Wang, Subrata Mi-	906
850	Roberta Raileanu, Maria Lomeli, Luke Zettlemoyer,	tra, Nedim Lipka, and 2 others. 2024. Personaliza-	907
851	Nicola Cancedda, and Thomas Scialom. 2023. Tool-	tion of large language models: A survey. <i>Preprint</i> ,	908
852	former: Language models can teach themselves to	arXiv:2411.00027.	909
853	use tools . <i>Preprint</i> , arXiv:2302.04761.		
854	Prasha Shrestha, Sebastian Sierra, Fabio González,	Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan	910
855	Manuel Montes, Paolo Rosso, and Thamar Solorio.	Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin,	911
856	2017. Convolutional neural networks for authorship	Zhuohan Li, Dacheng Li, Eric P. Xing, Hao Zhang,	912
857	attribution of short texts . In <i>Proceedings of the 15th</i>	Joseph E. Gonzalez, and Ion Stoica. 2023. Judging	913
858	<i>Conference of the European Chapter of the Associa-</i>	LLM-as-a-judge with MT-Bench and chatbot arena.	914
859	<i>tion for Computational Linguistics: Volume 2, Short</i>	<i>Preprint</i> , arXiv:2306.05685.	915
860	<i>Papers</i> , pages 669–674. Association for Computa-		
861	tional Linguistics.		
862	Efstathios Stamatatos. 2009. A survey of modern au-		
863	thorship attribution methods . <i>Journal of the Ameri-</i>		
864	<i>can Society for Information Science and Technology</i> ,		
865	60(3):538–556.		
866	Jaime Teevan, Susan T. Dumais, and Eric Horvitz.		
867	2005. Personalizing search via automated analysis		
868	of interests and activities . In <i>Proceedings of the 28th</i>		
869	<i>Annual International ACM SIGIR Conference on Re-</i>		
870	<i>search and Development in Information Retrieval</i> ,		
871	pages 449–456. Association for Computing Machin-		
872	ery.		
873	Jonathan Uesato, Nate Kushman, Ramana Kumar,		
874	Francis Song, Noah Siegel, Lisa Wang, Anto-		
875	nia Creswell, Geoffrey Irving, and Irina Higgins.		
876	2022. Solving math word problems with process-		
877	and outcome-based feedback. In <i>arXiv preprint</i>		
878	<i>arXiv:2211.14275</i> .		
879	Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten		
880	Bosma, Brian Ichter, Fei Xia, Ed Chi, Quoc Le,		
881	and Denny Zhou. 2022. Chain-of-thought prompt-		
882	ing elicits reasoning in large language models. In		
883	<i>Advances in Neural Information Processing Systems</i> .		
884	Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio,		
885	William Cohen, Ruslan Salakhutdinov, and Christo-		
886	pher D. Manning. 2018. HotpotQA: A dataset for		
887	diverse, explainable multi-hop question answering .		
888	In <i>Proceedings of the 2018 Conference on Empiri-</i>		
889	<i>cal Methods in Natural Language Processing</i> , pages		
890	2369–2380. Association for Computational Linguis-		
891	tics.		
892	Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran,		
893	Thomas L. Griffiths, Yuan Cao, and Karthik		
894	Narasimhan. 2023a. Tree of thoughts: Deliber-		
895	ate problem solving with large language models .		
896	<i>Preprint</i> , arXiv:2305.10601.		
897	Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak		
898	Shafran, Karthik Narasimhan, and Yuan Cao. 2023b.		
899	ReAct: Synergizing reasoning and acting in lan-		
900	guage models . In <i>International Conference on</i>		
901	<i>Learning Representations</i> .		
902	Zhehao Zhang, Ryan A. Rossi, Branislav Kveton, Yi-		
903	jia Shao, Diyi Yang, Hamed Zamani, Franck Der-		
904	noncourt, Joe Barrow, Tong Yu, Sungchul Kim,		
905	Ruiyi Zhang, Jiuxiang Gu, Tyler Derr, Hongjie Chen,		

A Full Quality Sensitivity

Table 11 reports Solar Acc@1 under four inclusion policies. The dip-and-recovery ordering is preserved under every restriction, confirming that the primary result is not driven by low-quality reports.

Policy	Plan	Search	Comp.	Write	n
All matched	0.808	0.550	0.592	0.800	120
Success criteria met	0.822	0.567	0.611	0.811	90
No completeness err.	0.824	0.571	0.615	0.813	91
No ledger errors	0.807	0.546	0.588	0.798	119

Table 11: Solar Acc@1 under four quality-filtering policies (Solar Pro matcher, per-GT hard-negative candidates). All policies preserve the same stage ordering.

B Per-Seed Baseline Results

Table 12 disaggregates the non-LLM baseline accuracies by generation seed. BM25 exceeds Solar at Search in seed 0 (0.600 vs. 0.533) but not seed 1 (0.533 vs. 0.567), so the small combined advantage is not seed-stable. Random accuracy is near the 0.333 chance level at most stages; Writing (0.250 in both seeds) falls consistently below, consistent with the candidate-prior structure at the final stage (construction-center heuristic: 0.450 at Writing).

Seed	Method	Plan	Search	Comp.	Write
0	BM25	0.667	0.600	0.583	0.583
0	Embedding	0.450	0.300	0.383	0.483
0	Random	0.350	0.367	0.400	0.250
1	BM25	0.600	0.533	0.550	0.567
1	Embedding	0.433	0.283	0.367	0.467
1	Random	0.233	0.367	0.367	0.250

Table 12: Non-LLM baseline Acc@1 by generation seed ($n = 60$ per seed; per-GT hard-negative candidates). BM25 leads Solar at Search in seed 0 (0.600 vs. 0.533) but not seed 1 (0.533 vs. 0.567), so the combined BM25 advantage at Search (+0.017) is seed-0 driven and does not replicate.

C Extended Persona Confusion Table

Table 13 lists all ground-truth/prediction pairs with two or more stage-level errors across the 120 reports. User10 appears as the predicted label for eight distinct ground-truth personas, concentrated at Search and Compression.

D Stage Accuracy by Domain

Figure 7 visualizes the full domain $\times$ stage accuracy matrix. Table 14 gives the same data numerically.

Table 14 shows Solar Acc@1 across the ten PDR-Bench domains (both seeds, $n = 12$ per domain per stage). The dip-and-recovery trajectory holds in nine of ten domains. The exception is Creative, where Writing accuracy (0.500) does not rise above Search (0.500), suggesting that open-ended creative tasks may be harder to attribute once the planning brief’s topic framing is diluted by retrieved content. Education reaches near-ceiling performance (0.917/1.000/0.917/1.000), while Career and Real Estate show the lowest macro-average accuracy (0.500 and 0.458). The Search dip reaches chance level (0.333) in Career, Finance, and Real Estate.

E Qualitative Recovery Trajectories

We highlight two recovered reports (Plan correct, Search wrong, Write correct). Both are illustrative, not statistical claims.

Case A: emotion-regulation curriculum (pilot_task12_User5_seed0)

Planning (correct $\rightarrow$ User5). The brief names the occupation and frames a six-month self-study plan for emotional triggers, CBT/mindfulness resources, and interpersonal regulation—highly persona-specific scope.

Search (wrong $\rightarrow$ User2). Issued queries collapse to book-title / ISBN lookups (e.g., “Feeling Good” Burns; “Mind Over Mood”; DBT workbook), with little residual occupation or decision-style framing. The matcher flips to User2.

GT	Predicted	Stage	Count
User18	User10	Search	6
User12	User10	Compression	4
User12	User10	Search	4
User17	User10	Search	4
User18	User10	Compression	4
User18	User10	Writing	4
User18	User8	Search	4
User10	User18	Compression	3
User11	User10	Search	3
User14	User13	Search	3
User14	User20	Search	3
User17	User10	Compression	3
User17	User10	Planning	3
User17	User10	Writing	3
User18	User8	Compression	3
User19	User10	Compression	3
User19	User10	Writing	3
User10	User8	Search	2
User11	User10	Compression	2
User12	User10	Planning	2
User13	User10	Search	2
User13	User14	Compression	2
User13	User14	Planning	2
User13	User14	Search	2
User13	User14	Writing	2
User14	User13	Compression	2
User17	User25	Compression	2
User17	User25	Search	2
User17	User25	Writing	2
User18	User10	Planning	2
User19	User10	Search	2
User19	User18	Planning	2
User19	User18	Search	2
User2	User1	Compression	2
User22	User10	Search	2
User5	User2	Search	2
User8	User10	Writing	2
User8	User18	Search	2
User9	User11	Compression	2
User9	User12	Compression	2
User9	User12	Search	2

Table 13: All persona confusion pairs with ≥ 2 stage-level errors across 120 reports (Solar Pro matcher). User10 concentrates misattributions across eight ground-truth personas at Search and Compression.

Domain	Plan	Search	Comp.	Write	Avg
Career	0.667	0.333	0.333	0.667	0.500
Creative	0.750	0.500	0.500	0.500	0.562
Education	0.917	1.000	0.917	1.000	0.958
Finance	0.667	0.333	0.417	0.833	0.562
Health	0.917	0.583	0.667	1.000	0.792
Law	0.833	0.583	0.750	0.833	0.750
Parenting	0.917	0.500	0.750	0.750	0.729
Real Estate	0.500	0.333	0.333	0.667	0.458
Shopping	0.917	0.667	0.667	0.917	0.792
Travel	1.000	0.667	0.583	0.833	0.771

Table 14: Solar Acc@1 by domain across both seeds ($n = 12$ per cell; Solar Pro matcher; per-GT hard-negative candidates). The dip-and-recovery ordering holds in all domains except Creative. Chance accuracy is 0.333.

Compression (wrong $\rightarrow$ User2). Compressed notes continue to center cataloged books/courses rather than the engineering-student framing. 944 945

Writing (correct $\rightarrow$ User5). The final report reintroduces an analytical / engineering framing of emotion regulation as a structured information-processing system and recovers User5, consistent with Planning-brief re-injection 946 947

Solar Pro · both seeds · $n = 12$ per cell · chance = 0.333

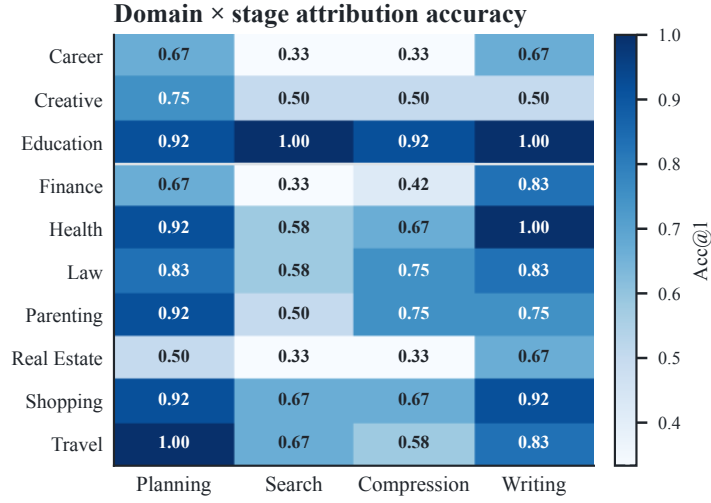


Figure 7: Domain × stage attribution accuracy (Solar Pro, both seeds, $n = 12$ per cell). Color intensity encodes Acc@1 above the 0.333 chance level (dashed line on color bar). Education is the only domain where Search reaches ceiling (1.000); Career, Finance, and Real Estate show Search at chance (0.333). Creative is the only domain where Writing (0.500) does not exceed Search.

plus writing-time synthesis.

Case B: AI-education startup (pilot_task7_User18_seed1)

Planning (correct → User18). The brief frames launching an online AI education startup for university students, with execution goals around learning efficiency, courses, and integrated tools.

Search (wrong → User8). Queries shift to market/metric retrieval (student AI-tool adoption, LTV/CAC, Chegg/Khanmigo/Gauth case studies). Persona-specific founder constraints thin out; attribution flips to User8.

Writing (correct → User18). The final report re-centers the startup-execution plan and recovers User18.

F Recovery vs. Non-Recovery Report Characteristics

Of the 32 reports that are correct at Planning and wrong at Search, 24 (75.0%) recover to a correct Writing attribution and 8 do not. Table 15 summarizes the domain distribution. The 8 non-recovered reports have a lower Compression accuracy (0.250) than the 24 recovered reports (0.375); with $n=8$ this is descriptive only. Non-recovered reports are spread across six domains; Creative (2/8) and Travel (2/8) are somewhat over-represented relative to their share of all reports. Four of the eight non-recovered reports come from two (task, persona) pairs that fail across both seeds (task17/User17, task29/User18).

Domain	Recovered ($n = 24$)	Not recovered ($n = 8$)
Career	3	1
Creative	1	2
Finance	4	0
Health	4	0
Law	3	0
Parenting	4	1
Real Estate	1	1
Shopping	2	1
Travel	2	2
Compression Acc	0.375	0.250

Table 15: Domain distribution of the 32 Planning-correct/Search-wrong reports by Writing recovery status. Non-recovered reports have lower Compression accuracy and are modestly concentrated in Creative and Travel.

G EXP-011: Generation-time Ablation Outcomes

We attempted seed-0 generation for two generation-time ablation conditions: *actionable-only* (identity leaf keys removed from the persona conditioning prompt) and *identity-only* (only identity leaf keys retained). Each condition targeted 15 reports (5 task clusters $\times$ 3 personas, seed 0).

Both conditions produced 15/15 schema-valid artifacts. However, each violated the pre-specified completeness gate (≤ 2 reports with missing topic sources), with 3 completeness issues per condition. The actionable-only condition additionally had one query-source ledger mismatch. Consequently, `generation_gate_passed = false` for both conditions, and seed-1 generation was not approved under the pre-registered gate protocol (DEC-006).

The Solar matcher was not run on these artifacts. Because the gate failure disqualifies these results from confirmatory use, we do not report attribution accuracy for the ablation conditions. The primary shortcut evidence in this paper relies instead on the post-hoc identifier-masking control (Table 6) and the generation-time shuffled-actionable intervention (Table 10), both of which passed their pre-specified quality criteria.

H Candidate-Set-Size Sensitivity

Table 16 reproduces the full sensitivity results for all three candidate-set sizes (seeds 0 and 1, $n = 120$ per row; Solar Pro matcher). The Planning $\rightarrow$ Search drop is -0.209 at $N = 2$, -0.258 at $N = 3$, and -0.287 at $N = 5$ in raw Acc; chance-normalized ($\Delta/(1 - \text{chance})$) these become -0.418 , -0.387 , -0.359 , *shrinking* with N —the raw gap expansion with N is driven by chance scaling rather than a genuine worsening of Search attribution (chance-normalized Search accuracy rises from 0.266 at $N = 2$ to 0.325 at $N = 3$ to 0.339 at $N = 5$). Writing accuracy exceeds Search by $+0.142$ ($N = 2$), $+0.250$ ($N = 3$), and $+0.246$ ($N = 5$). All stages exceed their respective chance levels at all three settings, confirming that the dip-and-recovery pattern is robust to the number of hard-negative candidates.

N	Chance	Plan	Search	Comp.	Write	$\Delta_{P \rightarrow S}$
2	0.500	0.842	0.633	0.625	0.775	-0.209
3	0.333	0.808	0.550	0.592	0.800	-0.258
5	0.200	0.758	0.471	0.525	0.717	-0.287

Table 16: Candidate-set-size sensitivity: Solar Acc@1 by N (seeds 0 and 1, $n = 120$ per row). Candidates selected by same-domain actionable-token Jaccard ranking. The trajectory shape is stable across all sizes.

I Matcher Prompt Template

The LLM matcher receives a fixed system prompt and a stage-specific user prompt constructed as follows.

System prompt.

You are an expert document analyst specializing in user profiling. Given a document excerpt from a research report and a set of candidate user profiles, identify which user this document was most likely produced for. Focus on content priorities, framing, vocabulary, and topic angles that reflect the user’s background, goals, and preferences. Call `submit_attribution` with your answer.

User prompt structure.

1. A stage-specific header (*Research Planning Brief*, *Search Queries and Retrieved Sources*, *Compressed Research Summaries*, or *Final Research Report (excerpt)*) followed by the artifact text, truncated to the stage character limit (Planning 4,000; Search 3,500; Compression 6,000; Writing 8,000 with opening and tail preserved).
2. A **Candidate User Profiles** section listing each candidate as **Candidate A / B / C** with the full persona text.
3. A closing instruction: “Which candidate profile (A, B, or C) best matches the perspective, priorities, and content framing of the document above? Call `submit_attribution`.”

Candidate order is deterministically shuffled per run and stage using a SHA-256-derived seed, ensuring position bias cannot produce a systematic accuracy advantage for any fixed candidate slot. The matcher is called with temperature 0 and a structured `submit_attribution` tool that enforces a single-label response.

Field	Contents
schema_version	Schema identifier (dra_trace_v2)
run_id	Unique run identifier
research_brief	Planning stage artifact (text)
research_topics	Ordered topic list from the planning stage
search_trace	List of per-topic search records: queries issued, sources selected with titles and snippets
compressed_research	Per-topic evidence synthesis (Compression stage)
final_report	Full Writing stage artifact (text)
execution_config	Generation seed, model IDs, prompt SHA-256, manifest version, task/persona IDs
token_ledger	Input/output/total tokens, query counts (attempted, successful, failed), source counts
capture_completeness	Boolean flags for each required artifact field

Table 17: Top-level fields of the dra_trace_v2 artifact schema produced by DRATracer.

J DRATracer Artifact Schema

DRATracer is a LangGraph v2 event listener that captures all four pipeline artifacts deterministically from a single pipeline run and writes them as a dra_trace_v2 JSON object. Table 17 summarizes the top-level fields.

K Candidate Construction Protocol

For each ground-truth persona p^* in a task cluster, we select two distractor personas from the same domain as follows.

1. **Actionable-token extraction.** Each persona profile is tokenized (lowercased, whitespace-split) and identity-field tokens (name, age, occupation, education, residence, family) are removed, leaving the *actionable token set*.
2. **Jaccard similarity.** For each candidate persona $p_i \neq p^*$ in the same domain, we compute the Jaccard similarity of the actionable token sets: $J(p^*, p_i) = |A^* \cap A_i| / |A^* \cup A_i|$.
3. **Hard-negative selection.** The two personas with the highest $J(p^*, \cdot)$ among those satisfying $J \geq 0.2$ are chosen as distractors. If fewer than two satisfy this threshold, the nearest remaining same-domain personas are used as fallback (tie-broken by ascending user ID).
4. **Frozen per-GT set.** Each ground-truth persona has its own two-distractor set. The resulting $N = 3$ candidate set is fixed in the manifest and shared across all four stages and both generation seeds for that persona. Candidate presentation order is independently shuffled per run and stage using a SHA-256-derived seed.

An artifact-free heuristic that picks the candidate with the highest mean pairwise actionable Jaccard scores 0.450 (bootstrap 95% CI [0.333, 0.567]), establishing a structural prior above the 0.333 chance level. This motivates our additional task-shared sensitivity analysis (Section 5).

L Persona Alignment Measurement Protocol

This appendix specifies the surface probes used in §6 (Figures 4 and 5).

Query text. All Search-side measurements use only executed Serper calls with status=ok (mean 5.2 per report under the 7-attempt cap). Planner-requested but rejected queries are excluded so that the probe matches the Search artifact seen by the matcher.

Tokenization. Text is lowercased and split on $[a-z0-9]^+$. Tokens of length ≤ 2 and a fixed English stopword list are removed. No stemming or lemmatization is applied.

Actionable lexical retention. Let A_p be the actionable token set of persona p after removing identity leaf fields (same definition as candidate construction). For artifact text t with token set A_t ,

$$\text{Ret}(p, t) = \frac{|A_p \cap A_t|}{|A_p|}.$$

We report means of Ret for briefs and for joined executed queries.

Section-level feature buckets. PDR-Bench profile subtrees are mapped to four buckets without overlap of section paths:	1033 1034
• Identity: Basic Attributes.Identity Characteristics, Family Status, Long-term Spatial Characteristics.	1035 1036
• Decision style: Behavioral Characteristics.Personality Traits, Environment.Time.	1037 1038
• Interests: Preferences and Interests, Online Usage Habits, Offline Long-term Behavior.	1039 1040
• Goals/constraints: Health Status,Financial Information.	1041
For each bucket B with token set A_B , retention is $ A_B \cap A_t / A_B $. A token string may appear in multiple buckets if it occurs in multiple fields; paths themselves are disjoint.	1042 1043
Embedding-based alignment. We encode (i) the full flattened persona profile, (ii) the Planning brief, and (iii) the concatenation of executed queries with all-MiniLM-L6-v2 and report cosine similarity. Contrasts use task-cluster bootstrap 95% intervals (2,000 resamples over the 20 task IDs).	1044 1045 1046