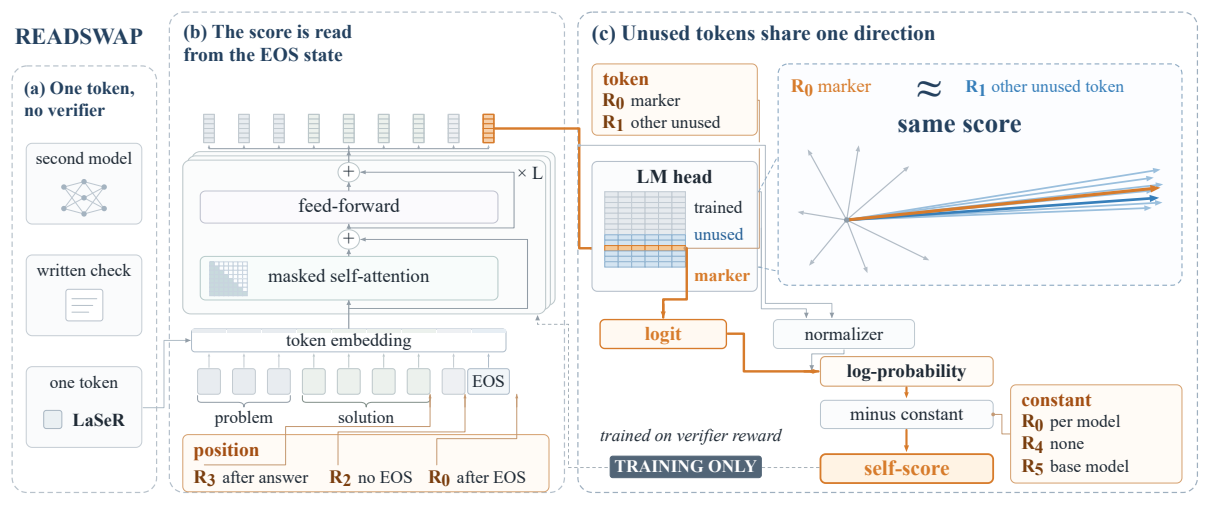

READSWAP
(a) One token, no verifier
second model
written check
one token
LaSeR
(b) The score is read from the EOS state
× L
feed-forward
masked self-attention
token embedding
problem
solution
EOS
position
R3 after answer
R2 no EOS
R0 after EOS
(c) Unused tokens share one direction
token
R0 marker
R1 other unused
LM head
trained
unused
marker
R0 marker
≈
R1 other unused token
same score
logit
normalizer
log-probability
minus constant
constant
R0 per model
R4 none
R5 base model
trained on verifier reward
TRAINING ONLY
self-score