


1. Screenshot 1 — AWS CLI Command Syntax

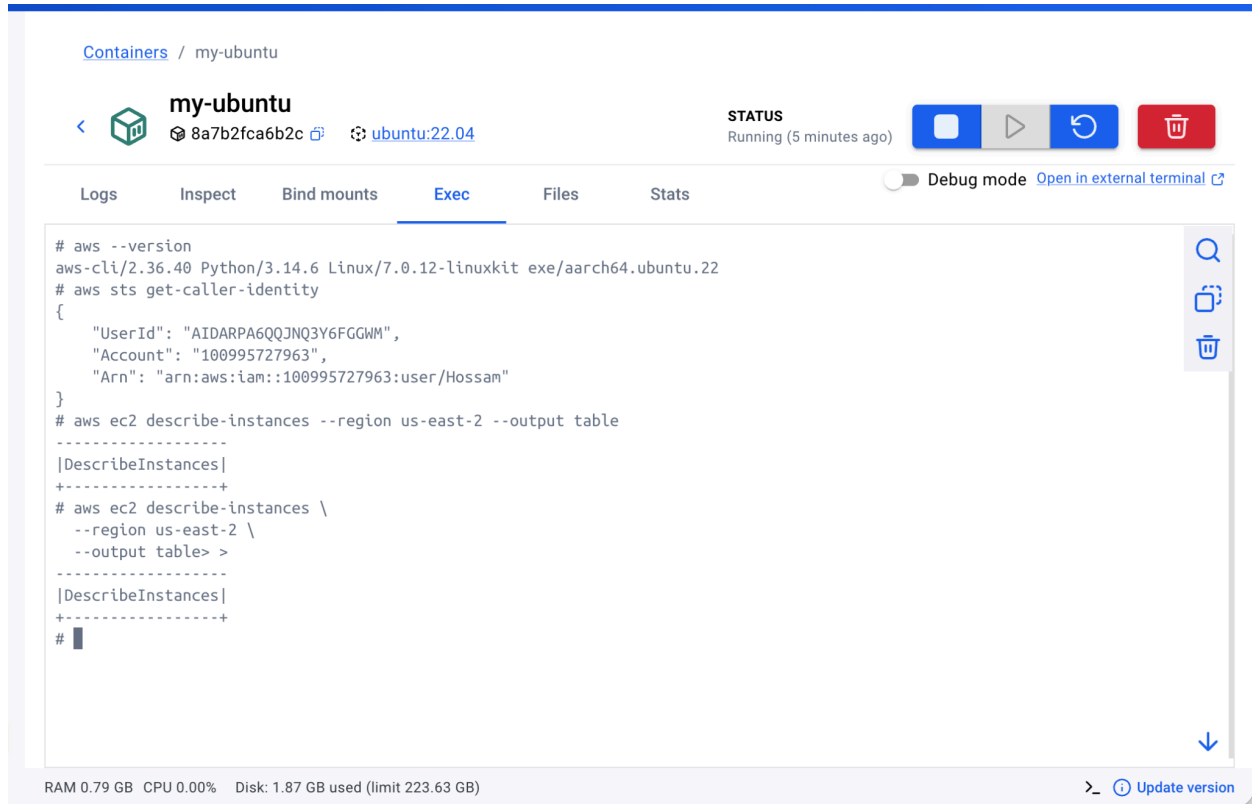

Containers / my-ubuntu

my-ubuntu  8a7b2fca6b2c  ubuntu:22.04

STATUS
Running (5 minutes ago)


Logs Inspect Bind mounts **Exec** Files Stats

Debug mode [Open in external terminal](#)

```
# aws --version
aws-cli/2.36.40 Python/3.14.6 Linux/7.0.12-linuxkit exe/aarch64.ubuntu.22
# aws sts get-caller-identity
{
  "UserId": "AIDARPA6QQJNQ3Y6FGWM",
  "Account": "100995727963",
  "Arn": "arn:aws:iam::100995727963:user/Hossam"
}
# aws ec2 describe-instances --region us-east-2 --output table
-----
|DescribeInstances|
+-----+
# aws ec2 describe-instances \
  --region us-east-2 \
  --output table> >
-----
|DescribeInstances|
+-----+
#
```

RAM 0.79 GB CPU 0.00% Disk: 1.87 GB used (limit 223.63 GB) [Update version](#)


2. Screenshot 2 — EC2 User-Data Web Server

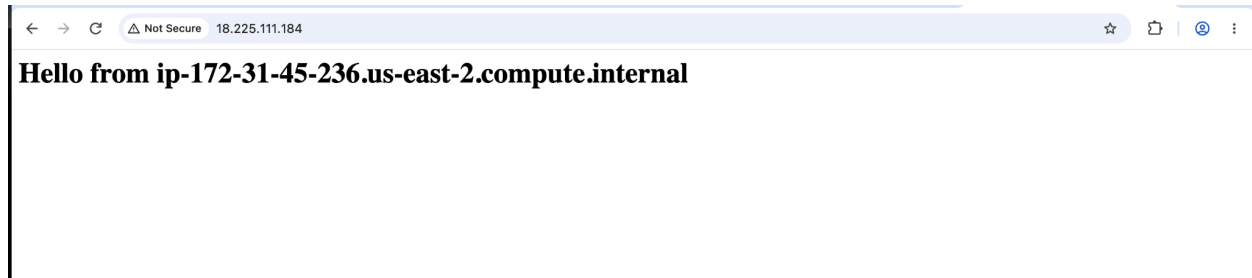


← → ↻ ⚠ Not Secure 18.225.111.184 ☆ 📄 | 🔒 ⋮

Hello from ip-172-31-45-236.us-east-2.compute.internal


3. Screenshot 3 — .env Protected by .gitignore

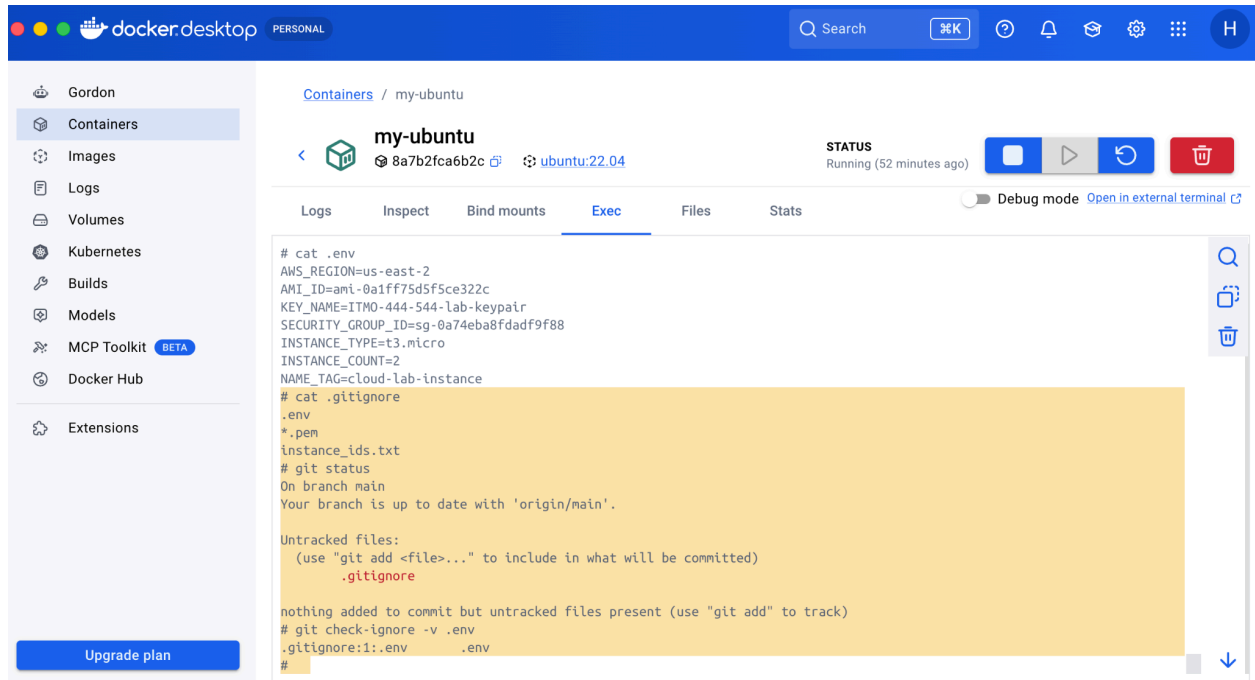

4. Screenshot 4 — Create Script Launched Two EC2 Instances

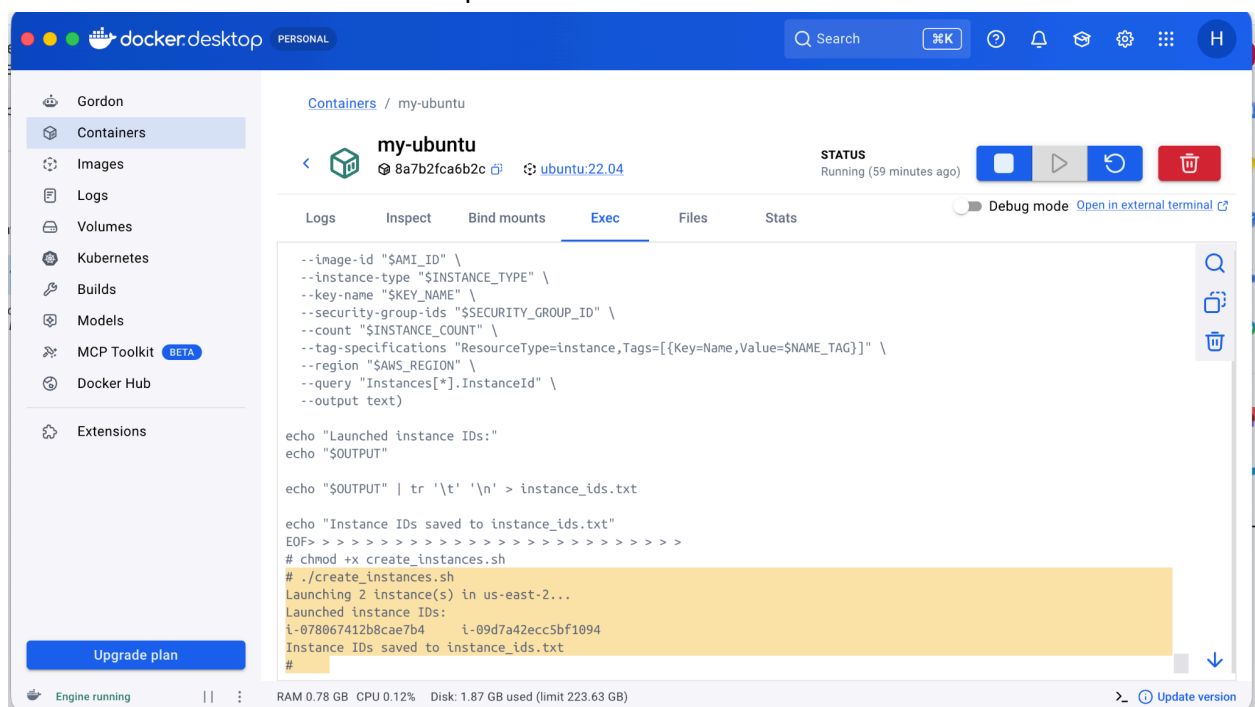

5. Screenshot 5 — Delete Script Terminated EC2 Instances

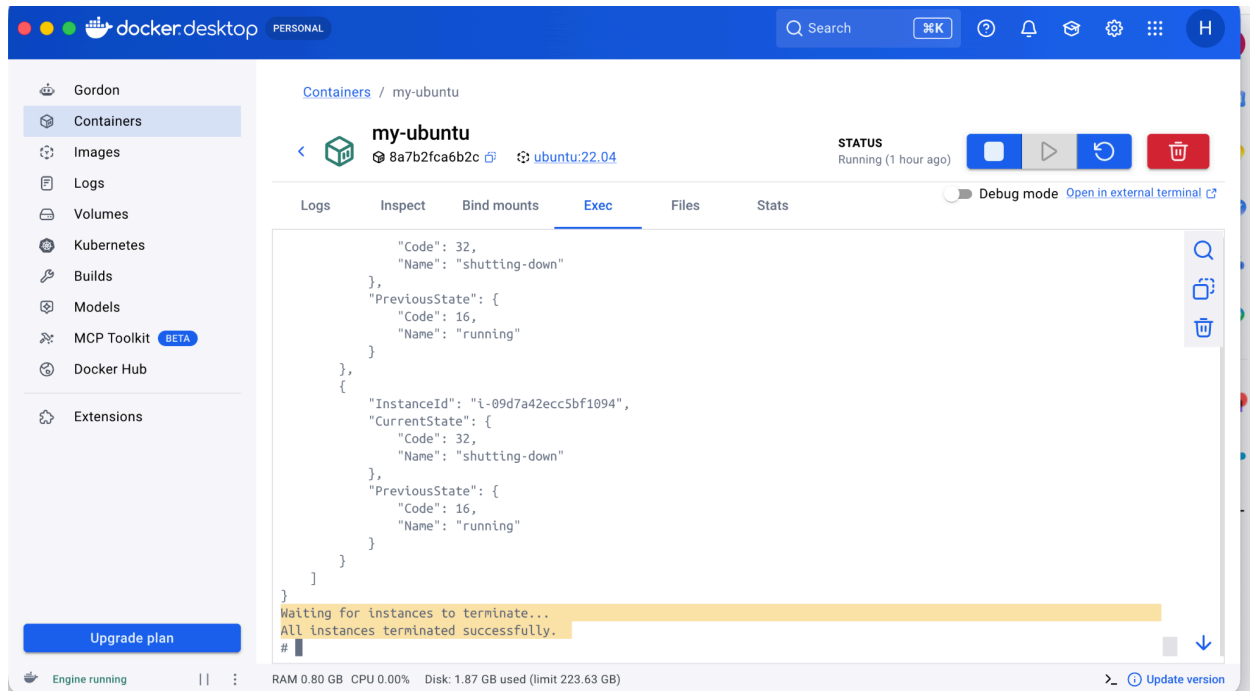

One paragraph explaining why environment files are excluded from Git, even in a “private” repository.:

Environment files are not added to Git because they can have private information like passwords, AWS keys, and other secret information. Even if a repository is private, it can still be shared with other people or become public by mistake. Keeping `.env` out of Git helps protect this information. Instead, we can use a `.env.example` file with example values to show what information is needed without sharing the real secrets.