

Jin L.C. Guo

M3 (b) – Object State

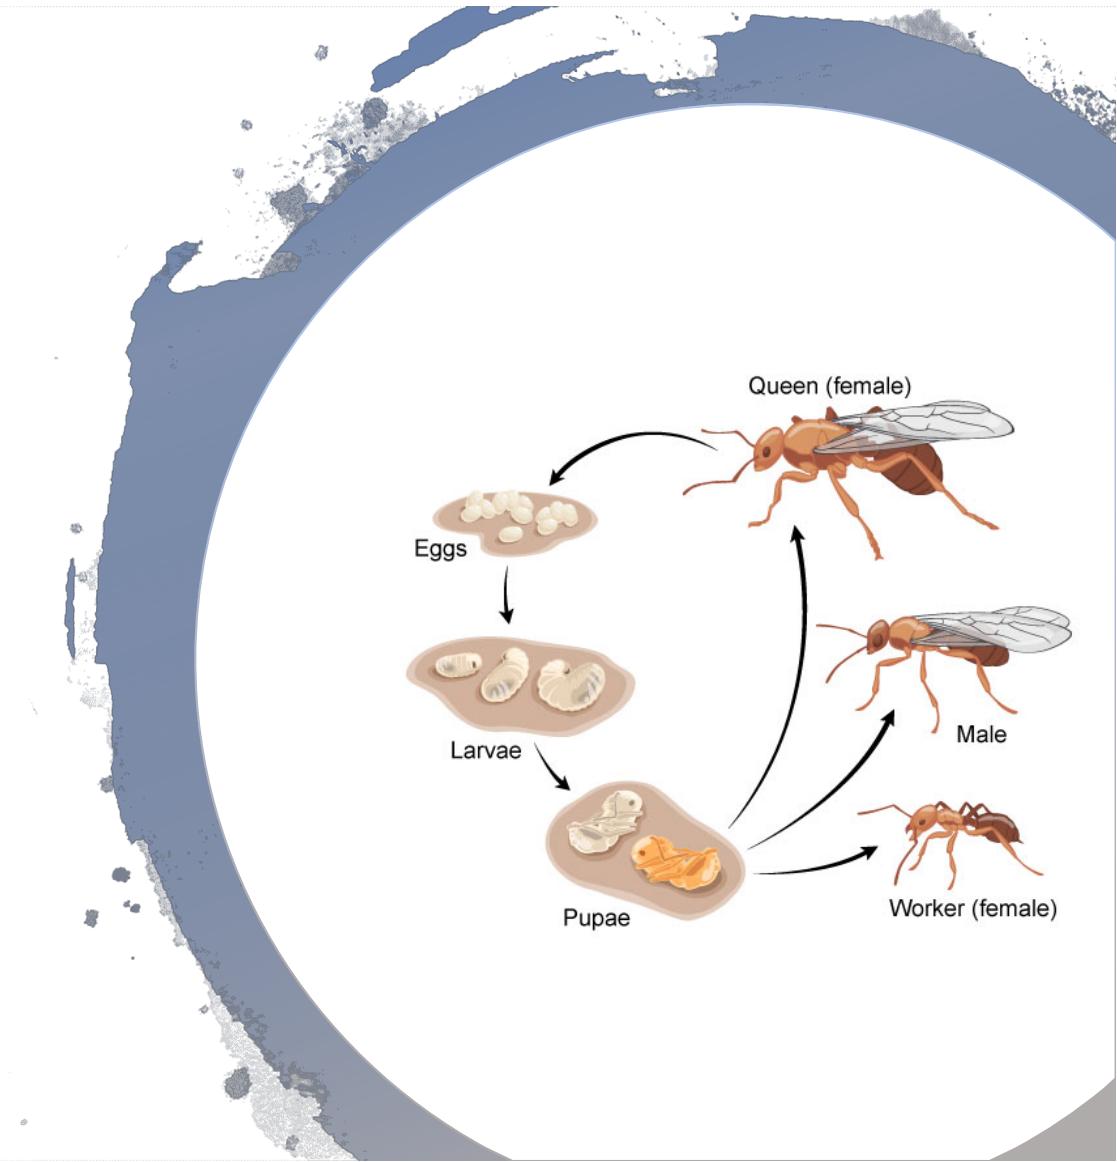


Image Source: <https://askabiologist.asu.edu/individual-life-cycle>

Objective

- Object Uniqueness
- Flyweight Pattern
- Singleton Pattern
- Inner Class and Object State

Object Uniqueness

Do we even need to have more than one object
to represent the cards with the same rank and suit?



Object Uniqueness

- Immutable objects are safe to share

Objects of one class cannot be equal.



Flyweight Design Pattern


Application uses a large number of objects;

Storage of those objects is high;

Objects are immutable;

Application doesn't depend on the object identity.

Flyweight Design Pattern

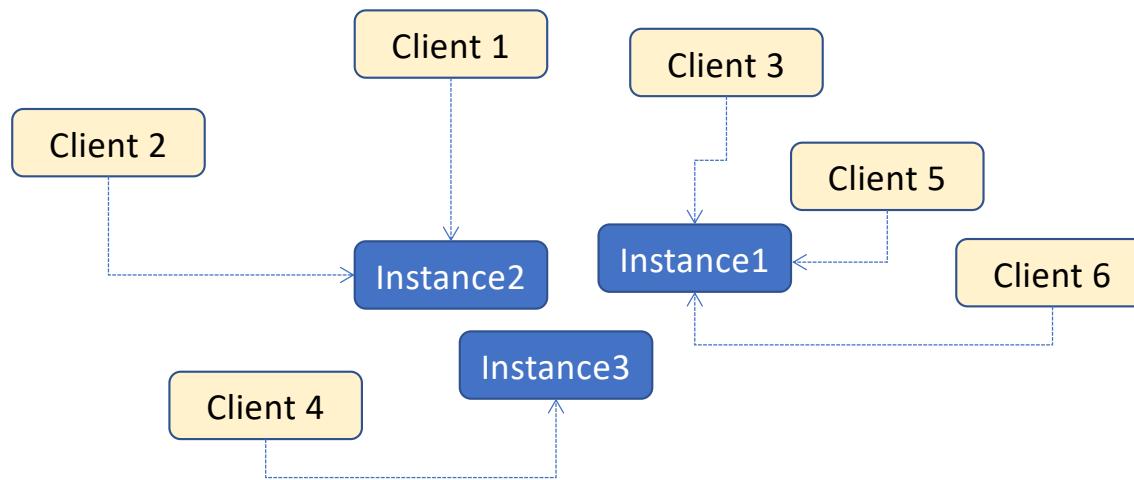

Flyweight Design Pattern

How to control the creation of instances?

Change access to constructor

How to store the flyweight instances?

Choose a data structure
and its location

How to supply the flyweight instances?

Use a static factory method

```
public class CardFactory
{
    private static final Card[][] CARDS
        = new Card[Card.Suit.values().length][];
    static
    {
        for (Card.Suit suit : Card.Suit.values())
        {
            CARDS[suit.ordinal()] = new
                Card[Card.Rank.values().length];
            for (Card.Rank rank : Card.Rank.values())
            {
                CARDS[suit.ordinal()][rank.ordinal()]
                    = new Card(rank, suit);
            }
        }
    }
}
```

```
public class CardFactory
{
    .....
public static Card getCard(Card.Rank rank, Card.Suit suit) {
    assert rank!=null && suit!=null;
    return CARDS[suit.ordinal()][rank.ordinal()];
}
}
```

Flyweight in Java

- [java.lang.Integer#valueOf\(int\)](#)

Returns an Integer instance representing the specified int value.

If a new Integer instance is not required, this method should generally be used in preference to the constructor [Integer\(int\)](#), as this method is likely to yield significantly better space and time performance by caching frequently requested values.

This method will always cache values in the range -128 to 127, inclusive, and may cache other values outside of this range.

```
public static Integer valueOf(int i) {  
    if (i >= IntegerCache.low && i <= IntegerCache.high)  
        return IntegerCache.cache[i + (-IntegerCache.low)];  
    return new Integer(i); }  
}  
  
private static class IntegerCache {  
    static final int low = -128;  
    static final int high;  
    static final Integer cache[];  
  
    static {  
        /* ... initialize cache ... */  
    }  
  
    private IntegerCache() {}  
}
```

Flyweight that enables sharing,
but does not enforce it.

Flyweight in Java

- [java.lang.Integer#valueOf\(int\)](#)
- Similarly on [Boolean](#), [Byte](#), [Character](#), [Short](#), [Long](#) and [BigDecimal](#)


Flyweight Design Pattern

- When to instantiate flyweight object?
 - Pre-instantiate
 - Create instance upon request

Flyweight Demo

Singleton Design Pattern

- Guarantee there is *a single instance* of a class

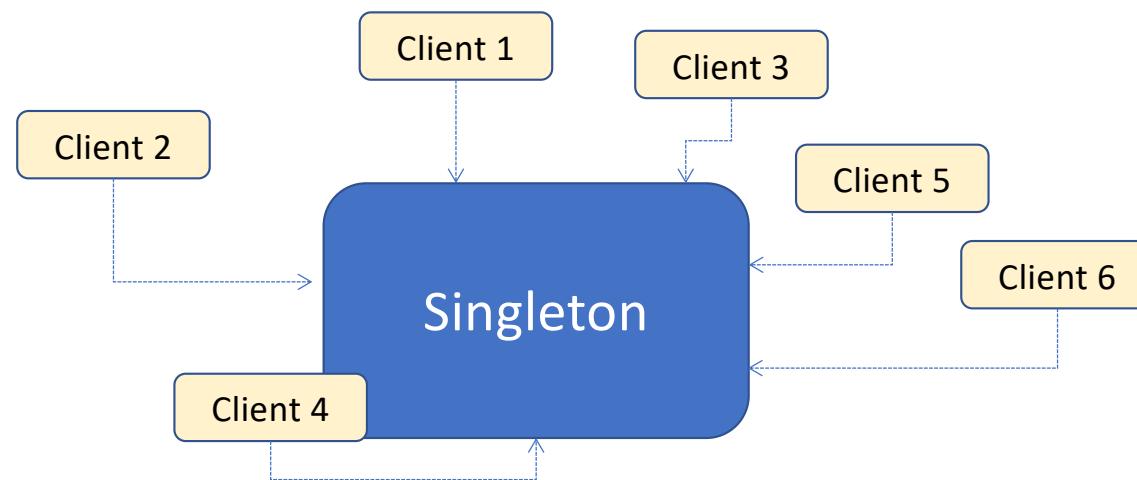

Singleton Design Pattern

How to control the creation of instance?

Change access to constructor

How to store the single instance?

A static final variable holding
the reference to the instance

How to supply the single instances?

public static method

Singleton in Java

- [java.lang.Runtime](#)

Every Java application has a single instance of class **Runtime** that allows the application to interface with the environment in which the application is running.

The current runtime can be obtained from the `getRuntime` method.

An application cannot create its own instance of this class.

```
public class Runtime {  
    private static Runtime currentRuntime = new Runtime();  
  
    /**  
     * Returns the runtime object associated with the current Java application.  
     * Most of the methods of class <code>Runtime</code> are instance  
     * methods and must be invoked with respect to the current runtime object.  
     *  
     * @return the <code>Runtime</code> object associated with the current  
     *         Java application.  
    */  
    public static Runtime getRuntime() {  
        return currentRuntime;  
    }  
  
    /** Don't let anyone else instantiate this class */  
    private Runtime() {}  
}
```

Code Exploration

- GameModel in Solitaire
- ApplicationResources in JetUML

Activity

- Analyze the similarity and differences of the two design patterns, Flyweight and Singleton and put your answers [here](#).