

CS223 Computer Architecture & Organization

DRAM Scheduling and Refreshing



John Jose


Associate Professor

Department of Computer Science & Engineering


Indian Institute of Technology Guwahati

DRAM Rank

DRAM Rank

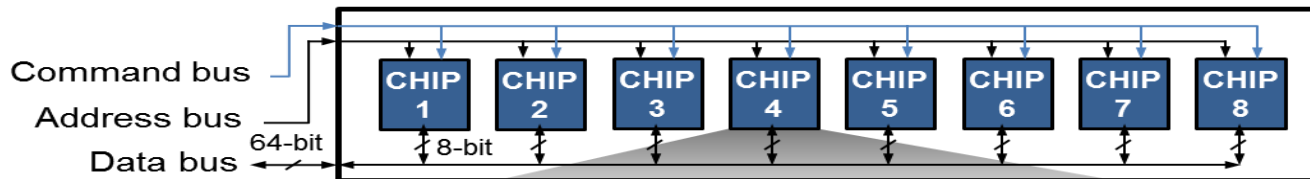


DRAM Chip

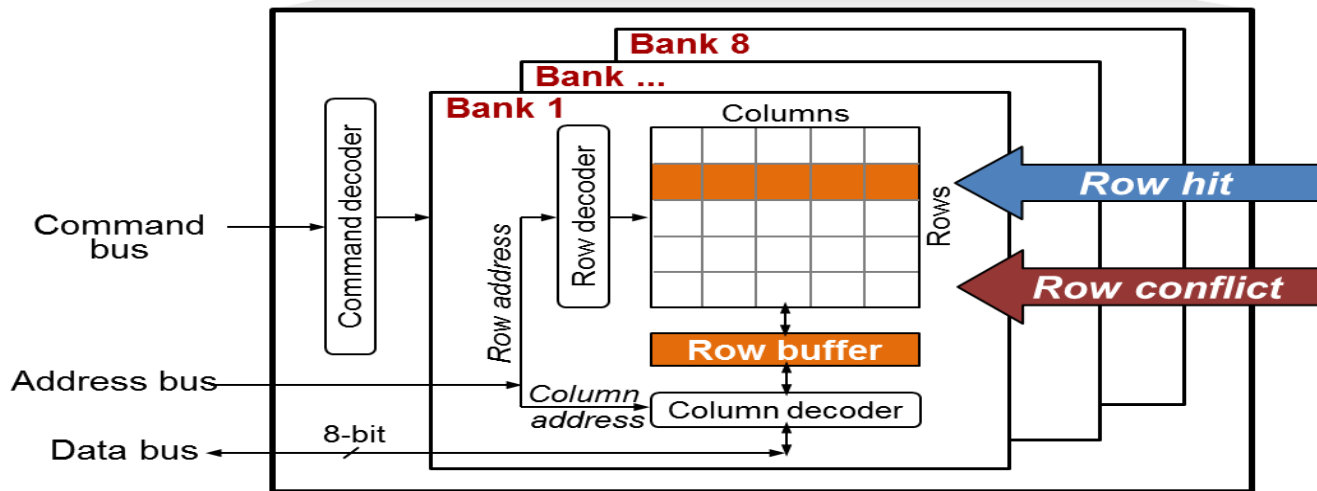


DRAM access latency varies depending on which row is stored in the row buffer

DRAM Controller Overview

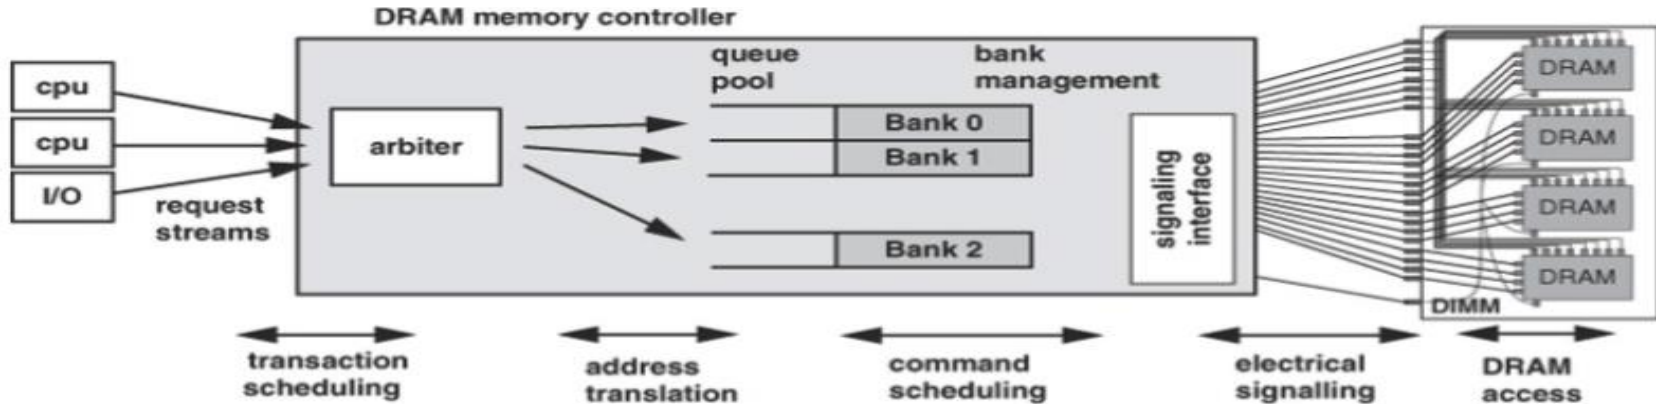

DRAM Controller Logic

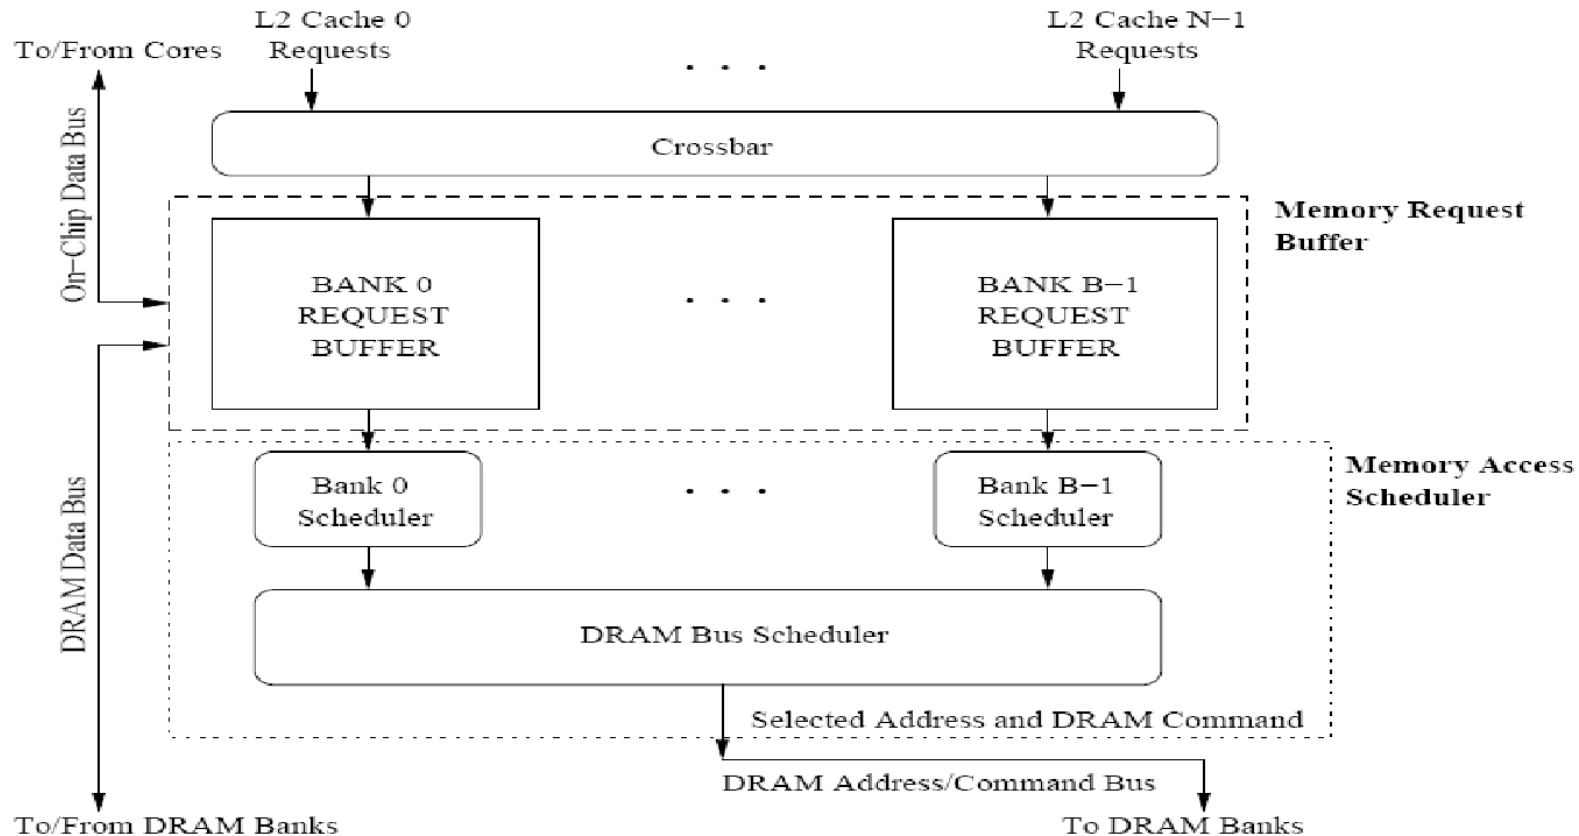

DRAM Scheduling Policies

- ❖ **FCFS** (first come first served)
 - ❖ Oldest request first
- ❖ **FR-FCFS** (first ready, first come first served)
 - ❖ Row-hit first and then Oldest first
 - ❖ Goal is to maximize row buffer hit rate
 - ❖ maximize DRAM throughput
- ❖ Scheduling is done at the command level
 - ❖ Column commands (read/write) prioritized over row commands (activate/precharge)
 - ❖ Within each group, older commands prioritized over younger ones

DRAM Scheduling Policies

- ❖ A scheduling policy is essentially a prioritization order
- ❖ Prioritization can be based on
 - ❖ Request age
 - ❖ Row buffer hit/miss status
 - ❖ Request type (prefetch, read, write)
 - ❖ Request mode (load miss or store miss)
 - ❖ Requestor Type (CPU, DMA, GPU)
 - ❖ Request criticality
 - ❖ How many instructions in core are dependent on it?
 - ❖ Will it stall the processor?
 - ❖ Interference caused to other cores

Row Buffer Management Policies

❖ Open row

- ❖ Keep the row open after an access
- ❖ Next access might need the same row ☐ row hit
- ❖ Next access might need a different row ☐ row conflict, wasted energy

❖ Closed row

- ❖ Close the row after an access (if no other requests already in the request buffer need the same row)
- ❖ Next access might need a different row ☐ avoid a row conflict
- ❖ Next access might need the same row ☐ extra activate latency
- ❖ **Adaptive policies-** Predict whether or not the next access to the bank will be to the same row

Open vs Closed Row Policies


Policy	First access	Next access	Commands needed for next access
Open row	Row 0	Row 0 (row hit)	Read
Open row	Row 0	Row 1 (row conflict)	Precharge + Activate Row 1 + Read
Closed row	Row 0	Row 0 – access in request buffer (row hit)	Read
Closed row	Row 0	Row 0 – access not in request buffer (row closed)	Activate Row 0 + Read + Precharge
Closed row	Row 0	Row 1 (row closed)	Activate Row 1 + Read + Precharge

DRAM Refresh

- ❖ DRAM capacitor charge leaks over time
- ❖ The memory controller needs to read each row periodically to restore the charge
 - ❖ Activate + precharge each row every N ms
 - ❖ Typical $N = 64$ ms (Refresh Interval)
- ❖ Implications on performance?
 - ❖ DRAM bank unavailable while refreshed
 - ❖ Long pause times: If we refresh all rows in burst, every 64ms the DRAM will be unavailable until refresh ends

DRAM Refresh

- ❖ **Burst refresh**: All rows refreshed immediately after one another
- ❖ **Distributed refresh**: Each row refreshed at a different time, at regular intervals
- ❖ **Distributed refresh eliminates long pause times**

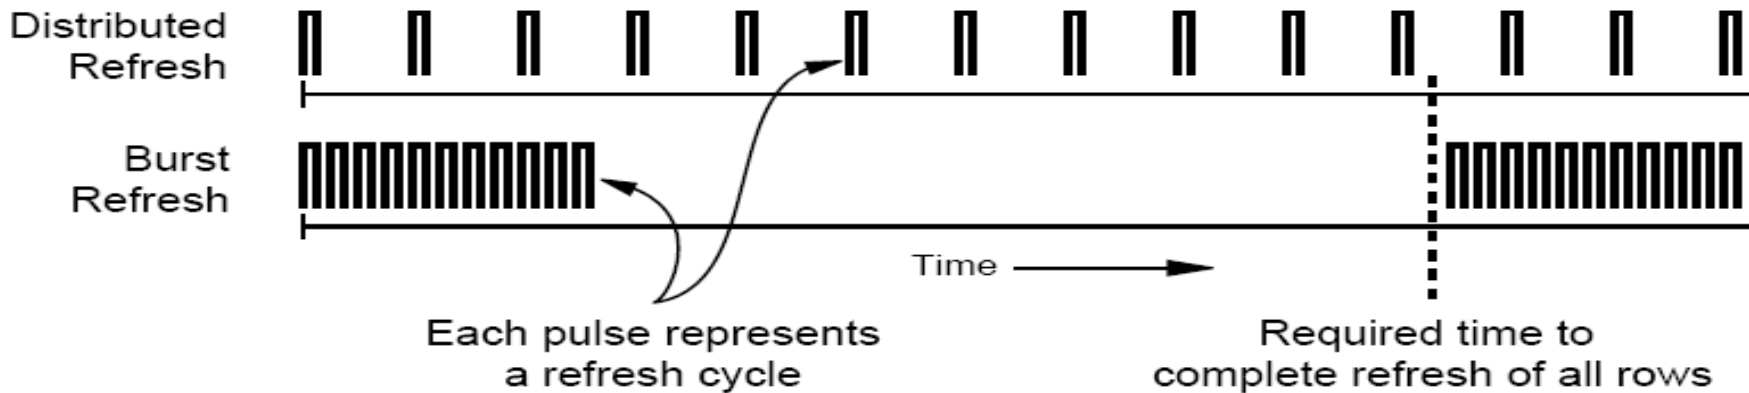



johnjose@iitg.ac.in
<http://www.iitg.ac.in/johnjose/>