

Energy Data Analysis with R

Reto Marek

2020-11-22

Contents

1	Introduction	5
1.1	Content	5
1.2	Why R and RStudio?	6
1.3	Other useful sources	6
2	Getting started	7
2.1	Install R and R Studio	7
2.2	Install required packages	8
2.3	Create an R Script	9
2.4	What's next?	10
3	R Basics	11
3.1	Loading Data	11
4	Data Wrangling	13
4.1	Add Metadata for later filtering	13
4.2	Data Frames	15
4.3	Examples	17
5	Explorative Data Analysis	21
5.1	Get overview	21
5.2	Basic plots	23

6 Data Visualizations	25
6.1 Room Temperature Reduction	25
6.2 Energy Consumption Before/After per Month	28
6.3 Decomposition	30
6.4 Building Energy Signature	32
6.5 Daily Profiles - Overview	35
6.6 Daily Profiles - Overlayed	36
6.7 Daily Profiles - Mean	40
6.8 Mollier hx Diagram	42
6.9 SIA 180 Thermal Comfort	44
6.10 Electricity Consumption Residential	49
A Packages in R	57
A.1 Installing a Package	57
A.2 Loading a Package	58
A.3 Upgrading Packages	58

Chapter 1

Introduction

Preface

This book gives you an overview of the statistical software R and its ability to analyze and visualize time series in the context of building energy and comfort.

It is aimed at R beginners as well as experienced R users and is strongly inspired by the R Graphics Cookbook and Engineering Data Analysis in R. The aim of this book is to provide additional specific recipes for energy and comfort related tasks and to make your entry into R smooth and easy.

1.1 Content

The book is independently structured and a beginner gets information on how to install the program environment and gets a quick practical introduction.

The examples in this book will show you how to complete certain specific tasks. Examples are shown so that you can understand the basic principle and reproduce the analysis or visualization with your own data. Simply copy the code into your R-script, replace the sample data files with your own and execute the code.

This book was developed using Yihui Xie's bookdown framework. The book is built using code that combines R code, data, and text to create a book for which R code and examples can be re-executed every time the book is re-built. The online book is hosted using GitHub's free GitHub Pages. All material for this book is available and can be explored at the book's GitHub repository.

1.2 Why R and RStudio?

In a study commissioned by the Swiss Federal Office of Energy, experts from the field were asked how and where they perform energy analyses and create visualizations. The result was that many people today either need Excel or use a building monitoring software to execute analysis and create visualizations. Excel users are pushing the program to its limits with the ever-increasing data sets. Also the interactive ability of the graphics there is limited. The change to an environment like “R” seems to be difficult for many. In the market there are numerous books which make the change to “R” for other disciplines easier. However, experts from the energy and building services engineering industry lack a corresponding work. The present book is intended to close this gap.

The freely available programming language “R” and its graphical user interface “RStudio” offer many more possibilities for data analysis and data visualization.

1.3 Other useful sources

A really good source is R for Data Science by Garrett Grolemund and Hadley Wickham. The entire book is freely available online through the same format of this book.

There are a number of other useful books available on general R programming, including:

- R Graphics Cookbook
- Introduction to Data Science - Data Analysis and Prediction Algorithms with R
- Hands-On Programming with R
- Engineering Data Analysis in R

Chapter 2

Getting started

2.1 Install R and R Studio

Before we can start the first analysis, we have to install “R” and “RStudio”. This may seem laborious, but it is necessary and easier than it appears at first glance.

- “R” is a programming language used for statistical computing while “RStudio” provides a graphical user interface
- “R” may be used without “RStudio”, but “RStudio” may not be used without “R”
- Both, “R” and “RStudio” are free of charge and there are no licence fees
- When you later make an analysis and visualizations, you only work in the graphical user interface “RStudio”

2.1.1 Download and Install R

2.1.1.1 Windows

1. Open <https://cran.r-project.org/bin/windows/base/> and press the link “Download R...”
2. Run the downloaded installer file and follow the installation wizard

The wizard will install “R” into your **Program Files** folders and adds a shortcut in your Start menu. Note that you will need to have all necessary administration rights to install new software on your machine.

2.1.1.2 Mac OSX

1. Open <https://cran.r-project.org/bin/macosx/> and download the latest *.pkg file
2. Run the downloaded installer file and follow the installation wizard

The installer allows you to customize your installation. However the default values will be suitable for most users.

2.1.1.3 Linux

“R” is part of many Linux distributions, therefore you should check with your Linux package management system if it’s already installed.

The CRAN website provides files to build “R” from source on Debian, Redhat, SUSE, and Ubuntu systems under the link “Download R for Linux”

- Open <https://cran.r-project.org/bin/linux/> and then follow the directory trail to the version of Linux you wish to install R on top of

The exact installation procedure will vary depending on your Linux operating system. CRAN supports the process by grouping each set of source files with documentation or README files that explain how to install on your system.

2.1.2 Download and Install RStudio

“R Studio” is a development environment for “R”.

1. Open <https://rstudio.com/products/rstudio/download/> and download “RStudio Desktop Open Source”
2. Follow the on-screen instructions
3. Once you have installed “R Studio”, you can run it like any other application by clicking the program icon

2.2 Install required packages

Appendix A gives you an introduction to what a package is and how to install it. Below are the packages used in this book and it is recommended to install them now.

- Open “RStudio” just as you would any program, by clicking on its icon

- Copy the following code and paste it into your console (on the bottom left, right of the symbol >):

```
install.packages("devtools", "tidyverse", "plotly", "lubridate", "r2d3", "checkmate")
install_github("hslu-ige-laes/redutils")
```

- Press **Enter** or **Return**

The installation of the packages is now in progress and this may take a while, please be patient. In the meantime you can read in appendix A what packages are in general and how they can be installed and later loaded into scripts.

2.3 Create an R Script


Finally, you have installed “R” and “RStudio” with the first set of packages on your computer.

Let’s create the first visualization. - Open “RStudio” just as you would any program, by clicking on its icon - Go to the menu on the top left and click to **File / New File / R Script** - Copy the following code and paste it into your script:

```
library(graphics)
plot(co2, ylab = "CO2 (ppm)", las = 1)
title(main = "Mauna Loa Atmospheric CO2 Concentration")
```

- select all by pressing **Ctrl + A**
- Then run the code by pressing the **Run** Button or **Ctrl + Enter**

You should now get your first visualization:

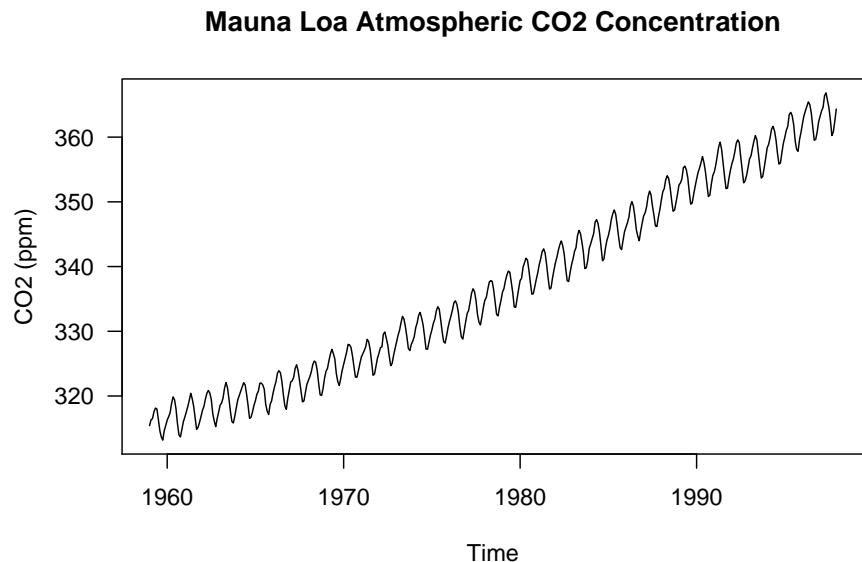

As you probably noticed, we did not load any data. The basic installation of “R” and some packages come with test data. So that is an easy way to test something. The R Dataset Package provides some preinstalled datasets, including the used “Mauna Loa Atmospheric CO₂ Concentration” dataset.

2.4 What’s next?

Now hopefully, everything has worked fine so far with the installation and your first visualization. Congratulations! You have now a running R environment and we can start with more interesting stuff.

The following chapters will give you an overview

Chapter 3

R Basics

3.1 Loading Data

3.1.1 Csv File

```
df <- read.csv("datafile.csv")
df <- read.csv("datafile.csv", header=FALSE, stringsAsFactors=FALSE)

df <- read.csv("https://github.com/retomarek/r/raw/master/datasets/buildingMonitoringTestDataSet.csv",
              stringsAsFactors=FALSE,
              sep =",",
              na.strings = c("", "NA"))
```

Attention: By default, strings in the data are treated as factors. `read.csv()` is a convenience wrapper function around `read.table()`. If you need more control over the input, see `?read.table`

3.1.2 Excel File

```
# Only need to install once
install.packages("xlsx")

library(xlsx)

df <- read.xlsx("datafile.xlsx", 1)
df <- read.xlsx("datafile.xls", sheetIndex=2)
df <- read.xlsx("datafile.xls", sheetName="Revenues")
```

For reading older Excel files in the .xls format, the gdata package has the function `read.xls()`:

```
# Only need to install once
install.packages("gdata")

library(gdata)
# Read first sheet
df <- read.xls("datafile.xls")
df <- read.xls("datafile.xls", sheet=2)
```

Both the xlsx and gdata packages require other software to be installed on your computer. For xlsx, you need to install Java on your machine. For gdata, you need Perl, which comes as standard on Linux and Mac OS X, but not Windows. On Windows, you'll need ActiveState Perl. The Community Edition can be obtained for free.

Chapter 4

Data Wrangling

4.1 Add Metadata for later filtering

Firstly we have to load a dataset into a dataframe:

```
# load data set
df <- read.csv("https://github.com/hslu-ige-laes/edar/raw/master/sampleData/centralOutsideTemp.csv",
               stringsAsFactors=FALSE,
               sep =";")
```

4.1.1 Year, Month, Day, Day of Week

To group, filter and aggregate data we need to have the date splitted up in day, month and year separately:

```
library(dplyr)
library(lubridate)

df$time <- parse_date_time(df$time, "YmdHMS", tz = "Europe/Zurich")
df$year <- as.Date(cut(df$time, breaks = "year"))
df$month <- as.Date(cut(df$time, breaks = "month"))
df$day <- as.Date(cut(df$time, breaks = "day"))
df$weekday <- weekdays(df$time)
```

This code first parses the timestamp with a specific timezone. Then three columns are added.

Please note that the month also contains the year and a day. This is useful for a later step where you can group the series afterwards.

```
head(df,2)

##           time centralOutsideTemp      year     month     day
## 1 2018-03-21 11:00:00          5.2 2018-01-01 2018-03-01 2018-03-21
## 2 2018-03-21 12:00:00          6.7 2018-01-01 2018-03-01 2018-03-21
##   weekday
## 1 Mittwoch
## 2 Mittwoch

tail(df,2)

##           time centralOutsideTemp      year     month     day
## 21864 2020-09-17 10:00:00         26.65 2020-01-01 2020-09-01 2020-09-17
## 21865 2020-09-17 11:00:00         28.10 2020-01-01 2020-09-01 2020-09-17
##   weekday
## 21864 Donnerstag
## 21865 Donnerstag
```

4.1.2 Season of Year

For some analyses it is useful to color single points of a scatterplot according to the season. For this we need to have the season in a separate column:

```
library(reddutils)
# get season from a date
getSeason(as.Date("2019-04-01"))

## [1] "Spring"
```

If you want to change the language, you can give the function dedicated names for the season:

```
getSeason(as.Date("2019-04-01"),
          seasonNames = c("Winter", "Frühling", "Sommer", "Herbst"))

## [1] "Frühling"
```

To apply this function to a whole dataframe we can use the dplyr mutate function. The code below creates a new column named “season”:

```
df <- dplyr::mutate(df, season = getSeason(df$time))

head(df,1)

##           time centralOutsideTemp      year     month     day
## 1 2018-03-21 11:00:00          5.2 2018-01-01 2018-03-01 2018-03-21
##   weekday season
## 1 Mittwoch Spring
```

```
tail(df, 1)

##                               time centralOutsideTemp      year     month      day
## 21865 2020-09-17 11:00:00           28.1 2020-01-01 2020-09-01 2020-09-17
##             weekday season
## 21865 Donnerstag Fall
```

4.2 Data Frames

Firstly we have to load a dataset into a dataframe:

```
# load data set
df <- read.csv("https://github.com/hslu-ige-laes/edar/raw/master/sampleData/flatTempHum.csv",
               stringsAsFactors=FALSE,
               sep =";")
```

4.2.1 Change Row Names

```
# Print the header and the first line
head(df, 1)

##                               time FlatA_Hum FlatA_Temp FlatB_Hum FlatB_Temp FlatC_Hum
## 1 2018-10-03 00:00:00           53       24.43     38.8       22.4       44
##   FlatC_Temp FlatD_Hum FlatD_Temp
## 1       24.5       49       24.43

# rename columns and print the header and the first line
names(df) <- c("timestamp", "Hum_A", "Temp_A", "Hum_B", "Temp_B", "Hum_C", "Temp_C", "Hum_D", "Temp_D")
head(df, 1)

##                               timestamp Hum_A Temp_A Hum_B Temp_B Hum_C Temp_C Hum_D Temp_D
## 1 2018-10-03 00:00:00      53   24.43   38.8    22.4     44   24.5   49.0   24.43
```

4.2.2 Wide to Long

```
# create a copy of the dataframe and print the header and the first five line
head(df, 5)

##                               timestamp Hum_A Temp_A Hum_B Temp_B Hum_C Temp_C Hum_D Temp_D
## 1 2018-10-03 00:00:00  53.0   24.43  38.8   22.40  44.0   24.5   49.0   24.43
## 2 2018-10-03 01:00:00  53.0   24.40  38.8   22.40  44.0   24.5   49.0   24.40
## 3 2018-10-03 02:00:00  53.0   24.40  39.3   22.40  44.7   24.5   48.3   24.38
## 4 2018-10-03 03:00:00  53.0   24.40  40.3   22.40  45.0   24.5   48.0   24.33
## 5 2018-10-03 04:00:00  53.3   24.40  41.0   22.37  45.2   24.5   47.7   24.30
```

```
# convert wide to long format
df.long <- as.data.frame(tidyverse::pivot_longer(df,
  cols = -timestamp,
  names_to = "sensor",
  values_to = "value",
  values_drop_na = TRUE)
)

# long format
head(df.long, 16)
```

```
##           timestamp sensor value
## 1 2018-10-03 00:00:00 Hum_A 53.00
## 2 2018-10-03 00:00:00 Temp_A 24.43
## 3 2018-10-03 00:00:00 Hum_B 38.80
## 4 2018-10-03 00:00:00 Temp_B 22.40
## 5 2018-10-03 00:00:00 Hum_C 44.00
## 6 2018-10-03 00:00:00 Temp_C 24.50
## 7 2018-10-03 00:00:00 Hum_D 49.00
## 8 2018-10-03 00:00:00 Temp_D 24.43
## 9 2018-10-03 01:00:00 Hum_A 53.00
## 10 2018-10-03 01:00:00 Temp_A 24.40
## 11 2018-10-03 01:00:00 Hum_B 38.80
## 12 2018-10-03 01:00:00 Temp_B 22.40
## 13 2018-10-03 01:00:00 Hum_C 44.00
## 14 2018-10-03 01:00:00 Temp_C 24.50
## 15 2018-10-03 01:00:00 Hum_D 49.00
## 16 2018-10-03 01:00:00 Temp_D 24.40
```

4.2.3 Long to Wide

```
# long format
head(df.long)

##           timestamp sensor value
## 1 2018-10-03 00:00:00 Hum_A 53.00
## 2 2018-10-03 00:00:00 Temp_A 24.43
## 3 2018-10-03 00:00:00 Hum_B 38.80
## 4 2018-10-03 00:00:00 Temp_B 22.40
## 5 2018-10-03 00:00:00 Hum_C 44.00
## 6 2018-10-03 00:00:00 Temp_C 24.50

# convert long table into wide table
df.wide <- as.data.frame(tidyverse::pivot_wider(df.long,
  names_from = "sensor",
  values_from = "value")
)

# wide format
head(df.wide)
```

```
##           timestamp Hum_A Temp_A Hum_B Temp_B Hum_C Temp_C Hum_D Temp_D
## 1 2018-10-03 00:00:00 53.0 24.43 38.8 22.40 44.0 24.50 49.0 24.43
## 2 2018-10-03 01:00:00 53.0 24.40 38.8 22.40 44.0 24.50 49.0 24.40
## 3 2018-10-03 02:00:00 53.0 24.40 39.3 22.40 44.7 24.50 48.3 24.38
## 4 2018-10-03 03:00:00 53.0 24.40 40.3 22.40 45.0 24.50 48.0 24.33
## 5 2018-10-03 04:00:00 53.3 24.40 41.0 22.37 45.2 24.50 47.7 24.30
## 6 2018-10-03 05:00:00 53.7 24.40 41.2 22.30 47.2 24.57 47.2 24.30
```

4.2.4 Merge two Dataframes

```
library(dplyr)
library(lubridate)

# read file one and parse dates
dfOutsideTemp <- read.csv("https://github.com/hslu-ige-laes/edar/raw/master/sampleData/centralOutsideTemp.csv",
                           stringsAsFactors=FALSE,
                           sep =";")

dfOutsideTemp$time <- parse_date_time(dfOutsideTemp$time,
                                         orders = "YmdHMS",
                                         tz = "Europe/Zurich")

# read file two and parse dates
dfFlatTempHum <- read.csv("https://github.com/hslu-ige-laes/edar/raw/master/sampleData/flatTempHum.csv",
                           stringsAsFactors=FALSE, sep =";")

dfFlatTempHum$time <- parse_date_time(dfFlatTempHum$time,
                                         order = "YmdHMS",
                                         tz = "Europe/Zurich")

# merge the two files into a new data frame and keep only rows where all values are available
df <- merge(dfOutsideTemp, dfFlatTempHum, by = "time") %>% na.omit()
```

4.3 Examples

4.3.1 Import csv file from GWF Relay W60 M-Bus Logger

Some data loggers have a cryptic data format which requires some data wrangling ahead before we can use the time series efficiently. Following an example of a M-Bus data logger.

```
library(tidyr)

# load csv file
df <- read.csv("https://github.com/hslu-ige-laes/edar/raw/master/sampleData/flatHeatAndHotWater_GWF_RelayW60Logger.csv",
               stringsAsFactors=FALSE,
               sep =",")
head(df,23)
```

```

##          Datum Zeit Adr ID.Nr. HST Nr.      Wert Einheit
## 1 01.01.10 00:00 1     1 GWF  1           729   kWh
## 2 01.01.10 00:00 1     1 GWF  2           80.92  m^3
## 3 01.01.10 00:00 1     1 GWF  3           80.75  m^3
## 4 01.01.10 00:00 1     1 GWF  4             26   °C
## 5 01.01.10 00:00 1     1 GWF  5             25   °C
## 6 01.01.10 00:00 1     1 GWF  6             1.3    K
## 7 01.01.10 00:00 1     1 GWF  7           375   hours
## 8 01.01.10 00:00 1     1 GWF  8           375   hours
## 9 01.01.10 00:00 1     1 GWF  9             0    l/h
## 10 01.01.10 00:00 1     1 GWF 10            0    kW
## 11 01.01.10 00:00 1     1 GWF 11 31.12.09 23:58 Win V
## 12 01.01.10 00:00 1     1 GWF 12            87   HCA
## 13 01.01.10 00:00 1     1 GWF 13            0   HCA
## 14 01.01.10 00:00 1     1 GWF 14            0   kWh
## 15 01.01.10 00:00 1     1 GWF 15            0   m^3
## 16 01.01.10 00:00 1     1 GWF 16            0   m^3
## 17 01.01.10 00:00 1     1 GWF 17            0   HCA
## 18 01.01.10 00:00 1     1 GWF 18            0   HCA
## 19 01.01.10 00:00 1     1 GWF 19           00.00.00
## 20 01.01.10 00:00 1     1 GWF 20            $00
## 21 01.01.10 00:00 2     4 GWF  1           751   kWh
## 22 01.01.10 00:00 2     4 GWF  2           71.97  m^3
## 23 01.01.10 00:00 2     4 GWF  3           71.9   m^3

##          Beschreibung      Art Modul SP.Nr. Tarif
## 1          energy instant. 0     0     0
## 2          volume instant. 0     0     0
## 3          volume instant. 1     0     0
## 4      flow temperature instant. 0     0     0
## 5      return temperature instant. 0     0     0
## 6      temperature difference instant. 0     0     0
## 7          on time instant. 0     0     0
## 8      operating time instant. 0     0     0
## 9          volume flow instant. 0     0     0
## 10         power instant. 0     0     0
## 11         time point instant. 0     0     0
## 12      HCA-Unit instant. 1     0     0
## 13      HCA-Unit instant. 2     0     0
## 14          energy instant. 0     1     0
## 15          volume instant. 0     1     0
## 16          volume instant. 1     1     0
## 17      HCA-Unit instant. 1     1     0
## 18      HCA-Unit instant. 2     1     0
## 19         time point instant. 0     1     0
## 20      M-Bus state       NA    NA    NA
## 21          energy instant. 0     0     0
## 22          volume instant. 0     0     0
## 23          volume instant. 1     0     0

```

Please note * The Date and Time are in separate columns * The HCA-Unit value has a factor of 10, so the above HCA-value of 87 are in 10 liters Units and result in $87 \times 10 = 870$ liter * In the example "Adr" is the identification of the flat

We are only interested in Nr. 1 heating energy of the flat and Nr. 12 the impulse count of the additional meter which is the hot water of the flat.

Following the required steps to parse the data and bring them in a format we can later work with:

```
# create timestamp out of column "Date" and "Time"
df <- df %>% mutate(timestamp = paste0(df$Datum, " ", df$Zeit))
df$timestamp <- parse_date_time(df$timestamp,
                                 order = "d.m.y H:M",
                                 tz = "Europe/Zurich")

# select columns and rearrange
df <- df %>% select(timestamp, Adr, Nr., Wert, Einheit)

# filter out Adr. of interest
df <- df %>% filter(Nr. %in% c(1,12))

# rename columns
df <- df %>% mutate(Nr. = ifelse(Nr. == 1, paste0("Adr", sprintf("%02.0f", Adr), "_energyHeat"), ifelse(Nr. == 12, paste0("Adr", sprintf("%02.0f", Adr), "_hotWater"))))

# convert value to numeric
df$Wert <- as.numeric(df$Wert)

# multiply HCA-values by factor 10 to get liters and divide by 1000 to get m3
df <- df %>% mutate(Wert = ifelse(Einheit == "HCA", Wert * 10/1000, Wert))

df <- df %>% select(-Einheit, -Adr)

# convert long table into wide table
df.wide <- as.data.frame(pivot_wider(df,
                                       names_from = "Nr.",
                                       values_from = Wert,
                                       names_sep = "_"))
)
```

This is the result:

```
head(df.wide)
```

	timestamp	Adr01_energyHeat	Adr01_hotWater	Adr02_energyHeat	Adr02_hotWater
## 1	2010-01-01	729	0.87	751	1.16
## 2	2010-02-01	1850	2.18	2276	7.55
## 3	2010-03-01	2806	5.84	2826	12.94
## 4	2010-04-01	3615	9.92	3354	18.51
## 5	2010-05-01	4150	13.38	3613	24.81
## 6	2010-06-01	4669	17.50	3640	29.72
		Adr04_energyHeat	Adr04_hotWater	Adr03_energyHeat	Adr03_hotWater
## 1		972	1.56	799	0.07
## 2		2526	8.14	3103	1.32
## 3		3690	14.83	4786	3.73
## 4		4700	20.82	6151	6.05
## 5		5341	27.06	6900	7.74
## 6		5802	31.61	7702	9.49

Finally saving the csv file:

```
write.csv2(df.wide,  
          file = "flatHeatAndHotWater.csv",  
          row.names = FALSE)
```

Chapter 5

Explorative Data Analysis

5.1 Get overview

Get an overview of the whole data set and specific series of it

5.1.1 Load data

Load test data set in a data frame (e.g. from a csv-file)

```
df <- read.csv("https://github.com/retomarek/r/raw/master/datasets/buildingMonitoringTestDataSet.csv",
               stringsAsFactors=FALSE,
               sep = ",")
```

5.1.2 Names

show the column headers of the data frame

```
names(df)

## [1] "time"                  "WthStnPress"          "WthStnHum"
## [4] "WthStnRain"            "WthStnSolRad"         "WthStnTemp"
## [7] "WthStnWindDir"         "WthStnWindSpd"        "BldgEnergyHotwater"
## [10] "BldgEnergyHeating"     "FlatHum"              "FlatTemp"
## [13] "FlatVolFlowColdwater"  "FlatVolFlowHotwater"
```

5.1.3 Structure

show the structure of the data frame

```
str(df)
```

```
## 'data.frame': 16394 obs. of 14 variables:
## $ time : chr "2018-09-30T22:00:00.000Z" "2018-09-30T23:00:00.000Z" "2018-10-01T00:00:00...
## $ WthStnPress : num 1012 1012 1011 1011 1011 ...
## $ WthStnHum : num 87 87.5 87.5 86.5 88 89 86.5 81 78 80.5 ...
## $ WthStnRain : num 0.8 1.1 0.5 0.5 0.6 0.1 0.2 0 0 0 ...
## $ WthStnSolRad : num 0 0 0 0 0 0 0 3 24.5 ...
## $ WthStnTemp : num 12.8 12.4 11.9 11.9 11.6 ...
## $ WthStnWindDir : num 157.5 11.2 146.2 157.5 146.2 ...
## $ WthStnWindSpd : num 3.2 1.6 2.4 0.8 2.4 0.8 0.8 3.2 4 3.2 ...
## $ BldgEnergyHotwater : num 0 19 0 0 0 ...
## $ BldgEnergyHeating : num 0 0 0 0 0 0 0 0 0 ...
## $ FlatHum : num NA NA NA NA NA NA NA NA NA ...
## $ FlatTemp : num NA NA NA NA NA NA NA NA NA ...
## $ FlatVolFlowColdwater: num 0.006 0 0 0 0.006 ...
## $ FlatVolFlowHotwater : num 0 0 0 0 0 ...
```

5.1.4 Head/Tail

The head and tail functions are generic, so they will work whether your data is stored in a simple data frame, a zoo object, or an xts object.

```
head(df)
```

```
##          time WthStnPress WthStnHum WthStnRain WthStnSolRad
## 1 2018-09-30T22:00:00.000Z     1012.30      87.0       0.8       0
## 2 2018-09-30T23:00:00.000Z     1011.90      87.5       1.1       0
## 3 2018-10-01T00:00:00.000Z     1011.45      87.5       0.5       0
## 4 2018-10-01T01:00:00.000Z     1010.90      86.5       0.5       0
## 5 2018-10-01T02:00:00.000Z     1010.55      88.0       0.6       0
## 6 2018-10-01T03:00:00.000Z     1010.20      89.0       0.1       0
##   WthStnTemp WthStnWindDir WthStnWindSpd BldgEnergyHotwater BldgEnergyHeating
## 1     12.80      157.50        3.2             0             0
## 2     12.35      11.25        1.6           19             0
## 3     11.90      146.25        2.4             0             0
## 4     11.90      157.50        0.8             0             0
## 5     11.60      146.25        2.4             0             0
## 6     11.75      22.50        0.8             0             0
##   FlatHum FlatTemp FlatVolFlowColdwater FlatVolFlowHotwater
## 1     NA      NA         0.006             0
## 2     NA      NA         0.000             0
## 3     NA      NA         0.000             0
## 4     NA      NA         0.000             0
## 5     NA      NA         0.006             0
## 6     NA      NA         0.000             0
```

```
tail(df)
```

```
##          time WthStnPress WthStnHum WthStnRain WthStnSolRad
## 16389 2020-08-13T18:00:00.000Z     1011.650      74.75    2.19964      9
## 16390 2020-08-13T19:00:00.000Z     1012.000      79.00    2.19964      0
```

```

## 16391 2020-08-13T20:00:00.000Z    1011.950    78.25    2.19964    0
## 16392 2020-08-13T21:00:00.000Z    1012.025    76.50    2.19964    0
## 16393 2020-08-13T22:00:00.000Z    1012.250    73.00    0.00000    0
## 16394 2020-08-13T23:00:00.000Z      NA        NA        NA        NA
##           WthStnTemp WthStnWindDir WthStnWindSpd BldgEnergyHotwater
## 16389     22.000     162.00    0.000000        NA
## 16390     20.175     124.25    1.609340        NA
## 16391     19.350     125.00    0.402335        NA
## 16392     19.900     93.00    1.609340        NA
## 16393     20.625     116.25    2.414010        NA
## 16394       NA        NA        NA        NA
##           BldgEnergyHeating FlatHum FlatTemp FlatVolFlowColdwater
## 16389          NA        NA        NA        NA
## 16390          NA        NA        NA        NA
## 16391          NA        NA        NA        NA
## 16392          NA        NA        NA        NA
## 16393          NA        NA        NA        NA
## 16394          NA        NA        NA        NA
##           FlatVolFlowHotwater
## 16389          NA
## 16390          NA
## 16391          NA
## 16392          NA
## 16393          NA
## 16394          NA

```

5.1.5 Five number summary

reveals details of a specific series

```

summary(df$WthStnTemp)

##      Min. 1st Qu. Median      Mean 3rd Qu.      Max.      NA's
## -5.25    5.50   11.25   11.99   17.35   40.30      12

```

5.2 Basic plots

5.2.1 Scatterplot


5.2.1.1 plot()

```

# load data set
df <- read.csv("https://github.com/retomarek/r/raw/master/datasets/buildingMonitoringDataSet.csv",
               stringsAsFactors=FALSE,
               sep = ",")

# crate simple scatterplot
plot(df$WthStnTemp, df$BldgEnergyHeating)

```

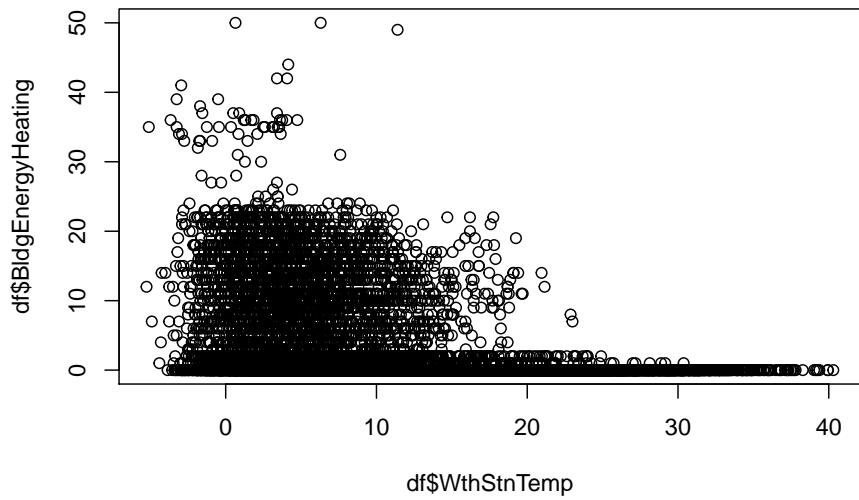

Chapter 6

Data Visualizations

tbd

6.1 Room Temperature Reduction

6.1.1 Task

As part of an energy optimization, you lower the room temperatures in a room and would now like to show the reduction effect using the time series of the room temperature sensor. In the example below you make two optimizations at different dates.

You want to create a time series plot with

- the daily median, min and max value
- the overall median of each period
- the desired setpoint

6.1.2 Basis

- Time series data from e.g. a temperature sensor with unaligned time intervals

6.1.3 Solution

```

library(dplyr)
library(lubridate)
library(dygraphs)
library(xts)
library(redutils)
library(RColorBrewer)

# Settings
tempSetpoint = 22.0

startDate = "2018-11-01"
endDate = "2019-02-01"

optiDate1 = "2018-12-17"
optiLabel1 = "Optimization I"

optiDate2 = "2019-01-03"
optiLabel2 = "Optimization II"

optiDelayDays = 5

# read and print data
df <- read.csv("https://github.com/hslu-ige-laes/edar/raw/master/sampleData/flatTempHum.csv",
               stringsAsFactors=FALSE,
               sep =";")

# select temperature and remove empty cells
df <- df %>% select(time, FlatA_Temp) %>% na.omit()

# create column with day for later grouping
df$time <- parse_date_time(df$time, "YmdHMS", tz = "Europe/Zurich")
df$day <- as.Date(cut(df$time, breaks = "day"))
df$day <- as.Date(as.character(df$day, "%Y-%m-%d"))

# filter time range
df <- df %>% filter(day > startDate, day < endDate)

# calculate daily median, min and max of temperature
df <- df %>%
  group_by(day) %>%
  mutate(minDay = min(as.numeric(FlatA_Temp)),
         medianDay = median(as.numeric(FlatA_Temp)),
         maxDay = max(as.numeric(FlatA_Temp))
  ) %>%
  ungroup()

# shrink down to daily values and remove rows with empty values
df <- df %>% select(day, medianDay, minDay, maxDay) %>% unique() %>% na.omit()

# calculate medians for time ranges
df <- df %>%
  mutate(period = ifelse(day >= startDate & day <= optiDate1,
                         "Baseline",
                         ifelse((day >= (as.Date(optiDate1) + optiDelayDays))
                               & (day <= optiDate2),
                               "Opti1",

```

```


            ifelse((day >= (as.Date(optiDate2) + optiDelayDays))
& (day <= endDate),
"Opti2",
NA)
)))

df <- df %>%
group_by(period) %>%
mutate(medianPeriod = ifelse(is.na(period), NA, median(medianDay))) %>%
ungroup() %>%
select(-period)

# create xts object for plotting
plotdata <- xts( x=df[,-1], order.by=df$day)

# plot graph
dygraph(plotdata, main = "Room Temperature Reduction") %>%
dyAxis("x", drawGrid = FALSE) %>%
dySeries(c("minDay", "medianDay", "maxDay"),
label = "Temperature") %>%
dySeries(c("medianPeriod"),
label = "Median Period",
strokePattern = "dashed") %>%
dyOptions(colors = RColorBrewer::brewer.pal(3, "Set2")) %>%
dyEvent(x = optiDate1,
label = optiLabel1,
labelLoc = "bottom",
color = "slategray",
strokePattern = "dotted") %>%
dyEvent(x = optiDate2,
label = optiLabel2,
labelLoc = "bottom",
color = "slategray",
strokePattern = "dotted") %>%
dyLimit(tempSetpoint,
color = "red",
label = "Target Setpoint") %>%
dyRangeSelector() %>%
dyLegend(show = "always")

```

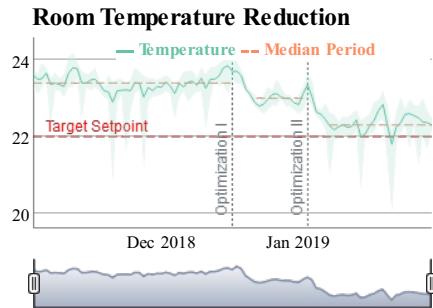

6.1.4 Discussion

In this example we used the dygraph package to create the graph. This package is fast and allows to show a rangeslider on the bottom of the graph. The exact same graph but without a slider is as well possible with ggplot.

Please note that the calculation of the periodic median after optimization I and II starts delayed because it takes time until the building has cooled down.

6.2 Energy Consumption Before/After per Month

6.2.1 Task

6.2.2 Basis

6.2.3 Solution

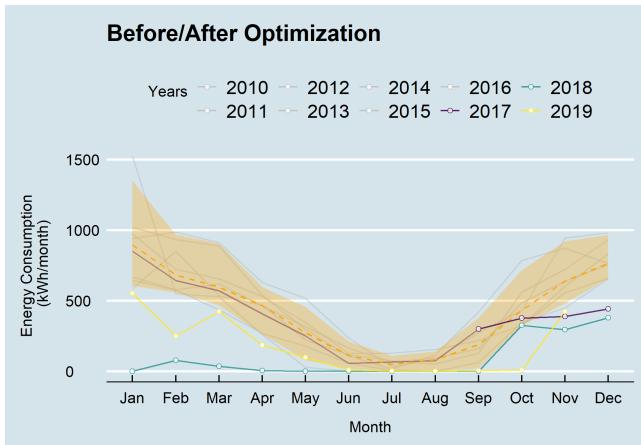


Figure 6.1: Energy Consumption Before/After Optimization

```

library(redutils)
library(dplyr)
library(plotly)
library(htmlwidgets)
library(ggthemes)

# load csv file
df <- read.csv2("https://github.com/hslu-ige-laes/edar/raw/master/sampleData/flatHeatAndHotWater.csv",
stringsAsFactors=FALSE)

# filter flat
df <- df %>% select(timestamp, Adr02_energyHeat)

colnames(df) <- c("timestamp", "meterValue")

# calculate consumption value per month
# pay attention, the value of 2010-02-01 00:00:00 represents the meter reading on february first,
# so the consumption for february first is value(march) - value(february) !
df <- df %>% mutate(value = lead(meterValue) - meterValue)

# remove counter value column
df <- df %>% select(-meterValue)

# create plot
plot <- plotEnergyConsBeforeAfter(df,
                                    dateOptimization = "2017-09-01",
                                    locTimeZone = "Europe/Zurich",
                                    titlePlot = "Before/After Optimization",
                                    titleYAxis = "Energy Consumption \n(kWh/month)"
)

# change theme (optional)
plot <- plot + ggthemes::theme_economist()

```

```
# make plot interactive (optional)
plotly <- plotly::ggplotly(plot)

# show plot
plotly
```



```
# save static plot as png
ggsave("images/plotEnergyConsBeforeAfter.png", plot)
```

```
# save interactive plot as html
library(htmlwidgets)
htmlwidgets::saveWidget(plotly, "plotlyEnergyConsBeforeAfter.html")
```

6.2.4 Discussion

6.3 Decomposition

6.3.1 Task

tbd

6.3.2 Basis

- tbd

6.3.3 Solution

Create a new script, copy/paste the following code and run it:

```
library(dplyr)
library(lubridate)
library(plotly)
library(ggseas)

# load csv file
df <- read.csv2("https://github.com/hslu-ige-laes/edar/raw/master/sampleData/flatHeatAndHotWater.csv",
                stringsAsFactors=FALSE)

# filter flat
df <- df %>% select(timestamp, Adr02_energyHeat)

colnames(df) <- c("timestamp", "meterValue")

df$timestamp <- parse_date_time(df$timestamp,
                                  orders = "YmdHMS",
                                  tz = "Europe/Zurich")


# calculate consumption value per month
# pay attention, the value of 2010-02-01 00:00:00 represents the meter reading on february first,
# so the consumption for february first is value(march) - value(february) !
df <- df %>% mutate(value = lead(meterValue) - meterValue)

# remove counter value column
df <- df %>% select(-meterValue)
df[1,2] <- 600

df.ts <- ts(df %>% select(value) %>% na.omit(), frequency = 12, start = min(year(df$timestamp)))

df2 <- ggseas::tsdf(df.ts)
p <- ggsdc(df2,
            aes(x = x, y = y),
            method = "stl",
            s.window = 12,
            facet.titles = c("Original Time Series",
                            "Trend",
                            "Seasonal Pattern",
                            "Randomness"))
) +
  geom_line(color = "darkorange", alpha = 0.7) +
  theme_minimal() +
  theme(panel.spacing = unit(1, "lines"),) +
  labs(x = "") +
  scale_x_continuous(breaks = seq(min(df2$x), max(df2$x), 1)) +
  ggtitle("Time Series Decomposition")

ggplotly(p)
```

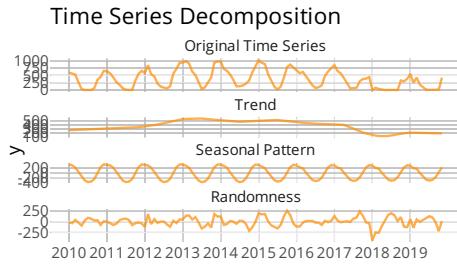

6.3.4 Discussion

tbd

6.3.5 See Also

tbd

6.4 Building Energy Signature

6.4.1 Task

You want to create a scatter plot with

- the daily mean outside temperature on the x-axis
- the daily energy consumption on the y-axis
- points colored according to season

6.4.2 Basis

- Two separate csv files with time series data from the outside temperature and the energy data with unaligned time intervals
- Energy consumption time series from a energy meter with steadily increasing meter values

6.4.3 Solution

After reading in the two time series the data has to get aggregated per day and then merged. Note that during the aggregation of the energy data you have to calculate the daily conspmption from the steadily increasing meter values as well.

Create a new script, copy/paste the following code and run it:


```
library(ggplot2)
library(plotly)
library(dplyr)
library(redutils)
library(lubridate)

# load time series data and aggregate daily mean values
dfOutsideTemp <- read.csv("https://github.com/hslu-ige-laes/edar/raw/master/sampleData/centralOutsideTemp.csv",
                           stringsAsFactors=FALSE,
                           sep =";")
dfOutsideTemp$time <- parse_date_time(dfOutsideTemp$time,
                                         order = "YmdHMS",
                                         tz = "Europe/Zurich")
dfOutsideTemp$day <- as.Date(cut(dfOutsideTemp$time, breaks = "day"))
dfOutsideTemp <- dfOutsideTemp %>%
  group_by(day) %>%
  mutate(tempMean = mean(centralOutsideTemp)) %>%
  ungroup()
dfOutsideTemp <- dfOutsideTemp %>%
  select(day, tempMean) %>%
  unique() %>%
  na.omit()
dfHeatEnergy <- read.csv("https://github.com/hslu-ige-laes/edar/raw/master/sampleData/centralHeating.csv",
                         stringsAsFactors=FALSE,
                         sep =";")
dfHeatEnergy <- dfHeatEnergy %>%
  select(time, energyHeatingMeter) %>%
  na.omit()
dfHeatEnergy$time <- parse_date_time(dfHeatEnergy$time,
                                       orders = "YmdHMS",
                                       tz = "Europe/Zurich")
dfHeatEnergy$day <- as.Date(cut(dfHeatEnergy$time, breaks = "day"))
dfHeatEnergy <- dfHeatEnergy %>%
  group_by(day) %>%
  mutate(energyMax = max(energyHeatingMeter)) %>%
  ungroup()
dfHeatEnergy <- dfHeatEnergy %>%
```

```

select(day, energyMax) %>%
  unique() %>%
  na.omit()
dfHeatEnergy <- dfHeatEnergy %>%
  mutate(energyCons = energyMax - lag(energyMax)) %>%
  select(-energyMax) %>%
  na.omit()
# merge the data in a tidy format
df <- merge(dfOutsideTemp, dfHeatEnergy, by = "day")
# calculate season
df <- df %>% mutate(season = reutils::getSeason(df$day))
# static chart with ggplot
p <- ggplot2::ggplot(df) +
  ggplot2::geom_point(aes(x = tempMean,
                           y = energyCons,
                           color = season,
                           alpha = 0.1,
                           text = paste("</br>Date: ", as.Date(df$day),
                                       "</br>Temp: ", round(df$tempMean, digits = 1), "\u00b0C",
                                       "</br>Energy: ", round(df$energyCons, digits = 0), "kWh/d",
                                       "</br>Season: ", df$season)))
  ) +
  scale_color_manual(values=c("#440154", "#2db27d", "#fde725", "#365c8d")) +
  ggtitle("Building Energy Signature") +
  theme_minimal() +
  theme(
    legend.position="none",
    plot.title = element_text(hjust = 0.5)
  )
# interactive chart
plotly::ggplotly(p, tooltip = c("text")) %>%
  layout(xaxis = list(title = "Outside temperature (\u00b0C)",
                       range = c(min(-5,min(df$tempMean)), max(35,max(df$tempMean))), zeroline = F),
         yaxis = list(title = "Daily energy consumption (kWh/d)",
                     range = c(-5, max(df$energyCons) + 10)),
         showlegend = TRUE
  ) %>%
  plotly::config(displayModeBar = FALSE, displaylogo = FALSE)

```

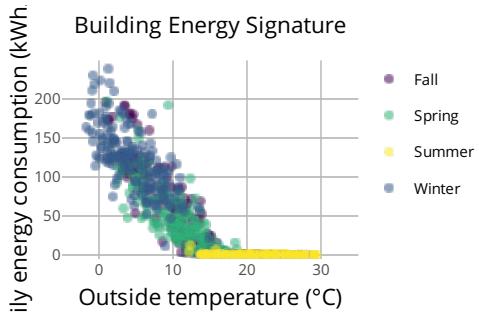

6.5 Daily Profiles - Overview

```

df <- merge(df, grid.df, all = TRUE)


# convert steadily counting energy meter value from kWh to power in kW
df <- df %>%
  mutate(value = (meterValue - lag(meterValue))*4) %>%
  select(-meterValue) %>%
  na.omit()

# remove negative values which occur because of change summer/winter time
df <- df %>% filter(value >= 0)

p <- plotDailyProfilesOverview(df, locTimeZone = "Europe/Zurich")

ggplotly(p)

```

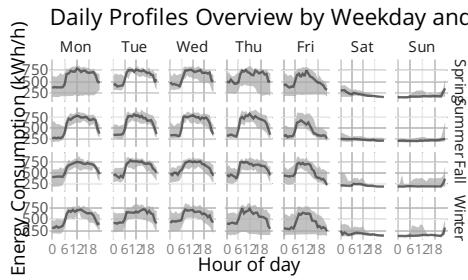

6.6 Daily Profiles - Overlaid

```

# change language to English, otherwise weekdays are in local language
Sys.setlocale("LC_TIME", "English")
## [1] "English_United States.1252"

```

```

library(plotly)
library(dplyr)
library(lubridate)

# load time series data
df <- read.csv("https://github.com/hslu-ige-laes/edar/raw/master/sampleData/eboBookEleMeter.csv",
               stringsAsFactors=FALSE,
               sep =";")

# rename column names
colnames(df) <- c("timestamp", "meterValue")

df$timestamp <- parse_date_time(df$timestamp,
                                 orders = "YmdHMS",
                                 tz = "Europe/Zurich")
df$timestamp <- force_tz(df$timestamp, tzzone = "UTC")

# uncomment to filter time range if necessary
#df <- df %>% filter(timestamp > "2015-03-01 00:00:00", timestamp < "2015-04-01 00:00:00")

# Fill missing values with NA
grid.df <- data.frame(timestamp = seq(min(df$timestamp, na.rm = TRUE),
                                       max(df$timestamp, na.rm = TRUE),
                                       by = "15 mins"))
df <- merge(df, grid.df, all = TRUE)

# convert steadily counting energy meter value from kWh to power in kW
df <- df %>%
  mutate(value = (meterValue - lag(meterValue))*4) %>%
  select(-meterValue) %>%
  na.omit()

# remove negative values which occur because of change summer/winter time
df <- df %>% filter(value >= 0)

# add metadata for later grouping and visualization purposes
df$x <- hour(df$timestamp) + minute(df$timestamp)/60 + second(df$timestamp) / 3600
df$weekday <- weekdays(df$timestamp)
df$weekday <- factor(df$weekday, c("Monday", "Tuesday", "Wednesday", "Thursday", "Friday", "Saturday", "Sunday"))
df$day <- as.Date(df$timestamp, format = "%Y-%m-%d %H:%M:%S")

df <- df %>% mutate(value = ifelse(x == 0.00, NA, df$value))

# plot graph with all time series
rangeX <- seq(0,24,0.25)
maxValue <- max(df$value, na.rm = TRUE)*1.05


df %>%
  highlight_key(~day) %>%
  plot_ly(x=~x,
          y=~value,
          color=~weekday,
          type="scatter",
          mode="lines",
          line = list(width = 1),
          alpha = 0.15,
          colors = "dodgerblue4",

```

```

text = ~day,
hovertemplate = paste("Time: ", format(df$timestamp, "%H:%M"),
                      "<br>Date: ", format(df$timestamp, "%Y-%m-%d"),
                      "<br>Value: %{y:.0f}") %>%
# workaround with add_trace to have fixed y axis when selecting a dedicated day
add_trace(x = 0, y = 0, type = "scatter", showlegend = FALSE, opacity=0) %>%
add_trace(x = 24, y = maxValue, type = "scatter", showlegend = FALSE, opacity=0) %>%
layout(title = "Daily Profiles - Overlayed",
       showlegend = TRUE,
       xaxis = list(
         title = "Hour of day",
         range = rangeX,
         tickvals = list(0, 3, 6, 9, 12, 15, 18, 21),
         showline=TRUE
       ),
       yaxis = list(
         title = "Power (kW)",
         range = c(0, maxValue)
       )
) %>%
highlight(on = "plotly_hover",
          off = "plotly_doubleclick",
          color = "orange",
          opacityDim = 1.0,
          selected = attrs_selected(showlegend = FALSE)) %>% # this hides elements in the legend
plotly::config(modeBarButtons = list(list("toImage")), displaylogo = FALSE)

```

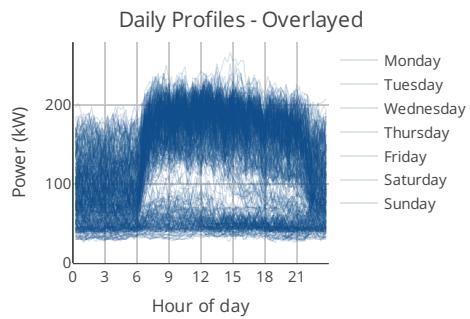

Next we want to create an overview with the mean values for each 15 minute slot per day.

Append the following code at the end of your script:


```
# Calculate Mean value for all 15 minutes for each weekday
df2 <- df %>% group_by(weekday, x) %>% mutate(dayTimeMean = mean(value)) %>% ungroup()

# shrink data frame
df2 <- df2 %>%
  select(x, weekday, timestamp, dayTimeMean) %>%
  unique() %>%
  na.omit() %>%
  arrange(weekday, x)

# plot graph with mean values
maxValMean <- max(df2$dayTimeMean, na.rm = TRUE)*1.05

df2 %>%
  highlight_key(~weekday) %>%
  plot_ly(x=~x,
          y=~dayTimeMean,
          color=~weekday,
          type="scatter",
          mode="lines",
          alpha = 0.25,
          colors = "dodgerblue4",
          text = ~weekday,
          hovertemplate = paste("Time: ", format(df2$timestamp, "%H:%M"),
                                "<br>Mean: %{y:.0f}")) %>%
  # workaround with add_trace to have fixed y axis when selecting a dedicated day
  add_trace(x = 0, y = 0, type = "scatter", showlegend = FALSE, opacity=0) %>%
  add_trace(x = 24, y = maxValMean, type = "scatter", showlegend = FALSE, opacity=0) %>%
  layout(title = "Superimposed Mean Profiles of Power Consumption per 15 min",
         showlegend = TRUE,
         xaxis = list(
           title = "Hour of day",
           tickvals = list(0, 3, 6, 9, 12, 15, 18, 21)
         ),
         yaxis = list(
           title = "Power (kW)",
           range = c(0, maxValMean)
         )
  ) %>%
  highlight(on = "plotly_hover",
            off = "plotly_doubleclick",
            color = "orange",
            opacityDim = 0.7,
            selected = attrs_selected(showlegend = FALSE)) %>% # this hides elements in the legend
  plotly::config(modeBarButtons = list(list("toImage")), displaylogo = FALSE)
```

imposed Mean Profiles of Power Consumption per

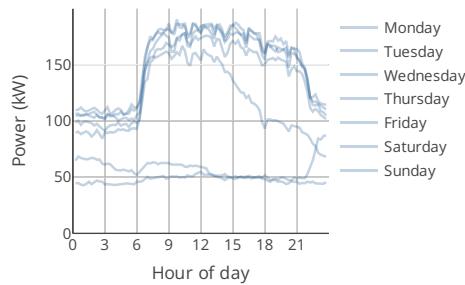

6.7 Daily Profiles - Mean

```
# change language to English, otherwise weekdays are in local language
Sys.setlocale("LC_TIME", "English")

## [1] "English_United States.1252"

library(plotly)
library(dplyr)
library(lubridate)

# load time series data
df <- read.csv("https://github.com/hslu-ige-laes/edar/raw/master/sampleData/eboBookEleMeter.csv",
               stringsAsFactors=FALSE,
               sep =";")

# rename column names
colnames(df) <- c("timestamp", "meterValue")

df$timestamp <- parse_date_time(df$timestamp,
                                 orders = "YmdHMS",
                                 tz = "Europe/Zurich")
df$timestamp <- force_tz(df$timestamp, tzzone = "UTC")
```

```

# uncomment to filter time range if necessary
#df <- df %>% filter(timestamp > "2015-03-01 00:00:00", timestamp < "2015-04-01 00:00:00")

# Fill missing values with NA
grid.df <- data.frame(timestamp = seq(min(df$timestamp, na.rm = TRUE),
                                         max(df$timestamp, na.rm = TRUE),
                                         by = "15 mins"))
df <- merge(df, grid.df, all = TRUE)

# convert steadily counting energy meter value from kWh to power in kW
df <- df %>%
  mutate(value = (meterValue - lag(meterValue))*4) %>%
  select(-meterValue) %>%
  na.omit()

# remove negative values which occur because of change summer/winter time
df <- df %>% filter(value >= 0)

# add metadata for later grouping and visualization purposes
df$x <- hour(df$timestamp) + minute(df$timestamp)/60 + second(df$timestamp) / 3600
df$weekday <- weekdays(df$timestamp)
df$weekday <- factor(df$weekday, c("Monday", "Tuesday", "Wednesday", "Thursday", "Friday", "Saturday", "Sunday"))

df <- df %>% mutate(value = ifelse(x == 0.00, NA, df$value))

# Calculate Mean value for all 15 minutes for each weekday
df <- df %>% group_by(weekday, x) %>% mutate(dayTimeMean = mean(value)) %>% ungroup()

# shrink data frame
df <- df %>%
  select(x, weekday, timestamp, dayTimeMean) %>%
  unique() %>%
  na.omit() %>%
  arrange(weekday, x)

# plot graph with mean values
maxValMean <- max(df$dayTimeMean, na.rm = TRUE)*1.05


df %>%
  highlight_key(~weekday) %>%
  plot_ly(x=~x,
          y=~dayTimeMean,
          color=~weekday,
          type="scatter",
          mode="lines",
          alpha = 0.25,
          colors = "dodgerblue4",
          text = ~weekday,
          hovertemplate = paste("Time: ", format(df$timestamp, "%H:%M"),
                                "<br>Mean: %{y:.0f}")) %>%
  # workaround with add_trace to have fixed y axis when selecting a dedicated day
  add_trace(x = 0, y = 0, type = "scatter", showlegend = FALSE, opacity=0) %>%
  add_trace(x = 24, y = maxValMean, type = "scatter", showlegend = FALSE, opacity=0) %>%
  layout(title = "Daily Profiles - Mean",
         showlegend = TRUE,
         xaxis = list(
           title = "Hour of day",

```

```

        tickvals = list(0, 3, 6, 9, 12, 15, 18, 21)
    ),
    yaxis = list(
        title = "Power (kW)",
        range = c(0, maxValMean)
    )
) %>%
highlight(on = "plotly_hover",
           off = "plotly_doubleclick",
           color = "orange",
           opacityDim = 0.7,
           selected = attrs_selected(showlegend = FALSE)) %>% # this hides elements in the legend
plotly::config(modeBarButtons = list(list("toImage")), displaylogo = FALSE)

```

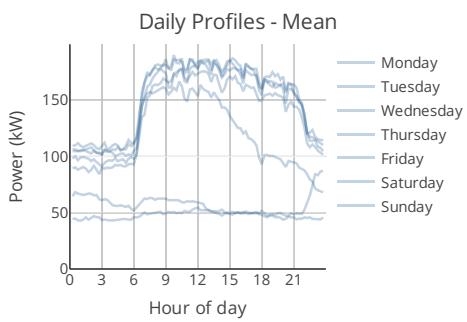

6.8 Mollier hx Diagram

6.8.1 Task

You want to plot a mollier h-x diagram with

- scatter plot of temperature- and humidity sensor data (mean values per day)
- points colored according to season

- comfort zone

6.8.2 Basis

- A csv file with time series from multiple temperature and humidity sensors in °C and %rH

6.8.3 Solution

The sensor data is not in a constant intervall and not yet aggregated. So after reading in the time series the data has to get filtered and aggregated per day.

Finally use the plot function `mollierHxDiagram` from the `redutils` package (R Energy Data Utilities). If you have not yet installed this package, proceed as follows:

```
install.packages("devtools")
library(devtools)
install_github("hslu-ige-laes/redutils")
```

Create a new script, copy/paste the following code and run it:

```
library(redutils)
library(dplyr)
library(lubridate)

# read and print data
data <- read.csv("https://github.com/hslu-ige-laes/edar/raw/master/sampleData/flatTempHum.csv",
                 stringsAsFactors=FALSE,
                 sep =";")

# select temperature and humidity and remove empty cells
data <- data %>% select(time, FlatA_Temp, FlatA_Hum) %>% na.omit()

# create column with day for later grouping
data$time <- parse_date_time(data$time, "YmdHMS", tz = "Europe/Zurich")
data$day <- as.Date(cut(data$time, breaks = "day"))

# calculate daily mean of temperature and humidity
data <- data %>%
  group_by(day) %>%
  mutate(tempMean = mean(as.numeric(FlatA_Temp)),
         humMean = mean(as.numeric(FlatA_Hum)))
  ) %>%
ungroup()

# shrink down to daily values and remove rows with empty values
data <- data %>% select(day, tempMean, humMean) %>% unique() %>% na.omit()

# plot mollier hx diagram
plotMollierHx(data)
```

6.9 SIA 180 Thermal Comfort

6.9.1 Task

You want to plot a diagram like the one from the SIA 180:2014 which shows

- scatter plot of indoor- and outdoor temperature sensor data (indoor mean of day, outdoor mean of last 48 hours)
- points colored according to season
- different comfort lines

6.9.2 Basis

- A csv file with time series from multiple temperature and humidity sensors in °C
- A csv file with the outdoor temperature

6.9.3 Solution

The sensor data is not in a constant intervall and not yet aggregated. So after reading in the time series the data has to get filtered, aggregated per day and merged.

Create a new script, copy/paste the following code and run it:

```

library(redutils)
library(dplyr)
library(lubridate)
library(zoo)
library(plotly)

# load time series data and aggregate mean values
dfTemp0a <- read.csv("https://github.com/hslu-ige-laes/edar/raw/master/sampleData/centralOutsideTemp.csv",
                      stringsAsFactors=FALSE,
                      sep =";")

dfTemp0a$time <- parse_date_time(dfTemp0a$time,
                                    order = "YmdHMS",
                                    tz = "UTC")

dfTemp0a$hour <- cut(dfTemp0a$time, breaks = "hour")

dfTemp0a <- dfTemp0a %>%
  group_by(hour) %>%
  mutate(tempMean = mean(centralOutsideTemp)) %>%
  ungroup() %>%
  select(time, tempMean) %>%
  unique()

# Fill missing values with NA
grid.df <- data.frame(time = seq(min(dfTemp0a$time, na.rm = TRUE),
                                   max(dfTemp0a$time, na.rm = TRUE),
                                   by = "hour"))
dfTemp0a <- merge(dfTemp0a, grid.df, all = TRUE)

dfTemp0a <- dfTemp0a %>%
  mutate(temp0a = rollmean(tempMean, 48, fill = NA, align = "right"))

dfTemp0a <- dfTemp0a %>%
  select(time, temp0a) %>%
  unique() %>%
  na.omit()

dfTempR <- read.csv("https://github.com/hslu-ige-laes/edar/raw/master/sampleData/flatTempHum.csv",
                     stringsAsFactors=FALSE,
                     sep =";")

dfTempR$time <- parse_date_time(dfTempR$time,
                                 order = "YmdHMS",
                                 tz = "UTC")

# select temperature and humidity and remove empty cells

```

```

dfTempR <- dfTempR %>% select(time, FlatA_Temp) %>% na.omit()

dfTempR$hour <- cut(dfTempR$time, breaks = "hour")

dfTempR <- dfTempR %>%
  group_by(hour) %>%
  mutate(tempR = mean(FlatA_Temp)) %>%
  ungroup() %>%
  select(time, tempR) %>%
  unique()

# Fill missing values with NA
grid.df <- data.frame(time = seq(min(dfTempR$time, na.rm = TRUE),
                                 max(dfTempR$time, na.rm = TRUE),
                                 by = "hour"))
dfTempR <- merge(dfTempR, grid.df, all = TRUE)

data <- merge(dfTempR, dfTemp0a, all = TRUE) %>% unique() %>% na.omit()

data$season <- reldists::getSeason(data$time)

# plot diagram

# axis properties
minx <- floor(min(0, min(data$temp0a)))
maxx <- ceiling(max(28, max(data$temp0a)))

miny <- floor(min(21.0,min(data$tempR)))-1
maxy <- ceiling(max(32.0,max(data$tempR)))+1

# line setpoint heat
df.heatSp <- data.frame(temp0a = c(minx, 19, 23.5, maxx), tempR = c(20.5, 20.5, 22, 22))

# line setpoint cool according to SIA 180:2014 Fig. 4
df.coolSp1 <- data.frame(temp0a = c(minx, 12, 17.5, maxx),tempR = c(24.5, 24.5, 26.5, 26.5))

# line setpoint cool according to SIA 180:2014 Fig. 3
df.coolSp2 <- data.frame(temp0a = c(minx, 10, maxx),tempR = c(25, 25, 0.33 * maxx + 21.8))

data %>%
  plot_ly(showlegend = TRUE) %>%
  add_lines(data = df.coolSp2,
            x = ~temp0a,
            y = ~tempR,
            name = "Upper limit SIA 180 passive cooling",
            opacity = 0.7,
            color = "#FDE725FF",
            hoverinfo = "text",
            text = ~ paste("Upper limit SIA 180 passive cooling",
                          "<br />TempR: ", sprintf("%.1f \u00b0C", tempR),
                          "<br />Temp0a: ", sprintf("%.1f \u00b0C", temp0a)
                        )
  ) %>%
  add_lines(data = df.coolSp1,
            x = ~temp0a,
            y = ~tempR,
            name = "Upper limit SIA 180 active cooling",
            opacity = 0.7,
            color = "#2ECC71"
  )


```

```

    opacity = 0.7,
    color = "#1E9B8AFF",
    hoverinfo = "text",
    text = ~ paste("Upper limit SIA 180 active cooling",
                  "<br />TempR: ", sprintf("%.1f \u00B0C", tempR),
                  "<br />Temp0a: ", sprintf("%.1f \u00B0C", temp0a)
    )      ) %>%
add_lines(data = df.heatSp,
          x = ~temp0a,
          y = ~tempR,
          name = "Lower Limit SIA 180",
          opacity = 0.7,
          color = "#440154FF",
          hoverinfo = "text",
          text = ~ paste("Lower Limit SIA 180",
                        "<br />TempR: ", sprintf("%.1f \u00B0C", tempR),
                        "<br />Temp0a: ", sprintf("%.1f \u00B0C", temp0a)
    )      ) %>%
add_markers(data = data %>% filter(season == "Spring"),
            x = ~temp0a,
            y = ~tempR,
            name = "Spring",
            marker = list(color = "#2db27d", opacity = 0.1),
            hoverinfo = "text",
            text = ~ paste("TempR: ", sprintf("%.1f \u00B0C", tempR),
                          "<br />Temp0a: ", sprintf("%.1f \u00B0C", temp0a),
                          "<br />Date:      ", time,
                          "<br />Season:   ", season
    )
) %>%
add_markers(data = data %>% filter(season == "Summer"),
            x = ~temp0a,
            y = ~tempR,
            name = "Summer",
            marker = list(color = "#febc2b", opacity = 0.1),
            hoverinfo = "text",
            text = ~ paste("TempR:   ", sprintf("%.1f \u00B0C", tempR),
                          "<br />Temp0a: ", sprintf("%.1f \u00B0C", temp0a),
                          "<br />Date:      ", time,
                          "<br />Season:   ", season
    )
) %>%
add_markers(data = data %>% filter(season == "Fall"),
            x = ~temp0a,
            y = ~tempR,
            name = "Fall",
            marker = list(color = "#440154", opacity = 0.1),
            hoverinfo = "text",
            text = ~ paste("TempR:   ", sprintf("%.1f \u00B0C", tempR),
                          "<br />Temp0a: ", sprintf("%.1f \u00B0C", temp0a),
                          "<br />Date:      ", time,
                          "<br />Season:   ", season
    )
) %>%
add_markers(data = data %>% filter(season == "Winter"),
            x = ~temp0a,
            y = ~tempR,

```

```
name = "Winter",
marker = list(color = "#365c8d", opacity = 0.1),
hoverinfo = "text",
text = ~ paste("TempR: ", sprintf("%.1f \u00b0C", tempR),
              "<br />Temp0a: ", sprintf("%.1f \u00b0C", temp0a),
              "<br />Date:      ", time,
              "<br />Season:   ", season
            )
)
) %>%
layout(
  xaxis = list(title = "Moving average outdoor temperature in \u00b0C over 48 hours",
               range = c(minx, maxx),
               zeroline = FALSE,
               tick0 = minx,
               dtick = 2,
               titlefont = list(size = 14, color = "darkgrey")),
  yaxis = list(title = "Room Temperature in \u00b0C",
               range = c(miny, maxy),
               dtick = 1,
               titlefont = list(size = 14, color = "darkgrey")),
  hoverlabel = list(align = "left"),
  margin = list(l = 80, t = 50, r = 50, b = 10),
  legend = list(orientation = 'h',
                x = 0.0,
                y = -0.3)
)
) %>%
plotly::config(modeBarButtons = list(list("toImage")),
               displaylogo = FALSE,
               toImageButtonOptions = list(
                 format = "svg"
               )
)
```

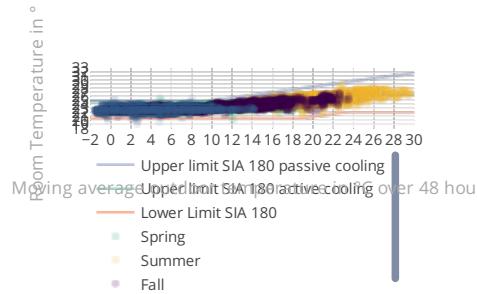

6.9.4 Discussion

tbd

6.9.5 See Also

tbd

6.10 Electricity Consumption Residential

6.10.1 Task

You want to plot an electricity consumption diagram which shows

- upper plot with daily energy consumption in kWh/day
- lower plot with standby-losses in Watts

Additionaly we would like to see the consumption of an average Swiss household.

6.10.2 Basis

- A csv file with time series of an electric meter in 15 minute interval.

6.10.3 Solution

Create a new script, copy/paste the following code and run it:

```
library(reddutils)
library(dplyr)
library(lubridate)
library(zoo)
library(plotly)

# load time series data and aggregate mean values
df <- read.csv("https://github.com/hslu-ige-laes/edar/raw/master/sampleData/flatElectricity.csv",
               stringsAsFactors=FALSE,
               sep =";")

df$time <- parse_date_time(df$time,
                            order = "YmdHMS",
                            tz = "UTC")

# select room
df <- df %>% select(time, FlatC_Ele)

# rename columns
colnames(df) <- c("timestamp", "meterValue")

# filter timerange
df <- df %>% filter(timestamp > "2019-07-01")

# Fill missing values with NA
grid.df <- data.frame(timestamp = seq(min(df$timestamp, na.rm = TRUE),
                                         max(df$timestamp, na.rm = TRUE),
                                         by = "15 mins"))
df <- merge(df, grid.df, all = TRUE)

# convert steadily counting energy meter value from kWh to power in kW
df <- df %>%
  mutate(value = (meterValue - lag(meterValue))) %>%
  select(-meterValue)

# remove negative values which occur because of change summer/winter time
df <- df %>% filter(value >= 0)

# determine date related parameters for later filtering
df$day <- as.Date(df$time, tz = "UTC")
df$week <- lubridate::week(df$time)
df$month <- lubridate::month(df$time)
df$year <- lubridate::year(df$time)

# data cleansing
# tag NA
```

```

df <- df %>% mutate(deleteNA = ifelse(is.na(value), 1, 0))

# tag values below 0 and higher than 9.2 kW
df <- df %>% mutate(deleteHiLoVal = ifelse(value > 9.2, 1, ifelse(value < 0, 1, 0)))
# Assumption max. fuse 40 ampere (higher fuses for single family houses)
# this results in continuous power 9.2 kW
# this results in an hourly consumption of 9.2kWh
# over 24h = approx. 221 kWh max. consumption per day

# tag whole days which have one or more values to delete, keep only whole valid days
df <- df %>%
  group_by(day) %>%
  mutate(delete = sum(deleteNA, na.rm = TRUE) + sum(deleteHiLoVal, na.rm = TRUE))

df <- df %>% ungroup()

# delete full days with invalid data
df <- df %>%
  filter(delete == 0) %>%
  select(-deleteNA, -deleteHiLoVal, -delete)

# determine season for later filtering
df <- df %>% mutate(season = redutils::getSeason(timestamp))

# calculate sum and min per day
df <- df %>% group_by(day) %>% mutate(sum = sum(value))
df <- df %>% group_by(day) %>% mutate(min = min(value)*1000*4)
df <- df %>% ungroup()

df <- df %>% select(day, sum, min, season) %>% unique()

df <- df %>% mutate(ravgUsage = zoo::rollmean(x=sum, 7, fill = NA))
df <- df %>% mutate(rminStandby = -1 * zoo::rollmaxr(x = -1 * min, 7, fill = NA))

typEleConsVal <- redutils::getTypEleConsHousehold(occupants = 2, rooms = 3.5, bldgType = "multi", laundry = "hotWaterSup")

# Plot

minY <- 0
maxYUsage <- max(df %>% select(sum), na.rm=TRUE)
maxYUsage <- maxYUsage * typEleConsVal/365
maxYStandby <- max(max(df %>% select(min), na.rm=TRUE), 0.25*maxYUsage/24*1000)
minX <- min(df$day)
maxX <- max(df$day)
averageUsage <- mean(df$sum, na.rm=TRUE)
averageStandby <- mean(df$rminStandby, na.rm=TRUE)
shareStandby <- nrow(df %>% select(sum) %>% na.omit()) * averageStandby * 24 / (1000 * sum(df$sum, na.rm=TRUE)) * 100

# legend
l <- list(
  orientation = "h",
  tracegroupgap = "20",
  font = list(size = 8),
  xanchor = "center",
  x = 0.5,
  itemclick = FALSE
)

```

```

)
fig1 <- df %>%
  plot_ly(x = ~day, showlegend = TRUE) %>%
  add_trace(data = df %>% filter(season == "Spring"),
             type = "bar",
             y = ~sum,
             name = "Spring",
             legendgroup = "group1",
             marker = list(color = "#2db27d", opacity = 0.2),
             hoverinfo = "text",
             text = ~ paste("<br />daily usage:           ", sprintf("%.1f kWh/d", sum),
                           "<br />rolling average:      ", sprintf("%.1f kWh/d", ravgUsage),
                           "<br />Average vis. points: ", sprintf("%.1f kWh/d", averageUsage),
                           "<br />Date:                  ", day,
                           "<br />Season:                ", season
             )
  ) %>%
  add_trace(data = df %>% filter(season == "Summer"),
             type = "bar",
             y = ~sum,
             name = "Summer",
             legendgroup = "group1",
             marker = list(color = "#febc2b", opacity = 0.2),
             hoverinfo = "text",
             text = ~ paste("<br />rolling average:      ", sprintf("%.1f kWh/d", ravgUsage),
                           "<br />Average vis. points: ", sprintf("%.1f kWh/d", averageUsage),
                           "<br />Date:                  ", day,
                           "<br />Season:                ", season
             )
  ) %>%
  add_trace(data = df %>% filter(season == "Fall"),
             type = "bar",
             y = ~sum,
             name = "Fall",
             legendgroup = "group1",
             marker = list(color = "#440154", opacity = 0.2),
             hoverinfo = "text",
             text = ~ paste("<br />rolling average:      ", sprintf("%.1f kWh/d", ravgUsage),
                           "<br />Average vis. points: ", sprintf("%.1f kWh/d", averageUsage),
                           "<br />Date:                  ", day,
                           "<br />Season:                ", season
             )
  ) %>%
  add_trace(data = df %>% filter(season == "Winter"),
             type = "bar",
             y = ~sum,
             name = "Winter",
             legendgroup = "group1",
             marker = list(color = "#365c8d", opacity = 0.2),
             hoverinfo = "text",
             text = ~ paste("<br />rolling average:      ", sprintf("%.1f kWh/d", ravgUsage),
                           "<br />Average vis. points: ", sprintf("%.1f kWh/d", averageUsage),
                           "<br />Date:                  ", day,
                           "<br />Season:                ", season
             )
  )
)
```

```

add_trace(data = df,
          type = "scatter",
          mode = "markers",
          y = ~ravgUsage,
          name = "Average Cons. (7 days)",
          legendgroup = "group2",
          marker = list(color = "orange", opacity = 0.4, symbol = "circle"),
          hoverinfo = "text",
          text = ~ paste("<br />rolling average:      ", sprintf("%.1f kWh/d", ravgUsage),
                        "<br />Average vis. points: ", sprintf("%.1f kWh/d", averageUsage),
                        "<br />Date:                  ", day,
                        "<br />Season:                ", season
                      )
        )
) %>%
add_segments(x = ~minX,
              xend = ~maxX,
              y = ~averageUsage,
              yend = ~averageUsage,
              name = "Average Cons. Total",
              legendgroup = "group2",
              line = list(color = "orange", opacity = 1.0, dash = "dot"),
              hoverinfo = "text",
              text = ~ paste("<br />rolling average:      ", sprintf("%.1f kWh/d", ravgUsage),
                            "<br />Average vis. points: ", sprintf("%.1f kWh/d", averageUsage),
                            "<br />Date:                  ", day,
                            "<br />Season:                ", season
                          )
            )
) %>%
add_segments(x = ~minX,
              xend = ~maxX,
              y = ~averageStandby*24/1000,
              yend = ~averageStandby*24/1000,
              name = "Average Standby Total",
              legendgroup = "group3",
              showlegend = FALSE,
              line = list(color = "black", opacity = 1.0, dash = "dot"),
              hoverinfo = "text",
              text = ~ paste("<br />Average standby power:      ", sprintf("%.0f W", averageStandby),
                            "<br />equals to daily energy:   ", sprintf("%.1f kWh", averageStandby*24/1000),
                            "<br />Standby percent of total cons.: ", sprintf("%.0f %%", shareStandby)
                          )
            )
) %>%
add_segments(x = ~minX,
              xend = ~maxX,
              y = ~typEleConsVal,
              yend = ~typEleConsVal,
              name = "typical household",
              legendgroup = "group4",
              line = list(color = "#481567FF", opacity = 1.0, dash = "dot"),
              hoverinfo = "text",
              text = ~ paste("<br />typical household:      ", sprintf("%.0f kWh/year", typEleConsVal*365),
                            "<br />equals to daily energy:   ", sprintf("%.1f kWh/day", typEleConsVal),
                            "<br />consumption of current flat: ", sprintf("%.1f kWh/day", averageUsage)
                          )
            )
) %>%
add_annotations(
  x = minX,

```

```

y = typEleConsVal,
text = paste0("typical comparable household ", sprintf("%.1f kWh/d", typEleConsVal)),
xref = "x",
yref = "y",
showarrow = TRUE,
arrowhead = 7,
ax = 100,
ay = -20,
font = list(color = "#481567FF")
) %>%
add_annotations(
  x = maxX,
  y = averageUsage,
  text = paste0("Average consumption ", sprintf("%.1f kWh/d", averageUsage)),
  xref = "x",
  yref = "y",
  showarrow = TRUE,
  arrowhead = 7,
  ax = -100,
  ay = -60,
  font = list(color = "orange")
) %>%
add_annotations(
  x = maxX,
  y = averageStandby*24/1000,
  text = sprintf("%.1f %%", shareStandby), " of the consumption are standby-losses"),
  xref = "x",
  yref = "y",
  showarrow = TRUE,
  arrowhead = 7,
  ax = -160,
  ay = -15,
  font = list(color = "black")
) %>%
layout(
  xaxis = list(
    title = ""
  ),
  yaxis = list(title = "Consumption<br>(kWh/d)",
    range = c(minY, maxYUsage),
    titlefont = list(size = 14, color = "darkgrey")),
  hoverlabel = list(align = "left"),
  margin = list(l = 80, t = 50, r = 50, b = 10),
  legend = l
)
)

fig2 <- df %>%
plot_ly(x = ~day, showlegend = TRUE) %>%
add_trace(data = df,
  type = "bar",
  y = ~min,
  name = "Daily standby-losses",
  legendgroup = "group3",
  marker = list(color = "darkgrey", opacity = 0.2),
  hoverinfo = "text",
  text = ~ paste("<br />daily standby:           ", sprintf("%.0f W", min),
                "<br />rolling average:      ", sprintf("%.0f W", rminStandby),

```

```

        "<br />Average vis. points: ", sprintf("%.0f W", averageStandby),
        "<br />Date:                 ", day,
        "<br />Season:                ", season
    )
) %>%
add_trace(data = df,
    type = "scatter",
    mode = "markers",
    y = ~rminStandby,
    name = "Average Standby (7 days)",
    legendgroup = "group3",
    marker = list(color = "darkgrey", opacity = 0.5, symbol = "circle"),
    hoverinfo = "text",
    text = ~ paste("<br />daily standby:           ", sprintf("%.0f W", min),
                  "<br />rolling average:      ", sprintf("%.0f W", rminStandby),
                  "<br />Average vis. points: ", sprintf("%.0f W", averageStandby),
                  "<br />Date:                 ", day,
                  "<br />Season:                ", season
    )
)
) %>%
add_segments(x = ~minX,
    xend = ~maxX,
    y = ~averageStandby,
    yend = ~averageStandby,
    name = "Average Standby Total",
    legendgroup = "group3",
    line = list(color = "black", opacity = 1.0, dash = "dot"),
    hoverinfo = "text",
    text = ~ paste("<br />Average standby power:      ", sprintf("%.0f W", averageStandby),
                  "<br />equals to daily energy:   ", sprintf("%.1f kWh", averageStandby*24/1000),
                  "<br />Standby percent of total cons.: ", sprintf("%.0f %%", shareStandby)
    )
)
) %>%
add_annotations(
    x = maxX,
    y = averageStandby,
    text = paste0(sprintf("%.0f W", averageStandby), " standby-losses on average"),
    xref = "x",
    yref = "y",
    showarrow = TRUE,
    arrowhead = 7,
    ax = -60,
    ay = -20,
    font = list(color = "black")
)
) %>%
layout(
    xaxis = list(
        title = ""
    ),
    yaxis = list(title = " Standby<br>(W)",
                  range = c(minY, maxYStandby),
                  titlefont = list(size = 14, color = "darkgrey"),
                  legend = list(orientation = 'h')),
    legend = 1
)


# calculate ratio which is visual representative for comparison

```

```

# ratio <- 1/maxYUsage * maxYStandby * 24 / 1000
ratio <- 0.3
fig <- subplot(fig1, fig2, nrows = 2, shareX = TRUE, heights = c(1-ratio, ratio), titleY = TRUE) %>%
  plotly::config(modeBarButtons = list(list("toImage")),
                 displaylogo = FALSE,
                 toImageButtonOptions = list(
                   format = "svg"
                 )
  )
fig

```

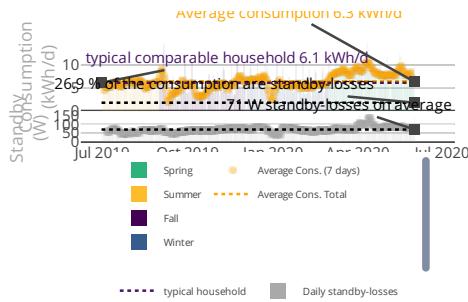

6.10.4 Discussion

tbd

6.10.5 See Also

tbd

Appendix A

Packages in R

Many functions of R are not pre-installed and must be loaded manually. R packages are similar to libraries in C, Python etc. An R package bundles useful functions, help files and data sets. You can use these functions within your own R code once you load the package.

The following chapters describe how to install, load, update and use packages.

A.1 Installing a Package

The easiest way to install an R Package is to use the RStudio tab “Packages”:

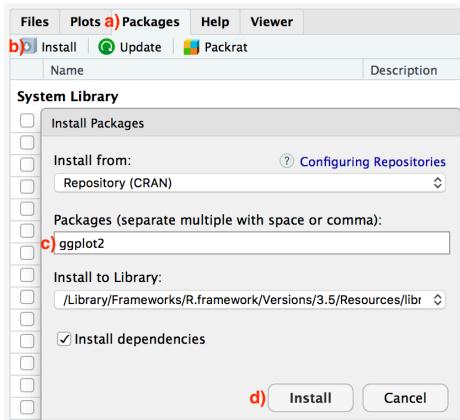


Figure A.1: Install packages via RStudio GUI

- Click on the “Packages” tab

- b) Click on “Install” next to Update
- c) Type the name of the package under “Packages, in this case type ggplot2
- d) Click “Install”

This will search for the package “ggplot” specified on a server (the so-called CRAN website). If the package exists, it will be downloaded to a library folder on your computer. Here R can access the package in future R sessions without having to reinstall it.

An other way is to use the `install.packages` function. Open R (if already opened please close all projects) and type the following at the command line:

```
install.packages("ggplot2")
```

If you want to install a package directly from github, the package “devtools” must be installed first:

```
install.packages("devtools")
library(devtools)
install_github("hslu-ige-laes/redutils")
```

A.2 Loading a Package

If you have installed a package, its functions are not yet available in your R project. To use an R package in your script, you must load it with the following command:

```
install.packages("ggplot2")
```

A.3 Upgrading Packages

R packages are often constantly updated on CRAN or GitHub, so you may want to update them once in a while with:

```
update.packages(ask = FALSE)
```