

Try again once you are ready**TO PASS** 80% or higher

Try again

GRADE**40%**

Neural Networks: Representation

LATEST SUBMISSION GRADE

40%


1. Which of the following statements are true? Check all that apply.

0 / 1 point

! Incorrect

2. Consider the following neural network which takes two binary-valued inputs $x_1, x_2 \in \{0, 1\}$ and outputs $h_{\Theta}(x)$. Which of the following logical functions does it (approximately) compute?

1 / 1 point

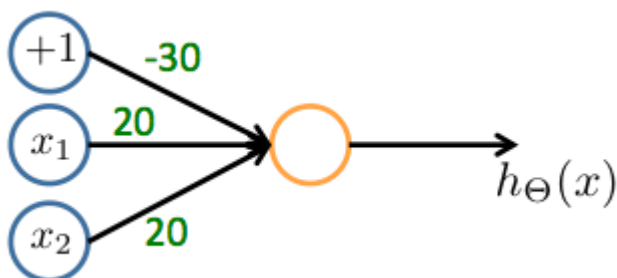


✓ Correct

3. Consider the neural network given below. Which of the following equations correctly

0 / 1 point


computes the activation $a_1^{(3)}$? Note: $g(z)$ is the sigmoid activation function.

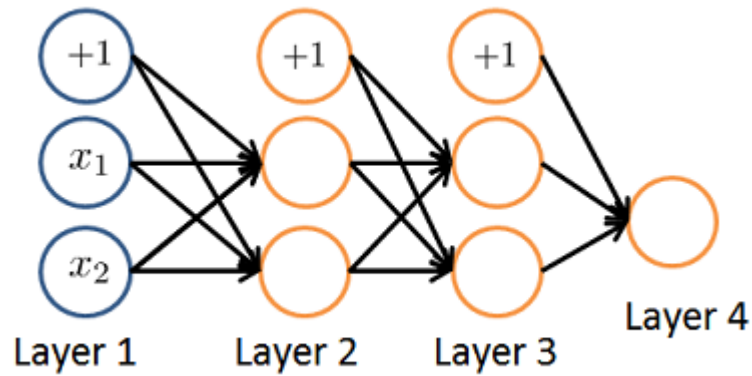

Incorrect


Coursera suggests this material **BETA**

Was this material helpful?

 Model Representation I
Video • 12 min

4. You have the following neural network:

0 / 1 point

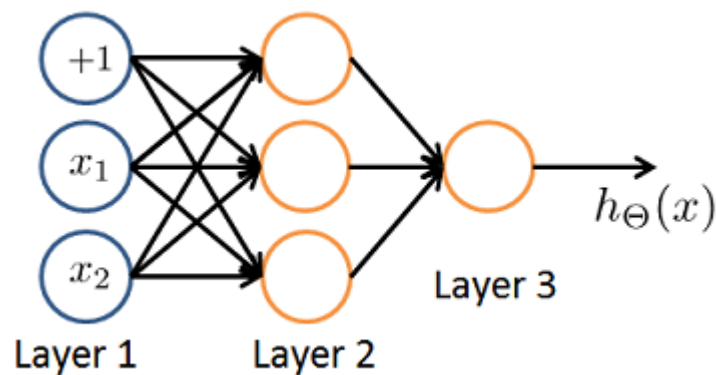

You'd like to compute the activations of the hidden layer $a^{(2)} \in \mathbb{R}^3$. One way to do so is the following Octave code:

```
% Theta1 is Theta with superscript "(1)" from lecture
% ie, the matrix of parameters for the mapping from layer 1 (input) to layer 2
% Theta1 has size 3x3
% Assume 'sigmoid' is a built-in function to compute 1 / (1 + exp(-z))


a2 = zeros (3, 1);
for i = 1:3
    for j = 1:3
        a2(i) = a2(i) + x(j) * Theta1(i, j);
    end
    a2(i) = sigmoid (a2(i));
end
```

You want to have a vectorized implementation of this (i.e., one that does not use for loops). Which of the following implementations correctly compute $a^{(2)}$? Check all that apply.

! Incorrect

5. You are using the neural network pictured below and have learned the parameters

$\Theta^{(1)} = \begin{bmatrix} 1 & 1 & 2.4 \\ 1 & 1.7 & 3.2 \end{bmatrix}$ (used to compute $a^{(2)}$) and $\Theta^{(2)} = \begin{bmatrix} 1 & 0.3 & -1.2 \end{bmatrix}$ (used to compute $a^{(3)}$) as a function of $a^{(2)}$. Suppose you swap the parameters for the first hidden layer between its two units so $\Theta^{(1)} = \begin{bmatrix} 1 & 1.7 & 3.2 \\ 1 & 1 & 2.4 \end{bmatrix}$ and also swap the output layer so $\Theta^{(2)} = \begin{bmatrix} 1 & -1.2 & 0.3 \end{bmatrix}$. How will this change the value of the output $h_{\Theta}(x)$?

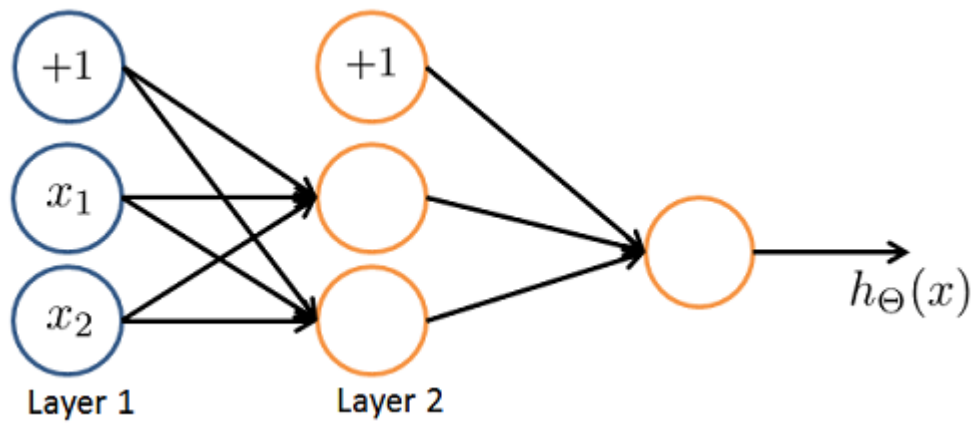

✓ Correct