

26F Stat TA Session W7



Midterm Information:

- time
- No questions about `R` will appear in midterm exam!
- No TA session in W8
- Email me to arrange the office hour if you need it!

0. Preparation for TA Session


- Download the sample code and attached datasets: `ames` & `loans_full_schema` [click here](#)
 - The former appears in W6 and the latter in W3!
- Also import the datasets into your environment

1. Final Lecture on Data Visualization


- Today we are going to introduce you to the last few things you should know when doing data visualization works!
- A well-selected and appropriate figure may be enough to see through the data, but sometimes adding some marks help others see what you see

Vertical Line/ Horizontal Line `geom_vline()` `geom_hline()`

```
ggplot(housing, aes(x = date, y = price)) +  
  geom_line(stat = "summary",  
            fun = "mean",  
            linewidth = 0.7,  
            color = "steelblue"  
  ) +  
  # add vertical line to the date with the highest average price  
  geom_vline(xintercept = as.Date("2006-09-01"),  
             color = "lightcoral")
```

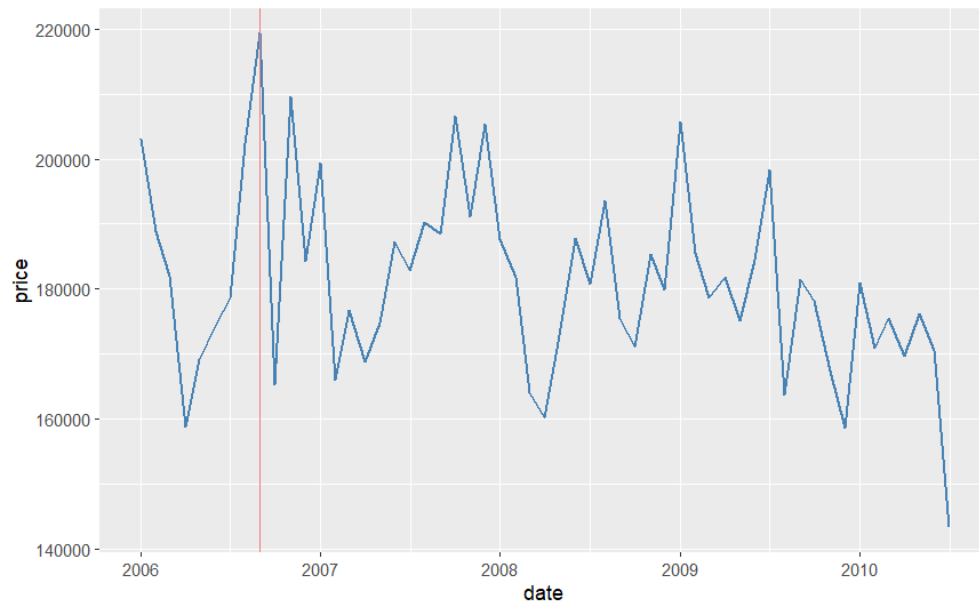

```
ggplot(housing, aes(x = date, y = price)) +
  geom_line(stat = "summary",
            fun = "mean",
            linewidth = 0.7,
            color = "steelblue"
  ) +
  geom_hline(yintercept = 180000,
             color = "gray")
```

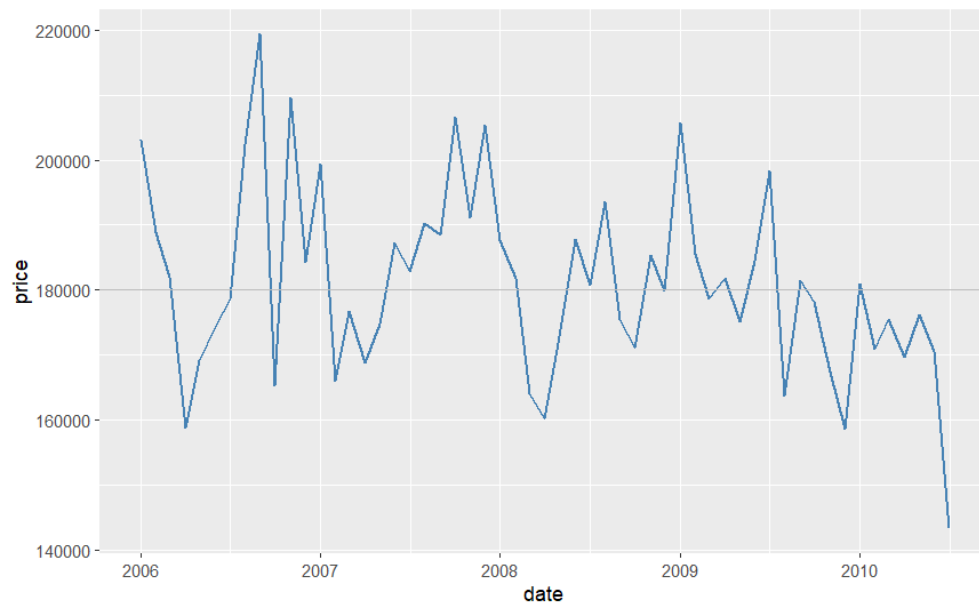

Split Figures into Groups `facet_wrap()`


- When dealing with grouped data, it is helpful to show them at the same time in smaller panels so that we can compare them directly!

- Scaling is the KEY! Use the fixed scaling for all facets unless you have a good reason not to!
 - For example, you want to show the trend for different groups instead of the exact numbers

```
ggplot(loan, aes(x = interest_rate)) +
  geom_histogram(bins = 20) +
  facet_wrap(~grade, scale = "fixed", nrow = 2) # default: fixed scaling
```

Syntax Decomposition

- `~grade` : facet by grade. Each unique grade level gets its own panel
 - This also works for multiple categories (e.g., `~grade + disbursement_method`)
- `scales =` : the default scaling is to use the fixed scaling for all panels. we can also set a different scaling method (e.g., `"free_y"` : fixed x-scaling and adjust y-scaling for each panel)
- `nrow` : place the panels in n rows
 - `ncol` also works

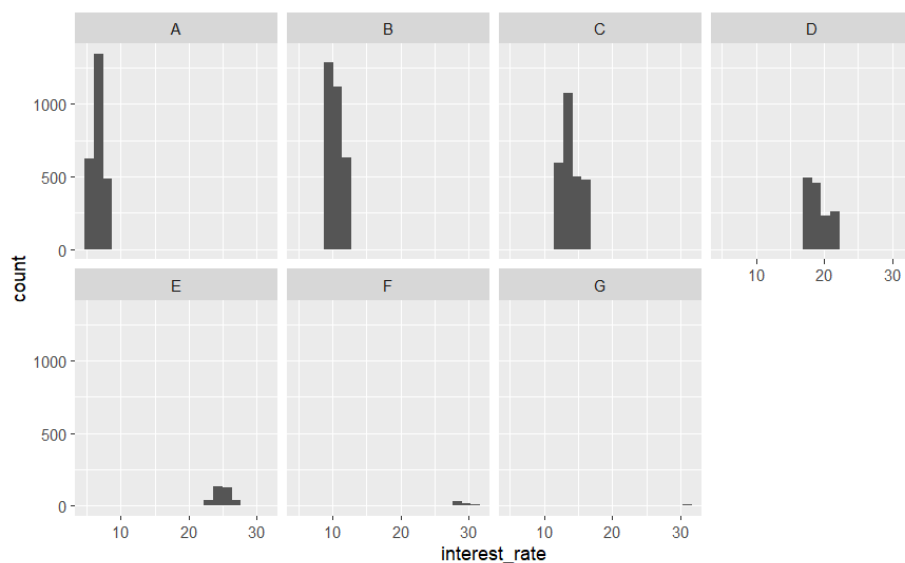


▼ Q. Should we use fixed scaling?

Ans. The answer is still: **it depends!**

- If we are comparing the counts, then we should fix the scaling
- If the overall trend is of our focus, then an adjusted y-scaling could be better!

```
ggplot(loan, aes(x = interest_rate)) +
  geom_histogram(bins = 20) +
  facet_wrap(~grade, scales = "free_y", nrow = 2) # y-axis automatically adjusted scaling
```

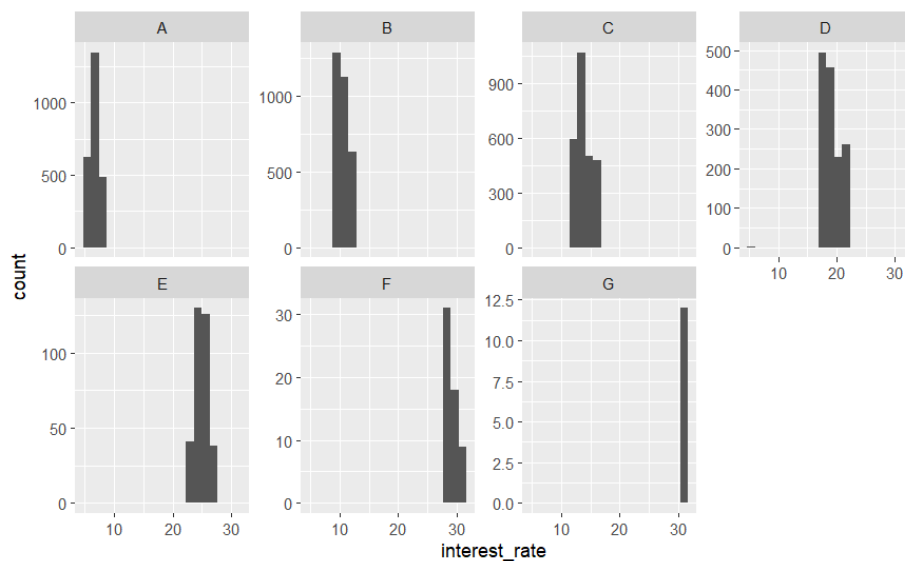

ggsave()

- The function of `ggsave` is simple: save your plots!
- By default, it saves plots to the working directory. But you can also save in the plot folder!

Path

- There are 2 ways to set the saved path
 - Type the path inside `filename`
 - Use `path = ""`

```
ggsave(filename = "C:/Users/you/figures/vline_plot.png")
ggsave(filename = "figures/vline_plot.png")
ggsave(filename = "vline_plot.png", path = "figures")
```

Customize your Plots

- One reason to use `ggsave()` (instead of simply click the produced plot and download it) is reproducibility
- Save plots in a specified format allows others to produce the exact same figure as we do
- By default, `ggsave()` saves the plot using the current plot size in `RStudio`. But we can customize the size and quality

```
ggsave(filename = "vline_plot.png",
       width = 6, # adjust the width
       height = 4,
       dpi = 300) # adjust the quality (default = 300)

# put all things together
ggsave(filename = "vline_plot.png",
```

```
plot = vline_plot,  
path = "figures",  
width = 6,  
height = 4,  
dpi = 300)
```

Exercises

W7 Exercises