ytauto – OAuth flow and upload interface

API client: ytauto (internal tool, single user = owner of the channel "Quiet Thoughts")


Google Cloud project number: 633236521221

OAuth scope: https://www.googleapis.com/auth/youtube.force-ssl

1. The channel owner authorizes ytauto once via Google's OAuth consent screen.
2. The refresh token is stored as an encrypted GitHub Actions secret.
3. A scheduled GitHub Actions workflow uploads the owner's own videos (videos.insert), sets thumbnails (thumbnails.set) and adds captions (captions.insert). There is no graphical UI and no other users.
4. Access can be revoked at security.google.com/settings/security/permissions.

Following pages: OAuth consent flow, upload workflow runs, workflow definition.

OAuth consent flow – step shown to the owner during authorization

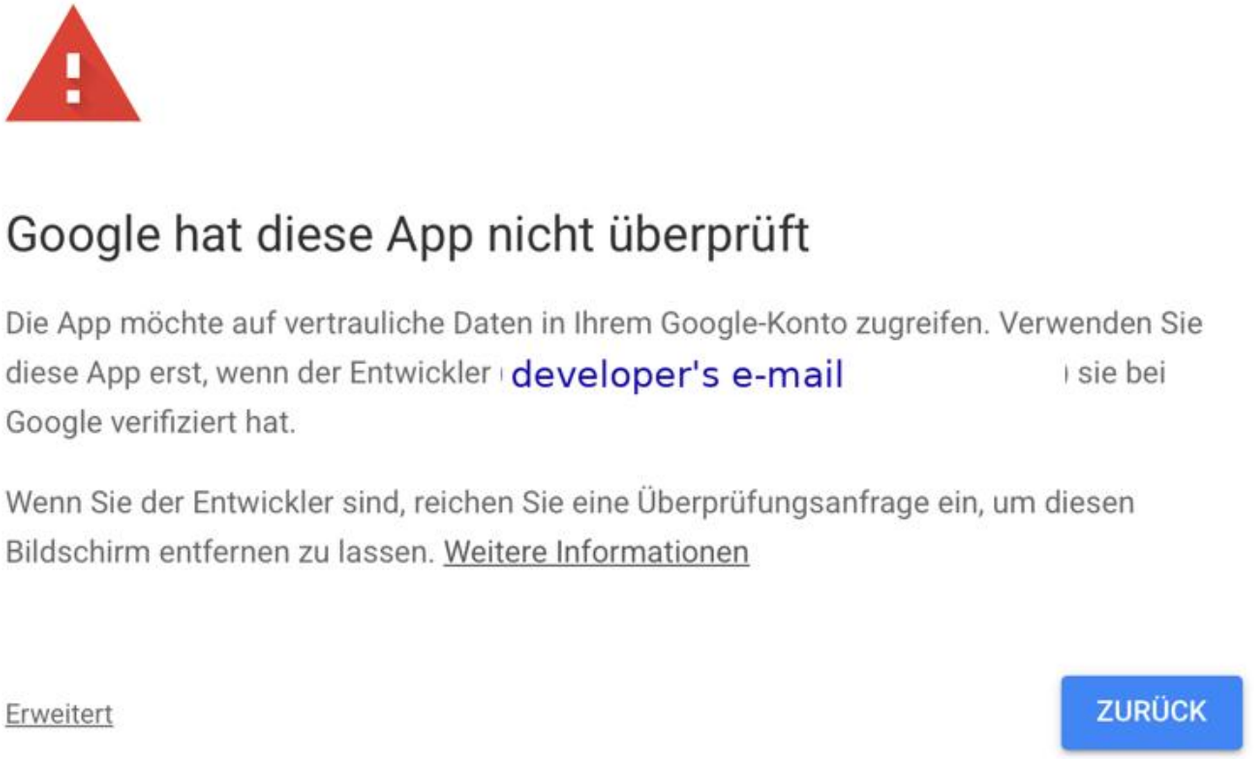

Upload interface – scheduled GitHub Actions workflow "Produce videos"

All workflows

Workflows

Produce videos

Verbindungstest

Produce videos

produce.yml

Search runs

6 workflow runs | Auto-refresh: 30s | Event | Status | Branch | Actor

Produce videos Produce videos #6: Manually run by hthkrksy54-dotcom	main	Today at 10:31 AM 4m 18s	...
Produce videos Produce videos #5: Manually run by hthkrksy54-dotcom	main	Today at 10:20 AM 4m 17s	...
Produce videos Produce videos #4: Manually run by hthkrksy54-dotcom	main	Today at 9:28 AM 13m 14s	...
Produce videos Produce videos #3: Manually run by hthkrksy54-dotcom	main	Today at 9:23 AM 1m 33s	...
Produce videos Produce videos #2: Manually run by hthkrksy54-dotcom	main	Today at 9:21 AM 1m 50s	...
Produce videos Produce videos #1: Manually run by hthkrksy54-dotcom	main	Today at 9:16 AM 1m 45s	...

Caches

Lockfile

Collapse sidebar

Upload interface – workflow definition (.github/workflows/produce.yml)

Files

main

Go to file

.github/workflows
check.yml
produce.yml
assets
config
content
docs
state
ytauto
.gitignore
PRIVACY.md
README.md
SETUP.md
TERMS.md
requirements.txt

Yt / .github / workflows / produce.yml

View runs

claude Switch script generation to Gemini/Groq free tiers (GitHub Models was... 8922595 · 3 hours ago History

Code Blame 96 lines (86 loc) · 3.1 KB Raw

```yaml
name: Produce videos

on:
  schedule:
    # Mon, Wed, Fri at 14:47 UTC (16:47 German summer time, 10:47 US Eastern)
    - cron: "47 14 * * 1,3,5"
  workflow_dispatch:
    inputs:
      langs:
        description: "Languages (space separated)"
        default: "de en"
      topic:
        description: "Topic id (empty = next in backlog)"
        default: ""
      upload:
        description: "Publish (YouTube, or GitHub release if YouTube isn't connected)"
        type: boolean
        default: true
      record:
        description: "Mark the topic as done (untick for test runs)"
        type: boolean
        default: true

permissions:
  contents: write

concurrency:
  group: produce
  cancel-in-progress: false

jobs:
  produce:
    runs-on: ubuntu-latest
    timeout-minutes: 150
    steps:
      - uses: actions/checkout@v4

      - uses: actions/setup-python@v5
        with:
          python-version: "3.12"
          cache: pip

      - name: Install ffmpeg
        run: sudo apt-get update -qq && sudo apt-get install -y -qq ffmpeg

      - name: Install Python packages
        run: pip install -r requirements.txt

      - name: Produce and publish
        env:
          GITHUB_TOKEN: ${{ secrets.GITHUB_TOKEN }}
          GEMINI_API_KEY: ${{ secrets.GEMINI_API_KEY }}
          GEMINI_MODEL: ${{ vars.GEMINI_MODEL }}
          GROQ_API_KEY: ${{ secrets.GROQ_API_KEY }}
          GROQ_MODEL: ${{ vars.GROQ_MODEL }}
          LLM_BASE_URL: ${{ vars.LLM_BASE_URL }}
          LLM_API_KEY: ${{ secrets.LLM_API_KEY }}
          LLM_MODEL: ${{ vars.LLM_MODEL }}
          YT_CLIENT_ID: ${{ secrets.YT_CLIENT_ID }}
          YT_CLIENT_SECRET: ${{ secrets.YT_CLIENT_SECRET }}
          YT_REFRESH_TOKEN_DE: ${{ secrets.YT_REFRESH_TOKEN_DE }}
          YT_REFRESH_TOKEN_EN: ${{ secrets.YT_REFRESH_TOKEN_EN }}
          IN_LANGS: ${{ github.event.inputs.langs || 'de en' }}
          IN_TOPIC: ${{ github.event.inputs.topic }}
          IN_UPLOAD: ${{ github.event.inputs.upload }}
          IN_RECORD: ${{ github.event.inputs.record }}
        run: |
          ARGS=(--langs $IN_LANGS)
          if [ -n "$IN_TOPIC" ]; then ARGS+=(--topic "$IN_TOPIC"); fi
          if [ "$IN_UPLOAD" = "false" ]; then ARGS+=(--no-upload); fi
          if [ "$IN_RECORD" = "false" ]; then ARGS+=(--no-record); fi
          python -m ytauto run "${ARGS[@]}"

      - name: Save progress (state + generated scripts)
        if: always()
        run: |
          git config user.name "ytauto-bot"
          git config user.email "41898282+github-actions[bot]@users.noreply.github.com"
          git add -A state content
          if ! git diff --cached --quiet; then
            git commit -m "Record produced videos [skip ci]"
            git pull --rebase origin "${GITHUB_REF_NAME}"
            git push origin "HEAD:${GITHUB_REF_NAME}"
          fi

      - name: Keep rendered files for review
        if: always()
        uses: actions/upload-artifact@v4
        with:
          name: videos-${{ github.run_number }}
          path: |
            out/**/*.mp4
```