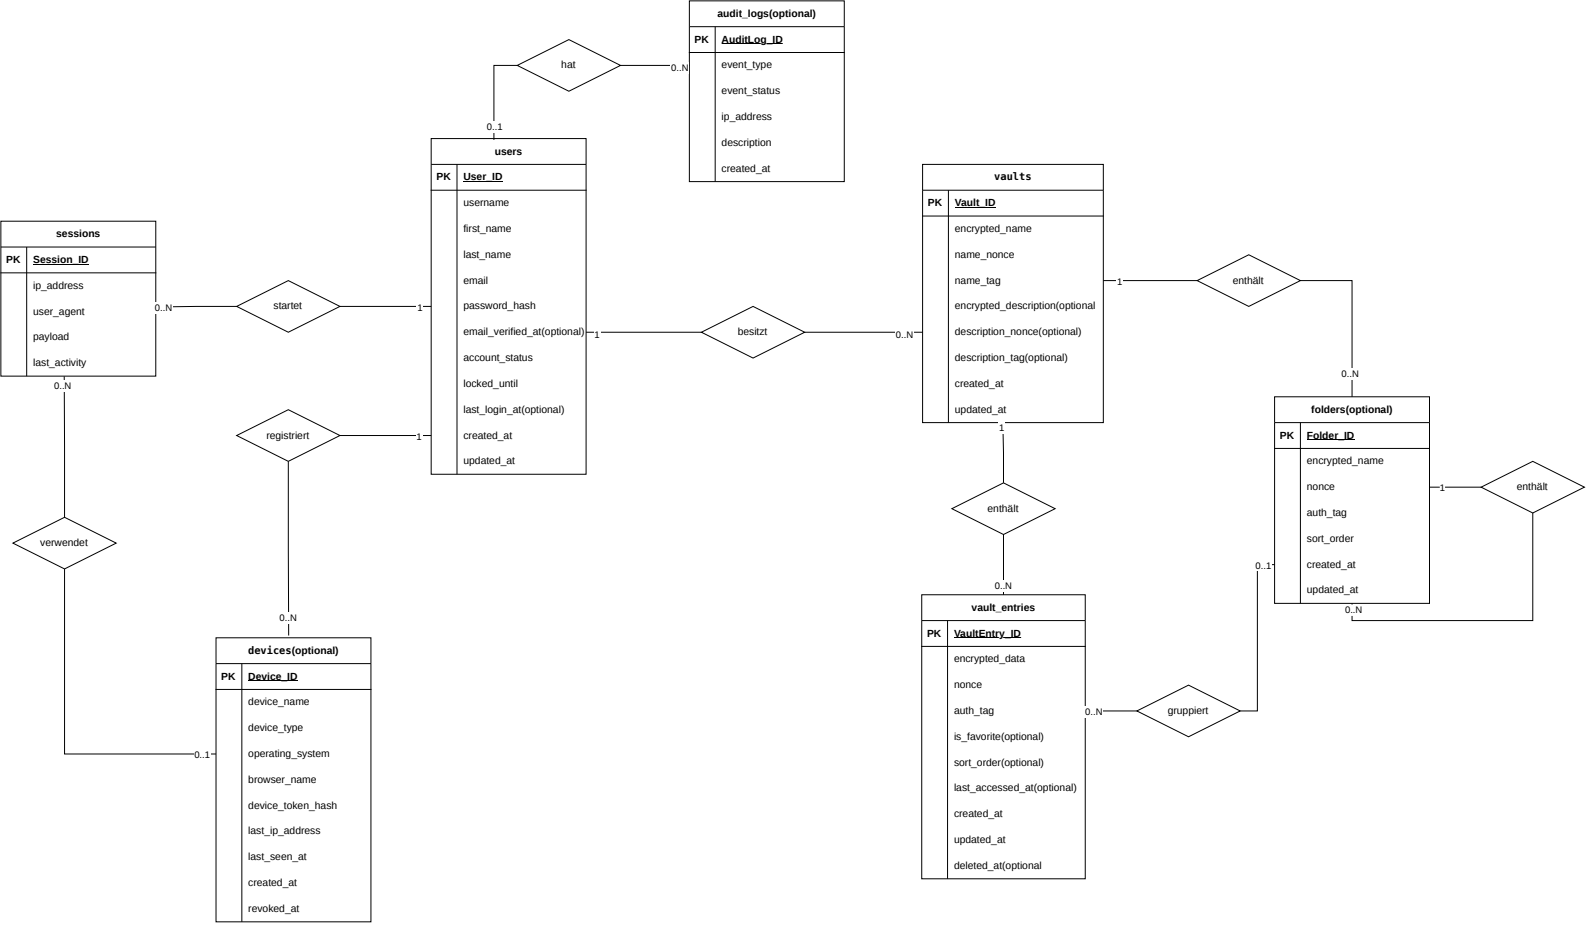


Relationenmodell

users(PK_User_ID, username, first_name, last_name, email, password_hash, email_verified_at (optional), account_status, locked_until, last_login_at (optional), created_at, updated_at)

vaults(PK_Vault_ID, FK_user_id, encrypted_name, name_nonce, name_tag, encrypted_description (optional), description_nonce (optional), description_tag (optional), created_at, updated_at)

vault_entries(PK_VaultEntry_ID, FK_vault_id, FK_folder_id (optional), encrypted_data, nonce, auth_tag, is_favorite (optional), sort_order (optional), last_accessed_at (optional), created_at, updated_at, deleted_at (optional))

sessions(PK_Session_ID, FK_user_id, FK_device_id (optional), ip_address, user_agent, payload, last_activity)

optional: folders(PK_Folder_ID, FK_vault_id, FK_parent_folder_ID (optional), encrypted_name, nonce, auth_tag, sort_order, created_at, updated_at)

optional: devices(PK_Device_ID, FK_user_id, device_name, device_type, operating_system, browser_name, device_token_hash, last_ip_address, last_seen_at, created_at, revoked_at)

optional: audit_logs(PK_AuditLog_ID, FK_user_id (nullable), event_type, event_status, ip_address, description, created_at)