HTML5 Rocks translation

Kuu Miyazaki

The original document is available at <u>HERE</u>.

About me

```
Working at a social gaming company.
History:
Musician {
Embedded software engineer {
外資系ベンダー勤務 (英語の壁) {
Current job;
```

Twitter - @miyazaqui Github - @kuu

Why me?

7 rocks!



Web Audio API の基礎



A Tale of Two Clocks -Scheduling Web Audio with Precision



Web Audio API を使用したゲーム用音声の開発



Static Memory Javascript with Object Pools



位置オーディオと WebGL の 統合




EME WTF?

An introduction to Encrypted Media Extensions



Effectively Managing Memory at Gmail scale

General workflow

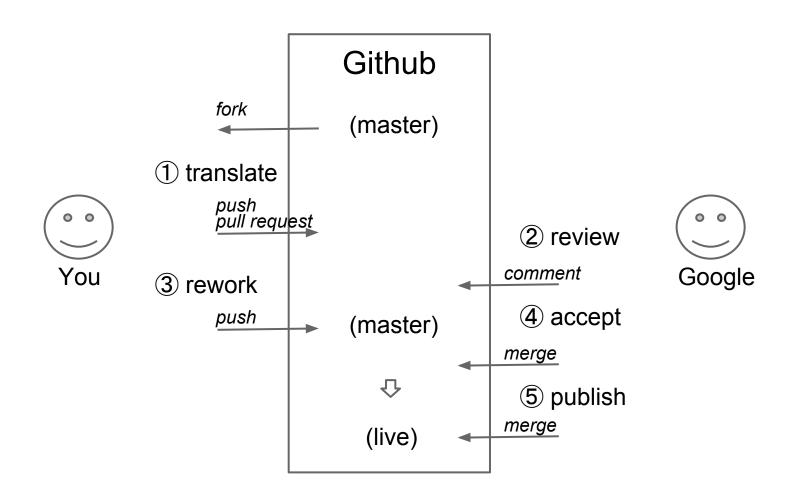

Before you start



Working with quota on mobile browsers

A research report on browser storage

Table of Contents

- Introduction
- Overview
- Details: Working with real world browsers
- + Chrome / Chrome for Android
- + Firefox / Firefox for Android
- + Android Browser
- + Safari / Safari for iOS
- + Internet Explorer
- + How to handle going over quota?
- + Conclusion



+ 日本語

♣ 하군어

Contribute another



By Eiji Kitamura


Published: January 28th, 2014 Updated: January 28th, 2014 Comments: 14

Introduction


One of the biggest evolutions happening around of persistent storage on browsers. Before HT using cookies to store some kind of data on a several choices for storing your data, dependent

The most broadly used technology is called \(\mathbf{\text{N}}\) key-value data storage which most major browb Storage has persistent storage called \(\mathbf{L}\) called \(\mathbf{SessionStorage}\) which will be cleared

WebSQL Database is a relational database is essentially deprecated and the W3C no lor meaning browsers may or may not continue to

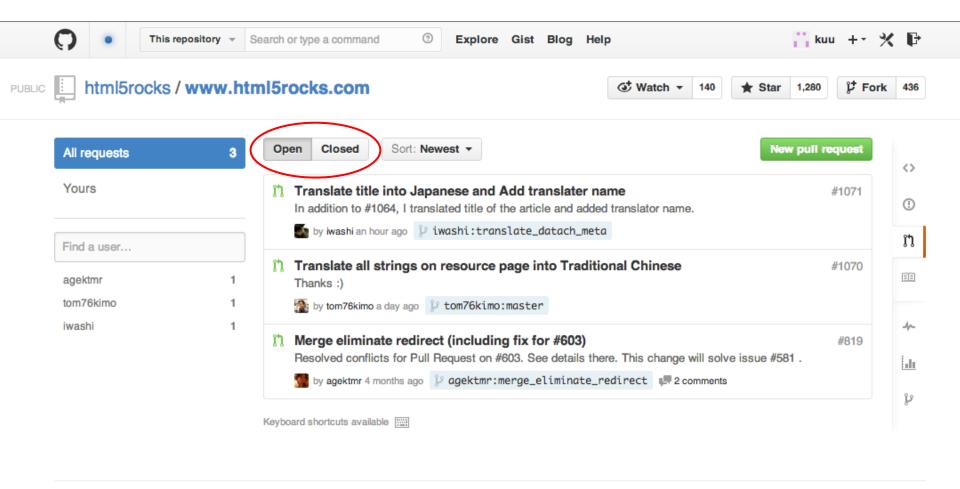

Where to go?

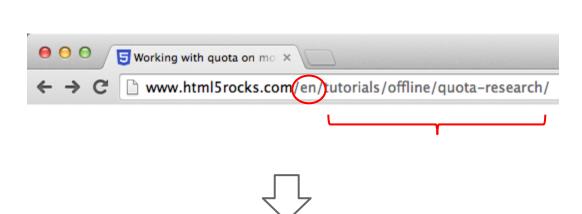



```
miyazaqui$ pwd
/Users/miyazaqui/GitHub/html5j-english/www.html5rocks.com
miyazaqui$ cd content/
miyazaqui$ tree tutorials/offline/quota-research/
tutorials/offline/quota-research/
 — en

─ index.html


    └─ index.html
    └─ static
    bsa-screenshot.png
    — chrome-inspect.png
    ff-android-permission.png

─ ie-settings.png

    ─ opera-permission.png
    -- safari-inspector.png
    -- safari-ios-permission.png
    — weinre.png
4 directories, 13 files
miyazaqui$ cd ..
miyazaqui$ ls conf/locale/ja/LC_MESSAGES/django.po
conf/locale/ja/LC_MESSAGES/django.po
```


miyazaqui\$

Step back from you work for a while.

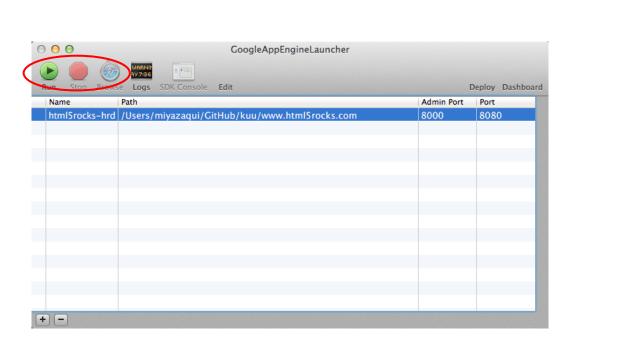

Be nice to 'en' people.

< Fixed sample code. #988

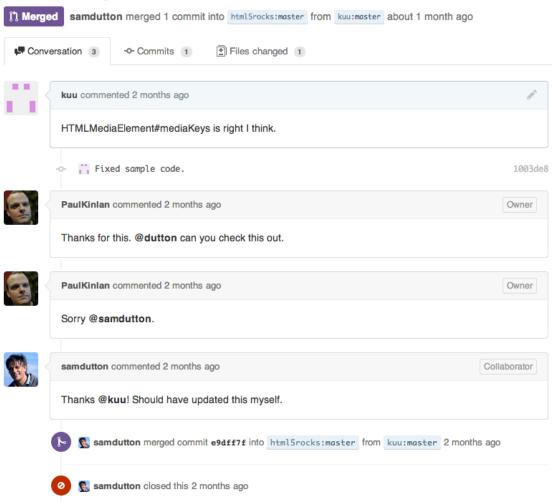

And lastly but most importantly,

```
\Theta \Theta \Theta
                index.html - /Users/mivazaqui/GitHub/html5i-english/www.html5rocks.com/content/tutorials/eme/basics/ia
🕶 🛅 ja
                                index.html
                                                      ×
    index.html
                                 {% extends "tutorial.html" %}
                                  {% block pagebreadcrumb %}{{ tut.title }}{% endblock %}
                                  {% block html5badge %}
                                <img src="/static/images/identity/html5-badge-h-multimedia.png" width="133" height="64" alt="This a</p>
                                  {% endblock %}
                                  {% block iscompatible %}
                              10 var audio = new Audio;
                             11 return typeof audio.addKey !== "undefined" ||
                                    typeof audio.webkitAddKey !== "undefined";
                                 {% endblock %}
                                 {% block translator %}
                                 <div class="translator">
                                    <strong>翻訳:</strong> <a href="https://github.com/kuu/">Kuu Miyazaki</a>
                                 </div>
                                  {% endblock %}
                              21 {% block head %}
                             22 <style>
                              23 .page header a[href^='http']:not([href*='html5rocks.']),
                              24 .tutorials a[href^='http']:not([href*='html5rocks.']),
                              25 .feed-section a[href^='http']:not([href*='html5rocks']),
                              .info-section a[href^='http']:not([href*='html5rocks.']),
                              27 article section a[href^='http']:not([href*='html5rocks']),
                              28 a[rel='external']
                              29 {
                                   background: none;
                                    padding-right: 0;
                              32 1
                              34 .h2 {
                                    font-size: 24px;
                              36 }
                              37 .h2 + h2 {
                                   margin-top: 0;
                              40 </style>
                                 {% endblock %}
                                                                                                            & master Send Feedback
                              index.html 1,1 HTML
```



By Sam Dutton

翻訳: <u>Kuu Miyazaki</u> 公開:: 1月 16th, 2014

更新:: 1月 16th, 2014

Comments: 5

https://github.com/html5rocks/www.html5rocks.com/blob/master/CONTRIBUTING.md

http://www.html5rocks.com/en/style-guide

Happy translating ;)