

# Activity Tracker

1.0

Generated by Doxygen 1.8.14



# Contents

<b>1</b>	<b>COMP-2005 Activity Tracker Documentation</b>	<b>1</b>
<b>2</b>	<b>Namespace Index</b>	<b>3</b>
2.1	Packages . . . . .	3
<b>3</b>	<b>Hierarchical Index</b>	<b>5</b>
3.1	Class Hierarchy . . . . .	5
<b>4</b>	<b>Class Index</b>	<b>7</b>
4.1	Class List . . . . .	7
<b>5</b>	<b>File Index</b>	<b>9</b>
5.1	File List . . . . .	9
<b>6</b>	<b>Namespace Documentation</b>	<b>11</b>
6.1	Package com . . . . .	11
6.2	Package com.activitytracker . . . . .	11
<b>7</b>	<b>Class Documentation</b>	<b>13</b>
7.1	com.activitytracker.ActivityTracker Class Reference . . . . .	13
7.1.1	Detailed Description . . . . .	13
7.1.2	Member Function Documentation . . . . .	13
7.1.2.1	main() . . . . .	13
7.2	com.activitytracker.CreateUserWindow Class Reference . . . . .	14
7.2.1	Detailed Description . . . . .	15
7.2.2	Constructor & Destructor Documentation . . . . .	15

7.2.2.1	CreateUserWindow()	16
7.2.3	Member Function Documentation	16
7.2.3.1	rootPanel()	16
7.2.3.2	setupActionListeners()	16
7.2.3.3	setupUI()	17
7.2.4	Member Data Documentation	17
7.2.4.1	buttonCancel	17
7.2.4.2	buttonOk	17
7.2.4.3	m_rootPanel	17
7.2.4.4	passwordField	17
7.2.4.5	textFieldEmail	18
7.2.4.6	textFieldHeight	18
7.2.4.7	textFieldName	18
7.2.4.8	textFieldWeight	18
7.3	com.activitytracker.DBManager Class Reference	18
7.3.1	Detailed Description	19
7.3.2	Constructor & Destructor Documentation	19
7.3.2.1	DBManager()	19
7.3.3	Member Function Documentation	20
7.3.3.1	createUser()	20
7.3.3.2	executeQuery()	21
7.3.3.3	executeUpdate()	22
7.3.3.4	getDateOfBirth()	22
7.3.3.5	getRunFloatAttribute()	23
7.3.3.6	getUserFloatAttribute()	24
7.3.3.7	getUserIDByEmail()	25
7.3.3.8	getUserLastRID()	26
7.3.3.9	getUserPassSalt()	27
7.3.3.10	getUserSex()	27
7.3.3.11	getUserStringAttribute()	28

7.3.3.12	<a href="#">init()</a>	30
7.3.3.13	<a href="#">isEmpty()</a>	31
7.3.3.14	<a href="#">newRun()</a>	31
7.3.3.15	<a href="#">runExists()</a>	33
7.3.3.16	<a href="#">setRun()</a>	33
7.3.3.17	<a href="#">setUserLastRID()</a>	34
7.3.3.18	<a href="#">userExists()</a>	35
7.3.4	<a href="#">Member Data Documentation</a>	35
7.3.4.1	<a href="#">m_conn</a>	36
7.4	<a href="#">com.activitytracker.Iteration3Test Class Reference</a>	36
7.4.1	<a href="#">Detailed Description</a>	36
7.4.2	<a href="#">Member Function Documentation</a>	36
7.4.2.1	<a href="#">main()</a>	36
7.5	<a href="#">com.activitytracker.LoginWindow Class Reference</a>	38
7.5.1	<a href="#">Detailed Description</a>	39
7.5.2	<a href="#">Constructor &amp; Destructor Documentation</a>	39
7.5.2.1	<a href="#">LoginWindow()</a>	39
7.5.3	<a href="#">Member Function Documentation</a>	39
7.5.3.1	<a href="#">rootPanel()</a>	39
7.5.3.2	<a href="#">setupActionListeners()</a>	40
7.5.3.3	<a href="#">setupCreateUserDialog()</a>	40
7.5.3.4	<a href="#">setupUI()</a>	41
7.5.4	<a href="#">Member Data Documentation</a>	41
7.5.4.1	<a href="#">buttonCreateUser</a>	41
7.5.4.2	<a href="#">buttonLogin</a>	41
7.5.4.3	<a href="#">labelLoginMsg</a>	41
7.5.4.4	<a href="#">labelPassword</a>	41
7.5.4.5	<a href="#">labelTitle</a>	42
7.5.4.6	<a href="#">labelUsername</a>	42
7.5.4.7	<a href="#">m_createUserDialog</a>	42

7.5.4.8	<a href="#">m_loginHandler</a>	42
7.5.4.9	<a href="#">m_rootPanel</a>	42
7.5.4.10	<a href="#">passwordField</a>	42
7.5.4.11	<a href="#">textFieldUsername</a>	43
7.6	<a href="#">com.activitytracker.MainWindow Class Reference</a>	43
7.6.1	<a href="#">Detailed Description</a>	43
7.6.2	<a href="#">Constructor &amp; Destructor Documentation</a>	43
7.6.2.1	<a href="#">MainWindow()</a>	44
7.6.3	<a href="#">Member Function Documentation</a>	44
7.6.3.1	<a href="#">rootPanel()</a>	44
7.6.3.2	<a href="#">setupActionListeners()</a>	44
7.6.3.3	<a href="#">setupUI()</a>	45
7.6.4	<a href="#">Member Data Documentation</a>	45
7.6.4.1	<a href="#">buttonAddDevice</a>	45
7.6.4.2	<a href="#">buttonMyActivity</a>	45
7.6.4.3	<a href="#">buttonMyFriends</a>	45
7.6.4.4	<a href="#">contentPanel</a>	46
7.6.4.5	<a href="#">labelProfileIcon</a>	46
7.6.4.6	<a href="#">m_rootPanel</a>	46
7.6.4.7	<a href="#">panelAddDevice</a>	46
7.6.4.8	<a href="#">panelMyActivity</a>	46
7.6.4.9	<a href="#">panelMyFriends</a>	46
7.6.4.10	<a href="#">scrollPaneMyFriends</a>	47
7.6.4.11	<a href="#">tableAvailableDevices</a>	47
7.6.4.12	<a href="#">tableMyActivity</a>	47
7.6.4.13	<a href="#">topPanel</a>	47
7.7	<a href="#">com.activitytracker.Run Class Reference</a>	47
7.7.1	<a href="#">Detailed Description</a>	48
7.7.2	<a href="#">Constructor &amp; Destructor Documentation</a>	48
7.7.2.1	<a href="#">Run()</a>	48

7.7.3	Member Function Documentation	49
7.7.3.1	getRuns()	49
7.7.3.2	newRunDataPoint()	49
7.7.4	Member Data Documentation	51
7.7.4.1	altitude_ascended	51
7.7.4.2	altitude_descended	51
7.7.4.3	caloriesBurned	51
7.7.4.4	date	51
7.7.4.5	dbManager	52
7.7.4.6	distance	52
7.7.4.7	duration	52
7.8	com.activitytracker.RunAttribute Enum Reference	52
7.8.1	Detailed Description	52
7.8.2	Member Data Documentation	53
7.8.2.1	ALTITUDE_ASCENDED	53
7.8.2.2	ALTITUDE_DESCENDED	53
7.8.2.3	DISTANCE	53
7.8.2.4	DURATION	53
7.9	com.activitytracker.SecureString Class Reference	54
7.9.1	Detailed Description	54
7.9.2	Constructor & Destructor Documentation	54
7.9.2.1	SecureString() [1/2]	54
7.9.2.2	SecureString() [2/2]	55
7.9.3	Member Function Documentation	55
7.9.3.1	equalString()	55
7.9.3.2	generateSalt()	56
7.9.3.3	generateSecureString()	56
7.9.3.4	getSalt()	58
7.9.3.5	toString()	58
7.9.4	Member Data Documentation	59

7.9.4.1	salt	59
7.9.4.2	secureString	59
7.10	com.activitytracker.User.Sex Enum Reference	59
7.10.1	Detailed Description	59
7.10.2	Member Data Documentation	59
7.10.2.1	FEMALE	60
7.10.2.2	MALE	60
7.11	com.activitytracker.User Class Reference	60
7.11.1	Detailed Description	61
7.11.2	Constructor & Destructor Documentation	61
7.11.2.1	User()	62
7.11.3	Member Function Documentation	62
7.11.3.1	createUser()	62
7.11.3.2	getDateOfBirth()	63
7.11.3.3	getEmailAddress()	63
7.11.3.4	getHeight()	64
7.11.3.5	getID()	64
7.11.3.6	getLastRID()	64
7.11.3.7	getName()	64
7.11.3.8	getSex()	65
7.11.3.9	getWeight()	65
7.11.3.10	setLastRID()	65
7.11.4	Member Data Documentation	65
7.11.4.1	dateOfBirth	65
7.11.4.2	dbManager	66
7.11.4.3	emailAddress	66
7.11.4.4	height	66
7.11.4.5	id	66
7.11.4.6	name	66
7.11.4.7	sex	66
7.11.4.8	weight	67
7.12	com.activitytracker.UserAttribute Enum Reference	67
7.12.1	Detailed Description	67
7.12.2	Member Data Documentation	67
7.12.2.1	DATE_OF_BIRTH	67
7.12.2.2	EMAIL_ADDRESS	68
7.12.2.3	HEIGHT	68
7.12.2.4	ID	68
7.12.2.5	NAME	68
7.12.2.6	PASSWORD	69
7.12.2.7	SALT	69
7.12.2.8	SEX	69
7.12.2.9	WEIGHT	69



<b>8 File Documentation</b>	<b>71</b>
8.1 app/src/com/activitytracker/ActivityTracker.java File Reference . . . . .	71
8.2 app/src/com/activitytracker/CreateUserWindow.java File Reference . . . . .	71
8.3 app/src/com/activitytracker/DBManager.java File Reference . . . . .	71
8.4 app/src/com/activitytracker/Iteration3Test.java File Reference . . . . .	72
8.5 app/src/com/activitytracker/LoginWindow.java File Reference . . . . .	72
8.6 app/src/com/activitytracker/MainWindow.java File Reference . . . . .	72
8.7 app/src/com/activitytracker/Run.java File Reference . . . . .	72
8.8 app/src/com/activitytracker/RunAttribute.java File Reference . . . . .	73
8.9 app/src/com/activitytracker/SecureString.java File Reference . . . . .	73
8.10 app/src/com/activitytracker/User.java File Reference . . . . .	73
8.11 app/src/com/activitytracker/UserAttribute.java File Reference . . . . .	73
<b>Index</b>	<b>75</b>



## Chapter 1

# COMP-2005 Activity Tracker Documentation

This website contains documentation for all source code contained in the *Activity Tracker* application. Class and method documentation may be accessed in HTML format using the left-hand side navigation bar, or the search box at the top right-hand side of the page.

For offline viewing, a precompiled PDF of this documentation has been made available [here](#) Note, however, that this document does *not* contain the full source code which is included in formatted HTML on this website.

More detailed information about contributions, repository branches, and commit history is available by browsing the [GitHub repository](#) for this project.



## Chapter 2

# Namespace Index

### 2.1 Packages

Here are the packages with brief descriptions (if available):

<a href="#">com</a> . . . . .	11
<a href="#">com.activitytracker</a> . . . . .	11



## Chapter 3

# Hierarchical Index

### 3.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

com.activitytracker.ActivityTracker . . . . .	13
com.activitytracker.DBManager . . . . .	18
com.activitytracker.Iteration3Test . . . . .	36
JDialog	
com.activitytracker.CreateUserWindow . . . . .	14
JFrame	
com.activitytracker.LoginWindow . . . . .	38
com.activitytracker.MainWindow . . . . .	43
com.activitytracker.Run . . . . .	47
com.activitytracker.RunAttribute . . . . .	52
com.activitytracker.SecureString . . . . .	54
com.activitytracker.User.Sex . . . . .	59
com.activitytracker.User . . . . .	60
com.activitytracker.UserAttribute . . . . .	67





## Chapter 4

# Class Index

### 4.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

<a href="#">com.activitytracker.ActivityTracker</a>	13
<a href="#">com.activitytracker.CreateUserWindow</a>	14
<a href="#">com.activitytracker.DBManager</a>	18
<a href="#">com.activitytracker.Iteration3Test</a>	36
<a href="#">com.activitytracker.LoginWindow</a>	38
<a href="#">com.activitytracker.MainWindow</a>	43
<a href="#">com.activitytracker.Run</a>	47
<a href="#">com.activitytracker.RunAttribute</a>	52
<a href="#">com.activitytracker.SecureString</a>	54
<a href="#">com.activitytracker.User.Sex</a>	59
<a href="#">com.activitytracker.User</a>	60
<a href="#">com.activitytracker.UserAttribute</a>	67



## Chapter 5

# File Index

### 5.1 File List

Here is a list of all files with brief descriptions:

app/src/com/activitytracker/ActivityTracker.java . . . . .	71
app/src/com/activitytracker/CreateUserWindow.java . . . . .	71
app/src/com/activitytracker/DBManager.java . . . . .	71
app/src/com/activitytracker/Iteration3Test.java . . . . .	72
app/src/com/activitytracker/LoginWindow.java . . . . .	72
app/src/com/activitytracker/MainWindow.java . . . . .	72
app/src/com/activitytracker/Run.java . . . . .	72
app/src/com/activitytracker/RunAttribute.java . . . . .	73
app/src/com/activitytracker/SecureString.java . . . . .	73
app/src/com/activitytracker/User.java . . . . .	73
app/src/com/activitytracker/UserAttribute.java . . . . .	73



## Chapter 6

# Namespace Documentation

### 6.1 Package com

#### Packages

- package [activitytracker](#)

### 6.2 Package com.activitytracker

#### Classes

- class [ActivityTracker](#)
- class [CreateUserWindow](#)
- class [DBManager](#)
- class [Iteration3Test](#)
- class [LoginWindow](#)
- class [MainWindow](#)
- class [Run](#)
- enum [RunAttribute](#)
- class [SecureString](#)
- class [User](#)
- enum [UserAttribute](#)



## Chapter 7

# Class Documentation

### 7.1 com.activitytracker.ActivityTracker Class Reference

#### Static Public Member Functions

- static void `main` (final String[] args)

#### 7.1.1 Detailed Description

The main program class.

Definition at line 28 of file ActivityTracker.java.

#### 7.1.2 Member Function Documentation

##### 7.1.2.1 main()

```
static void com.activitytracker.ActivityTracker.main (  
    final String [] args ) [static]
```

The main program entry point.

Definition at line 33 of file ActivityTracker.java.

```

33                                     {
34
35         // Create singleton instance of DBManager
36         DBManager dbManager = new DBManager();
37         if (!dbManager.init("data.db")) {
38             System.err.println("Failed to initialize DBManager");
39             System.exit(1);
40         }
41
42         // Set Look and Feel
43         try {
44             UIManager.setLookAndFeel(new MaterialLookAndFeel());
45         }
46         catch (final UnsupportedLookAndFeelException e) {
47             e.printStackTrace();
48         }
49         // Get desktop resolution of default monitor (in case of multi-monitor setups)
50         final GraphicsDevice gd = GraphicsEnvironment.getLocalGraphicsEnvironment().getDefaultScreenDevice(
51     );
52
53         // Create and populate the app window
54         final JFrame frame = new JFrame("Activity Tracker");
55         frame.setContentPane(new LoginWindow((Void) -> {
56             frame.setContentPane(new MainWindow().rootPanel());
57             frame.validate();
58             frame.repaint();
59             frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
60             frame.pack();
61         }).rootPanel());
62
63         // Set window size to be 1/2 of screen dimensions
64         frame.setSize(gd.getDisplayMode().getWidth() / 2, gd.getDisplayMode().getHeight() / 2);
65         frame.setLocationRelativeTo(null); // Center window
66         frame.setVisible(true);
67     }


```

The documentation for this class was generated from the following file:

- [app/src/com/activitytracker/ActivityTracker.java](#)


## 7.2 com.activitytracker.CreateUserWindow Class Reference

Inheritance diagram for com.activitytracker.CreateUserWindow:

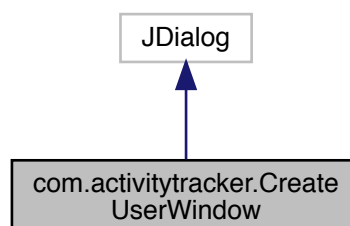



Collaboration diagram for com.activitytracker.CreateUserWindow:

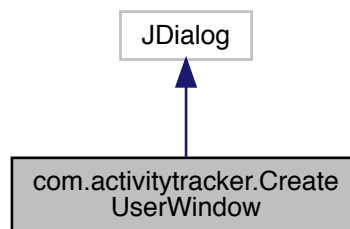

### Package Functions

- [CreateUserWindow \(\)](#)
- JPanel [rootPanel \(\)](#)

### Private Member Functions

- void [setupUI \(\)](#)
- void [setupActionListeners \(\)](#)

### Private Attributes

- JPanel [m\\_rootPanel](#)
- JTextField [textFieldName](#)
- JTextField [textFieldEmail](#)
- JPasswordField [passwordField](#)
- JButton [buttonOk](#)
- JTextField [textFieldHeight](#)
- JButton [buttonCancel](#)
- JTextField [textFieldWeight](#)

#### 7.2.1 Detailed Description

Definition at line 11 of file CreateUserWindow.java.

#### 7.2.2 Constructor & Destructor Documentation

### 7.2.2.1 CreateUserWindow()

`com.activitytracker.CreateUserWindow.CreateUserWindow ( ) [package]`

Definition at line 21 of file CreateUserWindow.java.

```
21         {
22
23         setupUI();
24         setupActionListeners();
25     }
```

## 7.2.3 Member Function Documentation

### 7.2.3.1 rootPanel()

`JPanel com.activitytracker.CreateUserWindow.rootPanel ( ) [package]`

Definition at line 48 of file CreateUserWindow.java.

```
48         {
49         return m_rootPanel;
50     }
```

### 7.2.3.2 setupActionListeners()

`void com.activitytracker.CreateUserWindow.setupActionListeners ( ) [private]`

Definition at line 32 of file CreateUserWindow.java.

```
32         {
33         buttonOk.addActionListener(new ActionListener() {
34             @Override
35             public void actionPerformed(ActionEvent e) {
36
37             }
38         });
39
40         buttonCancel.addActionListener(new ActionListener() {
41             @Override
42             public void actionPerformed(ActionEvent e) {
43
44             }
45         });
46     }
```

### 7.2.3.3 setupUI()

`void com.activitytracker.CreateUserWindow.setupUI ( ) [private]`

Definition at line 27 of file CreateUserWindow.java.

```
27         {
28             MaterialUIMovement.add(buttonCancel, MaterialColors.GRAY_100);
29             MaterialUIMovement.add(buttonOk, MaterialColors.GRAY_100);
30         }
```

## 7.2.4 Member Data Documentation

### 7.2.4.1 buttonCancel

`JButton com.activitytracker.CreateUserWindow.buttonCancel [private]`

Definition at line 18 of file CreateUserWindow.java.

### 7.2.4.2 buttonOk

`JButton com.activitytracker.CreateUserWindow.buttonOk [private]`

Definition at line 16 of file CreateUserWindow.java.

### 7.2.4.3 m\_rootPanel

`JPanel com.activitytracker.CreateUserWindow.m_rootPanel [private]`

Definition at line 12 of file CreateUserWindow.java.

### 7.2.4.4 passwordField

`JPasswordField com.activitytracker.CreateUserWindow.passwordField [private]`

Definition at line 15 of file CreateUserWindow.java.

#### 7.2.4.5 textFieldEmail

```
TextField com.activitytracker.CreateUserWindow.textFieldEmail [private]
```

Definition at line 14 of file CreateUserWindow.java.

#### 7.2.4.6 textFieldHeight

```
TextField com.activitytracker.CreateUserWindow.textFieldHeight [private]
```

Definition at line 17 of file CreateUserWindow.java.

#### 7.2.4.7 textFieldName

```
TextField com.activitytracker.CreateUserWindow.textFieldName [private]
```

Definition at line 13 of file CreateUserWindow.java.

#### 7.2.4.8 textFieldWeight

```
TextField com.activitytracker.CreateUserWindow.textFieldWeight [private]
```

Definition at line 19 of file CreateUserWindow.java.

The documentation for this class was generated from the following file:

- [app/src/com/activitytracker/CreateUserWindow.java](#)

## 7.3 com.activitytracker.DBManager Class Reference

### Public Member Functions

- void [createUser](#) (final String name, final String emailAddress, final int DOBYear, final int DOBMonth, final int DOBDay, final User.Sex sex, final float height, final float weight, final [SecureString](#) securePassword) throws AssertionError
- boolean [userExists](#) (final String emailAddress)
- int [getUserIDByEmail](#) (final String emailAddress)
- String [getUserStringAttribute](#) (final [UserAttribute](#) attribute, final int id)
- float [getUserFloatAttribute](#) (final [UserAttribute](#) attribute, final int id)
- Date [getDateOfBirth](#) (final int id)
- User.Sex [getUserSex](#) (final int id)
- byte [] [getUserPassSalt](#) (final int id)
- int [getUserLastRID](#) (final int id)
- void [setUserLastRID](#) (final int id, final int lastRID)
- int [newRun](#) (final int userID, final int year, final int month, final int day, final float duration, final float distance, final float altitude\_ascended, final float altitude\_descended)
- void [setRun](#) (final int rID, final float duration, final float distance, final float altitude\_ascended, final float altitude\_descended)
- float [getRunFloatAttribute](#) (final [RunAttribute](#) attribute, final int rID)
- boolean [runExists](#) (final int rID)

## Package Functions

- [DBManager](#) ()
- boolean [init](#) (final String dbURL)

## Private Member Functions

- ResultSet [executeQuery](#) (final String sqlQuery)
- boolean [executeUpdate](#) (final String sqlQuery)
- boolean [isEmpty](#) ()

## Private Attributes

- Connection [m\\_conn](#) = null

### 7.3.1 Detailed Description

Singleton class for the database. All classes and methods that interact with the database will use a method in this class.

Many times we are faced with the "chicken and egg" problem where we wish to create an object that is populated with information from the database. So the question one faces is, "does the object's constructor query the database (through the [DBManager](#) class, of course) for each attribute of the object that it wishes to retrieve, or do we directly interact with a [DBManager](#) method which will then return a [User](#) or [Run](#) object, for example?" We have decided to use the former methodology, with [DBManager](#) methods being as general as possible, and often accepting enum types which then are put into a switch to create the specific SQL query we wish to execute. This works best when all data returned is of the same data type (for example, the [Workout](#) class will have three float attributes at the time of writing so we use one method with return type of float for returning [Workout](#) attributes). This does not work as well when the object requires data of multiple types — for example, the [User](#) class. In this case, we have split the [DBManager](#) methods into a single method for each attribute being returned.

Polymorphism could theoretically be used here to simply have a return type of `Object`, however this is not flexible and requires casting *all* returned data to the correct type in the invoking method.

Definition at line 25 of file `DBManager.java`.

### 7.3.2 Constructor & Destructor Documentation

#### 7.3.2.1 DBManager()

```
com.activitytracker.DBManager.DBManager ( ) [package]
```

Creates a new [DBManager](#) object.

This should only be called once, from the main program, as [DBManager](#) is meant to be a *singleton* class.

This constructor takes no parameters as verification of the SQLite database is done in the [init\(\)](#) method of this class, which returns information about whether the initialization was successful or not.

Definition at line 42 of file `DBManager.java`.

```
42         {
43     }
```

### 7.3.3 Member Function Documentation

#### 7.3.3.1 createUser()

```
void com.activitytracker.DBManager.createUser (
    final String name,
    final String emailAddress,
    final int DOBYear,
    final int DOBMonth,
    final int DOBDay,
    final User.Sex sex,
    final float height,
    final float weight,
    final SecureString securePassword ) throws AssertionError
```

Adds a row for a user to the Users table in the SQLite database for the app.

Requires that the database tables exist and are in the correct format. If the user exists in the database this method raises an AssertionError exception.

##### Parameters

<i>name</i>	User's name
<i>emailAddress</i>	User's email address; used to authenticate
<i>DOBYear</i>	The year the user was born
<i>DOBMonth</i>	The month the user was born
<i>DOBDay</i>	The day of month the user was born
<i>sex</i>	The user's sex; is either <a href="#">User.Sex.MALE</a> or <a href="#">User.Sex.FEMALE</a>
<i>height</i>	Floating point number of the user's height in metres
<i>weight</i>	Floating point number of the user's weight in kilograms
<i>securePassword</i>	A <a href="#">SecureString</a> object containing the user's password, encrypted

Definition at line 61 of file DBManager.java.

```
63
64
65         if (!userExists(emailAddress)) {
66             String sqlQuery = "INSERT INTO Users (" +
67                 "email_address, " +
68                 "name, " +
69                 "date_of_birth, " +
70                 "sex, " +
71                 "height, " +
72                 "weight, " +
73                 "password_hash, " +
74                 "password_salt, " +
75                 "created_at" +
76                 ") VALUES (?, ?, ?, ?, ?, ?, ?, ?, ?)";
77             byte sexByte = sex.equals(User.Sex.MALE) ? (byte) 1 : (byte) 0;
78             java.sql.Date currentTime = new java.sql.Date(System.currentTimeMillis());
79             Calendar c = Calendar.getInstance();
80             c.set(DOBYear, DOBMonth, DOBDay);
81             java.sql.Date dateOfBirth = new java.sql.Date(
82                 c.get(Calendar.YEAR),
83                 c.get(Calendar.MONTH),
84                 c.get(Calendar.DAY_OF_MONTH)
85             );
86
87             try {
```

```

88         PreparedStatement stmt = m_conn.prepareStatement(sqlQuery);
89         stmt.setString(1, emailAddress);
90         stmt.setString(2, name);
91         stmt.setDate(3, dateOfBirth);
92         stmt.setByte(4, sexByte);
93         stmt.setFloat(5, height);
94         stmt.setFloat(6, weight);
95         stmt.setString(7, securePassword.toString());
96         stmt.setBytes(8, securePassword.getSalt());
97         stmt.setDate(9, currentTime);
98
99         if (stmt.executeUpdate() != 1) {
100             System.err.println("User not added to database.");
101         }
102
103         stmt.close();
104     }
105     catch (final SQLException e) {
106         System.err.println(e.getMessage());
107     }
108 }
109 else {
110     throw new AssertionError("User with email address '" + emailAddress + "' already exists.");
111 }
112 }

```

### 7.3.3.2 executeQuery()

```

ResultSet com.activitytracker.DBManager.executeQuery (
    final String sqlQuery ) [private]

```

A wrapper method for processing *safe* SQL queries.

By safe we mean that the SQL query string is entirely hard-coded in the program source code. In other words, no user input is added. This is an important distinction as the former may leave the application vulnerable to SQL injection.

In such cases, a SQL PreparedStatement should be used.

#### Parameters

<i>sqlQuery</i>	The SQL code to be executed. Must be a <i>SELECT</i> statement.
-----------------	---

#### Returns

This method returns a ResultSet containing the returned row(s) and/or column(s) of the SQL query that was executed.

Definition at line 680 of file DBManager.java.

```

680                                     {
681         ResultSet res = null;
682
683         try {
684             Statement stmt = m_conn.createStatement();
685             res = stmt.executeQuery(sqlQuery);
686             stmt.close();
687         }
688         catch (final SQLException e) {
689             System.err.println(e.getMessage());
690         }
691
692         return res;
693     }

```

### 7.3.3.3 executeUpdate()

```
boolean com.activitytracker.DBManager.executeUpdate (
    final String sqlQuery ) [private]
```

A wrapper method for processing *safe* SQL queries.

By safe we mean that the SQL query string is entirely hard-coded in the program source code. In other words, no user input is added. This is an important distinction as the former may leave the application vulnerable to SQL injection.

In such cases, a SQL PreparedStatement should be used.

#### Parameters

<i>sqlQuery</i>	The SQL code to be executed. Must be an <i>INSERT</i> or <i>UPDATE</i> statement.
-----------------	---

#### Returns

This method returns a boolean indicating if the query was successful.

Definition at line 708 of file DBManager.java.

```
708                                     {
709     try {
710         Statement stmt = m_conn.createStatement();
711         stmt.executeUpdate(sqlQuery);
712         stmt.close();
713     }
714     catch (final SQLException e) {
715         System.err.println(e.getMessage());
716         return false;
717     }
718
719     return true;
720 }
```

### 7.3.3.4 getDateOfBirth()

```
Date com.activitytracker.DBManager.getDateOfBirth (
    final int id )
```

Retrieves the user's date of birth (DOB) from the database.

At the time of writing, this method is only being used in the [User](#) constructor.

#### Parameters

<i>id</i>	Unique ID used to associate information in the database to this user.
-----------	---

#### Returns

This method returns a Date object containing the user's DOB (i.e., year, month, day).



Definition at line 298 of file DBManager.java.

```

298                                     {
299         Date DOB;
300         java.sql.Date DOBResult;
301         ResultSet res;
302         String sqlQuery = "SELECT date_of_birth FROM Users WHERE id=?";
303         try {
304             PreparedStatement stmt = m_conn.prepareStatement(sqlQuery);
305             stmt.setInt(1, id);
306             res = stmt.executeQuery();
307             DOBResult = res.getDate("date_of_birth");
308
309             stmt.close();
310         }
311         catch (final SQLException e) {
312             System.err.println(e.getMessage());
313             return null;
314         }
315         DOB = new Date(DOBResult.getYear(), DOBResult.getMonth(), DOBResult.getDay());
316
317         return DOB;
318     }

```

### 7.3.3.5 getRunFloatAttribute()

```

float com.activitytracker.DBManager.getRunFloatAttribute (
    final RunAttribute attribute,
    final int rID )

```

Retrieves a run's attribute as a floating point number, where applicable, from the database.

This method accepts a [RunAttribute](#) enumeration type to specify what attribute it is returning from the database. Only certain attributes are accepted by this method, namely those that are stored as real values. Attributes stored as other data types should use the appropriate accessor method.

#### Parameters

<i>attribute</i>	<p>The attribute that the method is supposed to query the DB for and return the value of. Note that only certain <a href="#">RunAttribute</a> types are supported in this method.</p> <ul style="list-style-type: none"> <li>When <i>attribute</i> is <a href="#">RunAttribute.DURATION</a>, the run's duration is returned.</li> <li>When <i>attribute</i> is <a href="#">RunAttribute.DISTANCE</a>, the run's cumulative distance is returned in metres.</li> <li>When <i>attribute</i> is <a href="#">RunAttribute.ALTITUDE_ASCENDED</a>, the run's cumulative altitude climbed is returned in metres</li> <li>When <i>attribute</i> is <a href="#">RunAttribute.ALTITUDE_DESCENDED</a>, the run's cumulative altitude descended is returned in metres</li> </ul>
<i>rID</i>	<p>Unique ID corresponding to the row in the Runs table that we wish to query. If such an ID does not exist, <i>0.0f</i> will be returned.</p>

#### Returns

This method returns a float containing run attribute as specified by the *attribute* parameter.

Definition at line 585 of file DBManager.java.

```

585                                     {
586         ResultSet res;
587         PreparedStatement stmt;
588         String sqlQuery, columnLabel;
589         float attrVal = 0.0f;
590         switch (attribute) {
591             case DURATION:
592                 columnLabel = "duration";
593                 sqlQuery = "SELECT " + columnLabel + " FROM Runs WHERE id=?";
594                 break;
595             case DISTANCE:
596                 columnLabel = "distance";
597                 sqlQuery = "SELECT " + columnLabel + " FROM Runs WHERE id=?";
598                 break;
599             case ALTITUDE_ASCENDED:
600                 columnLabel = "altitude_ascended";
601                 sqlQuery = "SELECT " + columnLabel + " FROM Runs WHERE id=?";
602                 break;
603             case ALTITUDE_DESCENDED:
604                 columnLabel = "altitude_descended";
605                 sqlQuery = "SELECT " + columnLabel + " FROM Runs WHERE id=?";
606                 break;
607             default:
608                 return attrVal;
609         }
610         if (runExists(rID)) {
611             try {
612                 stmt = m_conn.prepareStatement(sqlQuery);
613                 stmt.setInt(1, rID);
614                 res = stmt.executeQuery();
615                 attrVal = res.getFloat(columnLabel);
616             }
617             catch (final SQLException e) {
618                 System.err.println(e.getMessage());
619             }
620         }
621         else {
622             System.err.println("Run " + Integer.toString(rID) + " does not exist. Cannot get " +
columnLabel + ".");
623         }
624         return attrVal;
625     }
626 }
627 }

```

### 7.3.3.6 getUserFloatAttribute()

```

float com.activitytracker.DBManager.getUserFloatAttribute (
    final UserAttribute attribute,
    final int id )

```

Retrieves a user's attribute in floating point format, when applicable, from the database's Users table.

This method accepts a [UserAttribute](#) enumeration type to specify what attribute it is returning from the database. Only certain attributes are accepted by this method, namely those that are stored as real values. Attributes stored as other data types should use the appropriate accessor method.

#### Parameters

<i>attribute</i>	<p>The attribute that the method is supposed to query the DB for and return the value of. Note that only certain <a href="#">UserAttribute</a> types are supported in this method.</p> <ul style="list-style-type: none"> <li>When <i>attribute</i> is <a href="#">UserAttribute.WEIGHT</a>, this method retrieves the user's weight from the database.</li> <li>When <i>attribute</i> is <a href="#">UserAttribute.HEIGHT</a>, this method retrieves the user's height from the database.</li> </ul>
<i>id</i>	Unique ID used to associate information in the database to this user.

**Returns**

Returns a floating point number corresponding to the [UserAttribute](#) passed to the method, for the user specified by *id*.

Definition at line 257 of file DBManager.java.

```

257                                     {
258         float attrVal;
259         ResultSet res;
260         String sqlQuery, columnLabel;
261         switch (attribute) {
262             case WEIGHT:
263                 columnLabel = "weight";
264                 sqlQuery = "SELECT " + columnLabel + " FROM Users WHERE id=?";
265                 break;
266             case HEIGHT:
267                 columnLabel = "height";
268                 sqlQuery = "SELECT " + columnLabel + " FROM Users WHERE id=?";
269                 break;
270             default:
271                 throw new AssertionError("Incorrect UserAttribute enumeration type passed to method.");
272         }
273         try {
274             PreparedStatement stmt = m_conn.prepareStatement(sqlQuery);
275             stmt.setInt(1, id);
276             res = stmt.executeQuery();
277             attrVal = res.getFloat(columnLabel);
278
279             stmt.close();
280         }
281         catch (final SQLException e) {
282             System.err.println(e.getMessage());
283             return 0.0f;
284         }
285
286         return attrVal;
287     }

```

**7.3.3.7 getUserIDByEmail()**

```

int com.activitytracker.DBManager.getUserIDByEmail (
    final String emailAddress )

```

As we are using the user's email address as their identifying attribute, they will supply this when they log in. Hence, as the database relates everything to the user's unique ID, we must retrieve this ID given the email address.

The logic behind this method relies on the database Users table structure making *email\_address* a unique field.

**Parameters**

<i>emailAddress</i>	The user's email address with which they authenticate.
---------------------	--

**Returns**

This method returns a unique integer corresponding to the row in the database's Users table that stores user information for user with email address *emailAddress*.

Definition at line 155 of file DBManager.java.

```

155                                     {

```

```

156         int id = 0;
157         ResultSet res;
158         String sqlQuery = "SELECT id FROM Users WHERE `email_address`=?";
159         try {
160             PreparedStatement stmt = m_conn.prepareStatement(sqlQuery);
161             stmt.setString(1, emailAddress);
162             res = stmt.executeQuery();
163             id = res.getInt("id");
164
165             stmt.close();
166         }
167         catch (final SQLException e) {
168             System.err.println(e.getMessage());
169         }
170
171         return id;
172     }

```

### 7.3.3.8 getUserLastRID()

```

int com.activitytracker.DBManager.getUserLastRID (
    final int id )

```

Retrieves the last workout ID that the user added as an integer from the database.

This is used because of the format in which the data is supplied. As the only way to denote a new workout is by receiving (0, 0, 0) in the input file, if the input is *not* (0, 0, 0), we need to update the previously added workout with the latest line. Hence we need some way of storing an identifier for this workout. As this is unique to each user, we have chosen to store this in the Users table of the database.

#### Parameters

<i>id</i>	Unique ID used to associate information in the database to this user.
-----------	---

#### Returns

An integer corresponding to the last row in the Workouts table that the user created.

Definition at line 395 of file DBManager.java.

```

395                                     {
396         int rID = 0;
397         ResultSet res;
398         String columnLabel = "last_run";
399         String sqlQuery = "SELECT " + columnLabel + " FROM Users WHERE id=?";
400         try {
401             PreparedStatement stmt = m_conn.prepareStatement(sqlQuery);
402             stmt.setInt(1, id);
403             res = stmt.executeQuery();
404             rID = res.getInt(columnLabel);
405             stmt.close();
406         }
407         catch (final SQLException e) {
408             System.err.println(e.getMessage());
409         }
410
411         return rID;
412     }

```

### 7.3.3.9 getUserPassSalt()

```
byte [] com.activitytracker.DBManager.getUserPassSalt (
    final int id )
```

Retrieves a byte array containing the salt used to encrypt the user's password from the database.

This is necessary because to compare a candidate password supplied by a user to a known (encrypted) password stored in the database, we must encrypt the new candidate password using the same salt as was originally used.

#### Parameters

<i>id</i>	Unique ID used to associate information in the database to this user.
-----------	---

#### Returns

This method returns a byte array containing the user's password encryption salt.

Definition at line 366 of file DBManager.java.

```
366                                     {
367     byte[] passSalt;
368     ResultSet res;
369     String sqlQuery = "SELECT password_salt FROM Users WHERE id=?";
370     try {
371         PreparedStatement stmt = m_conn.prepareStatement(sqlQuery);
372         stmt.setInt(1, id);
373         res = stmt.executeQuery();
374         passSalt = res.getBytes("password_salt");
375         stmt.close();
376     }
377     catch (final SQLException e) {
378         System.err.println(e.getMessage());
379         return null;
380     }
381     return passSalt;
382 }
```

### 7.3.3.10 getUserSex()

```
User.Sex com.activitytracker.DBManager.getUserSex (
    final int id )
```

Retrieves the user's gender from the database.

We have chosen to represent gender in the SQLite database with the data type BIT(1), where 1 denotes male and 0 denotes female. Hence, if the database contains 1 this method returns [User.Sex.MALE](#) and if the database contains 0 then this method returns [User.Sex.FEMALE](#).

At the time of writing, this method is only being used in the [User](#) constructor.

#### Parameters

<i>id</i>	Unique ID used to associate information in the database to this user.
-----------	---

## Returns

This method returns a [User.Sex](#) enumeration type corresponding to the user's gender.

Definition at line 333 of file DBManager.java.

```
333                                     {
334     byte sex;
335     ResultSet res;
336     String sqlQuery = "SELECT sex FROM Users WHERE id=?";
337     try {
338         PreparedStatement stmt = m_conn.prepareStatement(sqlQuery);
339         stmt.setInt(1, id);
340         res = stmt.executeQuery();
341         sex = res.getBytes("sex");
342
343         stmt.close();
344     }
345     catch (final SQLException e) {
346         System.err.println(e.getMessage());
347         return null;
348     }
349
350     if (sex == (byte) 1)
351         return User.Sex.MALE;
352     else
353         return User.Sex.FEMALE;
354 }
```

### 7.3.3.11 getUserStringAttribute()

```
String com.activitytracker.DBManager.getUserStringAttribute (
    final UserAttribute attribute,
    final int id )
```

This method retrieves a string, varchar, text, or char field, when applicable, from the database's Users table.

This method accepts a [UserAttribute](#) enumeration type to specify what attribute it is returning from the database. Only certain attributes are accepted by this method, namely those that are stored as string-like values. Attributes stored as other data types should use the appropriate accessor method.

## Parameters

<i>attribute</i>	<p>The attribute that the method is supposed to query the DB for and return the value of. Note that only certain <a href="#">UserAttribute</a> types are supported in this method.</p> <ul style="list-style-type: none"> <li>When <i>attribute</i> is <a href="#">UserAttribute.PASSWORD</a>, this method retrieves the user's encrypted password from the database. Typically this will be used in the following sequence of calls: <ol style="list-style-type: none"> <li>User attempts to authenticate with email and password</li> <li>Their unique ID is retrieved from the database using <a href="#">DBManager::getUserIDByEmail()</a></li> <li>Their ID is used to retrieve the hash of their password (i.e., this method is called)</li> <li>The returned string from this method is compared a <a href="#">SecureString</a> generated from the candidate password supplied by the user when authenticating.</li> </ol> </li> <li>When <i>attribute</i> is <a href="#">UserAttribute.NAME</a>, this method retrieves the user's full name from the database (e.g., "John Doe").</li> <li>When <i>attribute</i> is <a href="#">UserAttribute.EMAIL_ADDRESS</a>, this method retrieves the user's email address from the database. Note that this is likely somewhat redundant as the user will always be required to authenticate by providing their email address and hence it will already be available to the <a href="#">User</a> constructor, which is likely what is invoking this method.</li> </ul>
<i>id</i>	Unique ID used to associate information in the database to this user.

## Returns

This method returns a string containing attribute specified by the *attribute* parameter for the user specified by the *id* parameter.

Definition at line 203 of file DBManager.java.

```

203                                     {
204     String name;
205     ResultSet res;
206     String sqlQuery, columnLabel;
207     switch (attribute) {
208     case PASSWORD:
209         columnLabel = "password_hash";
210         sqlQuery = "SELECT " + columnLabel + " FROM Users WHERE id=?";
211         break;
212     case NAME:
213         columnLabel = "name";
214         sqlQuery = "SELECT " + columnLabel + " FROM Users WHERE id=?";
215         break;
216     case EMAIL_ADDRESS:
217         columnLabel = "email_address";
218         sqlQuery = "SELECT " + columnLabel + " FROM Users WHERE id=?";
219         break;
220     default:
221         throw new AssertionError("Incorrect UserAttribute enumeration type passed to method.");
222     }
223     try {
224         PreparedStatement stmt = m_conn.prepareStatement(sqlQuery);
225         stmt.setInt(1, id);
226         res = stmt.executeQuery();
227         name = res.getString(columnLabel);
228
229         stmt.close();
230     }
231     catch (final SQLException e) {
232         System.err.println(e.getMessage());
233         return null;
234     }
235
236     return name;
237 }
```

### 7.3.3.12 init()

```
boolean com.activitytracker.DBManager.init (
    final String dbURL ) [package]
```

Initializes a connection to the SQLite database.

As no work is done in the [DBManager\(\)](#) constructor, this method should be called immediately after creating the single instance of [DBManager](#) that the application is to use.

This method will attempt to connect to the database file specified by the *dbURL* parameter, creating the file and all required tables if it/they do not exist. You are encouraged to view the source code of this method for more information about the database schema used.

If all of the above is successful, the method returns True. Otherwise, False is returned.

#### Parameters

<i>dbURL</i>	A file system path to the SQLite database file.
--------------	---

#### Returns

This method returns True if the database can be initialized, or False otherwise.

Definition at line 762 of file DBManager.java.

```
762                                     {
763     try {
764         m_conn = DriverManager.getConnection("jdbc:sqlite:" + dbURL);
765     }
766     catch (final SQLException e) {
767         System.err.println(e.getMessage());
768         return false;
769     }
770     System.out.println("Opened database successfully.");
771
772     if (isEmpty()) {
773         System.out.println("Creating tables...");
774
775         // Create users table
776         String sqlQuery = "CREATE TABLE USERS (" +
777             "    id            INTEGER PRIMARY KEY ASC AUTOINCREMENT NOT NULL," +
778             "    email_address STRING NOT NULL UNIQUE ON CONFLICT FAIL," +
779             "    name          STRING NOT NULL," +
780             "    date_of_birth DATE    NOT NULL," +
781             "    sex           BIT(1)  NOT NULL," +
782             "    height        REAL    NOT NULL," +
783             "    weight        REAL    NOT NULL," +
784             "    password_hash STRING  NOT NULL," +
785             "    password_salt BLOB    NOT NULL," +
786             "    last_run      INTEGER NOT NULL DEFAULT 0," +
787             "    created_at    DATE    NOT NULL" +
788             ")";
789
790         if (!executeUpdate(sqlQuery)) {
791             return false;
792         }
793
794         // Create workouts table
795         sqlQuery = "CREATE TABLE RUNS (" +
796             "    id            INTEGER PRIMARY KEY ASC AUTOINCREMENT NOT NULL," +
797             "    user_id       INTEGER NOT NULL REFERENCES USERS (id)," +
798             "    date          DATE    NOT NULL," +
799             "    duration      REAL    NOT NULL," +
800             "    distance      REAL    NOT NULL," +
801             "    altitude_ascended REAL  NOT NULL," +
802             "    altitude_descended REAL  NOT NULL" +
803             ")";
804
805         if (!executeUpdate(sqlQuery)) {
```



```

806         return false;
807     }
808
809     // Create friends table
810     sqlQuery = "CREATE TABLE FRIENDS (" +
811         "    id            INTEGER PRIMARY KEY ASC AUTOINCREMENT NOT NULL," +
812         "    sender       INTEGER NOT NULL REFERENCES USERS (id)," +
813         "    receiver      INTEGER REFERENCES USERS (id)," +
814         "    send_date     DATETIME NOT NULL," +
815         "    confirm_date  DATETIME DEFAULT NULL" +
816         ")";
817
818     if (!executeUpdate(sqlQuery)) {
819         return false;
820     }
821
822 }
823
824 return true;
825 }

```

### 7.3.3.13 isEmpty()

```
boolean com.activitytracker.DBManager.isEmpty ( ) [private]
```

Returns a boolean value depending on whether or not the database is populated.

This is done by retrieving tables in the database and checking if this iterator has a next(). If not then there are no tables in the database and we consider it to be empty.

#### Returns

Returns True if there are tables in the database, False otherwise.

Definition at line 730 of file DBManager.java.

```

730         {
731
732         try {
733             final DatabaseMetaData dbmd = m_conn.getMetaData();
734             final String[] types = {"TABLE"};
735             final ResultSet rs = dbmd.getTables(null, null, "%", types);
736
737             return !rs.next();
738         }
739         catch (final SQLException e) {
740             System.err.println(e.getMessage());
741             return true;
742         }
743     }
744 }

```

### 7.3.3.14 newRun()

```
int com.activitytracker.DBManager.newRun (
    final int userID,
    final int year,
    final int month,
    final int day,
    final float duration,
    final float distance,
    final float altitude_ascending,
    final float altitude_descending )
```

Creates a new row in the Runs table with the attributes provided as parameters.

In particular, this method will be called when [Run::newRunDataPoint\(\)](#) receives (0, 0, 0) for (*duration*, *distance*, *altitude*).

## Parameters

<i>userID</i>	Unique ID used to associate information in the database to this user.
<i>year</i>	Year that the run was completed.
<i>month</i>	Month that the run was completed (1-12).
<i>day</i>	Day that the run was completed (1-31).
<i>duration</i>	Duration of the run in seconds.
<i>distance</i>	Distance ran in metres.
<i>altitude_ascended</i>	Cumulative altitude climbed in metres.
<i>altitude_descended</i>	Cumulative altitude descended in metres.

## Returns

Returns a unique integer corresponding to the new row in the SQLite Workouts table by which the new entry can be identified.

Definition at line 459 of file DBManager.java.

```

461                                     {
462     java.sql.Date RDate = new java.sql.Date(year, month, day);
463     int rID = 0;
464     ResultSet res;
465     String sqlInsertQuery = "INSERT INTO Runs (" +
466         "user_id," +
467         "date," +
468         "duration," +
469         "distance," +
470         "altitude_ascended," +
471         "altitude_descended" +
472         ") VALUES (?, ?, ?, ?, ?, ?)";
473     String sqlSelectQuery = "SELECT id FROM Runs WHERE " +
474         "user_id=? AND " +
475         "date=? AND " +
476         "duration=? AND " +
477         "distance=? AND " +
478         "altitude_ascended=? AND " +
479         "altitude_descended=?";
480
481     try {
482         PreparedStatement stmt = m_conn.prepareStatement(sqlInsertQuery);
483         stmt.setInt(1, userID);
484         stmt.setDate(2, RDate);
485         stmt.setFloat(3, duration);
486         stmt.setFloat(4, distance);
487         stmt.setFloat(5, altitude_ascended);
488         stmt.setFloat(6, altitude_descended);
489
490         if (stmt.executeUpdate() != 1) {
491             System.err.println("Run not added to database.");
492         }
493
494         stmt.close();
495
496         // Pass back in the stuff we just created to get the right row ID
497         // Look at a better way of doing this with OUTPUT clause of INPUT statement
498         stmt = m_conn.prepareStatement(sqlSelectQuery);
499         stmt.setInt(1, userID);
500         stmt.setDate(2, RDate);
501         stmt.setFloat(3, duration);
502         stmt.setFloat(4, distance);
503         stmt.setFloat(5, altitude_ascended);
504         stmt.setFloat(6, altitude_descended);
505
506         res = stmt.executeQuery();
507         rID = res.getInt("id");
508     }
509     catch (final SQLException e) {
510         System.err.println(e.getMessage());
511     }
512
513     return rID;
514 }
```

## 7.3.3.15 runExists()

```
boolean com.activitytracker.DBManager.runExists (
    final int rID )
```

Determines if a given run ID exists in the database.

## Parameters

<i>rID</i>	Unique ID corresponding to the row in the Runs table that we wish to check exists.
------------	--

## Returns

This method returns True if the run row with ID *WOID* exists in the database, or False otherwise.

Definition at line 636 of file DBManager.java.

```
636                                     {
637     ResultSet res;
638     String sqlQuery = "SELECT COUNT(*) as count FROM Runs WHERE id=?";
639     boolean exists = false;
640     try {
641         PreparedStatement stmt = m_conn.prepareStatement(sqlQuery);
642         stmt.setInt(1, rID);
643         res = stmt.executeQuery();
644         switch (res.getInt("count")) {
645             case 0:
646                 exists = false;
647                 break;
648             case 1:
649                 exists = true;
650                 break;
651             default:
652                 exists = true;
653                 System.err.println("More than one run for ID " +
654                     Integer.toString(rID) + ". Something isn't right.");
655                 break;
656         }
657     }
658     catch (final SQLException e) {
659         System.err.println(e.getMessage());
660     }
661     return exists;
662 }
663
664 }
```

## 7.3.3.16 setRun()

```
void com.activitytracker.DBManager.setRun (
    final int rID,
    final float duration,
    final float distance,
    final float altitude_ascended,
    final float altitude_descended )
```

Updates a run entry in the database as new information becomes available from the input file.

In particular, this method is called when [Run::newRunDataPoint\(\)](#) receives non-(0, 0, 0) input for (*duration*, *distance*, *altitude*).

This method will not be called directly by the application, rather it is called from [Run::newRunDataPoint\(\)](#). Hence that method will take care of adding/subtracting to/from the current stored values for *duration*, *distance*, and *altitude* — here we just take the input and put it in the database.

## Parameters

<i>rID</i>	Unique ID used to identify a run in the database.
<i>duration</i>	The number of seconds the user's run lasted.
<i>distance</i>	The cumulative number of metres the user ran.
<i>altitude_ascended</i>	The cumulative number of metres the user climbed.
<i>altitude_descended</i>	The cumulative number of metres the user descended.

Definition at line 533 of file DBManager.java.

```

534                                     {
535         String sqlQuery = "UPDATE Runs SET " +
536             "duration = ?, " +
537             "distance = ?, " +
538             "altitude_ascended=?, " +
539             "altitude_descended=? " +
540             "WHERE id=? ";
541         try {
542             PreparedStatement stmt = m_conn.prepareStatement(sqlQuery);
543             stmt.setFloat(1, duration);
544             stmt.setFloat(2, distance);
545             stmt.setFloat(3, altitude_ascended);
546             stmt.setFloat(4, altitude_descended);
547             stmt.setInt(5, rID);
548
549             int result = stmt.executeUpdate();
550             System.err.println(Integer.toString(result) + " rows updated in setRun().");
551             if (result != 1) {
552                 System.err.println("Run not updated in database.");
553             }
554
555             stmt.close();
556         }
557         catch (final SQLException e) {
558             System.err.println(e.getMessage());
559         }
560     }
561 }
```

### 7.3.3.17 setUserLastRID()

```

void com.activitytracker.DBManager.setUserLastRID (
    final int id,
    final int lastRID )
```

Updates a user's last run ID in the database.

This method will be used to update the run that a particular user last created. This is used when creating new run as the format of the input file requires that we maintain a record of what run we must update if the next line in the file is *not* (0, 0, 0).

See [getUserLastRID\(\)](#) for more information on the user of the *last\_run* field in the database.

## Parameters

<i>id</i>	Unique ID used to associate information in the database to this user.
<i>lastRID</i>	Integer corresponding to the last row in the Workouts table that the user with ID <i>id</i> created.

Definition at line 426 of file DBManager.java.

```

426                                     {
427         String sqlQuery = "UPDATE Users SET last_run=? WHERE id=?";
428         try {
429             PreparedStatement stmt = m_conn.prepareStatement(sqlQuery);
430             stmt.setInt(1, lastRID);
431             stmt.setInt(2, id);
432             if (stmt.executeUpdate() != 1) {
433                 System.err.println("User's last run was not updated correctly.");
434             }
435         }
436         catch (final SQLException e) {
437             System.err.println(e.getMessage());
438         }
439     }

```

### 7.3.3.18 userExists()

```

boolean com.activitytracker.DBManager.userExists (
    final String emailAddress )

```

The [DBManager::userExists\(\)](#) method is designed to facilitate the user experience (UX) design choice of users creating one account to the app and logging in with an existing account for future use. This maintains saved (persistent) data and helps enforce the unique constraint placed on the *email\_address* field in the database (again, as users are authenticating using their email address as a user name to identify themselves).

#### Parameters

<i>emailAddress</i>	The user's email address for which we are checking existence. We use email address here because this is what the user uses to log in to the app.
---------------------	--

#### Returns

True if the user exists in the database, false otherwise.

Definition at line 124 of file DBManager.java.

```

124                                     {
125         String sqlQuery = "SELECT COUNT(*) AS count FROM Users WHERE `email_address`=?";
126         boolean exists = false;
127
128         try {
129             PreparedStatement stmt = m_conn.prepareStatement(sqlQuery);
130             stmt.setString(1, emailAddress);
131             ResultSet res = stmt.executeQuery();
132             exists = res.getInt("count") > 0;
133
134             stmt.close();
135         }
136         catch (final SQLException e) {
137             System.err.println(e.getMessage());
138         }
139
140         return exists;
141     }

```

## 7.3.4 Member Data Documentation

#### 7.3.4.1 m\_conn

```
Connection com.activitytracker.DBManager.m_conn = null [private]
```

The *m\_conn* variable in the [DBManager](#) class is initially assigned the value of *null*.

When [DBManager::init\(\)](#) is invoked, it is made to be the connection to the database and is subsequently used each time a new SQL statement is created.

Definition at line 32 of file DBManager.java.

The documentation for this class was generated from the following file:

- [app/src/com/activitytracker/DBManager.java](#)

## 7.4 com.activitytracker.Iteration3Test Class Reference

### Static Public Member Functions

- static void [main](#) (String[] args)

#### 7.4.1 Detailed Description

Definition at line 6 of file Iteration3Test.java.

#### 7.4.2 Member Function Documentation

##### 7.4.2.1 main()

```
static void com.activitytracker.Iteration3Test.main (  
    String [] args ) [static]
```

Definition at line 8 of file Iteration3Test.java.

```
8                                     {  
9  
10         // Iteration 1 begins here  
11  
12         User john = null;  
13  
14         DBManager dbManager = new DBManager();  
15         if (!dbManager.init("data.db")) {  
16             System.err.println("Failed to initialize DBManager");  
17             System.exit(1);  
18         }  
19  
20         System.out.println("Attempting to create user...");  
21  
22         if (!dbManager.userExists("jdoe@mac.com"))  
23             User.createUser(  
24                 dbManager,  
25                 "John Doe",  
26                 "jdoe@mac.com",
```


```
27         1997,
28         12,
29         12,
30         User.Sex.MALE,
31         1.6764f,
32         54.4310844f,
33         "My Very Secure Password"
34     );
35     else
36         System.out.println("User already exists.");
37
38
39
40     if (dbManager.userExists("jdoe@mac.com"))
41         System.out.println("John Doe was created!");
42     else
43         System.out.println("User was NOT created.");
44
45
46     System.out.println("Testing incorrect password...");
47
48     try {
49         john = new User(dbManager, "jdoe@mac.com", "Some Incorrect Password");
50     }
51     catch (final AuthenticationException e) {
52         System.out.println("Incorrect password used; authentication failed.");
53     }
54
55     System.out.println("Authenticating user...");
56
57     try {
58         john = new User(dbManager, "jdoe@mac.com", "My Very Secure Password");
59     }
60     catch (final AuthenticationException e) {
61         System.out.println("Test failed; user could not be authenticated.");
62     }
63
64     // Iteration 1 ended here
65
66     // Iteration 2 begins here
67
68     if (john != null) {
69         Date today = new Date();
70         Run.newRunDataPoint(dbManager, john, 0f, today, 0f, 0f);
71         Run.newRunDataPoint(dbManager, john, 30f, today, 100f, 5f);
72         Run.newRunDataPoint(dbManager, john, 60f, today, 210f, 2f);
73         Run.newRunDataPoint(dbManager, john, 90f, today, 330f, -2f);
74     }
75     else {
76         System.out.println("John is null. Cannot execute phase 2.");
77     }
78
79     // Iteration 2 ends here
80
81 }
```

The documentation for this class was generated from the following file:


- [app/src/com/activitytracker/Iteration3Test.java](#)

## 7.5 com.activitytracker.LoginWindow Class Reference

Inheritance diagram for com.activitytracker.LoginWindow:



Collaboration diagram for com.activitytracker.LoginWindow:



### Package Functions

- [LoginWindow](#) (java.util.function.Consumer< Void > loginHandler)
- JPanel [rootPanel](#) ()

### Private Member Functions

- void [setupUI](#) ()
- void [setupCreateUserDialog](#) ()
- void [setupActionListeners](#) ()



## Private Attributes

- JLabel [labelTitle](#)
- JTextField [textFieldUsername](#)
- JPasswordField [passwordField](#)
- JLabel [labelUsername](#)
- JLabel [labelPassword](#)
- JButton [buttonLogin](#)
- JLabel [labelLoginMsg](#)
- JPanel [m\\_rootPanel](#)
- JButton [buttonCreateUser](#)
- JDialog [m\\_createUserDialog](#) = null
- java.util.function.Consumer< Void > [m\\_loginHandler](#)

### 7.5.1 Detailed Description

Definition at line 11 of file LoginWindow.java.

### 7.5.2 Constructor & Destructor Documentation

#### 7.5.2.1 LoginWindow()

```
com.activitytracker.LoginWindow.LoginWindow (
    java.util.function.Consumer< Void > loginHandler ) [package]
```

Definition at line 26 of file LoginWindow.java.

```
26                                     {
27     m\_loginHandler = loginHandler;
28
29     setupUI();
30     setupCreateUserDialog();
31     setupActionListeners();
32 }
```

### 7.5.3 Member Function Documentation

#### 7.5.3.1 rootPanel()

```
JPanel com.activitytracker.LoginWindow.rootPanel ( ) [package]
```

Definition at line 85 of file LoginWindow.java.

```
85                                     {
86     return m\_rootPanel;
87 }
```

### 7.5.3.2 setupActionListeners()

```
void com.activitytracker.LoginWindow.setupActionListeners ( ) [private]
```

Definition at line 54 of file LoginWindow.java.

```

54                                     {
55
56         // Login button
57         buttonLogin.addActionListener(new ActionListener() {
58             @Override
59             public void actionPerformed(ActionEvent e) {
60
61                 // Do nothing if login fields are empty
62                 if (textFieldUsername.getText().isEmpty() ||
passwordField.getPassword().length == 0) {
63                     return;
64                 }
65
66                 // Change to verifyLogin()
67                 if (true) {
68                     m_loginHandler.accept(null);
69                     return;
70                 }
71
72                 // Display error message
73             }
74         });
75
76         // Create user button
77         buttonCreateUser.addActionListener(new ActionListener() {
78             @Override
79             public void actionPerformed(ActionEvent e) {
80                 m_createUserDialog.setVisible(true);
81             }
82         });
83     }

```

### 7.5.3.3 setupCreateUserDialog()

```
void com.activitytracker.LoginWindow.setupCreateUserDialog ( ) [private]
```

Definition at line 41 of file LoginWindow.java.

```

41                                     {
42
43         // Get desktop resolution of default monitor (in case of multi-monitor setups)
44         final GraphicsDevice gd = GraphicsEnvironment.getLocalGraphicsEnvironment().getDefaultScreenDevice(
);
45
46         m_createUserDialog = new JDialog(this, "Activity Logger | Create User", true);
47         m_createUserDialog.setContentPane(new CreateUserWindow().
rootPanel());
48         m_createUserDialog.pack();
49         // Set window size to be 1/2 of screen dimensions
50         m_createUserDialog.setSize(gd.getDisplayMode().getWidth() / 2, gd.getDisplayMode(
).getHeight() / 2);
51         m_createUserDialog.setLocationRelativeTo(this); // Center window
52     }

```

#### 7.5.3.4 setupUI()

`void com.activitytracker.LoginWindow.setupUI ( ) [private]`

Definition at line 34 of file LoginWindow.java.

```
34         {
35             MaterialUIMovement.add(buttonLogin, MaterialColors.GRAY_100);
36             MaterialUIMovement.add(buttonCreateUser, MaterialColors.GRAY_100);
37
38             labelLoginMsg.setVisible(false);
39     }
```

### 7.5.4 Member Data Documentation

#### 7.5.4.1 buttonCreateUser

`JBUTTON com.activitytracker.LoginWindow.buttonCreateUser [private]`

Definition at line 20 of file LoginWindow.java.

#### 7.5.4.2 buttonLogin

`JBUTTON com.activitytracker.LoginWindow.buttonLogin [private]`

Definition at line 17 of file LoginWindow.java.

#### 7.5.4.3 labelLoginMsg

`JLabel com.activitytracker.LoginWindow.labelLoginMsg [private]`

Definition at line 18 of file LoginWindow.java.

#### 7.5.4.4 labelPassword

`JLabel com.activitytracker.LoginWindow.labelPassword [private]`

Definition at line 16 of file LoginWindow.java.

#### 7.5.4.5 labelTitle

```
JLabel com.activitytracker.LoginWindow.labelTitle [private]
```

Definition at line 12 of file LoginWindow.java.

#### 7.5.4.6 labelUsername

```
JLabel com.activitytracker.LoginWindow.labelUsername [private]
```

Definition at line 15 of file LoginWindow.java.

#### 7.5.4.7 m\_createUserDialog

```
JDialog com.activitytracker.LoginWindow.m_createUserDialog = null [private]
```

Definition at line 22 of file LoginWindow.java.

#### 7.5.4.8 m\_loginHandler

```
java.util.function.Consumer<Void> com.activitytracker.LoginWindow.m_loginHandler [private]
```

Definition at line 24 of file LoginWindow.java.

#### 7.5.4.9 m\_rootPanel

```
JPanel com.activitytracker.LoginWindow.m_rootPanel [private]
```

Definition at line 19 of file LoginWindow.java.

#### 7.5.4.10 passwordField

```
JPasswordField com.activitytracker.LoginWindow.passwordField [private]
```

Definition at line 14 of file LoginWindow.java.

#### 7.5.4.11 textFieldUsername

`TextField com.activitytracker.LoginWindow.textFieldUsername [private]`

Definition at line 13 of file LoginWindow.java.

The documentation for this class was generated from the following file:

- [app/src/com/activitytracker/LoginWindow.java](#)

## 7.6 com.activitytracker.MainWindow Class Reference

### Package Functions

- [MainWindow \(\)](#)
- [JPanel rootPanel \(\)](#)

### Private Member Functions

- void [setupUI \(\)](#)
- void [setupActionListeners \(\)](#)

### Private Attributes

- [JPanel m\\_rootPanel](#)
- [JPanel topPanel](#)
- [JButton buttonMyActivity](#)
- [JButton buttonAddDevice](#)
- [JButton buttonMyFriends](#)
- [JPanel contentPanel](#)
- [JLabel labelProfileIcon](#)
- [JPanel panelMyActivity](#)
- [JPanel panelAddDevice](#)
- [JPanel panelMyFriends](#)
- [JScrollPane scrollPaneMyFriends](#)
- [JTable tableAvailableDevices](#)
- [JTable tableMyActivity](#)

### 7.6.1 Detailed Description

Definition at line 12 of file MainWindow.java.

### 7.6.2 Constructor & Destructor Documentation

### 7.6.2.1 MainWindow()

`com.activitytracker.MainWindow.MainWindow ( ) [package]`

Definition at line 27 of file MainWindow.java.

```
27     {
28         setupUI();
29         setupActionListeners();
30     }
```

## 7.6.3 Member Function Documentation

### 7.6.3.1 rootPanel()

`JPanel com.activitytracker.MainWindow.rootPanel ( ) [package]`

Definition at line 84 of file MainWindow.java.

```
84     {
85         return m_rootPanel;
86     }
```

### 7.6.3.2 setupActionListeners()

`void com.activitytracker.MainWindow.setupActionListeners ( ) [private]`

Definition at line 54 of file MainWindow.java.

```
54     {
55         // My Activity button
56         buttonMyActivity.addActionListener(new ActionListener() {
57             @Override
58             public void actionPerformed(ActionEvent actionEvent) {
59                 panelMyActivity.setVisible(true);
60                 panelAddDevice.setVisible(false);
61                 panelMyFriends.setVisible(false);
62             }
63         });
64         // Add Device button
65         buttonAddDevice.addActionListener(new ActionListener() {
66             @Override
67             public void actionPerformed(ActionEvent actionEvent) {
68                 panelMyActivity.setVisible(false);
69                 panelAddDevice.setVisible(true);
70                 panelMyFriends.setVisible(false);
71             }
72         });
73         // My Friends button
74         buttonMyFriends.addActionListener(new ActionListener() {
75             @Override
76             public void actionPerformed(ActionEvent actionEvent) {
77                 panelMyActivity.setVisible(false);
78                 panelAddDevice.setVisible(false);
79                 panelMyFriends.setVisible(true);
80             }
81         });
82     }
```

### 7.6.3.3 setupUI()

`void com.activitytracker.MainWindow.setupUI ( ) [private]`

Definition at line 32 of file MainWindow.java.

```
32         {
33
34         // Apply Material-defined hover effect to buttons
35         Color coolGrey10 = new Color(99, 102, 106);
36         Color coolGrey11 = new Color(83, 86, 90);
37         MaterialUIMovement.add(buttonMyActivity, coolGrey11);
38         MaterialUIMovement.add(buttonAddDevice, coolGrey11);
39         MaterialUIMovement.add(buttonMyFriends, coolGrey11);
40
41         // Load and scale logo into UI
42         String logoPath = "./assets/logo.png";
43         ImageIcon imageIcon = new ImageIcon(getClass().getResource(logoPath));
44         final Image image = imageIcon.getImage(); // transform it
45         final Image newimg = image.getScaledInstance(50, 50, java.awt.Image.SCALE_SMOOTH);
46         imageIcon = new ImageIcon(newimg); // transform it back
47         labelProfileIcon.setIcon(imageIcon);
48
49         panelMyActivity.setVisible(true);
50         panelAddDevice.setVisible(false);
51         panelMyFriends.setVisible(false);
52     }
```

## 7.6.4 Member Data Documentation

### 7.6.4.1 buttonAddDevice

`JButton com.activitytracker.MainWindow.buttonAddDevice [private]`

Definition at line 16 of file MainWindow.java.

### 7.6.4.2 buttonMyActivity

`JButton com.activitytracker.MainWindow.buttonMyActivity [private]`

Definition at line 15 of file MainWindow.java.

### 7.6.4.3 buttonMyFriends

`JButton com.activitytracker.MainWindow.buttonMyFriends [private]`

Definition at line 17 of file MainWindow.java.

#### 7.6.4.4 contentPanel

```
JPanel com.activitytracker.MainWindow.contentPanel [private]
```

Definition at line 18 of file MainWindow.java.

#### 7.6.4.5 labelProfileIcon

```
JLabel com.activitytracker.MainWindow.labelProfileIcon [private]
```

Definition at line 19 of file MainWindow.java.

#### 7.6.4.6 m\_rootPanel

```
JPanel com.activitytracker.MainWindow.m_rootPanel [private]
```

Definition at line 13 of file MainWindow.java.

#### 7.6.4.7 panelAddDevice

```
JPanel com.activitytracker.MainWindow.panelAddDevice [private]
```

Definition at line 21 of file MainWindow.java.

#### 7.6.4.8 panelMyActivity

```
JPanel com.activitytracker.MainWindow.panelMyActivity [private]
```

Definition at line 20 of file MainWindow.java.

#### 7.6.4.9 panelMyFriends

```
JPanel com.activitytracker.MainWindow.panelMyFriends [private]
```

Definition at line 22 of file MainWindow.java.



#### 7.6.4.10 scrollPaneMyFriends

```
JScrollPane com.activitytracker.MainWindow.scrollPaneMyFriends [private]
```

Definition at line 23 of file MainWindow.java.

#### 7.6.4.11 tableAvailableDevices

```
JTable com.activitytracker.MainWindow.tableAvailableDevices [private]
```

Definition at line 24 of file MainWindow.java.

#### 7.6.4.12 tableMyActivity

```
JTable com.activitytracker.MainWindow.tableMyActivity [private]
```

Definition at line 25 of file MainWindow.java.

#### 7.6.4.13 topPanel

```
JPanel com.activitytracker.MainWindow.topPanel [private]
```


Definition at line 14 of file MainWindow.java.

The documentation for this class was generated from the following file:

- app/src/com/activitytracker/[MainWindow.java](#)

## 7.7 com.activitytracker.Run Class Reference

Collaboration diagram for com.activitytracker.Run:

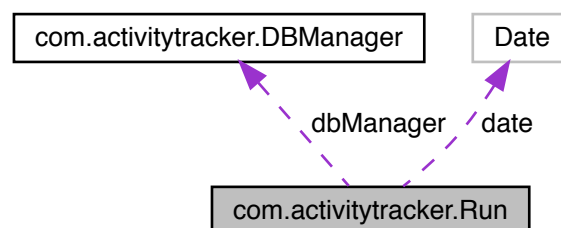

## Static Public Member Functions

- static void `newRunDataPoint` (final `DBManager` `dbManager`, final `User` `user`, final float `duration`, final Date `date`, final float `distance`, final float `altitude`)
- static Vector< `Run` > `getRuns` (final `DBManager` `dbManager`, final `User` `user`, final Date `startDate`, final Date `endDate`)

## Package Functions

- `Run` (final `DBManager` `dbManager`, final int `rID`)

## Package Attributes

- Date `date`
- `DBManager` `dbManager`
- float `duration`
- float `distance`
- float `altitude_ascended`
- float `altitude_descended`
- long `caloriesBurned` = 0

### 7.7.1 Detailed Description

Used to logically instantiate a run.

Definition at line 9 of file `Run.java`.

### 7.7.2 Constructor & Destructor Documentation

#### 7.7.2.1 `Run()`

```
com.activitytracker.Run.Run (
    final DBManager dbManager,
    final int rID ) [package]
```

The `Run()` constructor is used to retrieve workout information from the database and instantiate each row of the `Runs` table in a logical format.

#### Parameters

<i>dbManager</i>	The connection to the database.
<i>rID</i>	The run ID used to retrieve information from the database.

Definition at line 48 of file `Run.java`.

```

49         this.dbManager = dbManager;
50         this.duration = this.dbManager.getRunFloatAttribute(
RunAttribute.DURATION, rID);
51         this.distance = this.dbManager.getRunFloatAttribute(
RunAttribute.DISTANCE, rID);
52         this.altitude_ascended = this.dbManager.
getRunFloatAttribute(RunAttribute.ALTITUDE_ASCENDED, rID);
53         this.altitude_descended = this.dbManager.
getRunFloatAttribute(RunAttribute.ALTITUDE_DESCENDED, rID);
54     }

```

### 7.7.3 Member Function Documentation

#### 7.7.3.1 getRuns()

```

static Vector<Run> com.activitytracker.Run.getRuns (
    final DBManager dbManager,
    final User user,
    final Date startDate,
    final Date endDate ) [static]

```

Retrieves a set of runs from the database. Returns the result as a vector of [Run](#) objects.

##### Parameters

<i>dbManager</i>	Database connection with with the method interacts.
<i>user</i>	A <a href="#">User</a> object corresponding to the use whose run(s) is/are being retrieved from the database.
<i>startDate</i>	The beginning of the interval for which we are retrieving workouts.
<i>endDate</i>	The end of the interval for which we are retrieving workouts.

##### Returns

A vector containing instances of [Run](#) corresponding to all entered workouts between the start and end dates specified.

Definition at line 135 of file Run.java.

```

135         {
136             Vector<Run> runs = null;
137
138             return runs;
139         }

```

#### 7.7.3.2 newRunDataPoint()

```

static void com.activitytracker.Run.newRunDataPoint (
    final DBManager dbManager,
    final User user,
    final float duration,

```

```

    final Date date,
    final float distance,
    final float altitude ) [static]

```

Adds a new workout to the database or updates an existing workout with new information that the user imported from the log file.

If (*duration*, *distance*, *altitude*) passed to this method is (0, 0, 0) then the intended assumption is that this is the beginning of a new workout. As such, this input will cause a new row to be added to the Runs table in the database and the user's last run ID attribute will be updated accordingly. If the input is non-(0, 0, 0), then three things take place:

1. The *duration* in the database is overwritten by the *duration* provided as input;
2. The *distance* in the database is overwritten by the *distance* provided as input; and
3. Existing values for *altitude\_ascended* and *altitude\_descended* are retrieved from the database, their difference is compared to the current relative altitude, and depending whether this difference is positive or negative, the appropriate field in the database is updated to reflect the change.

#### Parameters

<i>dbManager</i>	Database connection with which the method interacts.
<i>user</i>	A <a href="#">User</a> object corresponding to the user whose run is being added to the database.
<i>duration</i>	The length of time in seconds that the user's run lasted.
<i>date</i>	The date the run occurred.
<i>distance</i>	The cumulative distance (in metres) that the user ran as of the current time passed to the method.
<i>altitude</i>	The relative current altitude (in metres) of the user at the time point being entered. Used to compute cumulative altitude ascended and descended throughout the run.

Definition at line 80 of file Run.java.

```

81                                     {
82         int userID = user.getID();
83         int rID;
84         float altitude_ascended;
85         float altitude_descended;
86
87         if (duration == 0f && distance == 0f && altitude == 0f) {
88             altitude_ascended = 0f;
89             altitude_descended = 0f;
90             rID = dbManager.newRun(
91                 userID,
92                 date.getYear(),
93                 date.getMonth(),
94                 date.getDay(),
95                 duration,
96                 distance,
97                 altitude_ascended,
98                 altitude_descended
99             );
100             user.setLastRID(rID);
101             System.err.println("Run " + Integer.toString(rID) + " added to database.");
102         } else {
103             rID = user.getLastRID();
104             if (dbManager.runExists(rID)) {
105                 altitude_ascended = dbManager.
106 getRunFloatAttribute(RunAttribute.ALTITUDE_ASCENDED, rID);
107                 altitude_descended = dbManager.
108 getRunFloatAttribute(RunAttribute.ALTITUDE_DESCENDED, rID);
109
110                 if (altitude < 0)
111                     altitude_descended += -1*altitude;
112                 else
113                     altitude_ascended += altitude;

```

```
112
113         dbManager.setRun(rID, duration, distance,
114         altitude_ascended, altitude_descended);
114         System.err.println("Run " + Integer.toString(rID) + " exists in the database; updating...")
115     ;
115         } else {
116             System.err.println("Run table and User table are inconsistent. No changes made.");
117         }
118     }
119 }
```

## 7.7.4 Member Data Documentation

### 7.7.4.1 altitude\_ascended

float com.activitytracker.Run.altitude\_ascended [package]

The altitude (in metres) that the user climbed throughout the run.

Definition at line 29 of file Run.java.

### 7.7.4.2 altitude\_descended

float com.activitytracker.Run.altitude\_descended [package]

The altitude (in metres) that the user descended throughout their run.

Definition at line 33 of file Run.java.

### 7.7.4.3 caloriesBurned

long com.activitytracker.Run.caloriesBurned = 0 [package]

The number of calories that the user burned throughout their run.

Currently this is not being used; it is for future features.

Definition at line 39 of file Run.java.

### 7.7.4.4 date

Date com.activitytracker.Run.date [package]

The date the run occurred.

Definition at line 13 of file Run.java.

#### 7.7.4.5 dbManager

`DBManager` `com.activitytracker.Run.dbManager` [package]

The run's connection to the database. This is used to add data points and retrieve workout metadata.

Definition at line 17 of file `Run.java`.

#### 7.7.4.6 distance

`float` `com.activitytracker.Run.distance` [package]

The distance (in metres) that the user ran.

Definition at line 25 of file `Run.java`.

#### 7.7.4.7 duration

`float` `com.activitytracker.Run.duration` [package]

The length of the run in seconds.

Definition at line 21 of file `Run.java`.

The documentation for this class was generated from the following file:

- `app/src/com/activitytracker/Run.java`

## 7.8 com.activitytracker.RunAttribute Enum Reference

### Public Attributes

- `DISTANCE`
- `DURATION`
- `ALTITUDE_ASCENDED`
- `ALTITUDE_DESCENDED`

#### 7.8.1 Detailed Description

This enumeration type is used to specify the behaviour of generalized methods, particularly in the `DBManager` class.

Definition at line 6 of file `RunAttribute.java`.

## 7.8.2 Member Data Documentation

### 7.8.2.1 ALTITUDE\_ASCENDED

```
com.activitytracker.RunAttribute.ALTITUDE_ASCENDED
```

The cumulative altitude (in metres) that the user has climbed throughout their run.

Used in [DBManager::getRunFloatAttribute](#) to specify that ascended altitude should be returned.

Definition at line 24 of file RunAttribute.java.

### 7.8.2.2 ALTITUDE\_DESCENDED

```
com.activitytracker.RunAttribute.ALTITUDE_DESCENDED
```

The cumulative altitude (in metres) that the user has descended throughout their run.

Used in [DBManager::getRunFloatAttribute](#) to specify that descended altitude should be returned.

Definition at line 30 of file RunAttribute.java.

### 7.8.2.3 DISTANCE

```
com.activitytracker.RunAttribute.DISTANCE
```

The cumulative distance the user has run (in metres).

Used in [DBManager::getRunFloatAttribute](#) to specify that distance should be returned.

Definition at line 12 of file RunAttribute.java.

### 7.8.2.4 DURATION

```
com.activitytracker.RunAttribute.DURATION
```

The duration of the user's run (in seconds).

Used in [DBManager::getRunFloatAttribute](#) to specify that duration should be returned.

Definition at line 18 of file RunAttribute.java.

The documentation for this enum was generated from the following file:

- [app/src/com/activitytracker/RunAttribute.java](#)

## 7.9 com.activitytracker.SecureString Class Reference

### Public Member Functions

- boolean [equalString](#) (final String other)
- byte [] [getSalt](#) ()
- String [toString](#) ()

### Package Functions

- [SecureString](#) (final String plaintext)
- [SecureString](#) (final String plaintext, final byte[] salt)

### Private Member Functions

- String [generateSecureString](#) (final String strToSecure, final byte[] salt)

### Static Private Member Functions

- static byte [] [generateSalt](#) () throws NoSuchAlgorithmException

### Private Attributes

- String [secureString](#)
- byte [] [salt](#)

### 7.9.1 Detailed Description

This class is used to securely store sensitive string-like information such as user passwords.

Definition at line 10 of file SecureString.java.

### 7.9.2 Constructor & Destructor Documentation

#### 7.9.2.1 SecureString() [1/2]

```
com.activitytracker.SecureString.SecureString (  
    final String plaintext ) [package]
```

The [SecureString\(\)](#) constructor takes as an argument a plain text string, encrypts it, and stores the encrypted string in the variable [SecureString::secureString](#).

Salt is generated using [SecureString::generateSalt\(\)](#).



## Parameters

<i>plaintext</i>	The string to be encrypted. May contain sensitive information.
------------------	--

Definition at line 29 of file SecureString.java.

```

29         {
30
31         try {
32             this.salt = generateSalt();
33         }
34         catch (final NoSuchAlgorithmException e) {
35             System.err.println(e.getMessage());
36         }
37         this.secureString = generateSecureString(plaintext, this.
salt);
38     }
39 }
```

## 7.9.2.2 SecureString() [2/2]

```

com.activitytracker.SecureString.SecureString (
    final String plaintext,
    final byte [] salt ) [package]
```

The [SecureString\(\)](#) constructor takes as an argument a plain text string and a previously-generated salt, encrypts the plain text string with the provided salt, and stores the encrypted string in the variable [SecureString::secureString](#).

## Parameters

<i>plaintext</i>	The string to be encrypted. May contain sensitive information.
<i>salt</i>	Salt that is used to encrypt <i>plaintext</i> . This parameter is used whenever we wish to encrypt using a previously-generated salt for the purpose of encrypted string comparison.

Definition at line 50 of file SecureString.java.

```

50         {
51
52         this.salt = salt;
53         this.secureString = generateSecureString(plaintext,
salt);
54     }
55 }
```

## 7.9.3 Member Function Documentation

## 7.9.3.1 equalString()

```

boolean com.activitytracker.SecureString.equalString (
    final String other )
```

Compares the secure string to the *other* parameter for equality.

This method will likely be used to authenticate a user from a password hash existing in the database.

**Parameters**

<i>other</i>	A (previously encrypted) string with which we compare <a href="#">SecureString::secureString</a> .
--------------	--

**Returns**

This method returns True if the hashes of both strings are the same, and False otherwise.

Definition at line 66 of file SecureString.java.

```

66                                     {
67
68         return this.secureString.equals(other);
69
70     }
```

**7.9.3.2 generateSalt()**

```

static byte [] com.activitytracker.SecureString.generateSalt ( ) throws NoSuchAlgorithmException←
Exception [static], [private]
```

This method generates salt for encryption of a plain text string.

**Returns**

Returns a byte array of length sixteen (16) containing the encryption salt.

**Exceptions**

<i>NoSuchAlgorithmException</i>	Required as <i>SecureRandom.getInstance()</i> may throw this exception and we would like the invoking method to decide how to handle it rather than catching and dismissing it here.
---------------------------------	--

Definition at line 83 of file SecureString.java.

```

83                                     {
84         SecureRandom sr = SecureRandom.getInstance("SHA1PRNG");
85         byte[] salt = new byte[16];
86         sr.nextBytes(salt);
87         return salt;
88     }
```

**7.9.3.3 generateSecureString()**

```

String com.activitytracker.SecureString.generateSecureString (
    final String strToSecure,
    final byte [] salt ) [private]
```

Encrypt string and return secure version.

Due to the importance of securely storing passwords, a "tried and true" method for encrypting passwords found at [this link](#) has been used.

**Parameters**

<i>strToSecure</i>	The plain text string we wish to encrypt.
<i>salt</i>	The salt with which we will encrypt <i>strToSecure</i> .

**Returns**

This private method returns the encrypted string to the [SecureString\(\)](#) constructor.

Definition at line 102 of file SecureString.java.

```

102                                     {
103     String generatedPassword = null;
104     try {
105         MessageDigest md = MessageDigest.getInstance("SHA-512");
106         md.update(salt);
107         byte[] strBytes = md.digest(strToSecure.getBytes());
108         StringBuilder sb = new StringBuilder();
109         for (int i = 0; i < strBytes.length; i++) {
110             sb.append(Integer.toString((strBytes[i] & 0xff) + 0x100, 16).substring(1));
111         }
112         generatedPassword = sb.toString();
113     }
114     catch (final NoSuchAlgorithmException e) {
115         System.err.println(e.getMessage());
116     }
117     return generatedPassword;
118 }
```

**7.9.3.4 getSalt()**

```
byte [] com.activitytracker.SecureString.getSalt ( )
```

**Returns**

Returns the byte array-type salt used to encrypt the text given to the object's constructor.

Definition at line 123 of file SecureString.java.

```

123                                     {
124     return this.salt;
125 }
```

**7.9.3.5 toString()**

```
String com.activitytracker.SecureString.toString ( )
```

Overridden method to return the object as a Java String.

The encrypted string will be returned, though it should be noted for completeness that this is not a full representation of the object since the salt is crucial in arriving at [SecureString::secureString](#) being returned.

**Returns**

Returns the encrypted string.

Definition at line 136 of file SecureString.java.

```

136                                     {
137     return this.secureString;
138 }
```

## 7.9.4 Member Data Documentation

### 7.9.4.1 salt

```
byte [] com.activitytracker.SecureString.salt [private]
```

The salt that was used to encrypt the plain text string.

Definition at line 19 of file SecureString.java.

### 7.9.4.2 secureString

```
String com.activitytracker.SecureString.secureString [private]
```

The encrypted string.

Definition at line 15 of file SecureString.java.

The documentation for this class was generated from the following file:

- [app/src/com/activitytracker/SecureString.java](#)

## 7.10 com.activitytracker.User.Sex Enum Reference

### Public Attributes

- [MALE](#)
- [FEMALE](#)

### 7.10.1 Detailed Description

Used to represent whether the user is male or female.

Definition at line 12 of file User.java.

### 7.10.2 Member Data Documentation

### 7.10.2.1 FEMALE

```
com.activitytracker.User.Sex.FEMALE
```

Used to represent that the user is female.

Recall from the source code included in [DBManager::init\(\)](#) that sex is stored in the database using a data type of BIT(1). If the user is female, we store this in the database by populating this field with a *0*.

Definition at line 26 of file User.java.

### 7.10.2.2 MALE

```
com.activitytracker.User.Sex.MALE
```

Used to represent that the user is male.

Recall from the source code included in [DBManager::init\(\)](#) that sex is stored in the database using a data type of BIT(1). If the user is female, we store this in the database by populating this field with a *1*.


Definition at line 19 of file User.java.

The documentation for this enum was generated from the following file:

- [app/src/com/activitytracker/User.java](#)

## 7.11 com.activitytracker.User Class Reference

Collaboration diagram for com.activitytracker.User:

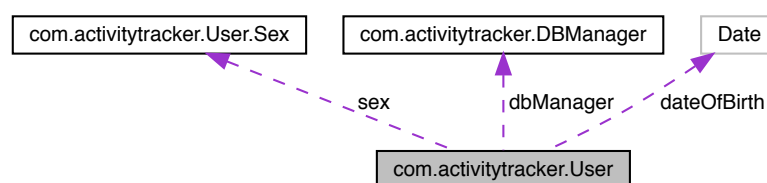

### Classes

- enum [Sex](#)

## Public Member Functions

- int [getID](#) ()
- String [getName](#) ()
- String [getEmailAddress](#) ()
- Date [getDateOfBirth](#) ()
- int [getLastRID](#) ()
- void [setLastRID](#) (final int rID)
- [Sex](#) [getSex](#) ()
- float [getHeight](#) ()
- float [getWeight](#) ()

## Static Public Member Functions

- static void [createUser](#) (final [DBManager](#) dbManager, final String [name](#), final String [emailAddress](#), final int DOBYear, final int DOBMonth, final int DOBDay, final User.Sex [sex](#), final float [height](#), final float [weight](#), final String plaintextPassword)

## Package Functions

- [User](#) (final [DBManager](#) dbManager, final String [emailAddress](#), final String plaintextPassword) throws AuthenticationException

## Private Attributes

- int [id](#)
- String [name](#)
- String [emailAddress](#)
- Date [dateOfBirth](#)
- [Sex](#) [sex](#)
- float [height](#)
- float [weight](#)
- [DBManager](#) [dbManager](#) = null

### 7.11.1 Detailed Description

Definition at line 8 of file User.java.

### 7.11.2 Constructor & Destructor Documentation

### 7.11.2.1 User()

```
com.activitytracker.User.User (
    final DBManager dbManager,
    final String emailAddress,
    final String plaintextPassword ) throws AuthenticationException [package]
```

Definition at line 38 of file User.java.

```
38
39         {
40             this.dbManager = dbManager;
41             if (this.dbManager.userExists(emailAddress)) {
42
43                 this.id = dbManager.getUserIDByEmail(
44                     emailAddress);
45                 String passHash = this.dbManager.getUserStringAttribute(
46                     UserAttribute.PASSWORD, this.id);
47                 byte[] passSalt = this.dbManager.getUserPassSalt(this.id);
48                 SecureString candidatePassword = new SecureString(plaintextPassword, passSalt);
49
50                 if (candidatePassword.equalString(passHash)) {
51
52
53                     this.name = this.dbManager.getUserStringAttribute(
54                         UserAttribute.NAME, this.id);
55                     // this.emailAddress = this.dbManager.getEmailAddress(this.id);
56                     this.emailAddress = emailAddress;
57                     this.dateOfBirth = this.dbManager.
58                         getDateOfBirth(this.id);
59                     this.sex = this.dbManager.getUserSex(this.id);
60                     this.height = this.dbManager.
61                         getUserFloatAttribute(UserAttribute.HEIGHT, this.id);
62                     this.weight = this.dbManager.
63                         getUserFloatAttribute(UserAttribute.WEIGHT, this.id);
64
65                     System.out.println("Authentication succeeded for " + this.name);
66
67                 }
68                 else {
69
70                     throw new AuthenticationException("Incorrect password.");
71
72                 }
73             }
74             else {
75
76                 throw new NoSuchElementException("No such user exists.");
77             }
78         }
```

## 7.11.3 Member Function Documentation

### 7.11.3.1 createUser()

```
static void com.activitytracker.User.createUser (
    final DBManager dbManager,
    final String name,
    final String emailAddress,
    final int DOBYear,
    final int DOBMonth,
    final int DOBDay,
```



```
final User.Sex sex,  
final float height,  
final float weight,  
final String plaintextPassword ) [static]
```

Definition at line 78 of file User.java.

```
80  
81  
82     SecureString securePassword = new SecureString(plaintextPassword);  
83  
84  
85     dbManager.createUser(  
86         name,  
87         emailAddress,  
88         DOBYear,  
89         DOBMonth,  
90         DOBDay,  
91         sex,  
92         height,  
93         weight,  
94         securePassword  
95     );  
96  
97 }
```

#### 7.11.3.2 getDateOfBirth()

Date com.activitytracker.User.getDateOfBirth ( )

Definition at line 111 of file User.java.

```
111  
112     return this.dateOfBirth;  
113 }
```

#### 7.11.3.3 getEmailAddress()

String com.activitytracker.User.getEmailAddress ( )

Definition at line 107 of file User.java.

```
107  
108     return this.emailAddress;  
109 }
```

#### 7.11.3.4 getHeight()

float com.activitytracker.User.getHeight ( )

Definition at line 123 of file User.java.

```
123         {  
124             return this.height;  
125         }
```

#### 7.11.3.5 getID()

int com.activitytracker.User.getID ( )

Definition at line 99 of file User.java.

```
99         {  
100             return this.id;  
101         }
```

#### 7.11.3.6 getLastRID()

int com.activitytracker.User.getLastRID ( )

Definition at line 115 of file User.java.

```
115 { return this.dbManager.getUserLastRID(this.id); }
```

#### 7.11.3.7 getName()

String com.activitytracker.User.getName ( )

Definition at line 103 of file User.java.

```
103         {  
104             return this.name;  
105         }
```

### 7.11.3.8 getSex()

`Sex com.activitytracker.User.getSex ( )`

Definition at line 119 of file User.java.

```
119         {  
120             return this.sex;  
121         }
```

### 7.11.3.9 getWeight()

`float com.activitytracker.User.getWeight ( )`

Definition at line 127 of file User.java.

```
127         {  
128             return this.weight;  
129         }
```

### 7.11.3.10 setLastRID()

`void com.activitytracker.User.setLastRID (   
 final int rID )`

Definition at line 117 of file User.java.

```
117 { this.dbManager.setUserLastRID(this.id, rID); }
```

## 7.11.4 Member Data Documentation

### 7.11.4.1 dateOfBirth

`Date com.activitytracker.User.dateOfBirth [private]`

Definition at line 32 of file User.java.

#### 7.11.4.2 dbManager

```
DBManager com.activitytracker.User.dbManager = null [private]
```

Definition at line 36 of file User.java.

#### 7.11.4.3 emailAddress

```
String com.activitytracker.User.emailAddress [private]
```

Definition at line 31 of file User.java.

#### 7.11.4.4 height

```
float com.activitytracker.User.height [private]
```

Definition at line 34 of file User.java.

#### 7.11.4.5 id

```
int com.activitytracker.User.id [private]
```

Definition at line 29 of file User.java.

#### 7.11.4.6 name

```
String com.activitytracker.User.name [private]
```

Definition at line 30 of file User.java.

#### 7.11.4.7 sex

```
Sex com.activitytracker.User.sex [private]
```

Definition at line 33 of file User.java.

#### 7.11.4.8 weight

```
float com.activitytracker.User.weight [private]
```

Definition at line 35 of file User.java.

The documentation for this class was generated from the following file:

- [app/src/com/activitytracker/User.java](#)

## 7.12 com.activitytracker.UserAttribute Enum Reference

### Public Attributes

- [ID](#)
- [NAME](#)
- [EMAIL\\_ADDRESS](#)
- [DATE\\_OF\\_BIRTH](#)
- [SEX](#)
- [WEIGHT](#)
- [HEIGHT](#)
- [PASSWORD](#)
- [SALT](#)

### 7.12.1 Detailed Description

This enumeration type is used to specify the behaviour of generalized methods, particularly in the [DBManager](#) class.

Definition at line 6 of file UserAttribute.java.

### 7.12.2 Member Data Documentation

#### 7.12.2.1 DATE\_OF\_BIRTH

```
com.activitytracker.UserAttribute.DATE_OF_BIRTH
```

Currently not used as no generalized method retrieves the user's DOB.

Definition at line 26 of file UserAttribute.java.

#### 7.12.2.2 EMAIL\_ADDRESS

```
com.activitytracker.UserAttribute.EMAIL_ADDRESS
```

The user's email address.

Used in [DBManager::getUserStringAttribute](#) to specify that the user's email address should be returned.

Definition at line 22 of file UserAttribute.java.

#### 7.12.2.3 HEIGHT

```
com.activitytracker.UserAttribute.HEIGHT
```

The user's height (in metres).

Used in [DBManager::getUserFloatAttribute](#) to specify that the user's email height should be returned.

Definition at line 42 of file UserAttribute.java.

#### 7.12.2.4 ID

```
com.activitytracker.UserAttribute.ID
```

Currently not used as no generalized method retrieves the user's ID.

Definition at line 10 of file UserAttribute.java.

#### 7.12.2.5 NAME

```
com.activitytracker.UserAttribute.NAME
```

The user's full name.

Used in [DBManager::getUserStringAttribute](#) to specify that the user's name should be returned.

Definition at line 16 of file UserAttribute.java.

#### 7.12.2.6 PASSWORD

```
com.activitytracker.UserAttribute.PASSWORD
```

The user's encrypted password hash.

Used in [DBManager::getUserStringAttribute](#) to specify that the user's password hash should be returned.

Definition at line 48 of file UserAttribute.java.

#### 7.12.2.7 SALT

```
com.activitytracker.UserAttribute.SALT
```

Currently not used as no generalized method retrieves the user's password encryption salt.

Definition at line 52 of file UserAttribute.java.

#### 7.12.2.8 SEX

```
com.activitytracker.UserAttribute.SEX
```

Currently not used as no generalized method retrieves the user's sex.

Definition at line 30 of file UserAttribute.java.

#### 7.12.2.9 WEIGHT

```
com.activitytracker.UserAttribute.WEIGHT
```

The user's weight (in kilograms).

Used in [DBManager::getUserFloatAttribute](#) to specify that the user's email weight should be returned.

Definition at line 36 of file UserAttribute.java.

The documentation for this enum was generated from the following file:

- [app/src/com/activitytracker/UserAttribute.java](#)





## Chapter 8

# File Documentation

### 8.1 app/src/com/activitytracker/ActivityTracker.java File Reference

#### Classes

- class [com.activitytracker.ActivityTracker](#)

#### Packages

- package [com.activitytracker](#)

### 8.2 app/src/com/activitytracker/CreateUserWindow.java File Reference

#### Classes

- class [com.activitytracker.CreateUserWindow](#)

#### Packages

- package [com.activitytracker](#)

### 8.3 app/src/com/activitytracker/DBManager.java File Reference

#### Classes

- class [com.activitytracker.DBManager](#)

#### Packages

- package [com.activitytracker](#)

## 8.4 app/src/com/activitytracker/Iteration3Test.java File Reference

### Classes

- class [com.activitytracker.Iteration3Test](#)

### Packages

- package [com.activitytracker](#)

## 8.5 app/src/com/activitytracker/LoginWindow.java File Reference

### Classes

- class [com.activitytracker.LoginWindow](#)

### Packages

- package [com.activitytracker](#)

## 8.6 app/src/com/activitytracker/MainWindow.java File Reference

### Classes

- class [com.activitytracker.MainWindow](#)

### Packages

- package [com.activitytracker](#)

## 8.7 app/src/com/activitytracker/Run.java File Reference

### Classes

- class [com.activitytracker.Run](#)

### Packages

- package [com.activitytracker](#)

## 8.8 app/src/com/activitytracker/RunAttribute.java File Reference

### Classes

- enum [com.activitytracker.RunAttribute](#)

### Packages

- package [com.activitytracker](#)

## 8.9 app/src/com/activitytracker/SecureString.java File Reference

### Classes

- class [com.activitytracker.SecureString](#)

### Packages

- package [com.activitytracker](#)

## 8.10 app/src/com/activitytracker/User.java File Reference

### Classes

- class [com.activitytracker.User](#)
- enum [com.activitytracker.User.Sex](#)

### Packages

- package [com.activitytracker](#)

## 8.11 app/src/com/activitytracker/UserAttribute.java File Reference

### Classes

- enum [com.activitytracker.UserAttribute](#)

### Packages

- package [com.activitytracker](#)



# Index

ALTITUDE\_ASCENDED  
    com::activitytracker::RunAttribute, 53  
ALTITUDE\_DESCENDED  
    com::activitytracker::RunAttribute, 53  
altitude\_ascended  
    com::activitytracker::Run, 51  
altitude\_descended  
    com::activitytracker::Run, 51  
app/src/com/activitytracker/ActivityTracker.java, 71  
app/src/com/activitytracker/CreateUserWindow.java, 71  
app/src/com/activitytracker/DBManager.java, 71  
app/src/com/activitytracker/Iteration3Test.java, 72  
app/src/com/activitytracker/LoginWindow.java, 72  
app/src/com/activitytracker/MainWindow.java, 72  
app/src/com/activitytracker/Run.java, 72  
app/src/com/activitytracker/RunAttribute.java, 73  
app/src/com/activitytracker/SecureString.java, 73  
app/src/com/activitytracker/User.java, 73  
app/src/com/activitytracker/UserAttribute.java, 73  
  
buttonAddDevice  
    com::activitytracker::MainWindow, 45  
buttonCancel  
    com::activitytracker::CreateUserWindow, 17  
buttonCreateUser  
    com::activitytracker::LoginWindow, 41  
buttonLogin  
    com::activitytracker::LoginWindow, 41  
buttonMyActivity  
    com::activitytracker::MainWindow, 45  
buttonMyFriends  
    com::activitytracker::MainWindow, 45  
buttonOk  
    com::activitytracker::CreateUserWindow, 17  
  
caloriesBurned  
    com::activitytracker::Run, 51  
com, 11  
com.activitytracker, 11  
com.activitytracker.ActivityTracker, 13  
com.activitytracker.CreateUserWindow, 14  
com.activitytracker.DBManager, 18  
com.activitytracker.Iteration3Test, 36  
com.activitytracker.LoginWindow, 38  
com.activitytracker.MainWindow, 43  
com.activitytracker.Run, 47  
com.activitytracker.RunAttribute, 52  
com.activitytracker.SecureString, 54  
com.activitytracker.User, 60  
com.activitytracker.User.Sex, 59  
com.activitytracker.UserAttribute, 67  
com::activitytracker::ActivityTracker  
    main, 13  
com::activitytracker::CreateUserWindow  
    buttonCancel, 17  
    buttonOk, 17  
    CreateUserWindow, 15  
    m\_rootPanel, 17  
    passwordField, 17  
    rootPanel, 16  
    setupActionListeners, 16  
    setupUI, 16  
    textFieldEmail, 17  
    textFieldHeight, 18  
    textFieldName, 18  
    textFieldWeight, 18  
com::activitytracker::DBManager  
    createUser, 20  
    DBManager, 19  
    executeQuery, 21  
    executeUpdate, 21  
    getDateOfBirth, 22  
    getRunFloatAttribute, 23  
    getUserFloatAttribute, 24  
    getUserIDByEmail, 25  
    getUserLastRID, 26  
    getUserPassSalt, 26  
    getUserSex, 27  
    getUserStringAttribute, 28  
    init, 29  
    isEmpty, 31  
    m\_conn, 35  
    newRun, 31  
    runExists, 32  
    setRun, 33  
    setUserLastRID, 34  
    userExists, 35  
com::activitytracker::Iteration3Test  
    main, 36  
com::activitytracker::LoginWindow  
    buttonCreateUser, 41  
    buttonLogin, 41  
    labelLoginMsg, 41  
    labelPassword, 41  
    labelTitle, 41  
    labelUsername, 42  
    LoginWindow, 39  
    m\_createUserDialog, 42  
    m\_loginHandler, 42

- m\_rootPanel, [42](#)
- passwordField, [42](#)
- rootPanel, [39](#)
- setupActionListeners, [39](#)
- setupCreateUserDialog, [40](#)
- setupUI, [40](#)
- textFieldUsername, [42](#)
- com::activitytracker::MainWindow
  - buttonAddDevice, [45](#)
  - buttonMyActivity, [45](#)
  - buttonMyFriends, [45](#)
  - contentPanel, [45](#)
  - labelProfileIcon, [46](#)
  - m\_rootPanel, [46](#)
  - MainWindow, [43](#)
  - panelAddDevice, [46](#)
  - panelMyActivity, [46](#)
  - panelMyFriends, [46](#)
  - rootPanel, [44](#)
  - scrollPaneMyFriends, [46](#)
  - setupActionListeners, [44](#)
  - setupUI, [44](#)
  - tableAvailableDevices, [47](#)
  - tableMyActivity, [47](#)
  - topPanel, [47](#)
- com::activitytracker::Run
  - altitude\_ascending, [51](#)
  - altitude\_descending, [51](#)
  - caloriesBurned, [51](#)
  - date, [51](#)
  - dbManager, [51](#)
  - distance, [52](#)
  - duration, [52](#)
  - getRuns, [49](#)
  - newRunDataPoint, [49](#)
  - Run, [48](#)
- com::activitytracker::RunAttribute
  - ALTITUDE\_ASCENDING, [53](#)
  - ALTITUDE\_DESCENDING, [53](#)
  - DISTANCE, [53](#)
  - DURATION, [53](#)
- com::activitytracker::SecureString
  - equalString, [55](#)
  - generateSalt, [56](#)
  - generateSecureString, [56](#)
  - getSalt, [58](#)
  - salt, [59](#)
  - SecureString, [54](#), [55](#)
  - secureString, [59](#)
  - toString, [58](#)
- com::activitytracker::User
  - createUser, [62](#)
  - dateOfBirth, [65](#)
  - dbManager, [65](#)
  - emailAddress, [66](#)
  - getDateOfBirth, [63](#)
  - getEmailAddress, [63](#)
  - getHeight, [63](#)
  - getID, [64](#)
  - getLastRID, [64](#)
  - getName, [64](#)
  - getSex, [64](#)
  - getWeight, [65](#)
  - height, [66](#)
  - id, [66](#)
  - name, [66](#)
  - setLastRID, [65](#)
  - sex, [66](#)
  - User, [61](#)
  - weight, [66](#)
- com::activitytracker::User::Sex
  - FEMALE, [59](#)
  - MALE, [60](#)
- com::activitytracker::UserAttribute
  - DATE\_OF\_BIRTH, [67](#)
  - EMAIL\_ADDRESS, [67](#)
  - HEIGHT, [68](#)
  - ID, [68](#)
  - NAME, [68](#)
  - PASSWORD, [68](#)
  - SALT, [69](#)
  - SEX, [69](#)
  - WEIGHT, [69](#)
- contentPanel
  - com::activitytracker::MainWindow, [45](#)
- createUser
  - com::activitytracker::DBManager, [20](#)
  - com::activitytracker::User, [62](#)
- CreateUserWindow
  - com::activitytracker::CreateUserWindow, [15](#)
- DATE\_OF\_BIRTH
  - com::activitytracker::UserAttribute, [67](#)
- DBManager
  - com::activitytracker::DBManager, [19](#)
- DISTANCE
  - com::activitytracker::RunAttribute, [53](#)
- DURATION
  - com::activitytracker::RunAttribute, [53](#)
- date
  - com::activitytracker::Run, [51](#)
- dateOfBirth
  - com::activitytracker::User, [65](#)
- dbManager
  - com::activitytracker::Run, [51](#)
  - com::activitytracker::User, [65](#)
- distance
  - com::activitytracker::Run, [52](#)
- duration
  - com::activitytracker::Run, [52](#)
- EMAIL\_ADDRESS
  - com::activitytracker::UserAttribute, [67](#)
- emailAddress
  - com::activitytracker::User, [66](#)
- equalString
  - com::activitytracker::SecureString, [55](#)

- executeQuery
  - com::activitytracker::DBManager, 21
- executeUpdate
  - com::activitytracker::DBManager, 21
- FEMALE
  - com::activitytracker::User::Sex, 59
- generateSalt
  - com::activitytracker::SecureString, 56
- generateSecureString
  - com::activitytracker::SecureString, 56
- getDateOfBirth
  - com::activitytracker::DBManager, 22
  - com::activitytracker::User, 63
- getEmailAddress
  - com::activitytracker::User, 63
- getHeight
  - com::activitytracker::User, 63
- getID
  - com::activitytracker::User, 64
- getLastRID
  - com::activitytracker::User, 64
- getName
  - com::activitytracker::User, 64
- getRunFloatAttribute
  - com::activitytracker::DBManager, 23
- getRuns
  - com::activitytracker::Run, 49
- getSalt
  - com::activitytracker::SecureString, 58
- getSex
  - com::activitytracker::User, 64
- getUserFloatAttribute
  - com::activitytracker::DBManager, 24
- getUserIDByEmail
  - com::activitytracker::DBManager, 25
- getUserLastRID
  - com::activitytracker::DBManager, 26
- getUserPassSalt
  - com::activitytracker::DBManager, 26
- getUserSex
  - com::activitytracker::DBManager, 27
- getUserStringAttribute
  - com::activitytracker::DBManager, 28
- getWeight
  - com::activitytracker::User, 65
- HEIGHT
  - com::activitytracker::UserAttribute, 68
- height
  - com::activitytracker::User, 66
- ID
  - com::activitytracker::UserAttribute, 68
- id
  - com::activitytracker::User, 66
- init
  - com::activitytracker::DBManager, 29
- isEmpty
  - com::activitytracker::DBManager, 31
- labelLoginMsg
  - com::activitytracker::LoginWindow, 41
- labelPassword
  - com::activitytracker::LoginWindow, 41
- labelProfileIcon
  - com::activitytracker::MainWindow, 46
- labelTitle
  - com::activitytracker::LoginWindow, 41
- labelUsername
  - com::activitytracker::LoginWindow, 42
- LoginWindow
  - com::activitytracker::LoginWindow, 39
- m\_conn
  - com::activitytracker::DBManager, 35
- m\_createUserDialog
  - com::activitytracker::LoginWindow, 42
- m\_loginHandler
  - com::activitytracker::LoginWindow, 42
- m\_rootPanel
  - com::activitytracker::CreateUserWindow, 17
  - com::activitytracker::LoginWindow, 42
  - com::activitytracker::MainWindow, 46
- MALE
  - com::activitytracker::User::Sex, 60
- main
  - com::activitytracker::ActivityTracker, 13
  - com::activitytracker::Iteration3Test, 36
- MainWindow
  - com::activitytracker::MainWindow, 43
- NAME
  - com::activitytracker::UserAttribute, 68
- name
  - com::activitytracker::User, 66
- newRun
  - com::activitytracker::DBManager, 31
- newRunDataPoint
  - com::activitytracker::Run, 49
- PASSWORD
  - com::activitytracker::UserAttribute, 68
- panelAddDevice
  - com::activitytracker::MainWindow, 46
- panelMyActivity
  - com::activitytracker::MainWindow, 46
- panelMyFriends
  - com::activitytracker::MainWindow, 46
- passwordField
  - com::activitytracker::CreateUserWindow, 17
  - com::activitytracker::LoginWindow, 42
- rootPanel
  - com::activitytracker::CreateUserWindow, 16
  - com::activitytracker::LoginWindow, 39
  - com::activitytracker::MainWindow, 44

- Run
  - com::activitytracker::Run, [48](#)
- runExists
  - com::activitytracker::DBManager, [32](#)
- SALT
  - com::activitytracker::UserAttribute, [69](#)
- SEX
  - com::activitytracker::UserAttribute, [69](#)
- salt
  - com::activitytracker::SecureString, [59](#)
- scrollPaneMyFriends
  - com::activitytracker::MainWindow, [46](#)
- SecureString
  - com::activitytracker::SecureString, [54](#), [55](#)
- secureString
  - com::activitytracker::SecureString, [59](#)
- setLastRID
  - com::activitytracker::User, [65](#)
- setRun
  - com::activitytracker::DBManager, [33](#)
- setUserLastRID
  - com::activitytracker::DBManager, [34](#)
- setupActionListeners
  - com::activitytracker::CreateUserWindow, [16](#)
  - com::activitytracker::LoginWindow, [39](#)
  - com::activitytracker::MainWindow, [44](#)
- setupCreateUserDialog
  - com::activitytracker::LoginWindow, [40](#)
- setupUI
  - com::activitytracker::CreateUserWindow, [16](#)
  - com::activitytracker::LoginWindow, [40](#)
  - com::activitytracker::MainWindow, [44](#)
- sex
  - com::activitytracker::User, [66](#)
- tableAvailableDevices
  - com::activitytracker::MainWindow, [47](#)
- tableMyActivity
  - com::activitytracker::MainWindow, [47](#)
- textFieldEmail
  - com::activitytracker::CreateUserWindow, [17](#)
- textFieldHeight
  - com::activitytracker::CreateUserWindow, [18](#)
- textFieldName
  - com::activitytracker::CreateUserWindow, [18](#)
- textFieldUsername
  - com::activitytracker::LoginWindow, [42](#)
- textFieldWeight
  - com::activitytracker::CreateUserWindow, [18](#)
- toString
  - com::activitytracker::SecureString, [58](#)
- topPanel
  - com::activitytracker::MainWindow, [47](#)
- User
  - com::activitytracker::User, [61](#)
- userExists
  - com::activitytracker::DBManager, [35](#)
- WEIGHT
  - com::activitytracker::UserAttribute, [69](#)
- weight
  - com::activitytracker::User, [66](#)