



Error 1: File not found, Server can't find file that Client is requesting

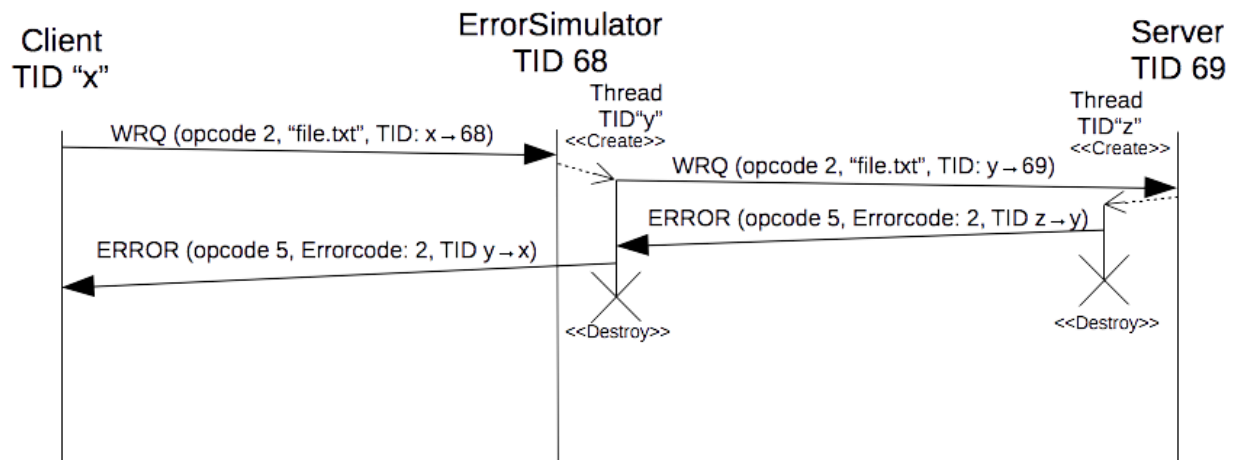


Note: this could be the case for a RRQ or a WRQ depending on a files permissions (i.e. read-only, write-only or neither)


Error 2: Server is unable to read/write from/to (or both) the requested file (permissions denied)

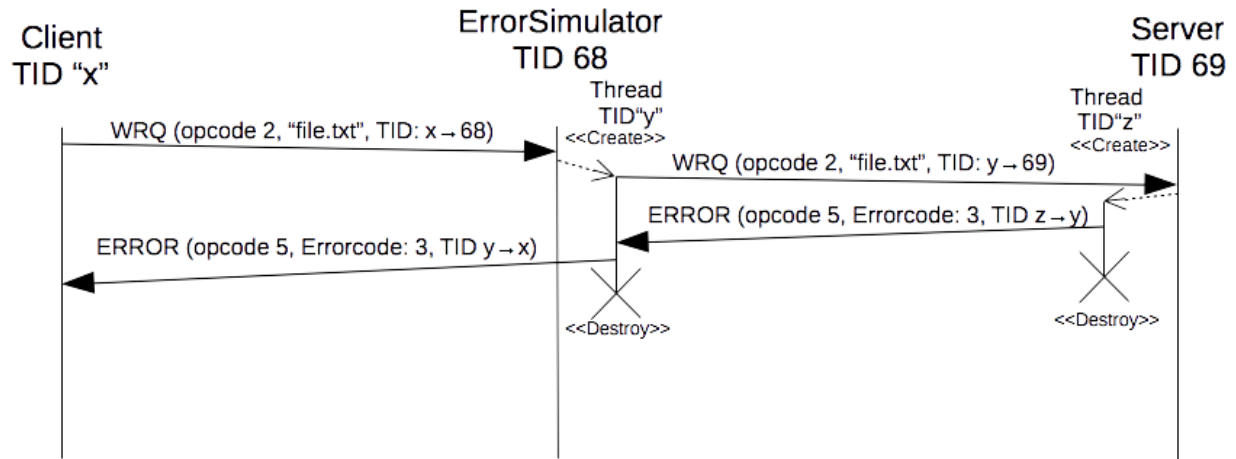

Error 3: Server cannot write requested file as disk is full

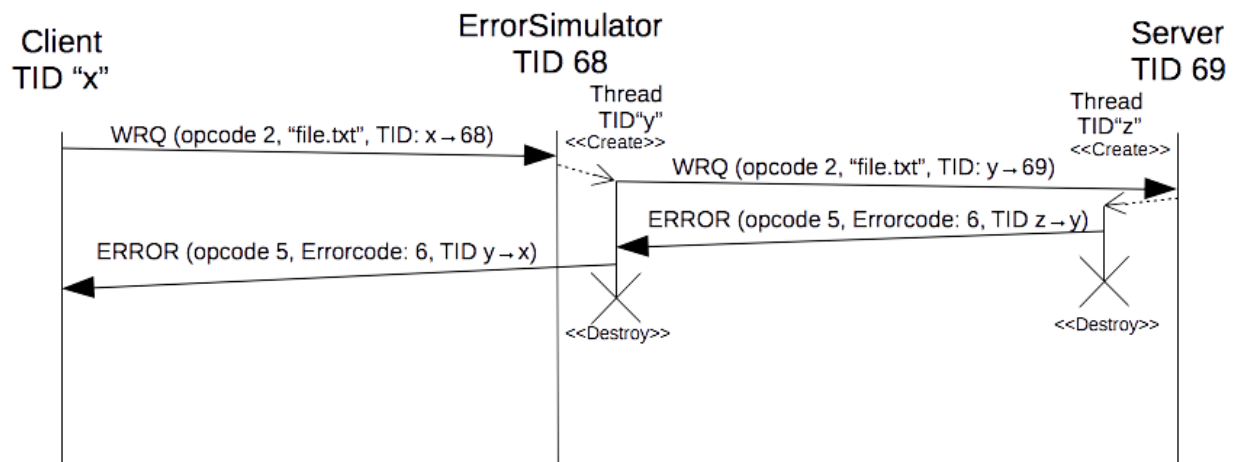

Error 6: Server unable to write Client's request as file already exists

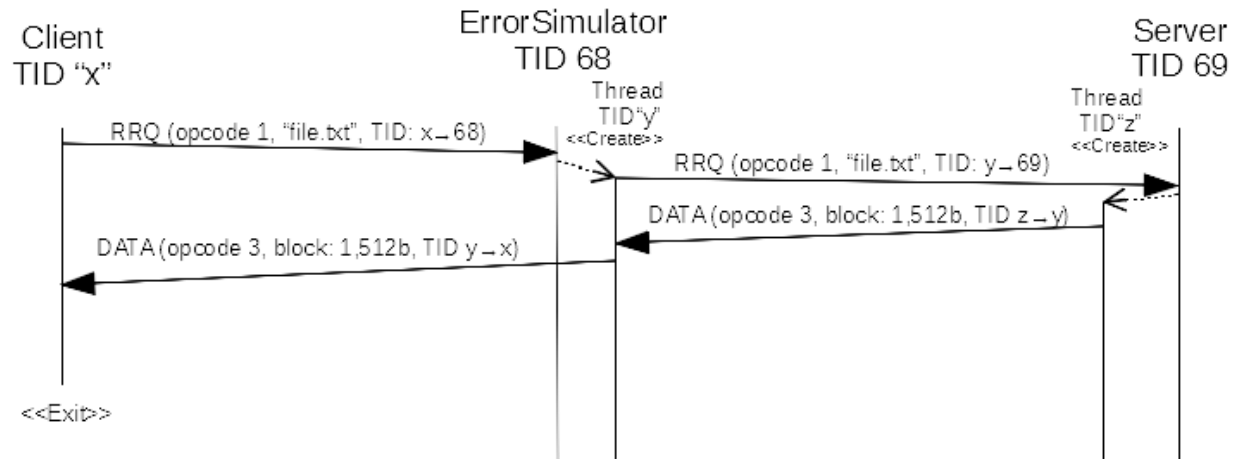

Note: This diagram represent what will occur with errors 2,3 and 6

- If error 2, then the Client would have tried to write to a text doc that is read only.
- If error 3, then the disk on the Client side is full and could not write the file being sent
- If error 6, then the file that Client is trying to write to already exists

As a design decision, the Client will just exit.

Errors 2,3,6: Client unable to write data sent from Server to the disk