


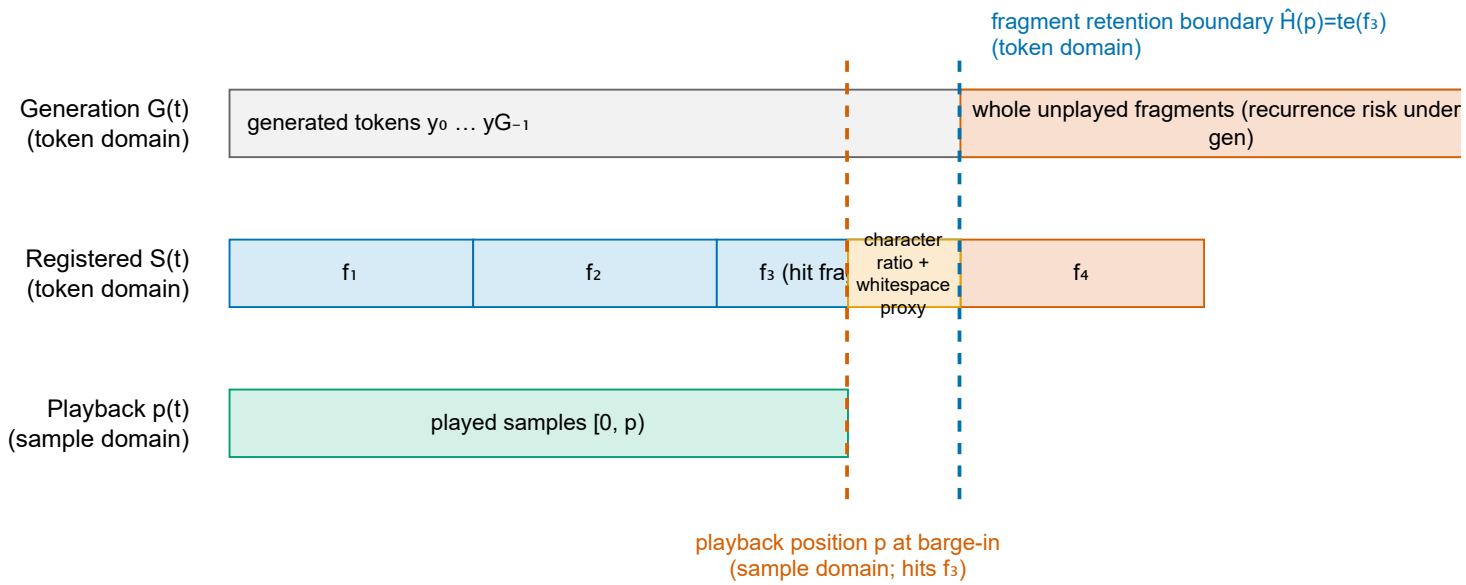

Locate the hit fragment using p, then compare token endpoints: $\hat{H}(p) \leq S(t) \leq G(t)$. B-ours keeps $[0, \hat{H}(p))$; the unplayed in-fr

- B-

agment text suffix is evaluated only by a character-ratio, whitespace-snapped proxy.