


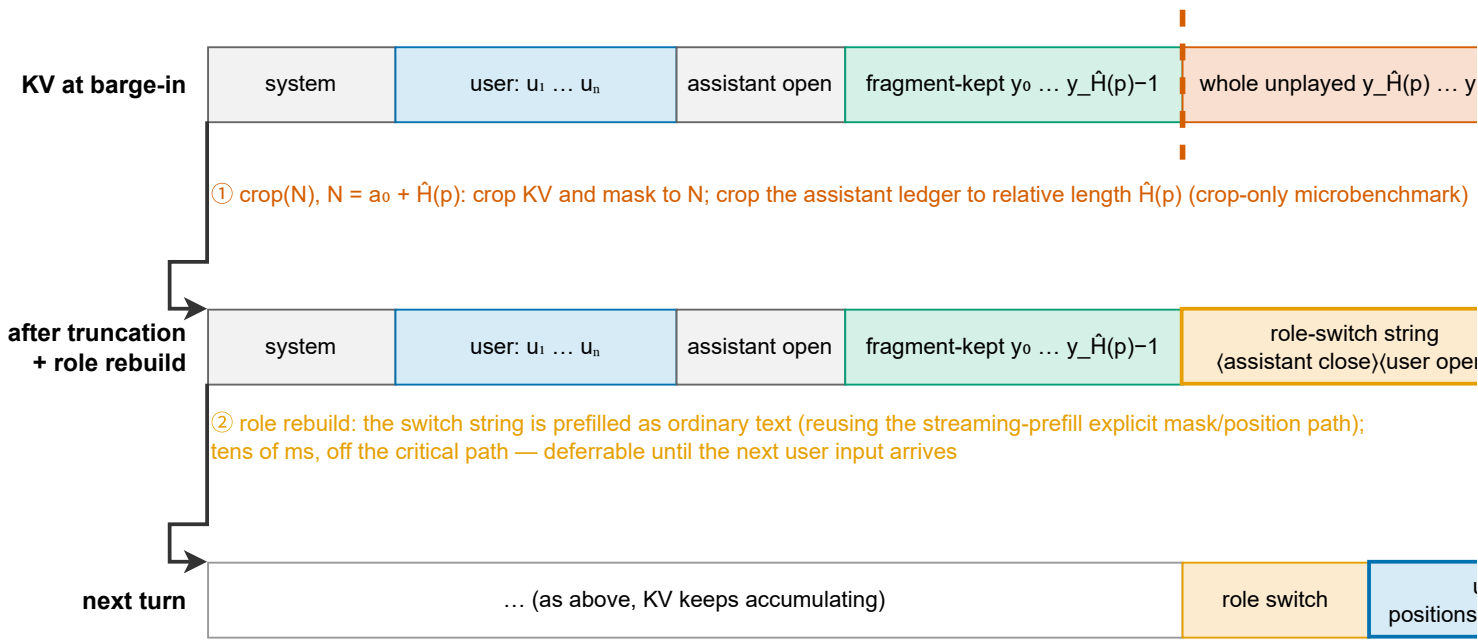

After crop: $|\mathcal{K}|=|\text{mask}|=N$ and assistant-ledger length= $\hat{H}(p)$. After pre-filling q role tokens: $|\mathcal{K}|=|\text{mask}|=N+q$; the ledger excludes t

G-1

n>

user: u₁' ...
; continue from N+q

the role string.