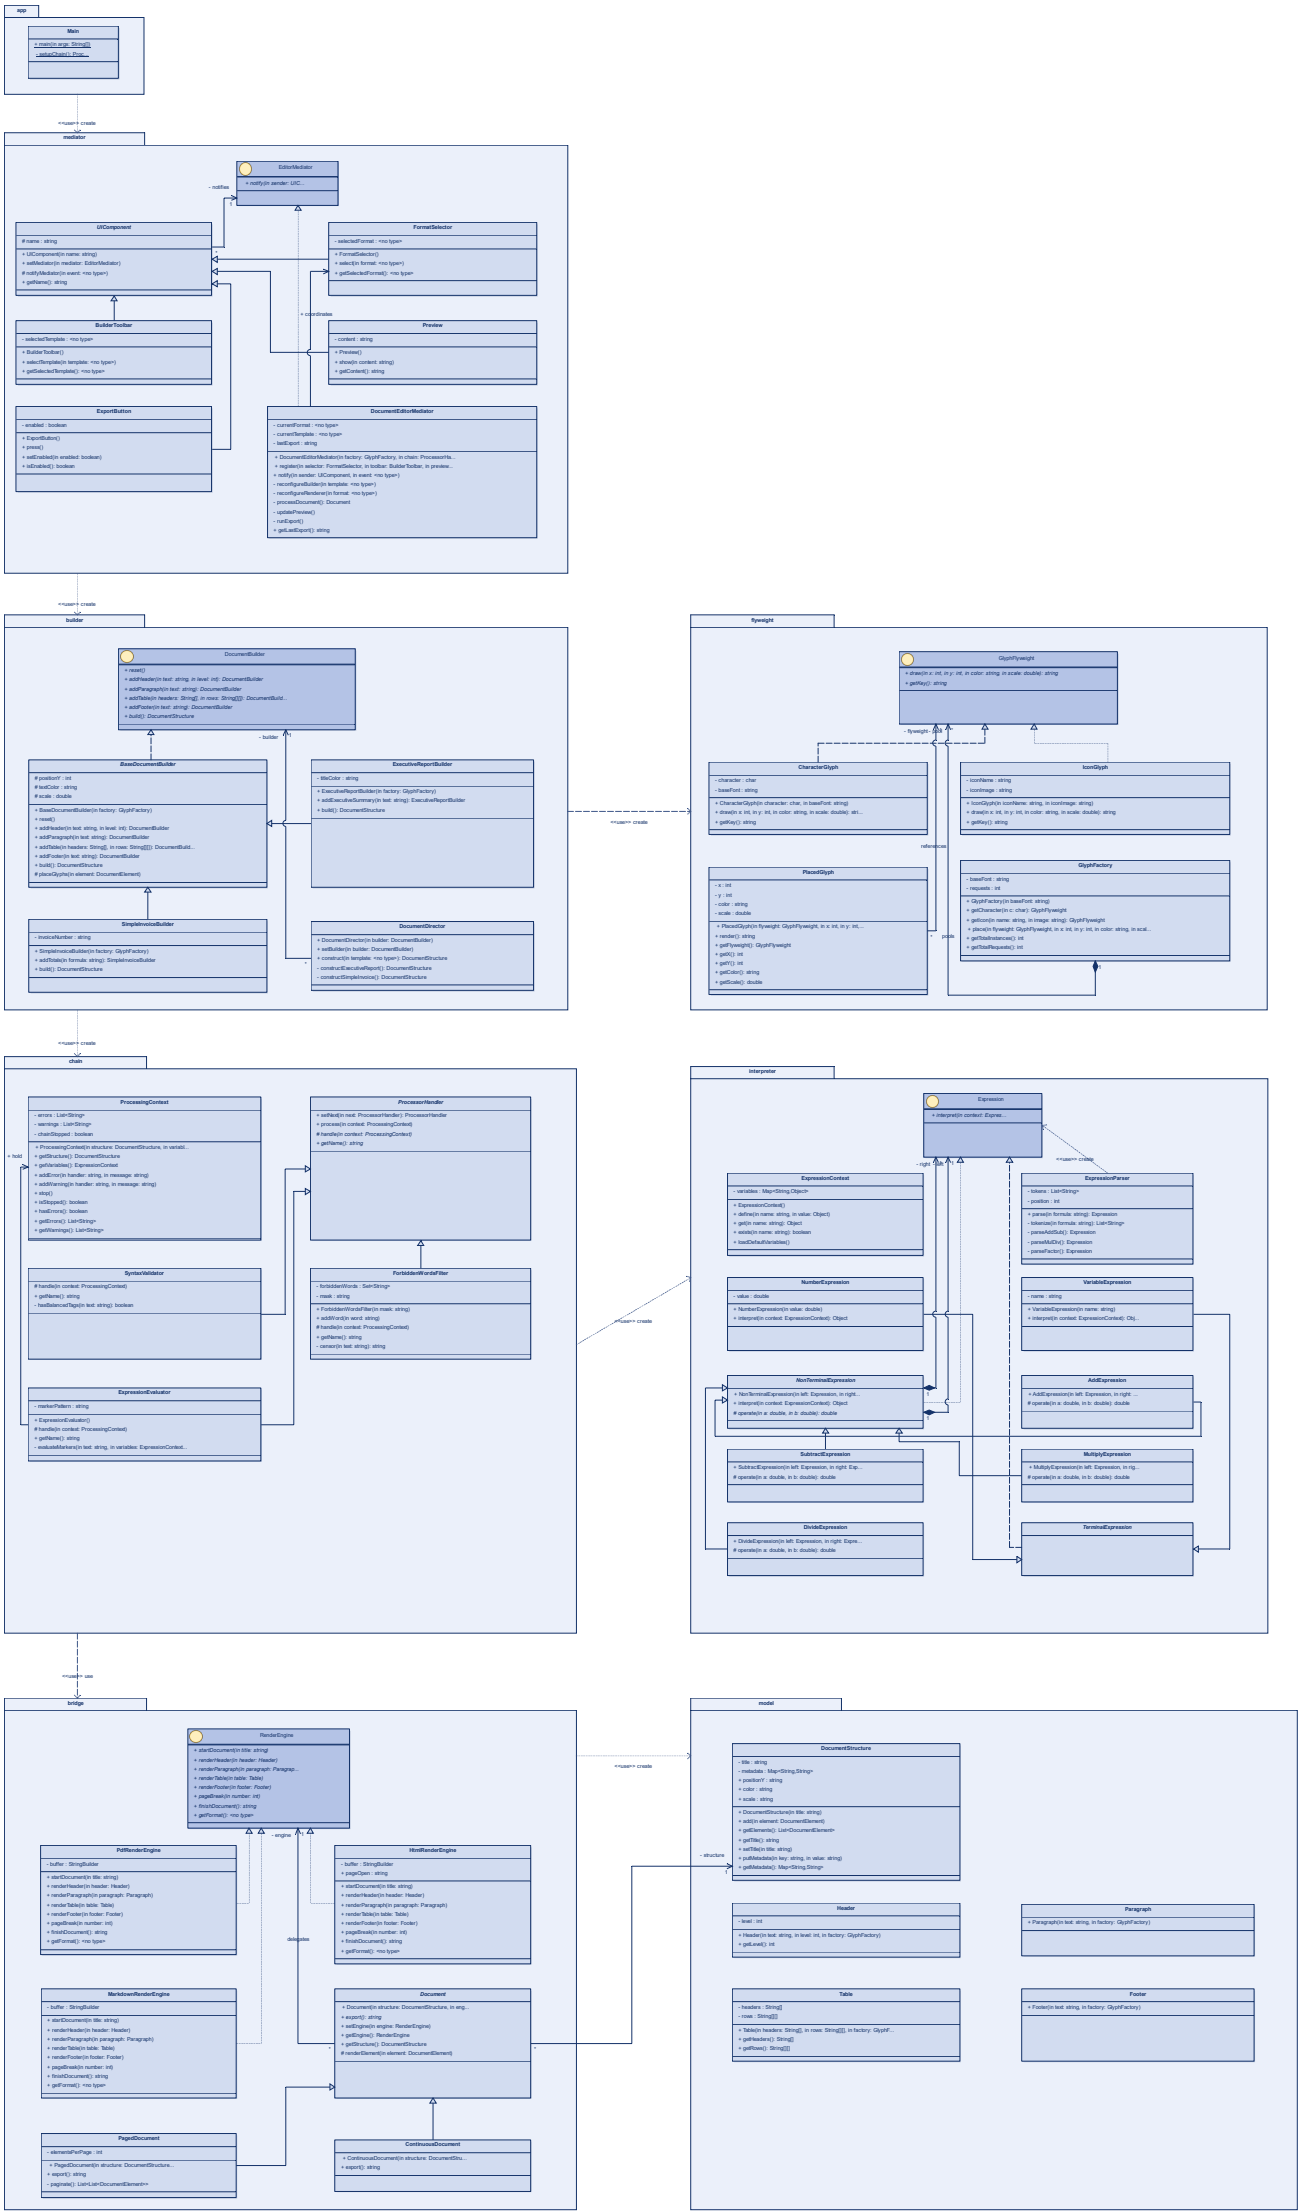

app
Main
+ main(in args: String[])
- setupChain(): Proc...
«create»
mediator
EditorMediator
+ notify(in sender: UIC...
- notifies
UIComponent
name : string
+ UIComponent(in name: string)
+ setMediator(in mediator: EditorMediator)
notifyMediator(in event: <no type>)
+ getName(): string
FormatSelector
- selectedFormat : <no type>
+ FormatSelector()
+ select(in format: <no type>)
+ getSelectedFormat(): <no type>
+ coordinates
BuilderToolbar
- selectedTemplate : <no type>
+ BuilderToolbar()
+ selectTemplate(in template: <no type>)
+ getSelectedTemplate(): <no type>
Preview
- content : string
+ Preview()
+ show(in content: string)
+ getContent(): string
ExportButton
- enabled : boolean
+ ExportButton()
+ press()
+ setEnabled(in enabled: boolean)
+ isEnabled(): boolean
DocumentEditorMediator
- currentFormat : <no type>
- currentTemplate : <no type>
- lastExport : string
+ DocumentEditorMediator(in factory: GlyphFactory, in chain: ProcessorHa...
+ register(in selector: FormatSelector, in toolbar: BuilderToolbar, in preview...
+ notify(in sender: UIComponent, in event: <no type>)
- reconfigureBuilder(in template: <no type>)
- reconfigureRenderer(in format: <no type>)
- processDocument(): Document
- updatePreview()
- runExport()
+ getLastExport(): string
«create»
builder
DocumentBuilder
+ reset()
+ addHeader(in text: string, in level: int): DocumentBuilder
+ addParagraph(in text: string): DocumentBuilder
+ addTable(in headers: String[], in rows: String[][]): DocumentBuild...
+ addFooter(in text: string): DocumentBuilder
+ build(): DocumentStructure
- builder
BaseDocumentBuilder
positionY : int
textColor : string
scale : double
+ BaseDocumentBuilder(in factory: GlyphFactory)
+ reset()
+ addHeader(in text: string, in level: int): DocumentBuilder
+ addParagraph(in text: string): DocumentBuilder
+ addTable(in headers: String[], in rows: String[][]): DocumentBuild...
+ addFooter(in text: string): DocumentBuilder
+ build(): DocumentStructure
placeGlyphs(in element: DocumentElement)
ExecutiveReportBuilder
- titleColor : string
+ ExecutiveReportBuilder(in factory: GlyphFactory)
+ addExecutiveSummary(in text: string): ExecutiveReportBuilder
+ build(): DocumentStructure
SimpleInvoiceBuilder
- invoiceNumber : string
+ SimpleInvoiceBuilder(in factory: GlyphFactory)
+ addTotals(in formula: string): SimpleInvoiceBuilder
+ build(): DocumentStructure
DocumentDirector
+ DocumentDirector(in builder: DocumentBuilder)
+ setBuilder(in builder: DocumentBuilder)
+ construct(in template: <no type>): DocumentStructure
- constructExecutiveReport(): DocumentStructure
- constructSimpleInvoice(): DocumentStructure
«create»
flyweight
GlyphFlyweight
+ draw(in x: int, in y: int, in color: string, in scale: double): string
+ getKey(): string
- flyweight
CharacterGlyph
- character : char
- baseFont : string
+ CharacterGlyph(in character: char, in baseFont: string)
+ draw(in x: int, in y: int, in color: string, in scale: double): str...
+ getKey(): string
IconGlyph
- iconName : string
- iconImage : string
+ IconGlyph(in iconName: string, in iconImage: string)
+ draw(in x: int, in y: int, in color: string, in scale: double): string
+ getKey(): string
references
PlacedGlyph
- x : int
- y : int
- color : string
- scale : double
+ PlacedGlyph(in flyweight: GlyphFlyweight, in x: int, in y: int, ...
+ render(): string
+ getFlyweight(): GlyphFlyweight
+ getX(): int
+ getY(): int
+ getColor(): string
+ getScale(): double
GlyphFactory
- baseFont : string
- requests : int
+ GlyphFactory(in baseFont: string)
+ getCharacter(in c: char): GlyphFlyweight
+ getIcon(in name: string, in image: string): GlyphFlyweight
+ place(in flyweight: GlyphFlyweight, in x: int, in y: int, in color: string, in scal...
+ getTotalInstances(): int
+ getTotalRequests(): int
pools
«create»
chain
ProcessingContext
- errors : List<String>
- warnings : List<String>
- chainStopped : boolean
+ ProcessingContext(in structure: DocumentStructure, in variabl...
+ getStructure(): DocumentStructure
+ getVariables(): ExpressionContext
+ addError(in handler: string, in message: string)
+ addWarning(in handler: string, in message: string)
+ stop()
+ isStopped(): boolean
+ hasErrors(): boolean
+ getErrors(): List<String>
+ getWarnings(): List<String>
+ hold
ProcessorHandler
+ setNext(in next: ProcessorHandler): ProcessorHandler
+ process(in context: ProcessingContext)
handle(in context: ProcessingContext)
+ getName(): string
SyntaxValidator
handle(in context: ProcessingContext)
+ getName(): string
- hasBalancedTags(in text: string): boolean
ForbiddenWordsFilter
- forbiddenWords : Set<String>
- mask : string
+ ForbiddenWordsFilter(in mask: string)
+ addWord(in word: string)
handle(in context: ProcessingContext)
+ getName(): string
- censor(in text: string): string
ExpressionEvaluator
- markerPattern : string
+ ExpressionEvaluator()
handle(in context: ProcessingContext)
+ getName(): string
- evaluateMarkers(in text: string, in variables: ExpressionContext...
«create»
interpreter
Expression
+ interpret(in context: Expres...
- right
«create»
ExpressionContext
- variables : Map<String,Object>
+ ExpressionContext()
+ define(in name: string, in value: Object)
+ get(in name: string): Object
+ exists(in name: string): boolean
+ loadDefaultVariables()
ExpressionParser
- tokens : List<String>
- position : int
+ parse(in formula: string): Expression
- tokenize(in formula: string): List<String>
- parseAddSub(): Expression
- parseMulDiv(): Expression
- parseFactor(): Expression
NumberExpression
- value : double
+ NumberExpression(in value: double)
+ interpret(in context: ExpressionContext): Object
VariableExpression
- name : string
+ VariableExpression(in name: string)
+ interpret(in context: ExpressionContext): Obj...
NonTerminalExpression
+ NonTerminalExpression(in left: Expression, in right...
+ interpret(in context: ExpressionContext): Object
operate(in a: double, in b: double): double
AddExpression
+ AddExpression(in left: Expression, in right: ...
operate(in a: double, in b: double): double
SubtractExpression
+ SubtractExpression(in left: Expression, in right: Exp...
operate(in a: double, in b: double): double
MultiplyExpression
+ MultiplyExpression(in left: Expression, in rig...
operate(in a: double, in b: double): double
DivideExpression
+ DivideExpression(in left: Expression, in right: Expre...
operate(in a: double, in b: double): double
TerminalExpression
«use»
bridge
RenderEngine
+ startDocument(in title: string)
+ renderHeader(in header: Header)
+ renderParagraph(in paragraph: Paragrap...
+ renderTable(in table: Table)
+ renderFooter(in footer: Footer)
+ pageBreak(in number: int)
+ finishDocument(): string
+ getFormat(): <no type>
- engine
PdfRenderEngine
- buffer : StringBuilder
+ startDocument(in title: string)
+ renderHeader(in header: Header)
+ renderParagraph(in paragraph: Paragraph)
+ renderTable(in table: Table)
+ renderFooter(in footer: Footer)
+ pageBreak(in number: int)
+ finishDocument(): string
+ getFormat(): <no type>
HtmlRenderEngine
- buffer : StringBuilder
- pageOpen : string
+ startDocument(in title: string)
+ renderHeader(in header: Header)
+ renderParagraph(in paragraph: Paragraph)
+ renderTable(in table: Table)
+ renderFooter(in footer: Footer)
+ pageBreak(in number: int)
+ finishDocument(): string
+ getFormat(): <no type>
delegates
MarkdownRenderEngine
- buffer : StringBuilder
+ startDocument(in title: string)
+ renderHeader(in header: Header)
+ renderParagraph(in paragraph: Paragraph)
+ renderTable(in table: Table)
+ renderFooter(in footer: Footer)
+ pageBreak(in number: int)
+ finishDocument(): string
+ getFormat(): <no type>
Document
+ Document(in structure: DocumentStructure, in eng...
+ export(): string
+ setEngine(in engine: RenderEngine)
+ getEngine(): RenderEngine
+ getStructure(): DocumentStructure
renderElement(in element: DocumentElement)
PagedDocument
- elementsPerPage : int
+ PagedDocument(in structure: DocumentStructure...
+ export(): string
- paginate(): List<List<DocumentElement>>
ContinuousDocument
+ ContinuousDocument(in structure: DocumentStru...
+ export(): string
«create»
model
DocumentStructure
- title : string
- metadata : Map<String,String>
+ position!Y : string
+ color : string
+ scale : string
+ DocumentStructure(in title: string)
+ add(in element: DocumentElement)
+ getElements(): List<DocumentElement>
+ getTitle(): string
+ setTitle(in title: string)
+ putMetadata(in key: string, in value: string)
+ getMetadata(): Map<String,String>
- structure
Header
- level : int
+ Header(in text: string, in level: int, in factory: GlyphFactory)
+ getLevel(): int
Paragraph
+ Paragraph(in text: string, in factory: GlyphFactory)
Table
- headers : String[]
- rows : String[][]
+ Table(in headers: String[], in rows: String[][], in factory: GlyphF...
+ getHeaders(): String[]
+ getRows(): String[][]
Footer
+ Footer(in text: string, in factory: GlyphFactory)