git-scm.com/install/windows

git --distributed-even-if-your-workflow-isnt

About
Learn
Tools
Reference
Install
Community

The entire **Pro Git book** written by Scott Chacon and Ben Straub is available to read online for free. Dead tree versions are available on Amazon.com.

Install

Windows | macOS | Linux | Build from S

Click here to download the latest (**2.55.0(5)**) **x64**
is the most recent maintained build. It was released

Other Git for Windows downloads

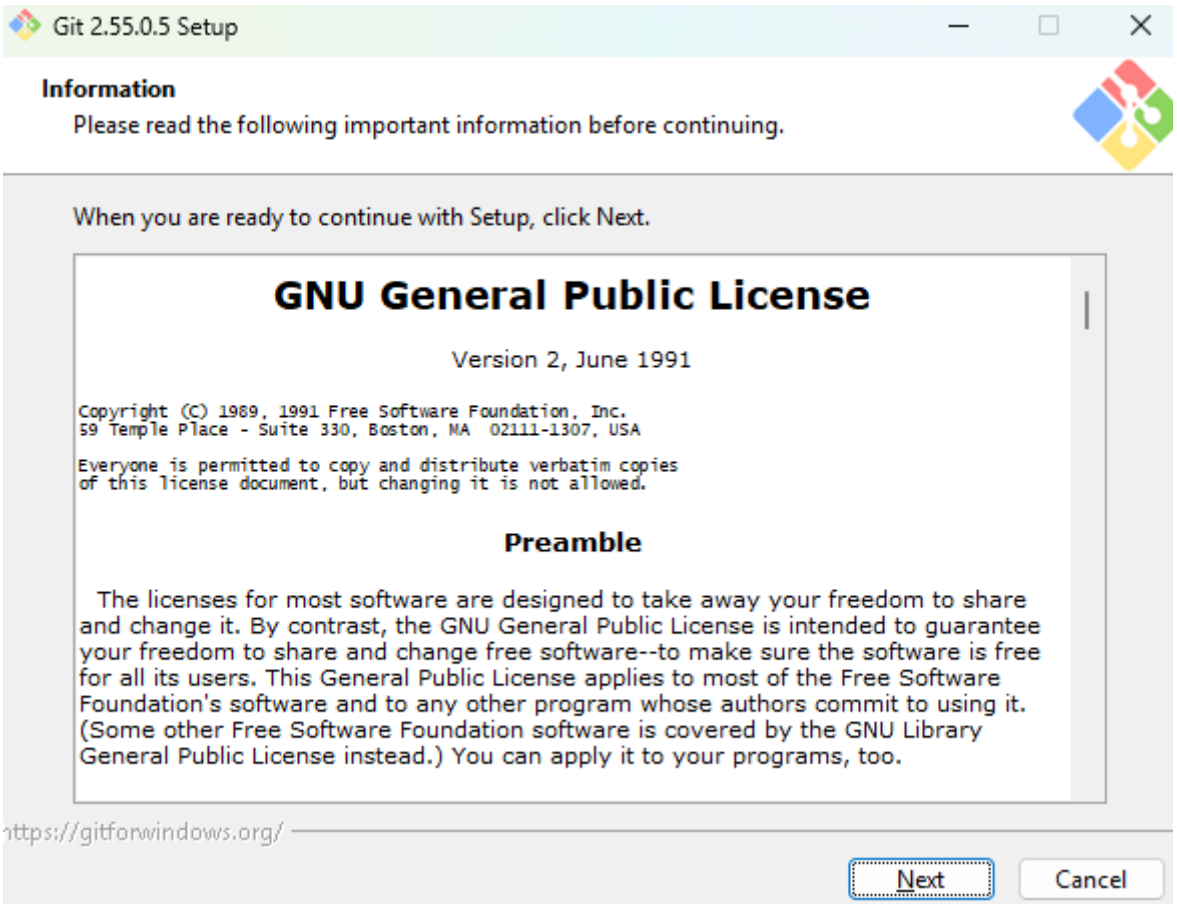
Standalone Installer
Git for Windows/x64 Setup.

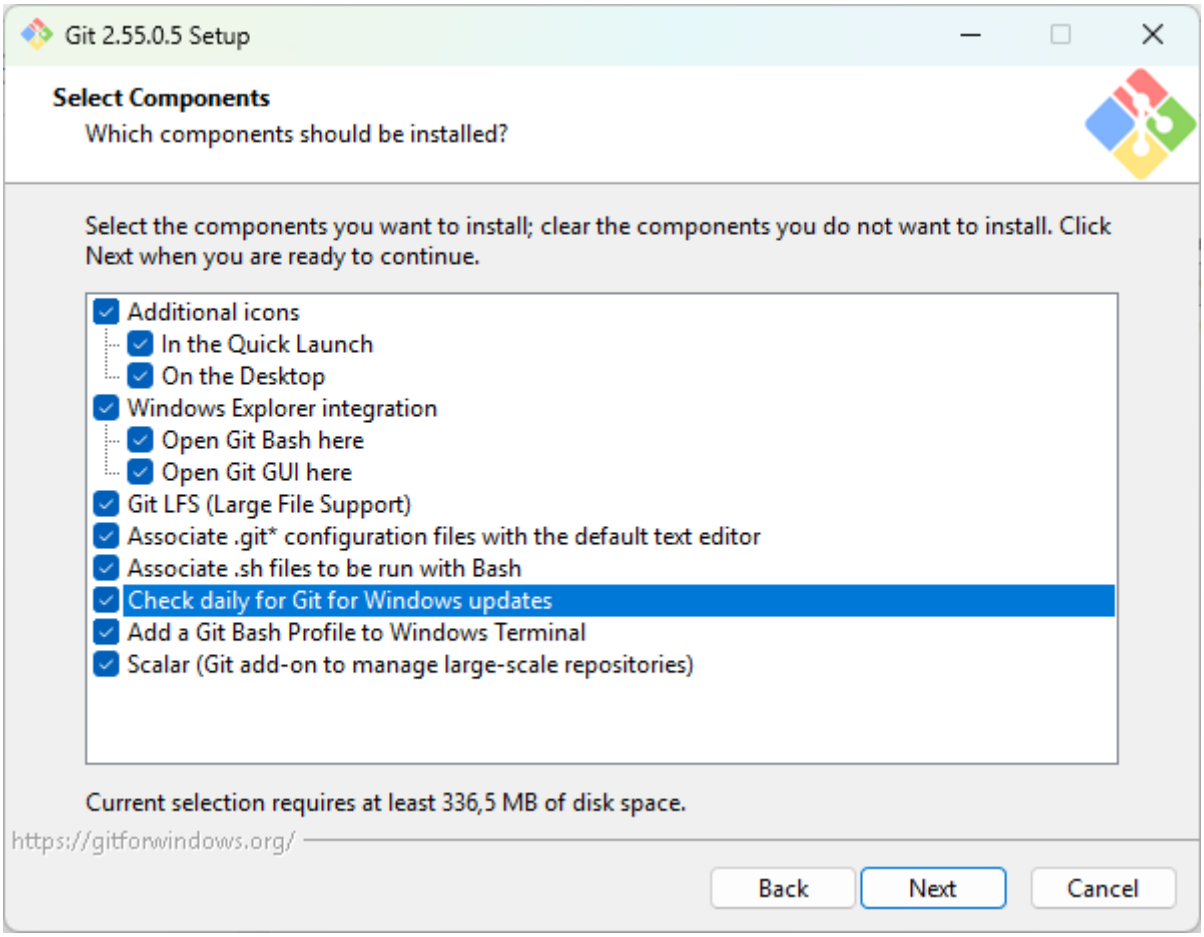
Git for Windows/ARM64 Setup.

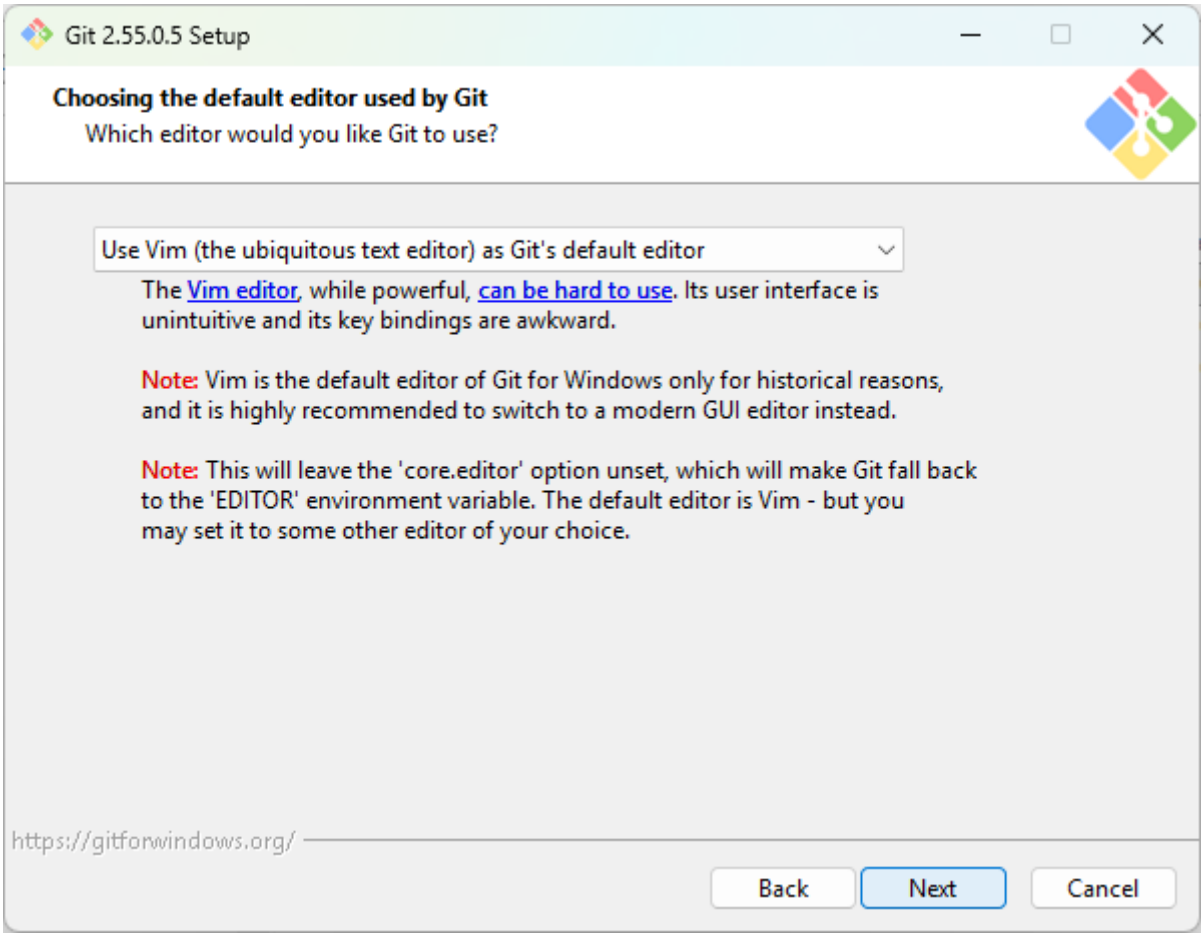
Portable ("thumbdrive edition")
Git for Windows/x64 Portable.

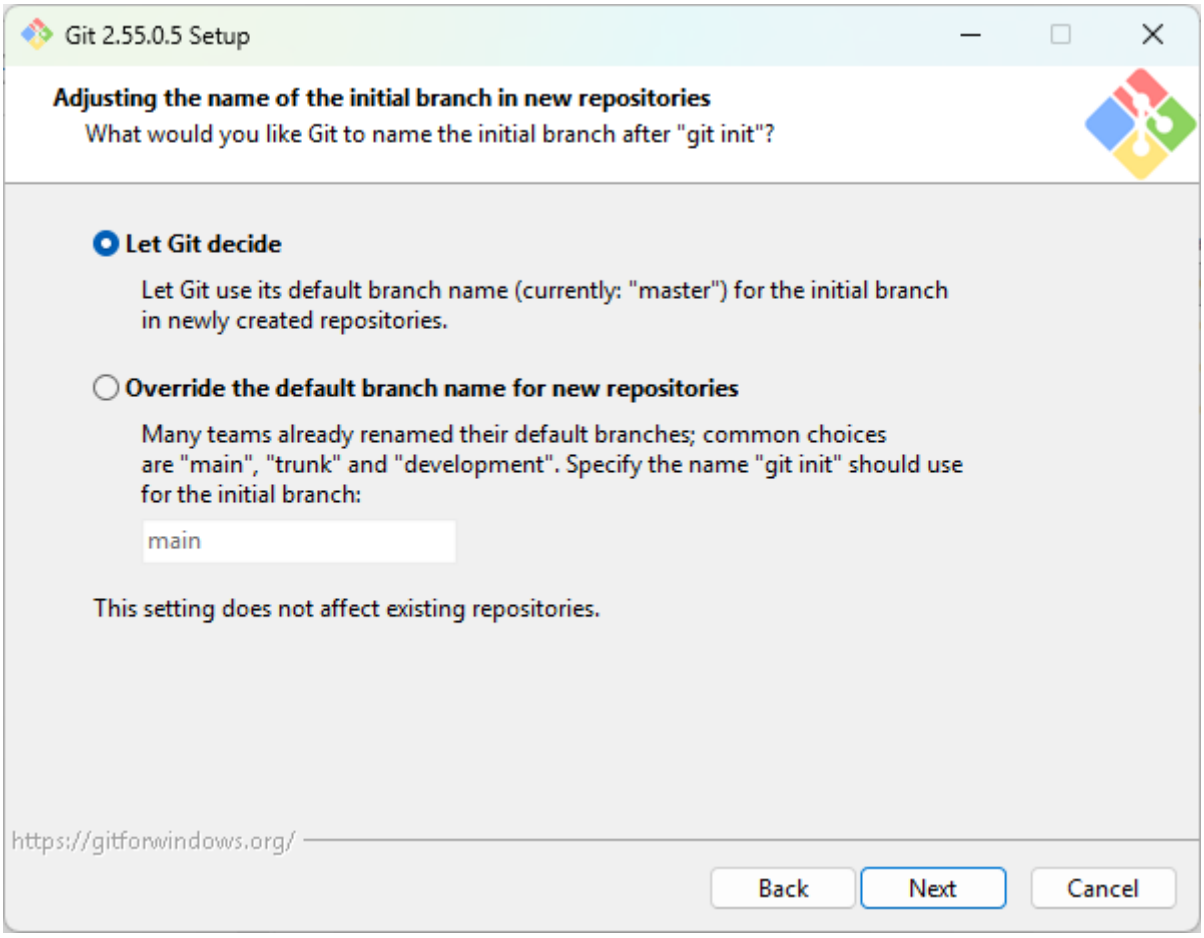
Git for Windows/ARM64 Portable.

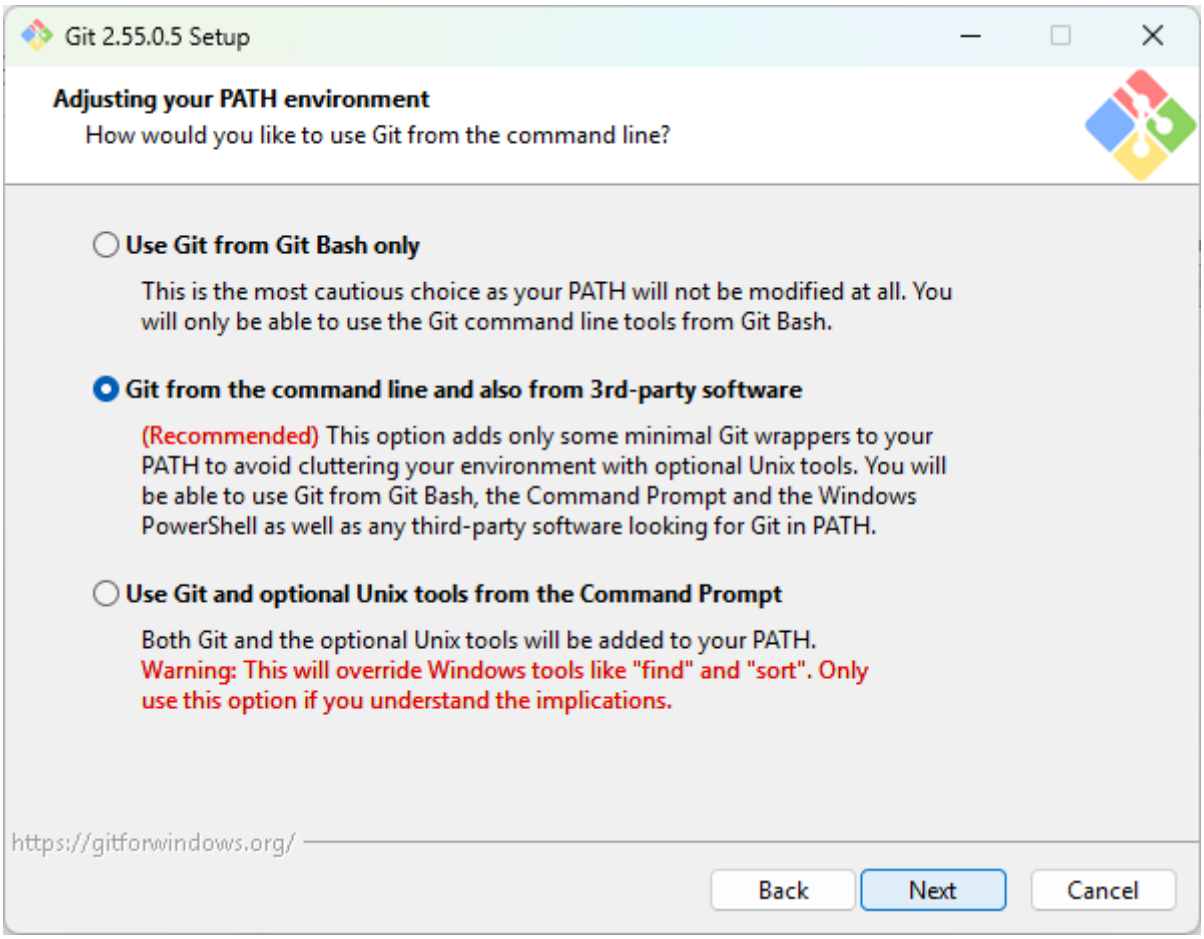
Using winget tool

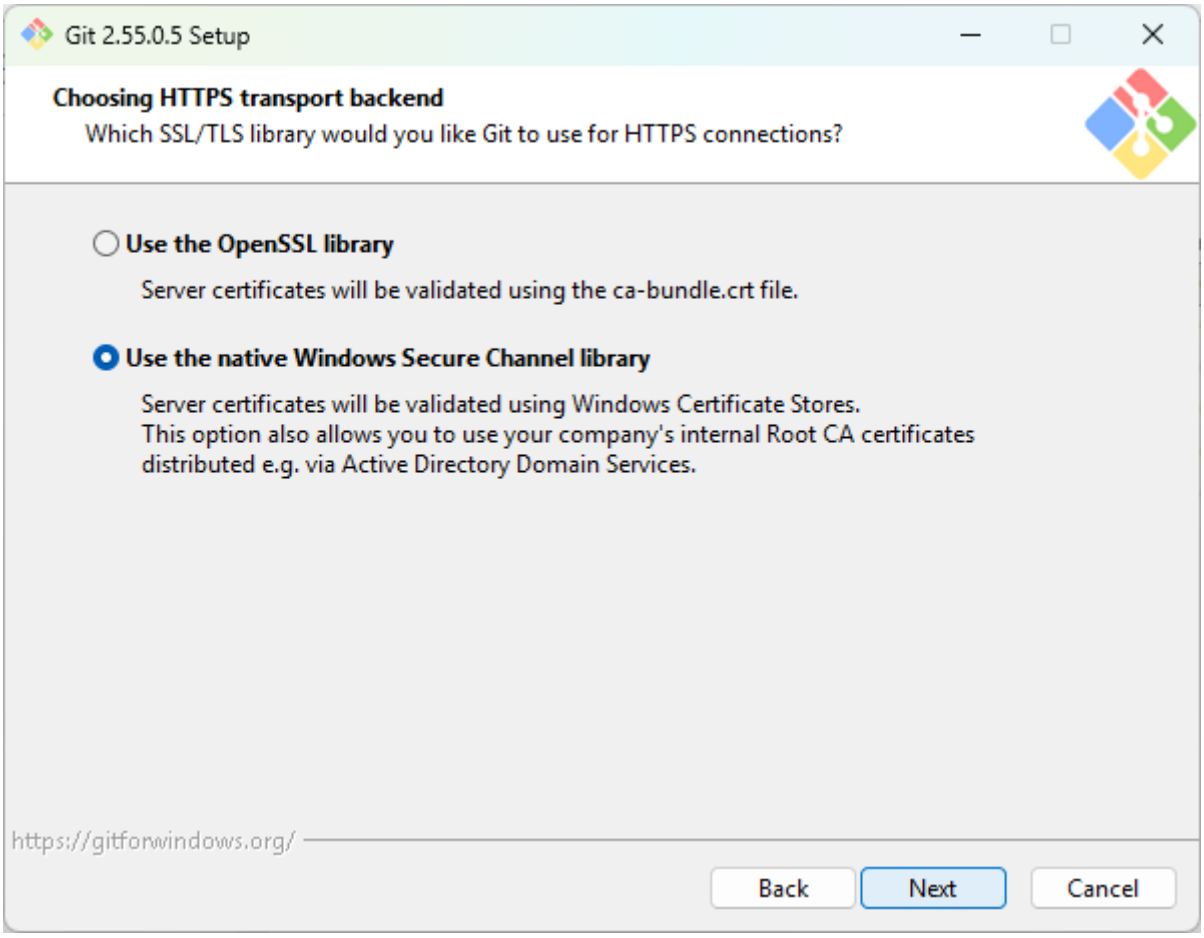


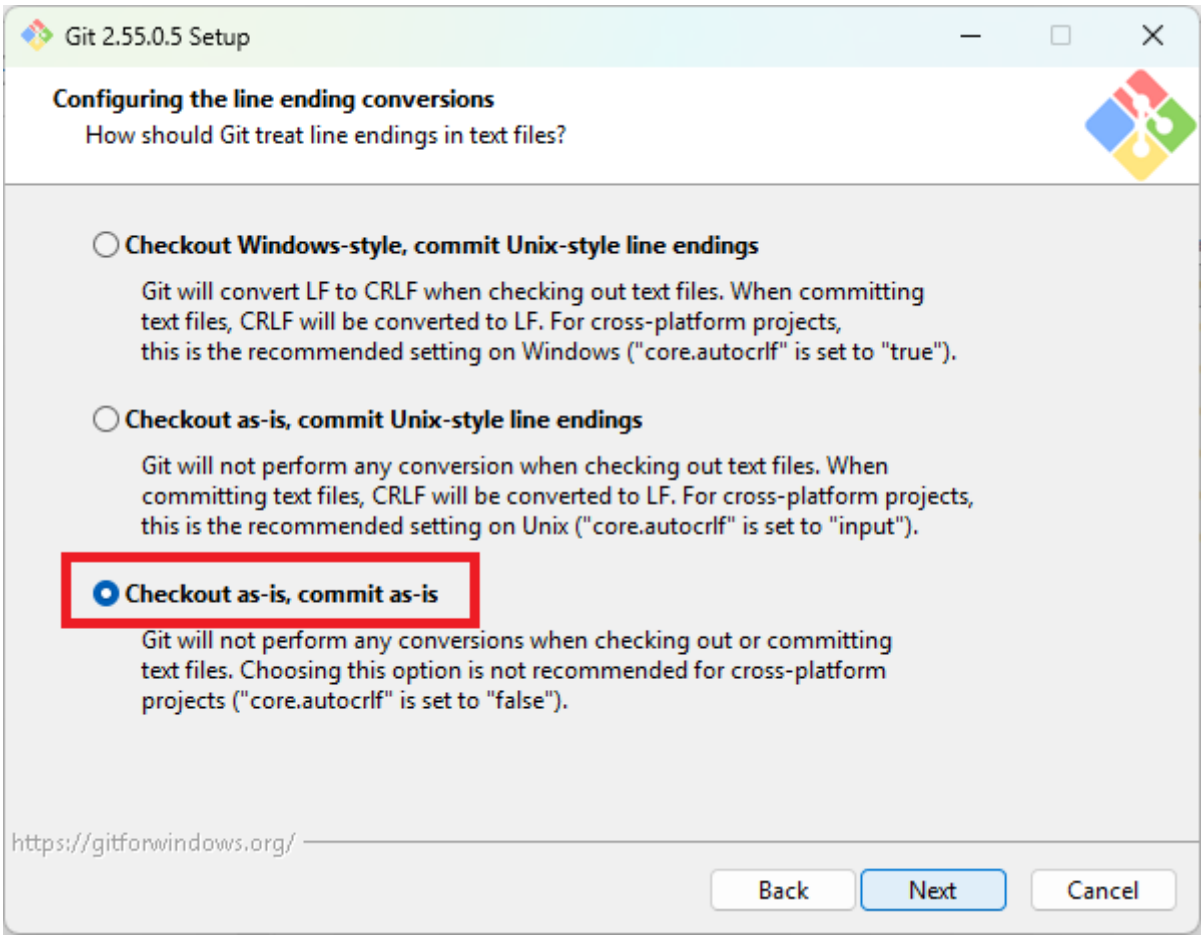

Git 2.55.0.5 Setup
Select Components
Which components should be installed?
Select the components you want to install; clear the components you do not want to install. Click Next when you are ready to continue.
Additional icons
In the Quick Launch
On the Desktop
Windows Explorer integration
Open Git Bash here
Open Git GUI here
Git LFS (Large File Support)
Associate .git* configuration files with the default text editor
Associate .sh files to be run with Bash
Check daily for Git for Windows updates
Add a Git Bash Profile to Windows Terminal
Scalar (Git add-on to manage large-scale repositories)
Current selection requires at least 336,5 MB of disk space.
https://gitforwindows.org/
Back
Next
Cancel

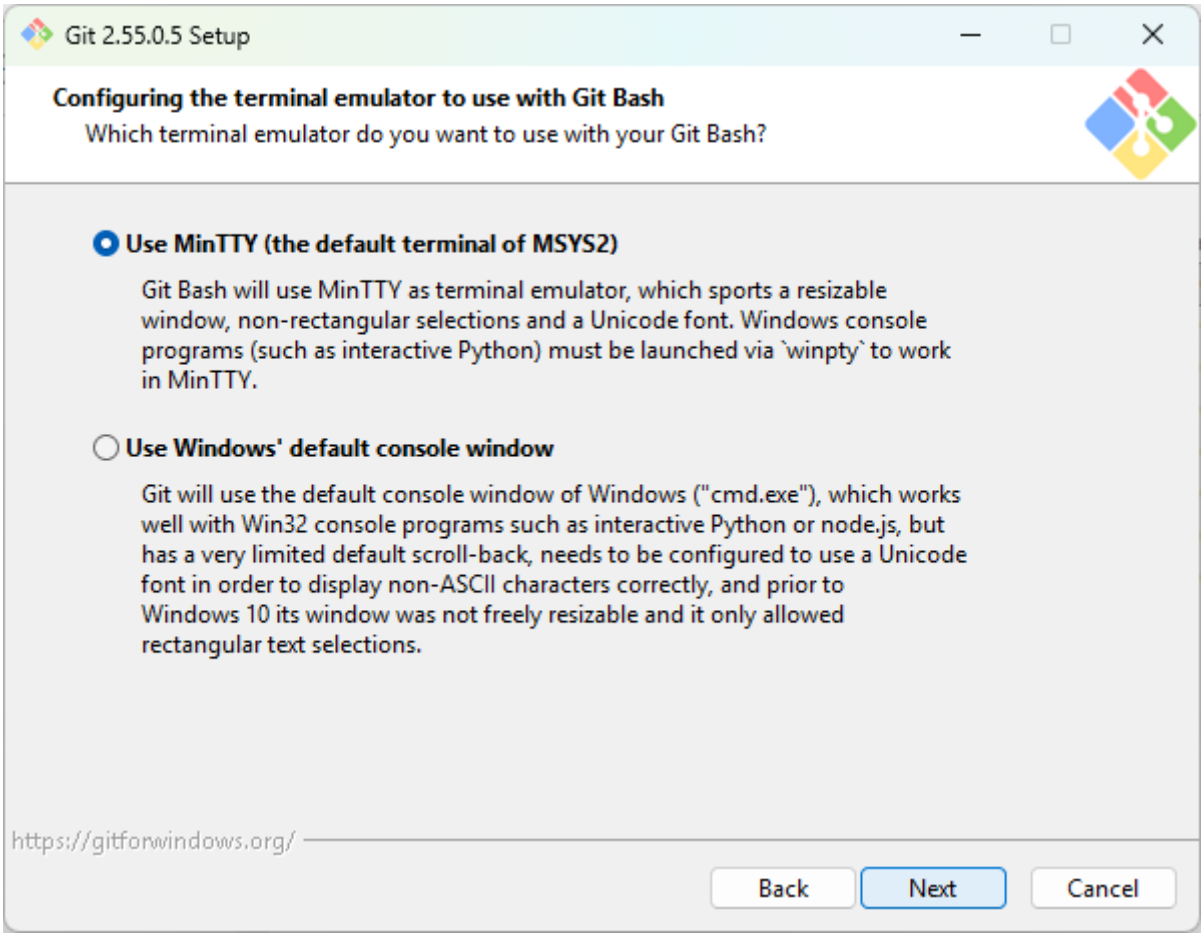

Git 2.55.0.5 Setup
Choosing the default editor used by Git
Which editor would you like Git to use?
Use Vim (the ubiquitous text editor) as Git's default editor
The Vim editor, while powerful, can be hard to use. Its user interface is unintuitive and its key bindings are awkward.
Note: Vim is the default editor of Git for Windows only for historical reasons, and it is highly recommended to switch to a modern GUI editor instead.
Note: This will leave the 'core.editor' option unset, which will make Git fall back to the 'EDITOR' environment variable. The default editor is Vim - but you may set it to some other editor of your choice.
https://gitforwindows.org/
Back
Next
Cancel

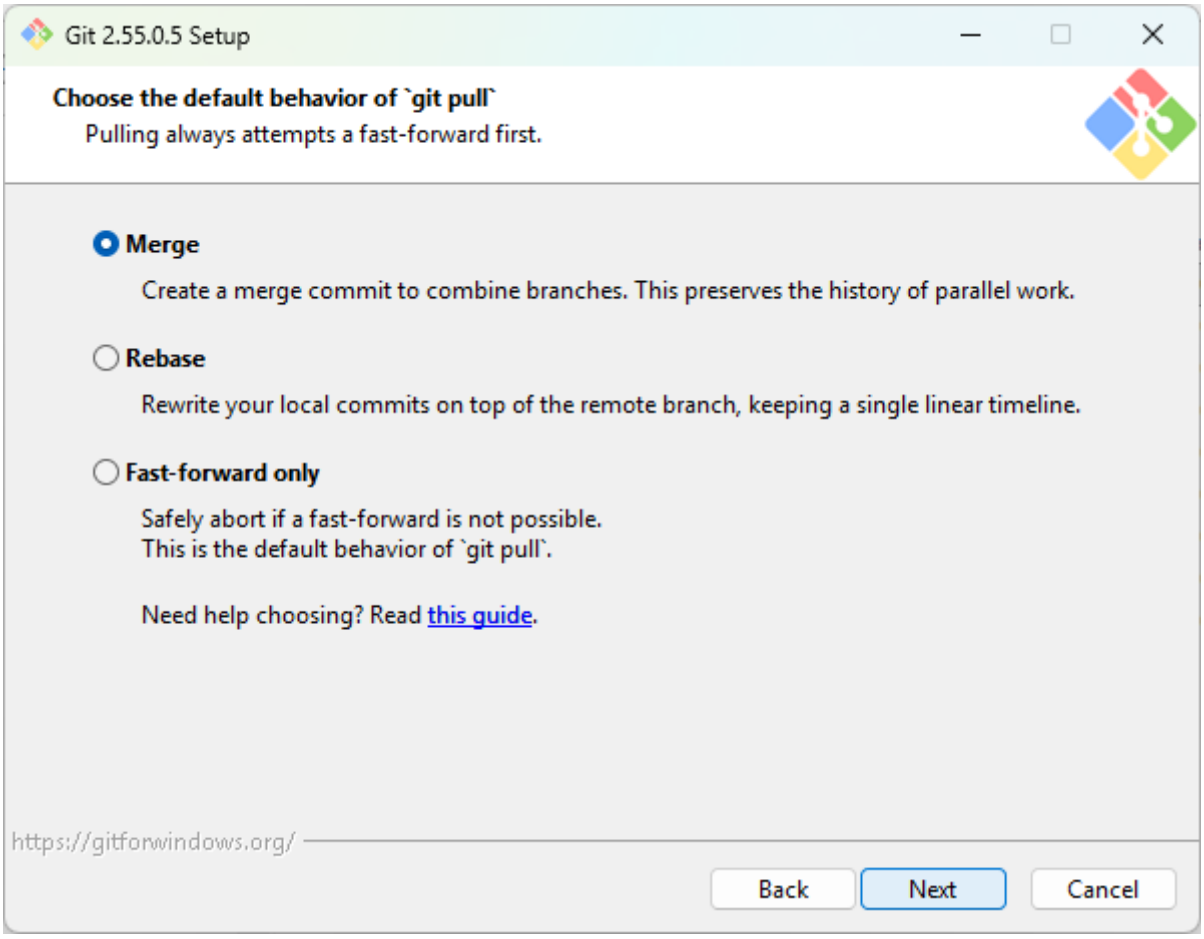

Git 2.55.0.5 Setup
Adjusting the name of the initial branch in new repositories
What would you like Git to name the initial branch after "git init"?
Let Git decide
Let Git use its default branch name (currently: "master") for the initial branch in newly created repositories.
Override the default branch name for new repositories
Many teams already renamed their default branches; common choices are "main", "trunk" and "development". Specify the name "git init" should use for the initial branch:
main
This setting does not affect existing repositories.
https://gitforwindows.org/
Back
Next
Cancel

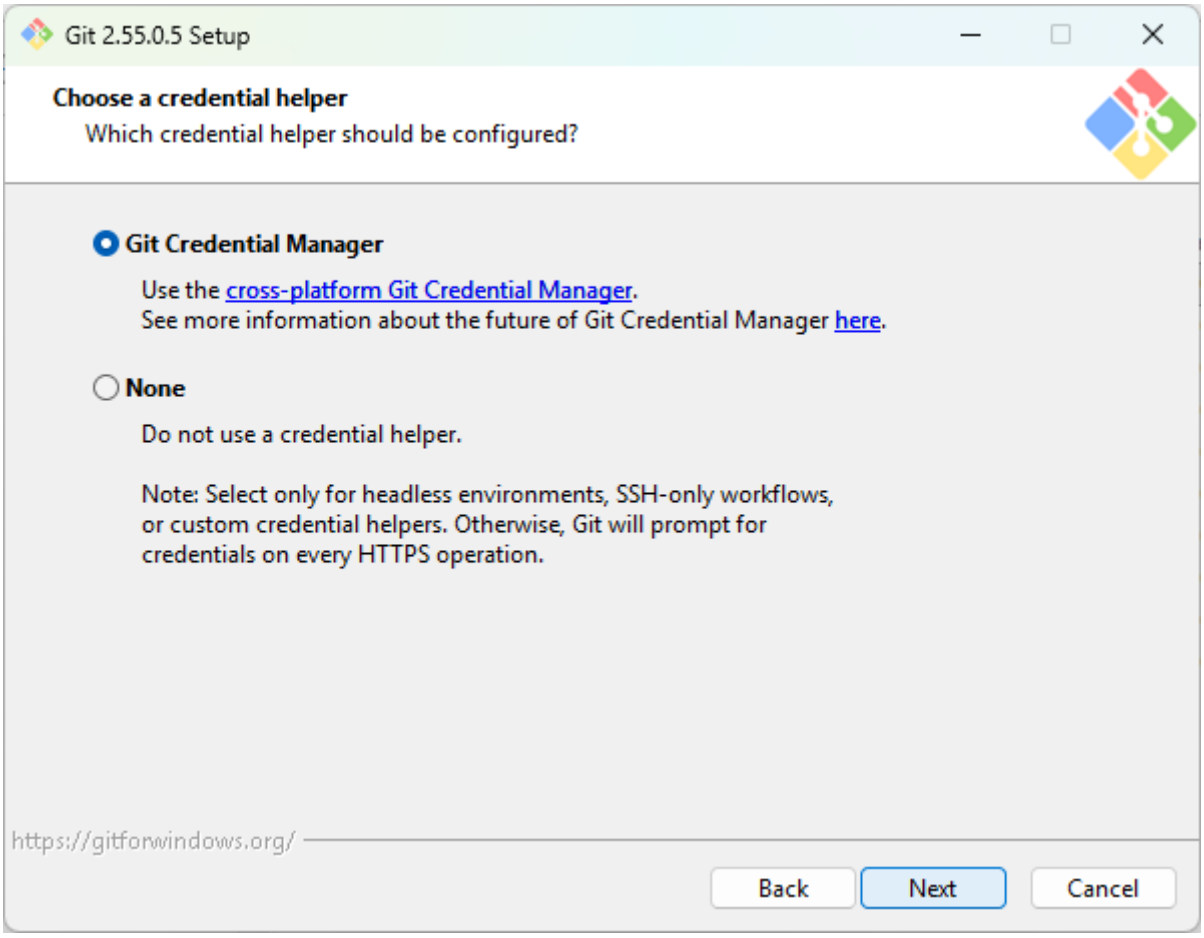

Git 2.55.0.5 Setup
Adjusting your PATH environment
How would you like to use Git from the command line?
Use Git from Git Bash only
This is the most cautious choice as your PATH will not be modified at all. You will only be able to use the Git command line tools from Git Bash.
Git from the command line and also from 3rd-party software
(Recommended) This option adds only some minimal Git wrappers to your PATH to avoid cluttering your environment with optional Unix tools. You will be able to use Git from Git Bash, the Command Prompt and the Windows PowerShell as well as any third-party software looking for Git in PATH.
Use Git and optional Unix tools from the Command Prompt
Both Git and the optional Unix tools will be added to your PATH.
Warning: This will override Windows tools like "find" and "sort". Only use this option if you understand the implications.
https://gitforwindows.org/
Back
Next
Cancel

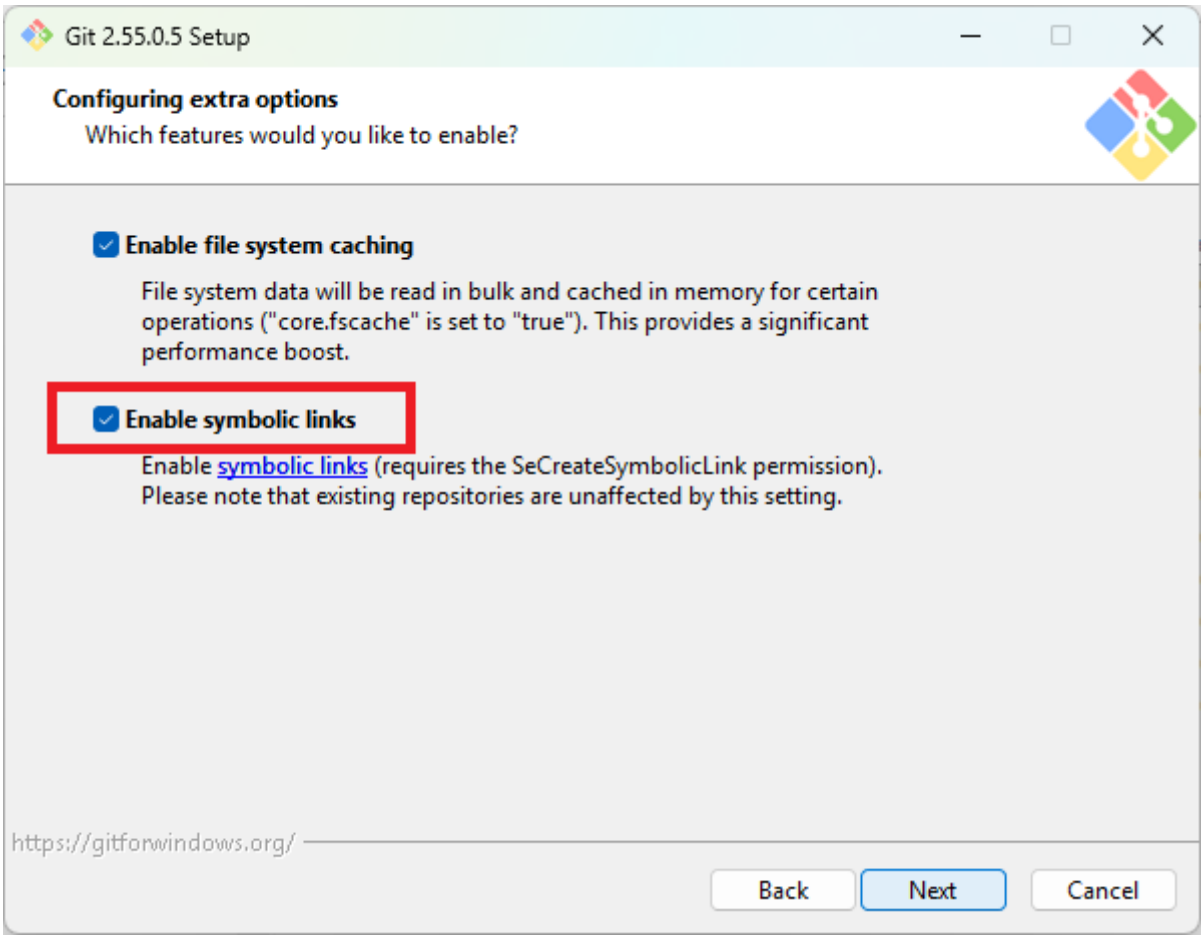

Git 2.55.0.5 Setup
Choosing HTTPS transport backend
Which SSL/TLS library would you like Git to use for HTTPS connections?
Use the OpenSSL library
Server certificates will be validated using the ca-bundle.crt file.
Use the native Windows Secure Channel library
Server certificates will be validated using Windows Certificate Stores.
This option also allows you to use your company's internal Root CA certificates
distributed e.g. via Active Directory Domain Services.
https://gitforwindows.org/
Back
Next
Cancel

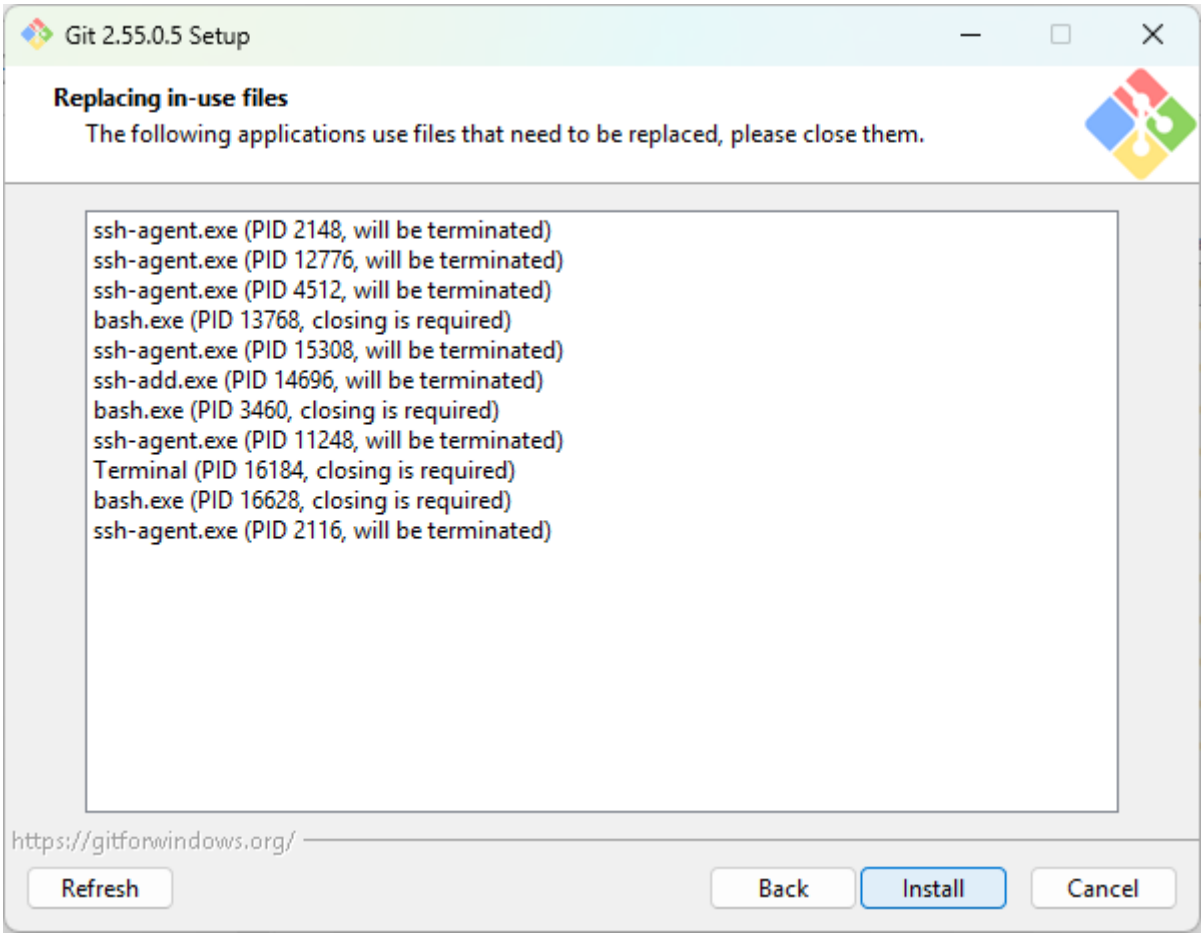

Git 2.55.0.5 Setup
Configuring the line ending conversions
How should Git treat line endings in text files?
Checkout Windows-style, commit Unix-style line endings
Git will convert LF to CRLF when checking out text files. When committing
text files, CRLF will be converted to LF. For cross-platform projects,
this is the recommended setting on Windows ("core.autocrlf" is set to "true").
Checkout as-is, commit Unix-style line endings
Git will not perform any conversion when checking out text files. When
committing text files, CRLF will be converted to LF. For cross-platform projects,
this is the recommended setting on Unix ("core.autocrlf" is set to "input").
Checkout as-is, commit as-is
Git will not perform any conversions when checking out or committing
text files. Choosing this option is not recommended for cross-platform
projects ("core.autocrlf" is set to "false").
https://gitforwindows.org/
Back
Next
Cancel


Git 2.55.0.5 Setup
Configuring the terminal emulator to use with Git Bash
Which terminal emulator do you want to use with your Git Bash?
Use MinTTY (the default terminal of MSYS2)
Git Bash will use MinTTY as terminal emulator, which sports a resizable window, non-rectangular selections and a Unicode font. Windows console programs (such as interactive Python) must be launched via `winpty` to work in MinTTY.
Use Windows' default console window
Git will use the default console window of Windows ("cmd.exe"), which works well with Win32 console programs such as interactive Python or node.js, but has a very limited default scroll-back, needs to be configured to use a Unicode font in order to display non-ASCII characters correctly, and prior to Windows 10 its window was not freely resizable and it only allowed rectangular text selections.
https://gitforwindows.org/
Back
Next
Cancel


Git 2.55.0.5 Setup
Choose the default behavior of `git pull`
Pulling always attempts a fast-forward first.
Merge
Create a merge commit to combine branches. This preserves the history of parallel work.
Rebase
Rewrite your local commits on top of the remote branch, keeping a single linear timeline.
Fast-forward only
Safely abort if a fast-forward is not possible.
This is the default behavior of `git pull`.
Need help choosing? Read this guide.
https://gitforwindows.org/
Back
Next
Cancel


Git 2.55.0.5 Setup
Choose a credential helper
Which credential helper should be configured?
Git Credential Manager
Use the cross-platform Git Credential Manager.
See more information about the future of Git Credential Manager here.
None
Do not use a credential helper.
Note: Select only for headless environments, SSH-only workflows,
or custom credential helpers. Otherwise, Git will prompt for
credentials on every HTTPS operation.
https://gitforwindows.org/
Back
Next
Cancel


Git 2.55.0.5 Setup
Configuring extra options
Which features would you like to enable?
Enable file system caching
File system data will be read in bulk and cached in memory for certain
operations ("core.fscache" is set to "true"). This provides a significant
performance boost.
Enable symbolic links
Enable symbolic links (requires the SeCreateSymbolicLink permission).
Please note that existing repositories are unaffected by this setting.
https://gitforwindows.org/
Back
Next
Cancel


Git 2.55.0.5 Setup
Replacing in-use files
The following applications use files that need to be replaced, please close them.
ssh-agent.exe (PID 2148, will be terminated)
ssh-agent.exe (PID 12776, will be terminated)
ssh-agent.exe (PID 4512, will be terminated)
bash.exe (PID 13768, closing is required)
ssh-agent.exe (PID 15308, will be terminated)
ssh-add.exe (PID 14696, will be terminated)
bash.exe (PID 3460, closing is required)
ssh-agent.exe (PID 11248, will be terminated)
Terminal (PID 16184, closing is required)
bash.exe (PID 16628, closing is required)
ssh-agent.exe (PID 2116, will be terminated)
https://gitforwindows.org/
Refresh
Back
Install
Cancel