



Informatica® Cloud Data Governance and
Catalog

2025 February

API Reference

© Copyright Informatica LLC 2021, 2025

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica, Informatica Cloud, Informatica Intelligent Cloud Services, PowerCenter, PowerExchange, and the Informatica logo are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at <https://www.informatica.com/trademarks.html>. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2025-02-20

Table of Contents

Preface.	5
Chapter 1: Introduction.	6
Authentication.	6
Send Requests.	7
Response Codes.	8
Download Sample API Collections.	9
Chapter 2: Search for assets.	10
List assets in the catalog.	10
Request parameters.	11
Request body.	11
Example requests.	16
Response body.	20
Get details of an asset.	22
Request parameters.	23
Examples.	24
Response body.	31
List details of multiple assets.	32
Request parameters.	33
Request body.	34
Example request.	34
Chapter 3: Export assets.	45
Export assets using search queries.	46
Request parameters.	46
Request body.	47
Example requests.	47
Export assets using asset IDs.	49
Request parameters.	49
Request body.	50
Example request.	50
Response body.	51
Chapter 4: Import assets.	52
Request body.	53
Example request.	53
Response body.	54

Chapter 5: Upload data quality scores.....	55
Request Body.	55
Example request.	56
Chapter 6: Run a catalog source job.....	57
Chapter 7: Monitor jobs.....	58
Chapter 8: API Rate Limits.....	59
Appendix A: Appendix.....	60
Search query examples.	60

Preface

Read *API Reference* to create and manage assets in Data Governance and Catalog using the APIs that Informatica provides.

This help is written for developers and administrators who are responsible for implementing Data Governance and Catalog. This help assumes that you have a basic knowledge of how to use Data Governance and Catalog. It also assumes that you understand JSON and API programming techniques.

CHAPTER 1

Introduction

You can make API calls to Data Governance and Catalog using a REST client, the cURL tool, or a suitable programming interface. Using these API calls, you can create and manage assets, search for assets, and view asset details.

Authentication

Before you make REST API calls, you must authenticate yourself with JWT authentication. First, use the Login API with your organization user name and password to receive the session ID and org ID. Then, use the session ID and org ID to generate a JSON Web (JW) token. Subsequently, you use the session ID and JW token to secure your API calls without having to authenticate yourself for each call.

Obtain the session ID

To get a session ID, use the Login API V1. The Login API is also available with SAML. For more information about logging in using SAML, see the *REST API Reference* in the Administrator help. Ensure that you have your Informatica Intelligent Cloud Services user name and password.

Send the POST request with the following URI, header, and request body:

URI	<LoginURL>/identity-service/api/v1/Login Note that <LoginURL> is the Informatica Intelligent Cloud Services login URL based on the region, such as https://dm-us.informaticacloud.com , https://dm-em.informaticacloud.com , https://dm-ap.informaticacloud.com , https://dm-uk.informaticacloud.com , and so on.
Header	Content-Type: application/json
Request Body	<pre>{ "username": "<your_IICS_user>", "password": "<your_IICS_password>", }</pre>

The response generates the session ID and the org ID. Note the value of the `sessionId` field to include in the subsequent API call.

Generate a JW Access Token

Use the value from the `sessionId` field that you obtained from the previous Login API response, and send the POST request with the following URL and headers to generate a JW access token:

URI	<LoginURL>/identity-service/api/v1/jwt/Token?client_id=idmc_api&nonce=1234 Note that <LoginURL> is the Informatica Intelligent Cloud Services login URL based on the region, such as https://dm-us.informaticacloud.com , https://dm-em.informaticacloud.com , https://dm-ap.informaticacloud.com , https://dm-uk.informaticacloud.com , and so on.
Headers	- cookie: USER_SESSION=<sessionId value> - IDS-SESSION-ID: <sessionId value>

The response generates the JW access token that you include in the authorization header for all subsequent API calls. The access token expires after 30 minutes from the initial grant of the token. You must regenerate the access token after every 30 minutes to authenticate your API calls.

Send Requests

When you make an API call in the REST client, the request is sent in JSON format. Depending on the request, the REST client receives a response in JSON format that contains the information for the request that was sent.

To make an API call, enter the URL to access the API, header requests, methods, and request parameters.

URL

Here's the URL structure for requests:

<baseApiUrl><endpoint>

The base API URL differs for each pod. The following table describes the base API URL to use for different regions:

Region	Base API URL
APJ	https://idmc-api.dm-ap.informaticacloud.com/
Canada	https://idmc-api.dm-na.informaticacloud.com/
EMEA	https://idmc-api.dm-em.informaticacloud.com/
North America	https://idmc-api.dm-us.informaticacloud.com/
United Kingdom	https://idmc-api.dm-uk.informaticacloud.com/

Headers

The following table describes the header request that you should use to send the Data Governance and Catalog API requests:

Header	Description
Content-Type:application/json	This header is required for the POST method. It indicates that the client is sending a JSON request.
Authorization:Bearer <jwt_token>	This header is required to secure all your API requests.
X-INFA-ORG-ID:<Org ID>	This header is required for POST and GET methods. It indicates the user's organization to send API requests to. The org ID is obtained from the Login API.
IDS-SESSION-ID	This header is required for sending API requests to upload your data quality scores to Data Governance and Catalog.

Response Codes

When you call any of the Data Governance and Catalog APIs, the response returns one of the standard HTTP response codes with information about the success or failure of the API call.

The standard response codes are defined in the following table:

Response Code	Description
200 OK	The request was completed successfully.
201 Created	The request was completed and the new resource is created successfully.
202 Accepted	The request was accepted for processing, but has not been completed.
204	No content to send back.
400 Bad Request	The request could not be processed because it contains missing or invalid information.
401 Unauthorized	The request is not authorized. The authentication may be missing or invalid.
403 Forbidden	The user cannot be authorized to perform this request.
404 Not Found	The request includes a resource URL that does not exist.
405 Method Not Allowed	The HTTP method specified in the request is not supported for this request.
429 Too Many Requests	The user has sent too many requests in a given amount of time and has reached the API rate limit.
500 Internal Server Error	The server encountered an error because of which the request is not fulfilled.

Download Sample API Collections

Informatica provides sample API collections in Postman that you can use to search for assets, export and import assets, and monitor jobs in Data Governance and Catalog.


For information about the sample Postman collection for Data Governance and Catalog APIs, see the Knowledge Base article [KB 000209295](#).

CHAPTER 2

Search for assets

Use the search API to either list the assets in the catalog or get details of a specific asset in the catalog. You can search for all types of assets including business assets, technical assets, classifications, glossary assets, and more. Based on the search query that you enter, appropriate search results are returned.

The following image shows the overall process of using the search API and the expected response for each endpoint:

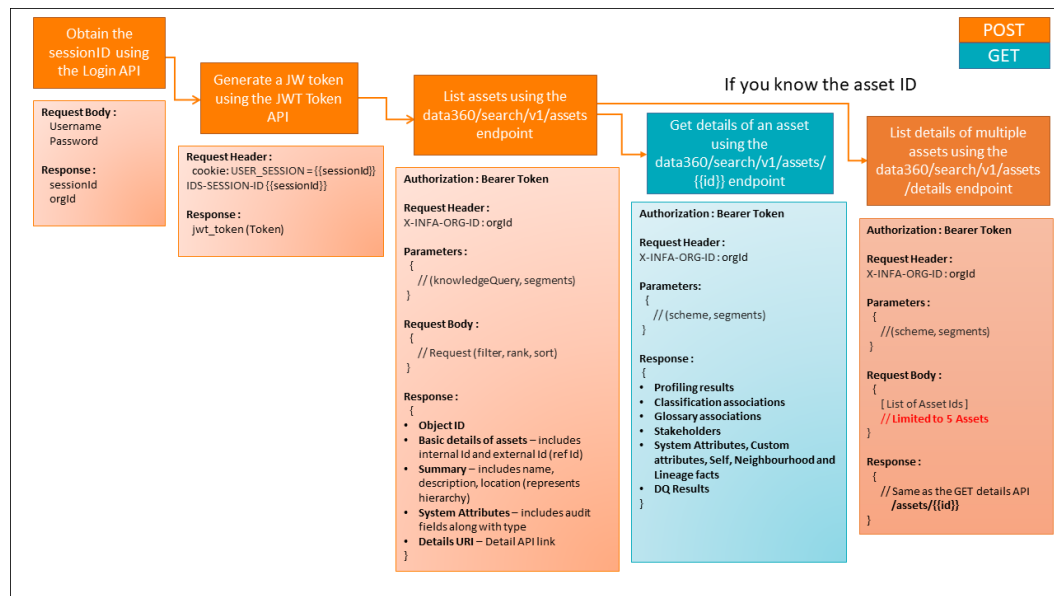

List assets in the catalog

Send a POST request to view the list of assets in the catalog that match your search query. While sending the request, you can specify the search query as request URL parameters and specify the filter criteria in the body of the request.

To view the list of assets in the catalog, submit a request with the following method and endpoint:

Method	Endpoint
POST	<baseApiUrl>/data360/search/v1/assets

The base API URL differs for each pod. For more information, see [“Send Requests” on page 7](#).

Request parameters

To view the list of specific assets, enter the search queries using URL parameters for POST request.

You can use the following request URL parameters to specify your search query:

Parameter	Description
knowledgeQuery	Specify the asset type or name along with any search criteria. For information about search query examples, see “Search query examples” on page 60. For example, knowledgeQuery=Business Terms and knowledgeQuery=data elements related to business term.
segments	Specify the level of asset detail that you want the API request to return. Enter any segment value from the following values: - all. Returns the summary, system attributes, and the API request link to view further details of the asset. - summary. Returns the name, description, and location of the asset. - systemAttributes. Returns the origin, class type of the asset, base types, user that created or updated the asset, and the date on which the asset was created or updated. - customAttributes. Returns the custom fields specified for the asset. - selfAttributes. Returns the properties of assets. - details. Returns the URI for the asset that you can click to send a request to view further details of a specific asset. The default value is segments=all.

Request body

Use the request body to specify parameters to filter, rank, and sort your search results. The API response returns a maximum of 100 results that match the specified criteria.

In the body of the request, specify the parameters in the following format:

```
{
  "from": 0,
  "size": 10,
  "searchFields": [
    "string"
  ],
  "filterSpec": [
    {
      "type": "dsl",
      "attribute": "string",
      "values": [
        "string"
      ],
      "expr": "string"
    }
  ],
  "rankingSpec": {
    "boostSpec": [
      {
        "fields": [
          "string"
        ]
      }
    ]
  }
},
```

```

    "scoringSpec": [{
      "type": "simple",
      "attribute": "core.identity",
      "order": "asc"
    },
    {
      "type": "simple",
      "attribute": "core.name",
      "order": "asc"
    }
  ]
},
/
"after": ["03c1883a-dcb7-4ae0-a6a5-c2743e52fb69",
          "column67"]
}

```

The following table describes the important parameters that you can specify in the body of the request:

Parameter	Type	Description
pagination parameters from and size	Numeric	Use the following parameters to retrieve records using pagination: - from. Specify a numeric value to set an offset for pagination. The default value is zero. - size. Specify a numeric value to set the maximum number of results to display on each page starting from the offset value. The default value is 10. You can set a maximum page size of 100 results. The following examples show how you can use the <code>from</code> and <code>size</code> parameters: <pre>{ "from": 0, "size": 50 }</pre> Retrieves 50 records per page starting from the first record, assuming that the <code>total_hits</code> is more than 50 records. <pre>{ "from": 50, "size": 50 }</pre> Retrieves 50 records per page starting from the 50th record, assuming that the <code>total_hits</code> is more than 50 records.
searchFields	String	Specify the asset fields that you want to search. For example, you can search for assets whose name and description fields match the term <code>SSN</code>. This does not influence the ordering of the search results.

Parameter	Type	Description
filterSpec	String	Specify a list of fields and values that you want the API to use to filter search results. You can use any of the following filter type or a combination of both filter types: Simple. Specify the asset attribute and one or more values to match the assets. For example, the following <code>filterSpec</code> parameter returns the assets that are in the 'Published' lifecycle status: <pre> { "from": 0, "size": 100, "filterSpec": [{ "type": "simple", "attribute": "core.assetLifecycle", "values": ["Published"] }] }</pre> dsl. Specify an advanced filter expression to match the assets. For example, the following <code>filterSpec</code> parameter returns business terms that are created in the last one hour: <pre> { "from": 0, "size": 100, "filterSpec": [{ "type": "dsl", "expr": "core.classType core.infa.ccfg.models.governance.BusinessTerm and core.createdOn within last 1 hour" }] }</pre>
rankingSpec	NA	Determines the order in which the assets appear in the search response. You can order the assets by specifying the asset scoring or boosting criteria or both.

Parameter	Type	Description
boostSpec	String	Specify one or more fields by which you want to sort the search results. If you specify multiple fields, all specified fields are treated equally for sorting. For example, the following <code>boostSpec</code> parameter first returns assets whose names match the search criteria, followed by the assets whose descriptions match the criteria. <pre> { "explain": false, "from": 0, "size": 100, "rankingSpec": { "boostSpec": [{ "fields": ["core.name"] }, { "fields": ["core.description"] }] } }</pre>

Parameter	Type	Description
scoringSpec	String	Specify one of the following two types of scoring criteria: Simple. Specify the sorting order (ascending or descending) on attributes such as name or identity. For example, the following <code>scoringSpec</code> parameter returns business terms that are sorted in the descending order of their names. <pre> { "from": 0, "size": 100, "rankingSpec": { "scoringSpec": [{ "type": "simple", "attribute": "core.name", "order": "desc" }] }, "filterSpec": [{ "type": "dsl", "expr": "core.classType com.infa.ccgf.models.governance.BusinessTerm" }] }</pre> dsl. Specify an advanced filter criteria in an expression to sort the search results. For example, the following <code>scoringSpec</code> parameter returns the list of business term assets sorted by assets that have an average rating greater than one. <pre> { "from": 0, "size": 100, "rankingSpec": { "scoringSpec": [{ "type": "dsl", "expr": "core.supplement.averageRating greater than 1" }] }, "filterSpec": [{ "type": "dsl", "expr": "core.classType com.infa.ccgf.models.governance.BusinessTerm" }] }</pre>
after	Object	Enter the value from the <code>SortValues</code> field of an asset that the API response returns. When you run the API request with this value, the response returns the next set of specified assets after the asset that you have specified the value for.

Search for more than 10000 assets

To search more than 10000 assets, set the `scoringSpec` type in the `rankingSpec` parameter to **Simple**. Among the attributes that you specify for the sorting order, specify at least one attribute that has unique values. For example, you can sort the order on the `core.identity` attribute, which is the internal ID of the asset.

You can retrieve a maximum of 100 assets with each API request. To see the next 100 assets, copy the value from the `SortValues` field of the last asset that the response returns and enter it in the `after` field of the request body before you send the request again.

Example requests

List the next set of results from the catalog

The following request returns the first 50 assets sorted in the ascending order of their internal IDs.

```
POST https://idmc-api.dm-us.informaticacloud.com/data360/search/v1/assets?
knowledgeQuery=*%&segments=all
Authorization: Bearer <jwt_token>
Content-Type: application/json
X-INFA-ORG-ID:<Org ID>

Body
{
  "from": 0,
  "size": 50,
  "rankingSpec": {
    "scoringSpec": [
      {
        "type": "simple",
        "attribute": "core.identity",
        "order": "asc"
      }
    ]
  }
}
```

To see the next 50 assets and so on, copy the value from the `SortValues` parameter of the 50th asset that the response returns and enter it in the `after` parameter of the request body as shown in the following example.

```
POST https://idmc-api.dm-us.informaticacloud.com/data360/search/v1/assets?
knowledgeQuery=*%&segments=all
Authorization: Bearer <jwt_token>
Content-Type: application/json
X-INFA-ORG-ID:<Org ID>

Body
{
  "size": 50,
  "rankingSpec": {
    "scoringSpec": [
      {
        "type": "simple",
        "attribute": "core.identity",
        "order": "asc"
      }
    ]
  },
  "after" : ["<The value from the sortValues field of the 50th asset>"]
}
```

To continue retrieving more assets from the catalog, replace the value of the `after` parameter in the request body during each API request.

List business terms

The following request returns up to 100 business terms based on the `size` body parameter.

```
POST https://idmc-api.dm-us.informaticacloud.com/data360/search/v1/assets?
knowledgeQuery=*&segments=all
Authorization: Bearer <jwt_token>
Content-Type: application/json
X-INFA-ORG-ID:<Org ID>
```

```
Body
{
  "from": 0,
  "size": 100,
  "filterSpec": [
    {
      "type": "simple",
      "attribute": "core.classType",
      "values": [
        "com.infa.ccgf.models.governance.BusinessTerm"
      ]
    }
  ]
}
```

List business terms in the 'Draft' lifecycle status

The following request returns business terms that are in the 'Draft' lifecycle status. The response displays up to 100 business terms based on the `size` body parameter.

```
POST https://idmc-api.dm-us.informaticacloud.com/data360/search/v1/assets?
knowledgeQuery=*&segments=all
Authorization: Bearer <jwt_token>
Content-Type: application/json
X-INFA-ORG-ID: <Org ID>
```

```
Body
{
  "from": 0,
  "size": 100,
  "filterSpec": [
    {
      "type": "simple",
      "attribute": "core.classType",
      "values": [
        "com.infa.ccgf.models.governance.BusinessTerm"
      ]
    },
    {
      "type": "simple",
      "attribute": "core.assetLifecycle",
      "values": [
        "Draft"
      ]
    }
  ]
}
```

List business terms created in the last 30 days

The following request returns business terms created in the last 30 days based on the `filterSpec` body parameter. The response displays up to 50 business terms based on the `size` body parameter.

```
POST https://idmc-api.dm-us.informaticacloud.com/data360/search/v1/assets?
knowledgeQuery=*&segments=all
Authorization: Bearer <jwt_token>
Content-Type: application/json
X-INFA-ORG-ID: <Org ID>
```

```
Body
```

```
{
  "from": 0,
  "size": 50,
  "filterSpec": [
    {
      "type": "dsl",
      "expr": "core.classType com.infa.ccgf.models.governance.BusinessTerm and
core.createdOn within last 30 day"
    }
  ]
}
```

List data elements related to business terms

The following request returns data elements that are related to business terms based on the `knowledgeQuery` parameter. The response displays up to 50 data elements based on the `size` body parameter.

```
POST https://idmc-api.dm-us.informaticacloud.com/data360/search/v1/assets?
knowledgeQuery=data elements related to business term&segments=all
Authorization: Bearer <jwt_token>
Content-Type: application/json
X-INFA-ORG-ID: <Org ID>

Body
{
  "from": 0,
  "size": 50
}
```

List assets related to the business term 'email'

The following request returns up to 100 assets related to the business term 'email' based on the `knowledgeQuery` URL parameter.

```
POST https://idmc-api.dm-us.informaticacloud.com/data360/search/v1/assets?
knowledgeQuery=all related to business term email&segments=all
Authorization: Bearer <jwt_token>
Content-Type: application/json
X-INFA-ORG-ID: <Org ID>

Body
{
  "from": 0,
  "size": 100
}
```

List the tables that are profiled

The following request returns up to 50 tables that are profiled based on the `knowledgeQuery` URL parameter. The list of tables appear in the order of the average rating as specified in the `scoringSpec` body parameter.

```
POST https://idmc-api.dm-us.informaticacloud.com/data360/search/v1/assets?
knowledgeQuery=tables which are profiled&segments=all
Authorization: Bearer <jwt_token>
Content-Type: application/json
X-INFA-ORG-ID: <Org ID>

Body
{
  "from": 0,
  "size": 50,
  "rankingSpec": {
    "scoringSpec": [
      {
        "type": "simple",
        "attribute": "core.supplement.averageRating",
        "values": [
          "5"
        ]
      }
    ]
  }
}
```

```
    }
  }
}
```

List data elements related to business terms that are critical data elements

The following request returns up to 50 data elements that are marked as critical data element and related to the business terms 'Country' and 'First Name' as specified in the `filterSpec` body parameter.

```
POST https://idmc-api.dm-us.informaticacloud.com/data360/search/v1/assets?
knowledgeQuery=data elements related to business term which are critical data
element&segments=all
Authorization: Bearer <jwt token>
Content-Type: application/json
X-INFA-ORG-ID: <Org ID>
```

```
Body
{
  "from": 0,
  "size": 50,
  "filterSpec": [
    {
      "type": "simple",
      "attribute": "core.name",
      "values": [
        "Country", "FirstName"
      ]
    }
  ]
}
```

List the system assets

The following request returns the system assets with the names 'Consumer Website' and 'Snowflake Product' as specified in the `filterSpec` body parameter. The response displays up to 100 system assets based on the `size` body parameter.

```
POST https://idmc-api.dm-us.informaticacloud.com/data360/search/v1/assets?
knowledgeQuery=system&segments=all
Authorization: Bearer <jwt token>
Content-Type: application/json
X-INFA-ORG-ID: <Org ID>
```

```
Body
{
  "from": 0,
  "size": 100,
  "filterSpec": [
    {
      "type": "simple",
      "attribute": "core.name",
      "values": [
        "Consumer Website",
        "Snowflake Product"
      ]
    }
  ]
}
```

List data classifications

The following request returns up to 100 data classifications as specified in the `size` body parameter.

```
POST https://idmc-api.dm-us.informaticacloud.com/data360/search/v1/assets?
knowledgeQuery=classification&segments=all
Authorization: Bearer <jwt token>
Content-Type: application/json
X-INFA-ORG-ID: <Org ID>
```

```
Body
```

```
{
  "from": 0,
  "size": 100
}
```

List data entity classifications

The following request returns data entity classifications as specified in the `filterSpec` body parameter. The response returns up to 50 classifications as specified in the `size` body parameter.

```
POST https://idmc-api.dm-us.informaticacloud.com/data360/search/v1/assets?
knowledgeQuery=classification&segments=all
Authorization: Bearer <jwt_token>
Content-Type: application/json
X-INFA-ORG-ID: <Org ID>
```

```
Body
{
  "from": 0,
  "size": 50,
  "filterSpec": [
    {
      "type": "dsl",
      "expr": "core.classType core.DataEntityClassification"
    }
  ]
}
```

Response body

The POST request response returns the list of assets that match the search criteria.

The response displays the `total_hits` parameter that shows the total number of assets that match the search criteria. The response returns 100 assets per page.

The following table describes the possible response body parameters for each asset in the response body:

Parameter	Description
<code>identity</code>	The internal ID of the asset. You can derive this ID by looking at the URL of the asset page in the Data Governance and Catalog application.
<code>externalID</code>	The unique reference ID of the asset.
<code>summary</code>	Contains the name, description, and location of the asset in the catalog.
<code>systemAttributes</code>	Contains the following meta parameters: - <code>modifiedOn</code>. The date on which the asset was last modified - <code>createdBy</code>. The user who created the asset. - <code>modifiedBy</code>. The user who last modified the asset. - <code>classType</code>. The type of asset. - <code>origin</code>. The origin of the assets in the catalog. - <code>createdOn</code>. The date on which the asset was created.
<code>customAttributes</code>	Contains the user-configured attributes of the asset.
<code>selfAttributes</code>	Contains different types of details depending on whether the asset is a business asset or a technical asset. Details include the lifecycle status, profiling and classification status, rating, information about whether the asset is a certified asset or a critical data element, and so on.

Parameter	Description
details	Contains the URI for the particular asset. Click the URI to send a request to view complete details of that asset.
sortValues	Contains a value to indicate the position of the asset in the response body. Enter this value in the <code>after</code> field of the request body to return the next set of specified assets after this asset.

Example response

The following example is an excerpt from a POST request to view business terms in the 'Draft' lifecycle status.

```
{
  "summary": {
    "total_hits": "1038"
  },
  "hits": [
    {
      "core.identity": "2f8e6839-14fe-4b25-a868-a6324be30164",
      "core.externalId": "BT-06092022-24",
      "summary": {
        "core.location": "CDGC://2f8e6839-14fe-4b25-a868-a6324be30164",
        "core.name": "BT-06092022-24",
        "core.description": " Desc Create using admin user from group and
\nDeleteed stakeholder user."
      },
      "systemAttributes": {
        "core.modifiedOn": 1689252674028,
        "core.createdBy": "5gwD6d18cwPeUaAJAyeV2V",
        "core.modifiedBy": "5gwD6d18cwPeUaAJAyeV2V",
        "core.classType": "com.infa.ccgf.models.governance.BusinessTerm",
        "core.origin": "CDGC",
        "type": [
          "core.IClassBusiness",
          "core.IClass",
          "com.infa.ccgf.models.governance.GlossaryBase",
          "com.infa.ccgf.models.governance.BusinessTerm"
        ],
        "core.createdOn": 1689252674028
      },
      "customAttributes": {
        "com.infa.odin.models.custom.ca_2205258177888237465": "default",
        "com.infa.odin.models.custom.ca_5534006856514172118": "default"
      },
      "selfAttributes": {
        "com.infa.ccgf.models.governance.FormatType": "Text",
        "core.mergedObjects": [],
        "com.infa.ccgf.models.governance.BusinessLogic": "BusinessLogic",
        "com.infa.ccgf.models.governance.isCDE": true,
        "core.supplement.certified": [
          false
        ],
        "core.assetLifecycle": "Draft",
        "com.infa.ccgf.models.governance.Examples": [
          "Example-1",
          "Exempl25"
        ],
        "com.infa.ccgf.models.governance.securityClassification": "Confidential",
        "com.infa.ccgf.models.governance.AliasNames": [
          "BT",
          "BTObject"
        ],
        "core.producer": "CDGC",
        "com.infa.ccgf.models.governance.FormatDescription": "Format Description"
      },
      "details": "/data360/search/assets/BT-06092022-24?"
    }
  ]
}
```

```

scheme=external&segments=summary,systemAttributes,customAttributes,selfAttributes"
    "sortValues": [
      "03c1ea71-cac8-4e39-9f4a-6774c657a8cf",
      "idsltc"
    ]
  }
}
}

```

Get details of an asset

To retrieve complete details of a particular asset, send a GET request using the search API. Based on the request URL parameters that you pass, the response includes details such as profiling, classification, relationships, custom attributes, and lineage information of the specified asset.

To get the details of an asset, submit a request with the following method and endpoint, and specify the asset ID:

Method	Endpoint
GET	<baseApiUrl>/data360/search/v1/assets/<assetID>

The `<baseApiUrl>` differs for each pod. For more information about the base API URL, see [“Send Requests” on page 7](#).

The `<assetID>` that you enter can be the internal ID or the external ID of the asset. You can specify in the `scheme` parameter of the request URL whether you want to search the asset by external ID or internal ID.

If you don't know the ID of a particular asset, you can first send a POST request using the `<baseApiUrl>/data360/search/assets` endpoint to view the list of assets in the catalog. The response for this request returns the internal ID of each asset in the `core.identity` parameter and the unique reference ID of the asset in the `core.externalId` parameter. For more information, see [“List assets in the catalog” on page 10](#).

Request parameters

In the request URL parameters, specify the type of asset ID that you want to use to search for assets. To limit the API response to specific details of an asset, you can additionally specify the type of asset details that you want the request to return.

Request parameters

Use the following parameters in the request URL:

Parameter	Description
scheme	Specify the type of asset ID you want to use to query assets. Enter one of the following values: - <code>internal</code>. Indicates that the asset ID that you specify in the request is the internal ID of the asset. - <code>external</code>. Indicates that the asset ID that you specify in the request is the unique reference ID of the asset.
segments	Specify the type of asset details that you want the API request to return. The default value is <code>segments=all</code>. Enter any segment value from the following values: - <code>all</code>. Returns the internal ID, external ID, summary, system attributes, and the API request link to view further details of the asset. - <code>summary</code>. Returns the name, description, and location of the asset. - <code>systemAttributes</code>. Returns the origin, class type, base types, user that created or updated the asset and the date on which the asset was created or updated. - <code>stakeholdership</code>. Returns the type of user and role that are assigned as stakeholder for the asset. - <code>customAttributes</code>. Returns the custom attributes specified for the asset. - <code>selfAttributes</code>. Returns the properties of assets. - <code>dataProfile</code>. Returns the profiling statistics of the asset. - <code>dataClassification</code>. Returns the data classification associated with the asset. - <code>glossary</code>. Returns the glossary associated with the asset. - <code>dataQuality</code>. Returns the data quality score of the asset. - <code>hierarchy</code>. Returns the immediate child assets of the asset. - <code>hierarchy:all</code>. Returns all the attributes of the immediate child assets in the hierarchy. - <code>hierarchy:selfAttributes</code>. Returns the properties of the immediate child assets in the hierarchy. - <code>hierarchy:systemAttributes</code>. Returns the system attributes of the immediate child assets in the hierarchy. - <code>hierarchy:customAttributes</code>. Returns the custom attributes of the immediate assets in the hierarchy. - <code>neighborhood</code>. Returns assets that are in a direct relationship with the searched asset. - <code>neighborhood:all</code>. Returns assets that are in a direct or indirect relationship with the searched asset. - <code>neighborhood:<classtype></code>. Returns assets of the specified class type that are in a direct relationship with the searched asset. - <code>lineage-level</code>. Returns the lineage level of the asset, that is data element or data set level. The default value for <code>lineage-level</code> is <code>dataset</code>. - <code>lineage-direction</code>. Returns the direction of the asset in the lineage, that is inbound or outbound. The default value for <code>lineage-direction</code> is <code>all</code>. - <code>lineage-level:dataset</code>. Returns assets that have a direct relationship with the searched asset.

Parameter	Description
	- lineage-direction:all. Returns assets that are in a direct inbound and outbound relationship with the searched asset. - lineage-direction:inbound. Returns assets that are in a direct inbound relationship with the searched asset. - lineage-direction:outbound. Returns assets that are in a direct outbound relationship with the searched asset. - descendants. Returns the immediate children and related child assets. - descendants:all. Returns all the details of the immediate and related child assets. - descendants:systemAttributes. Returns the system attributes of the immediate and related child assets. - descendants:selfAttributes. Returns the properties of the immediate and related child assets. - descendants:customAttributes. Returns the custom attributes of the immediate and related child assets.

Examples

Search for a business term using the asset ID

The following example shows the GET request to get all the details of a business term by specifying its internal ID.

```
GET https://idmc-api.dm-us.informaticacloud.com/data360/search/v1/assets/612adac1-5863-468f-a38c-fb3ba0a5686e?scheme=internal&segments=all
```

The following example shows the response for the request. The response returns all details of the business term 'AddressLine2' because the `segments` parameter in the request is set to `all`.

```
{
  "core.identity": "17b1e3ed-f64f-487a-b073-06b78ec30259",
  "core.externalId": "lower-68",
  "summary": {
    "core.location": "CDGC://17b1e3ed-f64f-487a-b073-06b78ec30259",
    "core.name": "AddressLine2"
  },
  "systemAttributes": {
    "core.modifiedOn": 1688816931942,
    "core.createdBy": "5gwD6d18cwPeUaAJAyev2V",
    "core.modifiedBy": "5gwD6d18cwPeUaAJAyev2V",
    "core.classType": "com.infa.ccgf.models.governance.BusinessTerm",
    "core.origin": "CDGC",
    "type": [
      "core.IClassBusiness",
      "core.IClass",
      "com.infa.ccgf.models.governance.GlossaryBase",
      "com.infa.ccgf.models.governance.BusinessTerm"
    ],
    "core.createdOn": 1688816931942
  },
  "customAttributes": {
    "com.infa.odin.models.custom.ca_2205258177888237465": "default",
    "com.infa.odin.models.custom.ca_5534006856514172118": "default"
  },
  "selfAttributes": {
    "com.infa.ccgf.models.governance.FormatType": "Text",
    "core.supplement.certified": [
      false
    ],
    "core.assetLifecycle": "Published",
    "core.producer": "CDGC",
  }
}
```

```

        "com.infa.ccgf.models.governance.isCDE": false
    },
    "dataProfile": {
        "core.classType": "com.infa.ccgf.models.governance.BusinessTerm",
        "core.identity": "17b1e3ed-f64f-487a-b073-06b78ec30259",
        "core.producer": "CDGC",
        "core.origin": "CDGC",
        "core.externalId": "lower-68",
        "core.name": "AddressLine2"
    },
    "neighborhood": [
        {
            "type": "com.infa.odin.models.file.flat.FlatField",
            "neighbors": [
                {
                    "neighbor": "AddressLine2",
                    "details": "/data360/search/assets/86aa9780-99d3-4efb-95ea-
b4d691bb97d0?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes",
                    "paths": [
                        {
                            "serialized": "lower-68 ( AddressLine2 ) <--
com.infa.ccgf.models.governance.IClassTechnicalGlossaryBase -- dqprofiling-dockerpod/
courses/person1.csv/AddressLine2~com.infa.odin.models.file.flat.FlatField
( AddressLine2 ) ",
                            "collection": [
                                {
                                    "association":
"com.infa.ccgf.models.governance.IClassTechnicalGlossaryBase",
                                    "curationStatus": "AUTO_ACCEPTED",
                                    "from": "AddressLine2",
                                    "to": "AddressLine2",
                                    "fromType":
"com.infa.odin.models.file.flat.FlatField",
                                    "toType":
"com.infa.ccgf.models.governance.BusinessTerm",
                                    "fromLocation": "99068dfb-2c91-34e2-
bd37-5232fde620b1://99068dfb-2c91-34e2-bd37-5232fde620b1/dqprofiling-dockerpod/courses/
person1.csv/AddressLine2",
                                    "toLocation": "CDGC://17b1e3ed-f64f-487a-
b073-06b78ec30259",
                                    "attributes": {
                                        "core.modifiedBy": "5gwD6d18cwPeUaAJAyeV2V",
                                        "core.origin": "99068dfb-2c91-34e2-
bd37-5232fde620b1",
                                        "core.modifiedOn": 1689076624370,
                                        "core.createdBy": "5gwD6d18cwPeUaAJAyeV2V",
                                        "core.confidenceScore": 100.0,
                                        "core.inferred": true,
                                        "core.associationKind":
"com.infa.ccgf.models.governance.semanticKind",
                                        "core.producer": "discovery-capability",
                                        "core.createdOn": 1689076624370,
                                        "core.curationStatus": "AUTO_ACCEPTED"
                                    },
                                    "details": {
                                        "fromUri": "/data360/search/assets/
86aa9780-99d3-4efb-95ea-b4d691bb97d0?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes",
                                        "toUri": "/data360/search/assets/lower-68?
scheme=external&segments=summary,systemAttributes,customAttributes,selfAttributes"
                                    },
                                    "fromProperties": {
                                        "core.identity": "86aa9780-99d3-4efb-95ea-
b4d691bb97d0",
                                        "core.classType":
"com.infa.odin.models.file.flat.FlatField",
                                        "core.location": "99068dfb-2c91-34e2-
bd37-5232fde620b1://99068dfb-2c91-34e2-bd37-5232fde620b1/dqprofiling-dockerpod/courses/
person1.csv/AddressLine2",

```

```

        "core.externalId": "dqprofiling-dockerpod/
courses/person1.csv/AddressLine2~com.infa.odin.models.file.flat.FlatField",
        "core.name": "AddressLine2"
    },
    "toProperties": {
        "core.identity": "17ble3ed-f64f-487a-
b073-06b78ec30259",
        "core.classType":
"com.infa.ccgf.models.governance.BusinessTerm",
        "core.location": "CDGC://17ble3ed-f64f-487a-
b073-06b78ec30259",
        "core.externalId": "lower-68",
        "core.name": "AddressLine2"
    }
}
    ]
}
    ],
    {
        "neighbor": "AddressLine2",
        "details": "/data360/search/assets/00b1dbb0-ee68-43e9-
a833-675b5c8f0ab2?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes",
        "paths": [
            {
                "serialized": "lower-68 ( AddressLine2 ) <--
com.infa.ccgf.models.governance.IClassTechnicalGlossaryBase -- dqprofiling-dockerpod/
courses/person1.csv/AddressLine2~com.infa.odin.models.file.flat.FlatField
( AddressLine2 ) ",
                "collection": [
                    {
                        "association":
"com.infa.ccgf.models.governance.IClassTechnicalGlossaryBase",
                        "curationStatus": "AUTO_ACCEPTED",
                        "from": "AddressLine2",
                        "to": "AddressLine2",
                        "fromType":
"com.infa.odin.models.file.flat.FlatField",
                        "toType":
"com.infa.ccgf.models.governance.BusinessTerm",
                        "fromLocation": "27397996-
ad9a-3f32-8093-2e4b80fcd93c://27397996-ad9a-3f32-8093-2e4b80fcd93c/dqprofiling-dockerpod/
courses/person1.csv/AddressLine2",
                        "toLocation": "CDGC://17ble3ed-f64f-487a-
b073-06b78ec30259",
                        "attributes": {
                            "core.modifiedBy": "5gwD6d18cwPeUaAJAyeV2V",
                            "core.origin": "27397996-
ad9a-3f32-8093-2e4b80fcd93c",
                            "core.modifiedOn": 1688819441749,
                            "core.createdBy": "5gwD6d18cwPeUaAJAyeV2V",
                            "core.confidenceScore": 100.0,
                            "core.inferred": true,
                            "core.associationKind":
"com.infa.ccgf.models.governance.semanticKind",
                            "core.producer": "discovery-capability",
                            "core.createdOn": 1688819441749,
                            "core.curationStatus": "AUTO_ACCEPTED"
                        },
                        "details": {
                            "fromUri": "/data360/search/assets/00b1dbb0-
ee68-43e9-a833-675b5c8f0ab2?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes",
                            "toUri": "/data360/search/assets/lower-68?
scheme=external&segments=summary,systemAttributes,customAttributes,selfAttributes"
                        },
                        "fromProperties": {
                            "core.identity": "00b1dbb0-ee68-43e9-
a833-675b5c8f0ab2",

```

```

        "core.classType":
"com.infa.odin.models.file.flat.FlatField",
        "core.location": "27397996-
ad9a-3f32-8093-2e4b80fcd93c://27397996-ad9a-3f32-8093-2e4b80fcd93c/dqprofiling-dockerpod/
courses/person1.csv/AddressLine2",
        "core.externalId": "dqprofiling-dockerpod/
courses/person1.csv/AddressLine2~com.infa.odin.models.file.flat.FlatField",
        "core.name": "AddressLine2"
    },
    "toProperties": {
        "core.identity": "17b1e3ed-f64f-487a-
b073-06b78ec30259",
        "core.classType":
"com.infa.ccgf.models.governance.BusinessTerm",
        "core.location": "CDGC://17b1e3ed-f64f-487a-
b073-06b78ec30259",
        "core.externalId": "lower-68",
        "core.name": "AddressLine2"
    }
}
]
}
]
}
]
{
    "type": "com.infa.odin.models.relational.Column",
    "neighbors": [
        {
            "neighbor": "CDGCTABL31COL2",
            "details": "/data360/search/assets/81e8ea5a-c888-4c40-
a780-849ac48e66fd?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes",
            "paths": [
                {
                    "serialized": "lower-68 ( AddressLine2 ) <--
com.infa.ccgf.models.governance.IClassTechnicalGlossaryBase -- CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCTABLE3/CDGCTABL31COL2~com.infa.odin.models.relational.Column
( CDGCTABL31COL2 ) ",
                    "collection": [
                        {
                            "association":
"com.infa.ccgf.models.governance.IClassTechnicalGlossaryBase",
                            "curationStatus": "ACCEPTED",
                            "from": "CDGCTABL31COL2",
                            "to": "AddressLine2",
                            "fromType": "com.infa.odin.models.relational.Column",
                            "toType":
"com.infa.ccgf.models.governance.BusinessTerm",
                            "fromLocation": "d4865a0f-406b-363e-
b850-2fc633b3f77b://d4865a0f-406b-363e-b850-2fc633b3f77b/CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCTABLE3/CDGCTABL31COL2",
                            "toLocation": "CDGC://17b1e3ed-f64f-487a-
b073-06b78ec30259",
                            "attributes": {
                                "core.modifiedOn": 1692806775314,
                                "core.createdBy": "5gwD6d18cwPeUaAJAyeV2V",
                                "core.associationKind":
"com.infa.ccgf.models.governance.semanticKind",
                                "core.modifiedBy": "5gwD6d18cwPeUaAJAyeV2V",
                                "core.inferred": false,
                                "core.producer": "CDGC",
                                "core.origin": "CDGC",
                                "core.createdOn": 1692806775314,
                                "core.curationStatus": "ACCEPTED"
                            },
                            "details": {
                                "fromUri": "/data360/search/assets/81e8ea5a-
c888-4c40-a780-849ac48e66fd?

```



```

"selfAttributes": {
  "com.infa.odin.models.relational.DatatypeLength": "100",
  "core.reference": false,
  "core.Position": 2,
  "core.rankArray": [],
  "core.patternStatistics": [],
  "com.infa.odin.models.relational.PrimaryKeyColumn": "false",
  "core.mergedObjects": [],
  "core.businessName": "Customer Records",
  "core.profiled": false,
  "core.resourceType": "Snowflake",
  "core.businessDescription": "",
  "core.lastProfiledState": "Not Profiled",
  "com.infa.odin.models.relational.Datatype": "VARCHAR",
  "core.supplement.certified": [
    false
  ],
  "com.infa.odin.models.relational.Nullable": "true",
  "core.assetLifecycle": "Published",
  "core.resourceName": "Snowflake_10June_22-10",
  "core.inferredDataTypeSummaries": []
},
"dataProfile": {
  "core.lastProfiledState": "Not Profiled",
  "core.topNValueFrequenciesSample": [],
  "core.rankArray": [],
  "core.patternStatistics": [],
  "core.profiled": false,
  "core.classType": "com.infa.odin.models.relational.Column",
  "core.identity": "5ab1fc47-68aa-4182-ab8e-80c8dc58e95d",
  "core.origin": "ab2cc915-4b30-396a-9632-bd89f02ddf1c",
  "core.externalId": "ab2cc915-4b30-396a-9632-bd89f02ddf1c://CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCTABLE3/CDGCTABL31COL2~com.infa.odin.models.relational.Column",
  "core.name": "CDGCTABL31COL2",
  "core.inferredDataTypeSummaries": [],
  "core.description": ""
},
"glossary": [
  {
    "core.identity": "7bc6fa52-b563-48a2-9f3a-643b02cc4421",
    "details": "/data360/search/assets/MLMRSCOE-24?
scheme=external&segments=summary,systemAttributes,customAttributes,selfAttributes",
    "core.externalId": "MLMRSCOE-24",
    "core.name": "Customer Records",
    "core.curationStatus": "ACCEPTED"
  }
],
"neighborhood": [
  {
    "type": "com.infa.odin.models.relational.Table",
    "neighbors": [
      {
        "neighbor": "CDGCTABLE3",
        "details": "/data360/search/assets/4e648258-9937-4197-
a933-92d35889fbb0?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes",
        "paths": [
          {
            "serialized": "CDGC_QE_SNOWFLAKE/CDGC_QE_SCHEMA/CDGCTABLE3/
CDGCTABL31COL2~com.infa.odin.models.relational.Column ( CDGCTABL31COL2 ) <--
com.infa.odin.models.relational.TableToColumn -- CDGC_QE_SNOWFLAKE/CDGC_QE_SCHEMA/
CDGCTABLE3~com.infa.odin.models.relational.Table ( CDGCTABLE3 ) ",
            "collection": [
              {
                "association":
"com.infa.odin.models.relational.TableToColumn",
                "curationStatus": "NONE",
                "from": "CDGCTABLE3",
                "to": "CDGCTABL31COL2",
                "fromType": "com.infa.odin.models.relational.Table",
                "toType": "com.infa.odin.models.relational.Column",

```

```

        "fromLocation": "ab2cc915-4b30-396a-9632-
bd89f02ddf1c://ab2cc915-4b30-396a-9632-bd89f02ddf1c/CDGC_QE_SNOWFLAKE/CDGC_QE_SCHEMA/
CDGCTABLE3",
        "toLocation": "ab2cc915-4b30-396a-9632-
bd89f02ddf1c://ab2cc915-4b30-396a-9632-bd89f02ddf1c/CDGC_QE_SNOWFLAKE/CDGC_QE_SCHEMA/
CDGCTABLE3/CDGCTABL31COL2",
        "attributes": {
            "core.modifiedOn": 1689007798639,
            "core.createdBy": "5gwD6d18cwPeUaAJAyeV2V",
            "core.associationKind": "core.ParentChild",
            "core.modifiedBy": "5gwD6d18cwPeUaAJAyeV2V",
            "core.origin": "ab2cc915-4b30-396a-9632-
bd89f02ddf1c",
            "core.createdOn": 1689007798639
        },
        "details": {
            "fromUri": "/data360/search/assets/
4e648258-9937-4197-a933-92d35889fbb0?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes",
            "toUri": "/data360/search/assets/
5ab1fc47-68aa-4182-ab8e-80c8dc58e95d?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes"
        },
        "fromProperties": {
            "core.identity": "4e648258-9937-4197-
a933-92d35889fbb0",
            "core.classType":
"com.infa.odin.models.relational.Table",
            "core.location": "ab2cc915-4b30-396a-9632-
bd89f02ddf1c://ab2cc915-4b30-396a-9632-bd89f02ddf1c/CDGC_QE_SNOWFLAKE/CDGC_QE_SCHEMA/
CDGCTABLE3",
            "core.externalId": "CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCTABLE3~com.infa.odin.models.relational.Table",
            "core.name": "CDGCTABLE3"
        },
        "toProperties": {
            "core.identity": "5ab1fc47-68aa-4182-
ab8e-80c8dc58e95d",
            "core.classType":
"com.infa.odin.models.relational.Column",
            "core.location": "ab2cc915-4b30-396a-9632-
bd89f02ddf1c://ab2cc915-4b30-396a-9632-bd89f02ddf1c/CDGC_QE_SNOWFLAKE/CDGC_QE_SCHEMA/
CDGCTABLE3/CDGCTABL31COL2",
            "core.externalId": "CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCTABLE3/CDGCTABL31COL2~com.infa.odin.models.relational.Column",
            "core.name": "CDGCTABL31COL2"
        }
    }
}
]
}
]
}
],
{
    "type": "com.infa.ccgf.models.governance.BusinessTerm",
    "neighbors": [
        {
            "neighbor": "Customer Records",
            "details": "/data360/search/assets/MLMRSCOE-24?
scheme=external&segments=summary,systemAttributes,customAttributes,selfAttributes",
            "paths": [
                {
                    "serialized": "CDGC_QE_SNOWFLAKE/CDGC_QE_SCHEMA/CDGCTABLE3/
CDGCTABL31COL2~com.infa.odin.models.relational.Column ( CDGCTABL31COL2 ) --
com.infa.ccgf.models.governance.IClassTechnicalGlossaryBase --> MLMRSCOE-24 ( Customer
Records ) ",
                    "collection": [
                        {
                            "association":
"com.infa.ccgf.models.governance.IClassTechnicalGlossaryBase",

```

Response body

The details that the response body displays for business and technical assets are based on the values that you specify in the `segments` URL parameter while sending the GET request. For more information about the details returned in the response body, see `segments` in [“Request parameters” on page 11](#).

List details of multiple assets

Send a POST request to view the details of multiple assets in the catalog. While sending the request, you can specify the reference IDs of one or more assets in the body of the request. In the request parameters, specify the type of asset details that you would like to view.

To list the details of multiple assets, submit a request with the following method and endpoint, and specify the asset ID:

Method	Endpoint
POST	<baseApiUrl>/data360/search/v1/assets/details

The <baseApiUrl> differs for each pod. For more information about the base API URL, see [“Send Requests” on page 7](#).

Request parameters

In the request URL parameters, specify the type of asset ID that you want to use to search for assets. To limit the API response to specific details of an asset, you can additionally specify the type of asset details that you want the request to return.

Request parameters

Use the following parameters in the request URL:

Parameter	Description
scheme	Specify the type of asset ID you want to use to query assets. Enter one of the following values: - <code>internal</code>. Indicates that the asset ID that you specify in the request is the internal ID of the asset. - <code>external</code>. Indicates that the asset ID that you specify in the request is the unique reference ID of the asset.
segments	Specify the type of asset details that you want the API request to return. The default value is <code>segments=all</code>. Enter any segment value from the following values: - <code>all</code>. Returns the internal ID, external ID, summary, system attributes, and the API request link to view further details of the asset. - <code>summary</code>. Returns the name, description, and location of the asset. - <code>systemAttributes</code>. Returns the origin, class type, base types, user that created or updated the asset and the date on which the asset was created or updated. - <code>stakeholdership</code>. Returns the type of user and role that are assigned as stakeholder for the asset. - <code>customAttributes</code>. Returns the custom attributes specified for the asset. - <code>selfAttributes</code>. Returns the properties of assets. - <code>dataProfile</code>. Returns the profiling statistics of the asset. - <code>dataClassification</code>. Returns the data classification associated with the asset. - <code>glossary</code>. Returns the glossary associated with the asset. - <code>dataQuality</code>. Returns the data quality score of the asset. - <code>hierarchy</code>. Returns the immediate child assets of the asset. - <code>hierarchy:all</code>. Returns all the attributes of the immediate child assets in the hierarchy. - <code>hierarchy:selfAttributes</code>. Returns the properties of the immediate child assets in the hierarchy. - <code>hierarchy:systemAttributes</code>. Returns the system attributes of the immediate child assets in the hierarchy. - <code>hierarchy:customAttributes</code>. Returns the custom attributes of the immediate assets in the hierarchy. - <code>neighborhood</code>. Returns assets that are in a direct relationship with the searched asset. - <code>neighborhood:all</code>. Returns assets that are in a direct or indirect relationship with the searched asset. - <code>neighborhood:<classtype></code>. Returns assets of the specified class type that are in a direct relationship with the searched asset. - <code>lineage-level</code>. Returns the lineage level of the asset, that is data element or data set level. The default value for <code>lineage-level</code> is <code>dataset</code>. - <code>lineage-direction</code>. Returns the direction of the asset in the lineage, that is inbound or outbound. The default value for <code>lineage-direction</code> is <code>all</code>. - <code>lineage-level:dataset</code>. Returns assets that have a direct relationship with the searched asset.

Parameter	Description
	- lineage-direction:all. Returns assets that are in a direct inbound and outbound relationship with the searched asset. - lineage-direction:inbound. Returns assets that are in a direct inbound relationship with the searched asset. - lineage-direction:outbound. Returns assets that are in a direct outbound relationship with the searched asset. - descendants. Returns the immediate children and related child assets. - descendants:all. Returns all the details of the immediate and related child assets. - descendants:systemAttributes. Returns the system attributes of the immediate and related child assets. - descendants:selfAttributes. Returns the properties of the immediate and related child assets. - descendants:customAttributes. Returns the custom attributes of the immediate and related child assets.

Request body

Use the request body to specify the external or internal IDs of assets that you want to view. You can specify in the `scheme` request parameter whether you want to search the asset by external ID or internal ID.

In the body of each API request, specify up to five comma-separated asset IDs. You can specify the asset IDs in the following format:

```
[
  "0c5777c2-ec04-4a57-8bf0-fc895c4579a2",
  "982cd858-b5b0-4cea-b120-cad3c325e38e",
  "e907f08f-6327-4214-9401-c794bc0c34db",
]
```

If you don't know the ID of a particular asset, you can first send a POST request to view the list of assets in the catalog. This request returns the internal ID of each asset in the `core.identity` parameter and the unique reference ID of the asset in the `core.externalId` parameter. For more information, see ["List assets in the catalog" on page 10](#).

Example request

Search for two assets using internal asset IDs

The following example shows the POST request to list all the details of a column and an associated business term by passing the internal IDs of both the assets in the request body.

```
POST https://idmc-api.dm-us.informaticacloud.com/data360/search/v1/assets/details?
scheme=internal&segments=all
Authorization: Bearer <jwt_token>
Content-Type: application/json
X-INFA-ORG-ID:<Org ID>

Body
[
  "81e8ea5a-c888-4c40-a780-849ac48e66fd",
  "17b1e3ed-f64f-487a-b073-06b78ec30259"
]
```

The following example shows the response for the request. The response returns all the details of the business term 'AddressLine2' and the column 'CDGCTABL31COL2' because the `segments` parameter in the request is set to `all`.

```
[
  {
    "core.identity": "17b1e3ed-f64f-487a-b073-06b78ec30259",
    "core.externalId": "lower-68",
    "summary": {
      "core.location": "CDGC://17b1e3ed-f64f-487a-b073-06b78ec30259",
      "core.name": "AddressLine2"
    },
    "systemAttributes": {
      "core.modifiedOn": 1688816931942,
      "core.createdBy": "5gwD6d18cwPeUaAJAyeV2V",
      "core.modifiedBy": "5gwD6d18cwPeUaAJAyeV2V",
      "core.classType": "com.infa.ccgf.models.governance.BusinessTerm",
      "core.origin": "CDGC",
      "type": [
        "core.IClassBusiness",
        "core.IClass",
        "com.infa.ccgf.models.governance.GlossaryBase",
        "com.infa.ccgf.models.governance.BusinessTerm"
      ],
      "core.createdOn": 1688816931942
    },
    "customAttributes": {
      "com.infa.odin.models.custom.ca_2205258177888237465": "default",
      "com.infa.odin.models.custom.ca_5534006856514172118": "default"
    },
    "selfAttributes": {
      "com.infa.ccgf.models.governance.FormatType": "Text",
      "core.supplement.certified": [
        false
      ],
      "core.assetLifecycle": "Published",
      "core.producer": "CDGC",
      "com.infa.ccgf.models.governance.isCDE": false
    },
    "neighborhood": [
      {
        "type": "com.infa.odin.models.file.flat.FlatField",
        "neighbors": [
          {
            "neighbor": "AddressLine2",
            "details": "/data360/search/assets/86aa9780-99d3-4efb-95ea-b4d691bb97d0?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes",
            "paths": [
              {
                "serialized": "lower-68 ( AddressLine2 ) <--
com.infa.ccgf.models.governance.IClassTechnicalGlossaryBase -- dqprofiling-dockerpod/
courses/person1.csv/AddressLine2~com.infa.odin.models.file.flat.FlatField
( AddressLine2 ) ",
                "collection": [
                  {
                    "association":
"com.infa.ccgf.models.governance.IClassTechnicalGlossaryBase",
                    "curationStatus": "AUTO_ACCEPTED",
                    "from": "AddressLine2",
                    "to": "AddressLine2",
                    "fromType":
"com.infa.odin.models.file.flat.FlatField",
                    "toType":
"com.infa.ccgf.models.governance.BusinessTerm",
                    "fromLocation": "99068dfb-2c91-34e2-
bd37-5232fde620b1://99068dfb-2c91-34e2-bd37-5232fde620b1/dqprofiling-dockerpod/courses/
person1.csv/AddressLine2",
                    "toLocation": "CDGC://17b1e3ed-f64f-487a-
b073-06b78ec30259",
                    "attributes": {
```

```

"core.modifiedBy": "5gwD6d18cwPeUaAJAyeV2V",
"core.origin": "99068dfb-2c91-34e2-
bd37-5232fde620b1",
"core.modifiedOn": 1689076624370,
"core.createdBy": "5gwD6d18cwPeUaAJAyeV2V",
"core.confidenceScore": 100.0,
"core.inferred": true,
"core.associationKind":
"com.infa.ccgf.models.governance.semanticKind",
"core.producer": "discovery-capability",
"core.createdOn": 1689076624370,
"core.curationStatus": "AUTO_ACCEPTED"
},
"details": {
  "fromUri": "/data360/search/assets/
86aa9780-99d3-4efb-95ea-b4d691bb97d0?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes",
  "toUri": "/data360/search/assets/lower-68?
scheme=external&segments=summary,systemAttributes,customAttributes,selfAttributes"
},
"fromProperties": {
  "core.identity": "86aa9780-99d3-4efb-95ea-
b4d691bb97d0",
  "core.classType":
"com.infa.odin.models.file.flat.FlatField",
  "core.location": "99068dfb-2c91-34e2-
bd37-5232fde620b1://99068dfb-2c91-34e2-bd37-5232fde620b1/dqprofiling-dockerpod/courses/
person1.csv/AddressLine2",
  "core.externalId": "dqprofiling-dockerpod/
courses/person1.csv/AddressLine2~com.infa.odin.models.file.flat.FlatField",
  "core.name": "AddressLine2"
},
"toProperties": {
  "core.identity": "17b1e3ed-f64f-487a-
b073-06b78ec30259",
  "core.classType":
"com.infa.ccgf.models.governance.BusinessTerm",
  "core.location": "CDGC://17b1e3ed-f64f-487a-
b073-06b78ec30259",
  "core.externalId": "lower-68",
  "core.name": "AddressLine2"
}
}
}
}
},
{
  "neighbor": "AddressLine2",
  "details": "/data360/search/assets/00b1dbb0-ee68-43e9-
a833-675b5c8f0ab2?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes",
  "paths": [
    {
      "serialized": "lower-68 ( AddressLine2 ) <--
com.infa.ccgf.models.governance.IClassTechnicalGlossaryBase -- dqprofiling-dockerpod/
courses/person1.csv/AddressLine2~com.infa.odin.models.file.flat.FlatField
( AddressLine2 ) ",
      "collection": [
        {
          "association":
"com.infa.ccgf.models.governance.IClassTechnicalGlossaryBase",
          "curationStatus": "AUTO_ACCEPTED",
          "from": "AddressLine2",
          "to": "AddressLine2",
          "fromType":
"com.infa.odin.models.file.flat.FlatField",
          "toType":
"com.infa.ccgf.models.governance.BusinessTerm",
          "fromLocation": "27397996-
ad9a-3f32-8093-2e4b80fcd93c://27397996-ad9a-3f32-8093-2e4b80fcd93c/dqprofiling-dockerpod/

```



```

    },
    "systemAttributes": {
      "core.modifiedOn": 1692806773089,
      "core.createdBy": "5gwD6d18cwPeUaAJAyeV2V",
      "core.modifiedBy": "5gwD6d18cwPeUaAJAyeV2V",
      "core.classType": "com.infa.odin.models.relational.Column",
      "core.origin": "d4865a0f-406b-363e-b850-2fc633b3f77b",
      "type": [
        "core.IClassTechnical",
        "core.IClass",
        "core.DataElement",
        "com.infa.odin.models.relational.Column"
      ],
      "core.createdOn": 1688650669237
    },
    "selfAttributes": {
      "com.infa.odin.models.relational.DatatypeLength": "100",
      "core.reference": false,
      "core.Position": 2,
      "core.rankArray": [],
      "core.patternStatistics": [],
      "com.infa.odin.models.relational.PrimaryKeyColumn": "false",
      "core.mergedObjects": [],
      "core.businessName": "AddressLine2",
      "core.profiled": false,
      "core.resourceType": "Snowflake",
      "core.businessDescription": "",
      "core.lastProfiledState": "Not Profiled",
      "com.infa.odin.models.relational.Datatype": "VARCHAR",
      "core.supplement.certified": [
        false
      ],
      "com.infa.odin.models.relational.Nullable": "true",
      "core.assetLifecycle": "Published",
      "core.resourceName": "Snowflake_CustCheck",
      "core.inferredDataTypeSummaries": []
    },
    "dataProfile": {
      "core.lastProfiledState": "Not Profiled",
      "core.topNValueFrequenciesSample": [],
      "core.rankArray": [],
      "core.patternStatistics": [],
      "core.profiled": false,
      "core.classType": "com.infa.odin.models.relational.Column",
      "core.identity": "81e8ea5a-c888-4c40-a780-849ac48e66fd",
      "core.origin": "d4865a0f-406b-363e-b850-2fc633b3f77b",
      "core.externalId": "d4865a0f-406b-363e-b850-2fc633b3f77b://CDGC_QE_SNOWFLAKE/CDGC_QE_SCHEMA/CDGCTABLE3/CDGCTABL31COL2~com.infa.odin.models.relational.Column",
      "core.name": "CDGCTABL31COL2",
      "core.inferredDataTypeSummaries": [],
      "core.description": ""
    },
    "glossary": [
      {
        "core.identity": "17b1e3ed-f64f-487a-b073-06b78ec30259",
        "details": "/data360/search/assets/lower-68?
scheme=external&segments=summary,systemAttributes,customAttributes,selfAttributes",
        "core.externalId": "lower-68",
        "core.name": "AddressLine2",
        "core.curationStatus": "ACCEPTED"
      }
    ],
    "neighborhood": [
      {
        "type": "com.infa.odin.models.relational.Table",
        "neighbors": [
          {
            "neighbor": "CDGCTABLE3",
            "details": "/data360/search/assets/44ef664f-90ef-4ac2-af4d-
a99f7670081b?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes",

```

```

        "paths": [
            {
                "serialized": "CDGC_QE_SNOWFLAKE/CDGC_QE_SCHEMA/
CDGCTABLE3/CDGCTABL31COL2~com.infa.odin.models.relational.Column ( CDGCTABL31COL2 ) <--
com.infa.odin.models.relational.TableToColumn -- CDGC_QE_SNOWFLAKE/CDGC_QE_SCHEMA/
CDGCTABLE3~com.infa.odin.models.relational.Table ( CDGCTABLE3 ) ",
                "collection": [
                    {
                        "association":
"com.infa.odin.models.relational.TableToColumn",
                        "curationStatus": "NONE",
                        "from": "CDGCTABLE3",
                        "to": "CDGCTABL31COL2",
                        "fromType":
"com.infa.odin.models.relational.Table",
                        "toType":
"com.infa.odin.models.relational.Column",
                        "fromLocation": "d4865a0f-406b-363e-
b850-2fc633b3f77b://d4865a0f-406b-363e-b850-2fc633b3f77b/CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCTABLE3",
                        "toLocation": "d4865a0f-406b-363e-
b850-2fc633b3f77b://d4865a0f-406b-363e-b850-2fc633b3f77b/CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCTABLE3/CDGCTABL31COL2",
                        "attributes": {
                            "core.modifiedOn": 1688650827020,
                            "core.createdBy": "5gwD6d18cwPeUaAJAyeV2V",
                            "core.associationKind": "core.ParentChild",
                            "core.modifiedBy": "5gwD6d18cwPeUaAJAyeV2V",
                            "core.origin": "d4865a0f-406b-363e-
b850-2fc633b3f77b",
                            "core.createdOn": 1688650827020
                        },
                        "details": {
                            "fromUri": "/data360/search/assets/
44ef664f-90ef-4ac2-af4d-a99f7670081b?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes",
                            "toUri": "/data360/search/assets/81e8ea5a-
c888-4c40-a780-849ac48e66fd?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes"
                        },
                        "fromProperties": {
                            "core.identity": "44ef664f-90ef-4ac2-af4d-
a99f7670081b",
                            "core.classType":
"com.infa.odin.models.relational.Table",
                            "core.location": "d4865a0f-406b-363e-
b850-2fc633b3f77b://d4865a0f-406b-363e-b850-2fc633b3f77b/CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCTABLE3",
                            "core.externalId": "CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCTABLE3~com.infa.odin.models.relational.Table",
                            "core.name": "CDGCTABLE3"
                        },
                        "toProperties": {
                            "core.identity": "81e8ea5a-c888-4c40-
a780-849ac48e66fd",
                            "core.classType":
"com.infa.odin.models.relational.Column",
                            "core.location": "d4865a0f-406b-363e-
b850-2fc633b3f77b://d4865a0f-406b-363e-b850-2fc633b3f77b/CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCTABLE3/CDGCTABL31COL2",
                            "core.externalId": "CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCTABLE3/CDGCTABL31COL2~com.infa.odin.models.relational.Column",
                            "core.name": "CDGCTABL31COL2"
                        }
                    }
                ]
            }
        ]
    },

```

```

{
  "type": "com.infa.odin.models.relational.ViewColumn",
  "neighbors": [
    {
      "neighbor": "CDGCVIEW3COL2",
      "details": "/data360/search/assets/
a1172b78-75cb-4485-88dd-8b407441187a?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes",
      "paths": [
        {
          "serialized": "CDGC_QE_SNOWFLAKE/CDGC_QE_SCHEMA/
CDGCTABLE3/CDGCTABL31COL2~com.infa.odin.models.relational.Column ( CDGCTABL31COL2 ) --
core.DirectionaDataFlow --> CDGC_QE_SNOWFLAKE/CDGC_QE_SCHEMA/CDGCVIEW3/
CDGCVIEW3COL2~com.infa.odin.models.relational.ViewColumn ( CDGCVIEW3COL2 ) ",
          "collection": [
            {
              "association": "core.DirectionaDataFlow",
              "curationStatus": "NONE",
              "from": "CDGCTABL31COL2",
              "to": "CDGCVIEW3COL2",
              "fromType":
"com.infa.odin.models.relational.Column",
              "toType":
"com.infa.odin.models.relational.ViewColumn",
              "fromLocation": "d4865a0f-406b-363e-
b850-2fc633b3f77b://d4865a0f-406b-363e-b850-2fc633b3f77b/CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCTABLE3/CDGCTABL31COL2",
              "toLocation": "d4865a0f-406b-363e-
b850-2fc633b3f77b://d4865a0f-406b-363e-b850-2fc633b3f77b/CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCVIEW3/CDGCVIEW3COL2",
              "attributes": {
                "core.modifiedOn": 1688650826911,
                "core.createdBy": "5gwD6d18cwPeUaAJAyev2V",
                "core.associationKind": "core.DataFlow",
                "core.modifiedBy": "5gwD6d18cwPeUaAJAyev2V",
                "core.origin": "d4865a0f-406b-363e-
b850-2fc633b3f77b",
                "core.createdOn": 1688650826911
              },
              "details": {
                "fromUri": "/data360/search/assets/81e8ea5a-
c888-4c40-a780-849ac48e66fd?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes",
                "toUri": "/data360/search/assets/
a1172b78-75cb-4485-88dd-8b407441187a?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes"
              },
              "fromProperties": {
                "core.identity": "81e8ea5a-c888-4c40-
a780-849ac48e66fd",
                "core.classType":
"com.infa.odin.models.relational.Column",
                "core.location": "d4865a0f-406b-363e-
b850-2fc633b3f77b://d4865a0f-406b-363e-b850-2fc633b3f77b/CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCTABLE3/CDGCTABL31COL2",
                "core.externalId": "CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCTABLE3/CDGCTABL31COL2~com.infa.odin.models.relational.Column",
                "core.name": "CDGCTABL31COL2"
              },
              "toProperties": {
                "core.identity":
"a1172b78-75cb-4485-88dd-8b407441187a",
                "core.classType":
"com.infa.odin.models.relational.ViewColumn",
                "core.location": "d4865a0f-406b-363e-
b850-2fc633b3f77b://d4865a0f-406b-363e-b850-2fc633b3f77b/CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCVIEW3/CDGCVIEW3COL2",
                "core.externalId": "CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCVIEW3/CDGCVIEW3COL2~com.infa.odin.models.relational.ViewColumn",
                "core.name": "CDGCVIEW3COL2"
              }
            }
          ]
        }
      ]
    }
  ]
}

```

```

    }
  ]
}
]
},
{
  "type": "com.infa.ccgf.models.governance.BusinessTerm",
  "neighbors": [
    {
      "neighbor": "AddressLine2",
      "details": "/data360/search/assets/lower-68?
scheme=external&segments=summary,systemAttributes,customAttributes,selfAttributes",
      "paths": [
        {
          "serialized": "CDGC_QE_SNOWFLAKE/CDGC_QE_SCHEMA/
CDGCTABLE3/CDGCTABL31COL2~com.infa.odin.models.relational.Column ( CDGCTABL31COL2 ) --
com.infa.ccgf.models.governance.IClassTechnicalGlossaryBase --> lower-68
( AddressLine2 ) ",
          "collection": [
            {
              "association":
"com.infa.ccgf.models.governance.IClassTechnicalGlossaryBase",
              "curationStatus": "ACCEPTED",
              "from": "CDGCTABL31COL2",
              "to": "AddressLine2",
              "fromType":
"com.infa.odin.models.relational.Column",
              "toType":
"com.infa.ccgf.models.governance.BusinessTerm",
              "fromLocation": "d4865a0f-406b-363e-
b850-2fc633b3f77b://d4865a0f-406b-363e-b850-2fc633b3f77b/CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCTABLE3/CDGCTABL31COL2",
              "toLocation": "CDGC://17b1e3ed-f64f-487a-
b073-06b78ec30259",
              "attributes": {
                "core.modifiedOn": 1692806775314,
                "core.createdBy": "5gwD6dl8cwPeUaAJAyeV2V",
                "core.associationKind":
"com.infa.ccgf.models.governance.semanticKind",
                "core.modifiedBy": "5gwD6dl8cwPeUaAJAyeV2V",
                "core.inferred": false,
                "core.producer": "CDGC",
                "core.origin": "CDGC",
                "core.createdOn": 1692806775314,
                "core.curationStatus": "ACCEPTED"
              },
              "details": {
                "fromUri": "/data360/search/assets/81e8ea5a-
c888-4c40-a780-849ac48e66fd?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes",
                "toUri": "/data360/search/assets/lower-68?
scheme=external&segments=summary,systemAttributes,customAttributes,selfAttributes"
              },
              "fromProperties": {
                "core.identity": "81e8ea5a-c888-4c40-
a780-849ac48e66fd",
                "core.classType":
"com.infa.odin.models.relational.Column",
                "core.location": "d4865a0f-406b-363e-
b850-2fc633b3f77b://d4865a0f-406b-363e-b850-2fc633b3f77b/CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCTABLE3/CDGCTABL31COL2",
                "core.externalId": "CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCTABLE3/CDGCTABL31COL2~com.infa.odin.models.relational.Column",
                "core.name": "CDGCTABL31COL2"
              },
              "toProperties": {
                "core.identity": "17b1e3ed-f64f-487a-
b073-06b78ec30259",
                "core.classType":

```

```

"com.infa.ccgf.models.governance.BusinessTerm",
    "core.location": "CDGC://17b1e3ed-f64f-487a-
b073-06b78ec30259",
    "core.externalId": "lower-68",
    "core.name": "AddressLine2"
  }
}
]
}
]
}
],
"lineage": [
  {
    "direction": "outbound",
    "hops": [
      {
        "distance": 1,
        "items": [
          {
            "from": "CDGCTABL31COL2",
            "to": "CDGCVIEW3COL2",
            "fromType": "com.infa.odin.models.relational.Column",
            "toType": "com.infa.odin.models.relational.ViewColumn",
            "fromLocation": "d4865a0f-406b-363e-
b850-2fc633b3f77b://d4865a0f-406b-363e-b850-2fc633b3f77b/CDGC_QE_SNOWFLAKE/
CDGC_QE_SCHEMA/CDGCTABLE3/CDGCTABL31COL2",
            "toLocation": "d4865a0f-406b-363e-b850-2fc633b3f77b://
d4865a0f-406b-363e-b850-2fc633b3f77b/CDGC_QE_SNOWFLAKE/CDGC_QE_SCHEMA/CDGCVIEW3/
CDGCVIEW3COL2",
            "attributes": {
              "core.modifiedOn": 1688650826911,
              "core.createdBy": "5gwD6d18cwPeUaAJAyeV2V",
              "core.associationKind": "core.DataFlow",
              "core.modifiedBy": "5gwD6d18cwPeUaAJAyeV2V",
              "__meta.association": "core.DirectionDataFlow",
              "core.origin": "d4865a0f-406b-363e-
b850-2fc633b3f77b",
              "core.createdOn": 1688650826911
            },
            "details": {
              "fromUri": "/data360/search/v1/assets/812526be-c8e0-48f9-
a82c-53055cb5d0e3?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes",
              "toUri": "/data360/search/v1/assets/
7635cb3e-3425-4440-9244-ce516f197ec5?
scheme=internal&segments=summary,systemAttributes,customAttributes,selfAttributes"
            },
            "fromProperties": {
              "core.identity": "812526be-c8e0-48f9-a82c-53055cb5d0e3",
              "core.classType": "core.DataElement",
              "core.location": "f2c12406-bb40-377e-
aeld-56574cf056e5://f2c12406-bb40-377e-aeld-56574cf056e5/f2c12406-bb40-377e-
aeld-56574cf056e5_S3__infagcstest/S3__infagcstest/rodfolder/bucket",
              "core.externalId": "f2c12406-bb40-377e-
aeld-56574cf056e5_S3__infagcstest://S3__infagcstest/rodfolder/bucket~core.DataElement",
              "core.name": "bucket"
            },
            "toProperties": {
              "core.identity": "7635cb3e-3425-4440-9244-ce516f197ec5",
              "core.classType":
"com.infa.odin.models.relational.ExternalColumn",
              "core.location": "f2c12406-bb40-377e-
aeld-56574cf056e5://f2c12406-bb40-377e-aeld-56574cf056e5/ATHENA-DB/gcsinstance/
account_managers/bucket",
              "core.externalId": "f2c12406-bb40-377e-
aeld-56574cf056e5://ATHENA-DB/gcsinstance/account_managers/
bucket~com.infa.odin.models.relational.ExternalColumn",
              "core.name": "bucket"
            }
          }
        ]
      }
    ]
  }
]

```

```
]
  }
  ]
  }
  ]
  }
  ]
  }
  ]
  }
```

CHAPTER 3

Export assets


Use this API to search for business or technical assets in the catalog and export the searched assets to a Microsoft Excel or a CSV file.

To export assets using the export API, ensure that your organization administrator has enabled the **Export** privilege for your user role in Administrator.

Use the export API in one of the following ways:

- Search for assets by using queries and export the specified assets
- Search for assets by asset ID and export the specified assets

The following image shows the overall process of using the export API and the expected response for the endpoint:

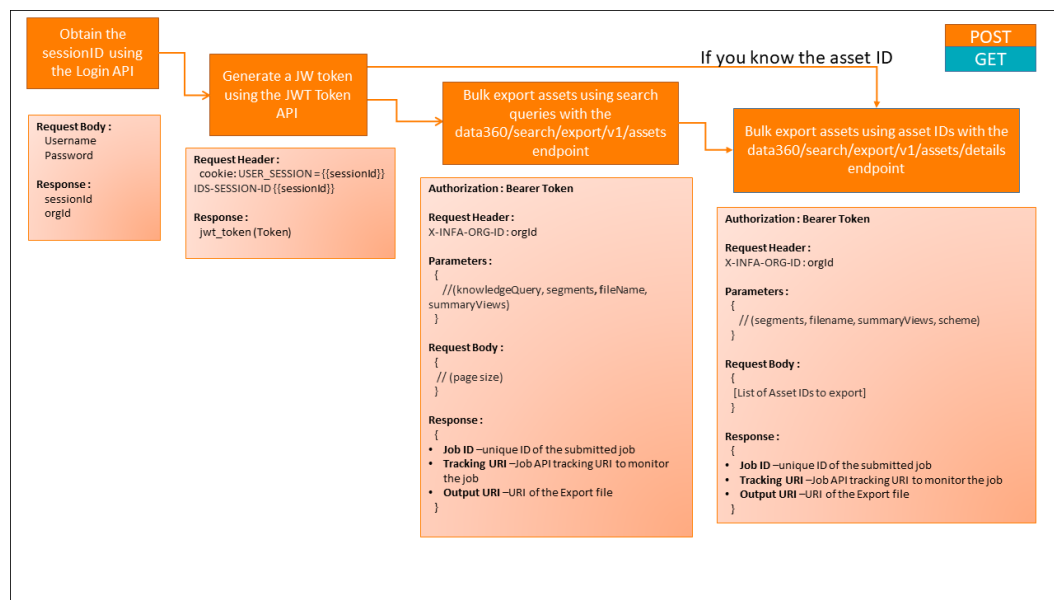

Export assets using search queries

Send a POST request to search for assets in the catalog using search queries and export the assets to a Microsoft Excel or a CSV file. Use the request URL parameters and the request body to enter your search queries and specify the details of the assets you want to export.

To search and export assets using search queries, submit a request with the following method and endpoint:

Method	Endpoint
POST	<baseApiUrl>/data360/search/export/v1/assets

The base API URL differs for each pod. For more information, see [“Send Requests” on page 7](#).

Request parameters

To limit the scope of the exported assets, enter search queries using the request URL parameters and filter the search results.

You can use the following request URL parameters to filter and limit your search results before you export the assets:

Parameter	Description
knowledgeQuery	Specify the asset type or name along with any search criteria. For information about search query examples, see “Search query examples” on page 60. For example, you can enter <code>knowledgeQuery=Business Terms</code> and <code>knowledgeQuery=data elements related to business term</code>.
segments	Specify the level of asset detail that you want the API request to return. Enter any segment value from the following values: - <code>all</code>. Returns the summary, system attributes, and the API request link to view further details of the asset. - <code>summary</code>. Returns the name, description, and location of the asset. - <code>systemAttributes</code>. Returns the origin, class type of the asset, base types, user that created or updated the asset, and the date on which the asset was created or updated. - <code>customAttributes</code>. Returns the custom fields specified for the asset. - <code>selfAttributes</code>. Returns the properties of assets. - <code>stakeholdership</code>. Returns the type of user and role that are assigned as stakeholder for the asset. - <code>dataProfile</code>. Returns the profiling statistics of the asset. - <code>dataClassification</code>. Returns the data classification associated with the asset. - <code>glossary</code>. Returns the glossary associated with the asset. - <code>dataQuality</code>. Returns the data quality score of the asset. - <code>hierarchy</code>. Returns the hierarchy of the asset. The default value is <code>segments=all</code>.

Parameter	Description
fileName	Specify the name of the Microsoft Excel output file that you want to export. The file name should not contain spaces.
summaryViews	If you set this parameter, the exported Microsoft Excel file includes a summary sheet. Specify the type of assets you want to see in the summary sheet. You can specify one of the following values: - all. The summary sheet in the exported file contains a summary of all the assets you have exported. - Technical. The summary sheet in the exported file contains a summary of only the technical assets you have exported. - Business. The summary sheet in the exported file contains a summary of only the business assets you have exported.

Request body

Use the request body to specify the pagination parameters. The API response exports the specified number of assets that match the search criteria.

In the body of the request, specify the pagination parameters in the following format:

```
{
  "from": 0,
  "size": 10,
}
```

The following list describes the pagination parameters that you can use to specify the number of assets that you want to export:

- **from**. Specify a numeric value to set an offset for pagination. The default value is zero.
- **size**. Specify a numeric value for the number of assets that you want to export. The default value is 10.

Consider the following scenarios when you specify the number of assets to export using this API:

- To export more than 10000 assets that match the search criteria, remove the **from** parameter and specify the number of assets to export in the **size** parameter of the request body. If **size** is set to more than 10000 assets, then the exported file is in the ZIP format containing multiple files. Each file is limited to 10K rows.
- To export all assets that match the search criteria, remove the **from** parameter and specify zero as the value of the **size** parameter in the request body.

Example requests

Export more than 10000 assets

The following example shows the POST request to export and download 15000 assets that start with the name 'Customer'. The summary sheet in the exported file will contain a summary of the assets.

```
POST https://idmc-api.dm-us.informaticacloud.com/data360/search/export/v1/assets?
knowledgeQuery=Customer*&fileName=Export__all__assetse&summaryViews=all

Authorization: Bearer <jwt_token>
Content-Type: application/json
X-INFA-ORG-ID:<Org ID>

Body
{
```

```
    "size": 15000
  }
```

Export all assets in the catalog

The following example shows the POST request to export and download all assets in the catalog. The summary sheet in the exported file will contain a summary of the assets.

```
POST https://idmc-api.dm-us.informaticacloud.com/data360/search/export/v1/assets?
knowledgeQuery=all&fileName=Export__all_assetse&summaryViews=all

Authorization: Bearer <jwt_token>
Content-Type: application/json
X-INFA-ORG-ID:<Org ID>

Body
{
    "size": 0
}
```

Export all details of all business assets

The following example shows the POST request to export all details of business assets in the catalog and downloads 500 assets based on the `size` body parameter. The summary sheet in the exported file will contain a summary of the assets.

```
POST https://idmc-api.dm-us.informaticacloud.com/data360/search/export/v1/assets?
knowledgeQuery=Business
Assets&segments=all&fileName=Export_32_all_segment_all_view&summaryViews=all

Authorization: Bearer <jwt_token>
Content-Type: application/json
X-INFA-ORG-ID:<Org ID>

Body
{
    "from": 0,
    "size": 500
}
```

Export the summary and custom attributes of all business assets

The following example shows the POST request to export the summary and custom attributes of business assets in the catalog and downloads 10 business assets based on the `size` body parameter. The summary sheet in the exported file will contain a summary of the business assets.

```
POST https://idmc-api.dm-us.informaticacloud.com/data360/search/export/v1/assets?
knowledgeQuery=Business
Assets&segments=summary,customAttributes&fileName=Export_32_all_segment_all_view&summaryV
iews=Business

Authorization: Bearer <jwt_token>
Content-Type: application/json
X-INFA-ORG-ID:<Org ID>

Body
{
    "from": 0,
    "size": 10
}
```

Export assets using asset IDs

Send a POST request to search for assets in the catalog using asset IDs and export the assets in a Microsoft Excel or a CSV file. Specify the asset IDs in the request body and use the request parameters to specify the details of the assets that you want to export.

To search and export assets using asset IDs, submit a request with the following method and endpoint and specify the asset IDs in the request body:

Method	Endpoint
POST	<baseApiUrl>/data360/search/export/v1/assets/details

The base API URL differs for each pod. For more information, see [“Send Requests” on page 7](#).

Request parameters

To export specific details of the exported assets, use the request URL parameters and specify the details that you want to export.

You can use the following request URL parameters to specify the details of the assets that you want to export:

Parameter	Description
segments	Specify the level of asset detail that you want the API request to return. Enter any segment value from the following values: - all. Returns the summary, system attributes, and the API request link to view further details of the asset. - summary. Returns the name, description, and location of the asset. - systemAttributes. Returns the origin, class type of the asset, base types, user that created or updated the asset, and the date on which the asset was created or updated. - customAttributes. Returns the custom fields specified for the asset. - selfAttributes. Returns the properties of assets. - stakeholdership. Returns the type of user and role that are assigned as stakeholder for the asset. - dataProfile. Returns the profiling statistics of the asset. - dataClassification. Returns the data classification associated with the asset. - glossary. Returns the glossary associated with the asset. - dataQuality. Returns the data quality score of the asset. - hierarchy. Returns the hierarchy of the asset. - neighborhood. Returns assets that are in a direct relationship with the searched asset. The default value is <code>segments=all</code>.
fileName	Specify the name of the Microsoft Excel output file that you want to export. The file name should not contain spaces. Specify the file extension. The exported file will either be in the <code>.xlsx</code> or in the <code>.csv</code> format.

Parameter	Description
summaryViews	If you set this parameter, the exported Microsoft Excel file includes a summary sheet. Specify the type of assets you want to see in the summary sheet. You can specify one of the following values: - all. The summary sheet in the exported file contains a summary of all the assets you have exported. - Technical. The summary sheet in the exported file contains a summary of only the technical assets you have exported. - Business. The summary sheet in the exported file contains a summary of only the business assets you have exported.
scheme	Specify the type of asset ID you want to use to query assets. Enter one of the following values: - internal. Indicates that the asset ID that you specify in the request is the internal ID of the asset. - external. Indicates that the asset ID that you specify in the request is the unique reference ID of the asset.

Request body

Use the request body to specify the external or internal IDs of assets you want to export. You can specify in the `scheme` parameter of the request URL whether you want to search the asset by external ID or internal ID.

In the body of the request, specify comma-separated asset IDs in the following format:

```
[
  "0c5777c2-ec04-4a57-8bf0-fc895c4579a2",
  "982cd858-b5b0-4cea-b120-cad3c325e38e",
  "e907f08f-6327-4214-9401-c794bc0c34db",
]
```

If you don't know the ID of a particular asset, you can first send a POST request to view the list of assets in the catalog. This request returns the internal ID of each asset in the `core.identity` parameter and the unique reference ID of the asset in the `core.externalId` parameter. For more information, see ["List assets in the catalog" on page 10](#).

Example request

Export technical assets along with the specified details

The following example shows the POST request to export the summary, data profile statistics, data classifications, and the associated glossary details of seven technical assets in a file named `Export_technical_assets`. The IDs of the technical assets are specified in the body of the request.

```
POST https://idmc-api.dm-us.informaticacloud.com/data360/search/export/v1/assets/details?
segments=summary,dataProfile,dataClassification,glossary&fileName=Export_technical_assets
&summaryViews=all&scheme=internal
Authorization: Bearer <jwt_token>
Content-Type: application/json
X-INFA-ORG-ID:<Org ID>
```

```
Body
[
  "0c5777c2-ec04-4a57-8bf0-fc895c4579a2",
  "982cd858-b5b0-4cea-b120-cad3c325e38e",
  "e907f08f-6327-4214-9401-c794bc0c34db",
  "a378e9fa-e4b1-427d-ae9b-978111d431dd",
  "7d01c99f-f57b-44f0-8dd9-ff3721f1eb93",
  "23fd6de2-b0aa-4c79-aa5f-c83205164fc1",
]
```

```
] "aaace41b-3dff-4a74-82f7-f4e7874dacb8"
```

Response body

When you send a POST request to export bulk assets from the catalog, the API triggers a job to export the assets.

The following example shows the response of the POST request to export bulk assets from the catalog:

```
{
  "jobId": "6a5b273a-f816-4346-a8ae-f2d27f3e3240",
  "trackingURI": "/data360/observable/v1/jobs/6a5b273a-f816-4346-a8ae-f2d27f3e3240?
expandChildren=OUTPUT-PROPERTIES",
  "outputURI": "/data360/observable/v1/jobs/6a5b273a-f816-4346-a8ae-f2d27f3e3240/
outputProperties/files/Export_File"
}
```

The following table describes the response body parameters for the export API request:

Parameter	Description
jobId	Unique ID of the export job that the request triggers.
trackingURI	Job tracking URI that you can use to send a GET request to monitor the status of the export job.
outputURI	Output file URI that you can use to send a GET request to download the exported file.

For more information about using the jobs API to monitor the status of jobs, see [Chapter 7, “Monitor jobs” on page 58](#). Once the job completes, you can send a GET request to download the exported file using the outputURI. The exported file is a Microsoft Excel file in the .xlsx format.

CHAPTER 4

Import assets


Use the import API to import bulk assets into the catalog. You can import new business assets into the catalog, create, update or delete existing business assets in the catalog, or re-import curated technical assets that you previously exported from the catalog.

Send a POST request after uploading the import file in the body of the request. Send the request with the following method and endpoint:

Method	Endpoint
POST	<baseApiUrl>/data360/content/import/v1/assets

The base API URL differs for each pod. For more information, see [“Send Requests” on page 7](#).

The following image shows the overall process of using the import API and the expected response for the endpoint:

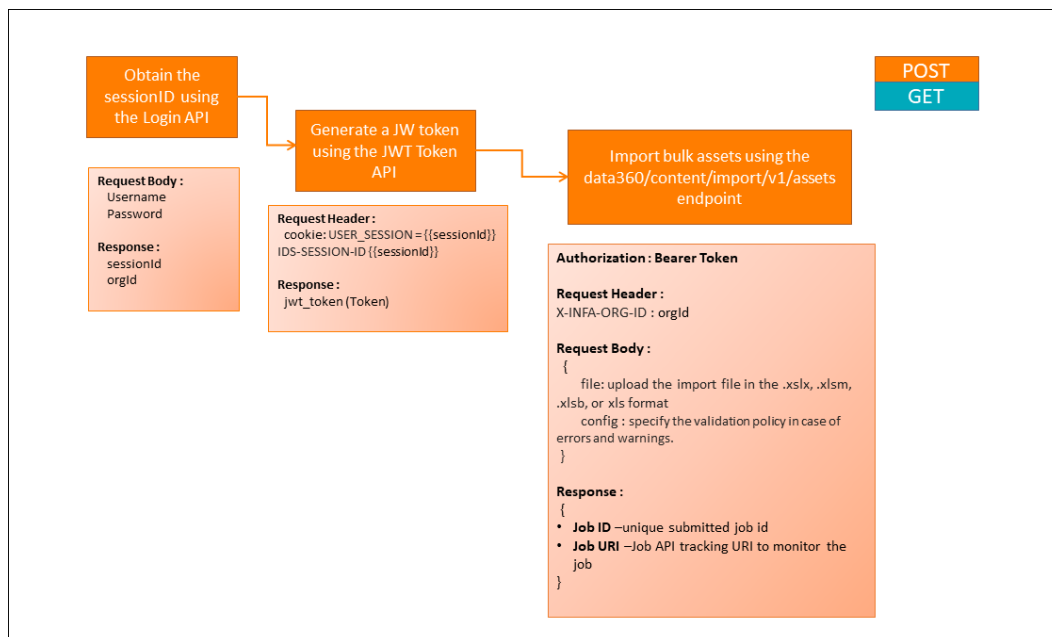

Request body

Use the request body to upload the import file and specify the action that the request should take in case of errors or warnings.

Let us assume that you want to import the `MyCurations.xls` file containing bulk asset details. In the body of the request, specify the parameters in the following format:

```
file: MyCurations.xls

config:
{
  "validationPolicy": "CONTINUE_ON_ERROR_WARNING"
}
```

The following table describes the parameters that you can specify in the body of the request:

Parameter	Description
file	Specify the full path to the import file or upload the import file. This should be a Microsoft Excel file in the .xlsx, .xlsm, .xlsb, .xls, or .csv format. You can upload only one Microsoft Excel or CSV file in each request.
config	Specify one of the following validation policies to specify the action that the API request takes in case of errors and warning: - <code>STOP_ON_ERROR</code>. If the import file contains a row with errors, the process stops, and no data is imported. If there are no errors, the system imports valid data from the file, and warnings are marked as skipped. - <code>STOP_ON_WARNING</code>. If the import file contains a row of data with warnings, the process stops, and no data is imported. - <code>CONTINUE_ON_ERROR_WARNING</code>. All valid rows from the file are imported. Rows of data with warnings and errors are marked as skipped. If you do not specify the validation policy, then the default value is <code>CONTINUE_ON_ERROR_WARNING</code>.

Example request

Import a bulk asset file in the catalog

The following example shows a POST request to import a bulk asset Microsoft Excel file named `MyCurations.xls`. The validation policy is set to import all valid rows from the file and skip rows with warnings and errors.

```
POST https://idmc-api.dm-us.informaticacloud.com/data360/content/import/v1/assets
Authorization: Bearer <jwt_token>
X-INFA-ORG-ID:<Org ID>

Body
--form 'file=@"/path/to/file"' \

--form 'config="{
  \"validationPolicy\": \"CONTINUE_ON_ERROR_WARNING\"
}";type=application/json'
```

Response body

When you send a POST request to import bulk assets into the catalog, the API triggers a job to import the assets.

The following example shows the response of the POST request to import bulk assets from the file `MyCurations.xls`:

```
{
  "jobId": "6a084b71-3696-4a50-b83b-9ef0f2c7f30d",
  "jobUri": "/data360/observable/v1/jobs/6a084b71-3696-4a50-b83b-9ef0f2c7f30d"
}
```

The following table describes the response body parameters for the import API request:

Parameter	Description
jobId	Unique ID of the import job that the request triggers.
jobUri	Job tracking URI that you can use to send a GET request to monitor the status of the import job.

For more information about using the jobs API to monitor the status of jobs, see [Chapter 7, “Monitor jobs” on page 58](#).

CHAPTER 5

Upload data quality scores

Upload one or more data quality scores to Data Governance and Catalog. When you upload a score, specify the data quality rule occurrence for which the scores apply. After you upload the scores, you can see the new scores in Data Governance and Catalog by opening the asset that is related to the rule occurrence you specified.

To upload one or more data quality scores, send the request with the following method and endpoint:

Method	Endpoint
PATCH	ccgf-ruleautomation/api/v1/dataQuality/publishScore?refBy=INTERNAL

Note: Depending on the base URL for each pod, prefix the base URL to the endpoint in the following format:
<baseApiUrl><endpoint>

For example, <https://cdgc-api.dm-em.informaticacloud.com/ccgf-ruleautomation/api/v1/dataQuality/publishScore?refBy=INTERNAL>

Request Body

Use the request body to upload one or more data quality scores of an asset.

In the body of request, specify the asset ID and the data quality scores in the following format:

```
{
  "scores": [
    {
      "assetId": "e8b757ba-63ca-41a6-b79d-00c66fa176a0",
      "dqscore": {
        "facts": {
          "com.infa.ccgf.models.governance.value": 94,
          "com.infa.ccgf.models.governance.totalCount": 20000,
          "com.infa.ccgf.models.governance.exception": 764,
          "com.infa.ccgf.models.governance.scannedTime": "2022-02-09T10:10:12.441Z"
        }
      }
    }
  ]
}
```

The following table describes the parameters that you can specify in the body of the request:

Parameter	Description
assetId	Required. Internal reference identifier of the data quality rule occurrence for which you want to upload the scores. You can determine the identifier by looking at the URL in the browser window when you open the rule occurrence. The identifier is the value between the <code>asset/</code> and <code>?</code> parameters. Consider the following example: - URL: <code><domain>/asset/22ea8dd9-5128-496b-a51a-f3f0e6ed2b56?type=RuleInstance&name=Rule%20Instance%20July%2009%201214</code> - Identifier: <code>22ea8dd9-5128-496b-a51a-f3f0e6ed2b56</code>
facts	Required. Attribute of the data quality score. You must enter the following values: - Enter <code>com.infa.ccgf.models.governance.value</code> to specify the data quality score. - Enter <code>com.infa.ccgf.models.governance.exception</code> to specify an exception score. - Enter <code>com.infa.ccgf.models.governance.scannedTime</code> to specify the timestamp of the last rule run. - Enter <code>com.infa.ccgf.models.governance.totalCount</code> to specify the total number of run counts.

Example request

The following example shows a PATCH request to upload two data quality scores:

```
PATCH https://idmc-api.dm-us.informaticacloud.com/ccgf-ruleautomation/api/v1/dataQuality/publishScore?refBy=INTERNAL
Authorization: Bearer <jwt token>
Content-Type: application/json
X-INFA-ORG-ID:<Org ID>
IDS-SESSION-ID: <sessionId value>

Body
{
  "scores": [
    {
      "assetId": "e8b757ba-63ca-41a6-b79d-00c66fa176a0",
      "dqscore": {
        "facts": {
          "com.infa.ccgf.models.governance.value": 94,
          "com.infa.ccgf.models.governance.totalCount": 20000,
          "com.infa.ccgf.models.governance.exception": 764,
          "com.infa.ccgf.models.governance.scannedTime": "2022-02-09T10:10:12.441Z"
        }
      }
    },
    {
      "assetId": "abc82672-63ca-41a6-b79d-00c66fa176a0",
      "dqscore": {
        "facts": {
          "com.infa.ccgf.models.governance.value": 100,
          "com.infa.ccgf.models.governance.totalCount": 100,
          "com.infa.ccgf.models.governance.exception": 0,
          "com.infa.ccgf.models.governance.scannedTime": "2022-02-09T10:10:12.441Z"
        }
      }
    }
  ]
}
```


CHAPTER 6

Run a catalog source job

Use the catalog source management API to run a catalog source job with capabilities that you specify.

For information about the catalog source management API, see the [Informatica Developer Portal](#).

The following image shows the overall process of using the catalog source management API and the expected response for the request:

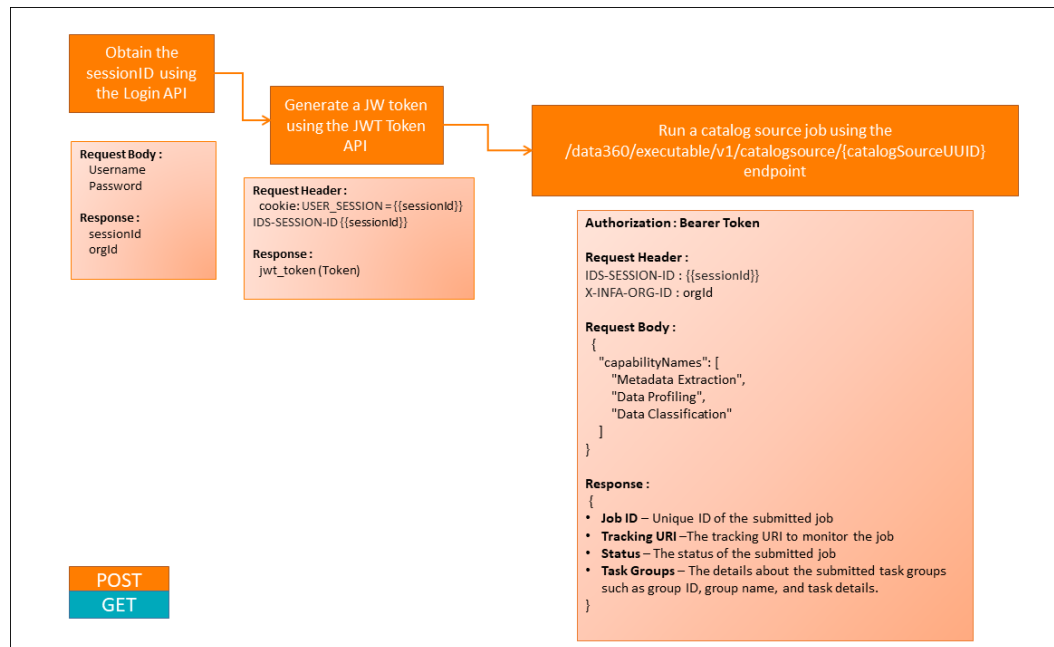


CHAPTER 7

Monitor jobs

Use the jobs API to monitor the status of any job in Data Governance and Catalog and download the job output files.

For information about the jobs API, see the [Informatica Developer Portal](#).

The following image shows the overall process of using the jobs API and the expected response for each endpoint:

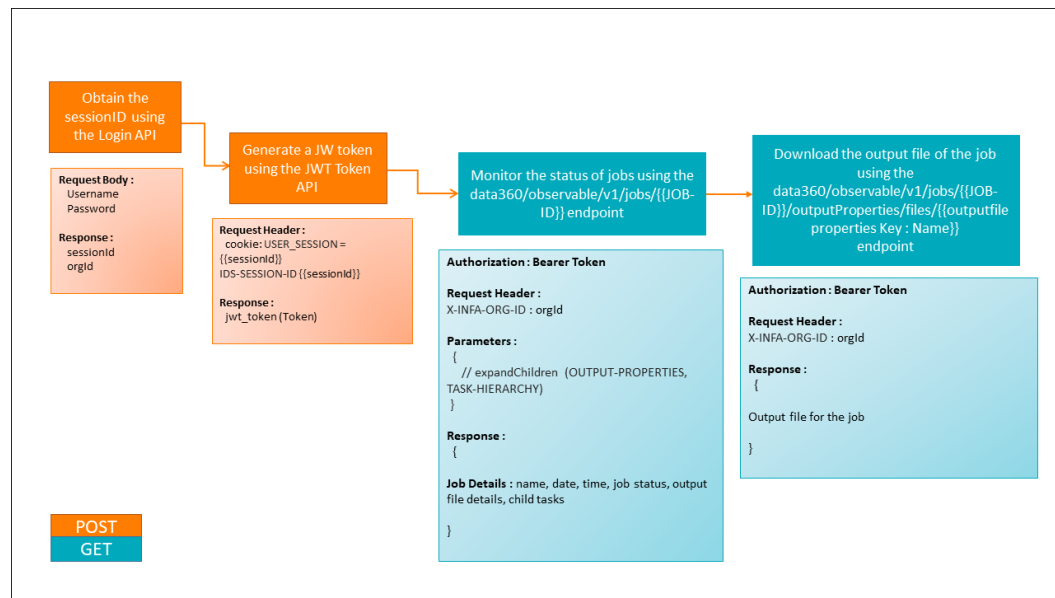

CHAPTER 8

API Rate Limits

Cloud Data Governance and Catalog APIs are throttled by default to provide optimal use of API resources.

By default, every API provides the following response headers for rate limits based on the number of API calls for each API key:

Response Header	Description
<code>ratelimit-limit</code>	Returns the number of requests allowed for the client in the time window. By default, you can make 120 API calls per minute and 10000 calls per day.
<code>ratelimit-remaining</code>	Returns the number of remaining requests in the current window.
<code>ratelimit-reset</code>	Returns the time remaining in the current window within which you can make the remaining API calls. This time is specified in seconds.

For example, if the value of `ratelimit-remaining` is 118 calls and `ratelimit-reset` is 28 seconds, then it means that you can make 118 API calls in the next 28 seconds. If the `ratelimit-remaining` is 0, wait for the `ratelimit-reset` value to reset before attempting the API request again.

If you send too many requests in a given amount of time and has reached the API rate limit, the response header `HTTP 429: Too Many Requests` is returned.

APPENDIX A

Appendix

This appendix includes the following topic:

- [Search query examples, 60](#)

Search query examples

In the search bar, you can progressively build complex search queries to search for business and technical assets. As you type your search query, the search provides intelligent suggestions.

Business assets search query examples

The following table lists some sample business asset search query that you can try in the search box:

Search query	What it does
<code>all in domain HIPAA*</code>	Shows all assets that are child assets or belong to Domain assets that start with the text <code>HIPAA</code> . The search returns results on the name, alias name, or business name fields of the asset.
<code>all in 'domain Human Resources'</code>	Shows all assets that are children or belong to Domain assets that start with the name <code>Human Resources</code> .
<code>business term 'phone number'</code>	Shows all Business Term assets with the text <code>Phone Number</code> . The search returns results on the name, alias name, or business name fields of the asset.
<code>business term phone*</code>	Shows all Business Term assets that start with text <code>Phone</code> . The search returns results on the name, alias name, or business name fields of the asset.
<code>business terms which are critical data element</code>	Shows all Business Term assets that are marked as Critical Data Element .
<code>business terms in domain Finance*</code>	Shows all Business Term assets that are children of Domain assets that start with the name <code>Finance</code> .
<code>business terms in subdomain *Payroll</code>	Shows all Business Term assets that are children of Subdomain assets that end with the text <code>Payroll</code> .

Search query	What it does
business terms where format type is Text	Shows all Business Term assets with Text in the Format Type field.
business terms without description	Shows all Business Term assets with the Description field empty.
business terms related to policy "CCPA Policy"	Shows all Business Term assets related to Policy assets with the name <code>CCPA Policy</code> .
business terms which are not critical data element	Shows all Business Term assets that are not marked as Critical Data Element .
business terms 'phone number', Metric 'EBITDA'	Shows all Business Term assets that have the name <code>phone number</code> and all Metric assets that have the name <code>EBITDA</code> . The search returns results on the name, alias name, or business name fields of the asset.
dataset Customers*	Shows all business Data Set assets that start with the text <code>Customers</code> . The search returns results on the name, alias name, or business name fields of the asset.
dataset containing manual data element 'Party Data'	Shows all data sets containing manual data elements with the text <code>Party Data</code> .
domain 'Party Data'	Shows all Domain assets with the text <code>Party Data</code> . The search returns results on the name, alias name, or business name fields of the asset.
domains 'Party Data*', subdomains 'Party Data*'	Shows all Domain assets that start with the text <code>Party Data</code> and Subdomain assets that start with the text <code>Party Data</code> . The search returns results on the name, alias name, or business name fields of the asset.
domains containing business term Email	Shows all Domain assets that have a parent-child relationship to Business Term assets with the name <code>Email</code> .
domains containing subdomain 'Party Data*'	Shows all Domain assets that have a parent-child relationship to Subdomain assets that start with <code>Party Data</code> .
domains containing metric EBITDA	Shows all Domain assets that have a parent-child relationship to Metric assets with the name <code>EBITDA</code> .
manual data element Customers*	Shows all manual data elements starting with the text <code>Customers*</code> .
manual data element matching 'Product Code'	Shows all manual data elements matching the name <code>'Product Code'</code> .
manual data elements in dataset EMPLOYEE.	Shows all manual data elements that are in the data set <code>EMPLOYEE</code> .
metric EBITDA	Shows all Metric assets with the name <code>EBITDA</code> .
metric without description	Shows all Metric assets with the Description field empty.

Search query	What it does
policy GDPR*	Shows all Policy assets that start with the text <code>GDPR</code> . The search returns results on the name, alias name, or business name fields of the asset.
policies, processes	Shows all Policy and Process assets.
policies without description	Shows all Policy assets with the Description field empty.
policy P*, process P*	Shows all Policy assets that start with <code>P</code> and Process assets that start with <code>P</code> . The search returns results on the name, alias name, or business name fields of the asset.
policy *University*, domain *University*	Shows all Policy assets that contains the text <code>University</code> and Domain assets that contain the text <code>University</code> . The search returns results on the name, alias name, or business name fields of the assets.
processes without description	Shows all Process assets with the Description field empty.
process KYC	Shows all Process assets that contain the text <code>KYC</code> . The search returns results on the name, alias name, or business name fields of the asset.
process 'Know Your Client'	Shows all Process assets with the exact text <code>Know Your Client</code> in its name, alias name, or business name fields.
subdomain Payroll*	Shows all Subdomain assets that start with the text <code>Payroll</code> . The search returns results on the name, alias name, or business name fields of the asset.
subdomain 'Party Data'	Shows all Subdomain assets with the exact text <code>Party Data</code> in its name, alias name, or business name.
subdomain Payroll* and containing business term Salary*	Shows all Subdomain assets that start with <code>Payroll</code> that have a parent-child relationship to Business Term assets that start with <code>Salary</code> .
subdomain 'Party Data*' and related to policies	Shows all Subdomain assets that start with <code>Party Data</code> and are related to Policy assets.
subdomain without description	Shows all Subdomain assets with the Description field empty.
subdomain 'Party Data*', subdomains 'Party Data*'	Shows all Subdomain assets that start with <code>Party Data</code> and are related to Subdomain assets that start with <code>Party Data</code> .
subdomain containing business term Email	Shows all Subdomain assets that have a parent-child relationship to Business Term assets with the name <code>Email</code> .
subdomain containing metric EBITDA	Shows all Subdomain assets that have a parent-child relationship to Metric assets with the name <code>EBITDA</code> .
system DWH*	Shows all System assets that start with the text <code>DWH</code> . The search returns results on the name, alias name, or business name fields of the asset.

Search query	What it does
systems without description	Shows all System assets with the Description field empty.
domain with reference ID '<Reference ID value>'	Shows the domain that has the specified value in its reference ID field.
<Reference ID value> REL_BT_AUT_Parent_CSV_05	Shows all assets with REL_BT_AUT_Parent_CSV_05 in the names, aliases, descriptions, and Reference ID .
business term 'phone_number*'	Shows all Business Term assets that start with the text phone_number. The search returns results on the name, alias name, or business name fields of the asset.
domain 'Party-Data*'	Shows all Domain assets that start with the text Party-Data. The search returns results on the name, alias name, or business name fields of the asset.
domains containing subdomain 'Party_Data*'	Shows all Domain assets that have a parent-child relationship to Subdomain assets that start with Party_Data, Party_Data, and Party-Data.
business terms 'phone-number*', Metric 'EBITDA'	Shows all Business Term assets that start with the text phone-number, and all Metric assets with the name EBITDA. The search returns results on the name, alias name, or business name fields of the asset.

Technical asset search query examples

The following table lists some technical asset search query examples that you can try in the search box:

Search query	What it does
all in resource <catalog source name>	Shows all the assets of the catalog source. The result includes the data quality rule occurrences that have their primary data element belonging to the catalog source.
all with catalog source name Oracle*	Shows all assets that belong to catalog sources starting with the name Oracle*.
all with catalog source type 'Amazon S3'	Shows all assets that belong to the catalog source type 'Amazon S3'.
columns related to business term 'Phone Number'	Shows all columns that are related to Business Term assets named Phone Number.
columns related to data classification 'Social Security Number'	Shows all columns that are related to data classifications named Social Security Number.
columns related to data classification Email	Shows all columns that are related to data classifications with the name Email.
columns in (catalog source Oracle*) and related to (business term 'Phone Number')	Shows all columns that are present in the catalog sources starting with the name ORACLE and are related to the Business Term asset Phone Number.

Search query	What it does
(columns which are profiled and in catalog source Oracle*) related to data classification Email	Shows all columns that are profiled and in catalog sources that start with the name ORACLE and are related to data classification Email .
columns not related to business term	Shows all columns that are not related to Business Term assets.
data elements related to business term Email	Shows all data elements that are related to Business Term assets with the name Email .
data elements related to data classification 'Social Security Number'	Shows all data elements that are related to data classifications with the name Social Security Number .
data elements not related to data classification	Shows all data elements that are not related to any data classification.
data elements related to (data set related to system DWH) and related to Policy GDPR	Shows all data elements that fulfill both the following criteria: - related to Data Set assets that are in turn related to System assets with the name DWH. - related to Policy assets with the name GDPR.
Data Elements related to data set related to System related to Policy GDPR	Shows all data elements related to Data Set assets and are related to System assets and are related to Policy assets with the name GDPR .
Data Elements related to data set related to System related to Process KYC	Shows all data elements related to Data Set assets and are related to System assets and are related to Process assets with the name KYC .
Data Elements related to data set related to System related to (Policy GDPR, Process KYC)	Shows all data elements related to Data Set assets and are related to System assets and are related to Policy assets with the name GDPR and Process assets with the name KYC .
data elements not related to business term	Shows all data elements that are not related to Business Term assets.
data elements related to data classification 'Social_Security_Number*'	Shows all data elements that are related to data classifications with the name Social Security Number , Social_Security_Number , and Social-Security-Number .
glossaries with lifecycle Published and related to policy GDPR*	Shows all Glossary assets where the Lifecycle field is in the Published status and are related to Policy assets that start with GDPR .
glossaries with lifecycle Published and related to (policy GDPR*, policy CCPA*)	Shows all Glossary assets where the Lifecycle field is in the Published status and are related to Policy assets that start with GDPR and are related to Policy assets that start with CCPA .
glossaries related to all in policy GDPR	Shows all Glossary assets related to all Policy assets with the name GDPR .
glossaries related to policy GDPR	Shows all Glossary assets related to Policy assets with the name GDPR .

Search query	What it does
<code>glossaries cust* and related to policy GDPR</code>	Shows all Glossary assets that start with <code>cust</code> and are related to Policy assets with the name <code>GDPR</code> .
<code>bi reports related to policy GDPR*</code>	Shows all BI reports that are related to Policy assets that start with <code>GDPR</code> .
<code>bi reports related to process KYC*</code>	Shows all BI reports that are related to Process assets that start with <code>KYC</code> .
<code>tables related to column City</code>	Shows all tables that are related to columns with the name <code>City</code> .
<code>data elements related to (business term Customer ID, Customer Name)</code>	Shows all data elements related to Business Term assets with the names <code>Customer ID</code> and <code>Customer Name</code> .
<code>catalog source ORACLE_HR</code>	Shows catalog source assets with the name <code>ORACLE_HR</code> . The search returns results on the name, alias name, or business name fields of the asset.
<code>catalog source ORACLE*</code>	Shows catalog source assets that start with the text <code>ORACLE</code> . The search returns results on the name, alias name, or business name fields of the asset.
<code>catalog sources with resource type Oracle</code>	Shows all assets of the catalog source type <code>ORACLE</code> .
<code>catalog sources with resource type 'Amazon S3'</code>	Shows all assets of the catalog source type <code>Amazon S3</code> .
<code>columns Credit*</code>	Shows all columns that start with the text <code>Credit</code> . The search returns results on the name, alias name, or business name fields of the asset.
<code>columns which are profiled</code>	Shows all columns that are profiled.
<code>columns which are not profiled</code>	Shows all columns that are not profiled.
<code>columns which are not related to data classification</code>	Shows all columns that are not related to data classifications.
<code>columns in catalog source Oracle*</code>	Show all columns in the catalog source types that start with <code>ORACLE</code> .
<code>flat field</code>	Shows all the flat field assets contained in flat files.
<code>data elements Credit*</code>	Shows all data elements that start with the text <code>Credit</code> . The search returns results on the name, alias name, or business name fields of the asset.
<code>data elements 'CREDIT_CARD'</code>	Shows all data elements with the name, alias name, or business name as <code>CREDIT_CARD</code> .
<code>data elements which are profiled</code>	Shows all data elements that are profiled.

Search query	What it does
file Customer*	Shows all files that start with the name Customer. The search returns results on the name, alias name, or business name fields of the asset.
folder Customer*	Shows all folders that start with the name Customer. The search returns results on the name, alias name, or business name fields of the asset.
folder containing hierarchical file Customer*	Shows all folders that contain files that start with Customer.
folder containing file Customer*	Shows all folders that contain files that start with Customer.
glossaries	Shows all Glossary assets.
glossaries cust*	Shows all Glossary assets that start with the text cust. The search returns results on the name, alias name, or business name fields of the asset.
glossaries with stakeholder @<username>	Shows all Glossary assets with a user name or user group in the Stakeholder field.
glossaries without stakeholder	Shows all Glossary assets with the Stakeholder field empty.
bi report 'Quarterly Sales'	Shows all BI reports with the name, alias name, or business name as Quarterly Sales.
bi reports with stakeholder @<username>	Shows all BI reports with a user name or user group in the Stakeholder field.
bi reports without stakeholder	Shows all BI reports with the Stakeholder field empty.
reports modified by @<username>	Shows all reports with a user name or user group in the Modified By field.
Tableau Workbook Org*	Shows all Tableau Workbook assets that start with the text Org. The search returns results on the name, alias name, or business name fields of the asset.
table CUST*	Shows all tables that start with the text CUST. The search returns results on the name, alias name, or business name fields of the asset.
tables which are profiled	Shows all columns that are profiled.
hierarchical file Employees*	Shows all hierarchical files that start with the text Employees. The search returns results on the name, alias name, or business name fields of the asset.
bi reports created by @<username>	Shows all BI reports with a user name or user group in the Created By field.
tables in catalog source Oracle*	Shows all tables in catalog source types that start with ORACLE.
tables in schema ORACLE_HR*	Shows all tables in schemas that start with ORACLE_HR.

Search query	What it does
technical dataset EMPLOYEE*	Shows all technical data set assets that start with the text <code>Employee</code> . The search returns results on the name, alias name, or business name fields of the asset.
technical datasets which are profiled	Shows all technical data set assets that are profiled.
technical datasets in catalog source Oracle*	Shows all technical data set assets in catalog source types that start with <code>ORACLE</code> .
technical datasets in schema ORACLE_HR*	Shows all technical data sets in schema source types that start with <code>ORACLE_HR</code> .
Property	Shows all assets that have <code>Property</code> in their names, business names, alias names, descriptions, or technical descriptions.
Customer	Shows all assets that have <code>Customer</code> in their names, business names, alias names, descriptions, or technical descriptions.
Phone_number	Shows assets with the text <code>Phone number</code> , <code>Phone_number</code> , and <code>Phone-number</code> in their names, business names, alias names, descriptions, or technical descriptions.

Asset groups search query examples

The following table lists some asset group search query examples:

Search query	What it does
((Domain, Sub Domain) with asset group @assetgroup:Finance) related to any	Shows domains and subdomains that are assigned the <code>Finance</code> asset group and are related to any asset.
(technical assets with asset group @assetgroup:Finance) in catalog source Oracle	Shows technical assets that are assigned the <code>Finance</code> asset group and are in the catalog source <code>Oracle</code> .
(technical assets with Asset Group in (@assetgroup:Finance,@assetgroup:Legal)) in catalog source Oracle	Shows technical assets that are assigned the <code>Finance</code> and <code>Legal</code> asset groups and belong to the catalog source <code>Oracle</code> .
(column with asset group @assetgroup:Finance) in schema Oracle_HR*	Shows assets that are assigned the <code>Finance</code> asset group and belong to the schema source <code>Oracle_HR</code> .
(technical data set with asset group in (@assetgroup:Finance)) related with curation status ACCEPTED to data classifications	Shows technical data sets that are assigned the <code>Finance</code> asset group and are related to data classifications that are in the accepted state.

Search query	What it does
(technical data set with asset group in (@assetgroup:Finance)) related with curation status REJECTED to data classification Sales*	Shows technical data sets that are assigned the Finance asset group and are related to the Sales* data classifications that are in the rejected state.
all with asset group *	Shows all assets that are assigned asset groups.
all with Asset Group @assetgroup:Finance	Shows assets that are assigned the Finance asset group.
all without asset group	Shows all assets that are not assigned asset groups.
asset with Asset Group @assetgroup:Finance	Shows assets that are assigned the Finance asset group.
assets related to Policy with Asset Group @assetgroup:EU	Shows assets related to Policy assets that are assigned the EU asset group.
Assets related to sub domain with Asset Group @assetgroup:Legal	Shows assets related to subdomains that are assigned the Legal asset group.
Asset with asset group @assetgroup:Finance and stakeholder @<username>	Shows assets that are assigned the Finance asset group and the stakeholder <username>.
business terms with asset group @assetgroup:EU	Shows all business terms that are assigned the EU asset group.

Relationship search query examples

The following table lists some relationship search query examples that you can try in the search box:

Search query	What it does
all related to business term email	Shows all assets that are related to Business Term assets with the name email.
all related to domain HIPAA*, all related to process KYC	Shows all assets that are related to Domain assets that start with the name HIPAA or all assets that are related to Process assets that start with the name KYC.
all related to glossary GDPR*	Shows all assets related to Glossary assets that start with GDPR.
business terms related to data elements	Shows all Business Term assets that are related to data elements.
data element related to data set EMPLOYEE	Shows data elements that are related to the data set EMPLOYEE.
business terms not related to data elements	Shows all Business Term assets that are not related to data elements.

Search query	What it does
dataset related to business term 'Customer'	Shows all Data Set assets that are related to Business Term assets with the name <code>Customer</code> .
datasets not related to business term	Shows all Data Set assets that are not related to Business Term assets.
datasets related to System related to Policy GDPR	Shows all Data Set assets related to System assets that are related to Policy assets with the name <code>GDPR</code> .
datasets related to System related to Process KYC	Shows all Data Set assets related to System assets that are related to Process assets with the name <code>KYC</code> .
datasets related to System related to (Policy GDPR, Process KYC)	Shows all Data Set assets related to System assets that are related to Policy assets with the name <code>GDPR</code> and Process assets with the name <code>KYC</code> .
domains HIPAA* and related to subdomains	Shows all Domain assets that start with <code>HIPAA</code> and are related to Subdomain assets.
domains 'Party Data*' and related to policies	Shows all Domain assets with the name <code>Party Data</code> and are related to Policy assets.
domains HIPAA* and related to subdomains	Shows all Domain assets that start with <code>HIPAA</code> and are related to Subdomain assets.
domains 'Party Data*' and related to policies	Shows all Domain assets with the name <code>Party Data</code> and are related to Policy assets.
domains related to policy GDPR*	Shows all Domain assets that are related to Policy assets that start with <code>GDPR</code> .
domains related to policies in policy CCPA*	Shows all Domain assets related to Policy assets that start with <code>CCPA</code> .
domain related to any	Shows all Domain assets that are related to any asset.
manual data element related to data set EMPLOYEE	Shows all manual data elements that are related to the data set <code>EMPLOYEE</code> .
manual data element related to data set ADDRESS, data element related to data set ADDRESS	Shows all manual data elements and data elements that are related to the data set <code>ADDRESS</code> .
manual data element related to glossary	Shows all manual data elements that are related to glossary assets.
manual data element related to Policy GDPR	Shows all manual data elements that are related to Policy assets with the name <code>GDPR</code> .
manual data elements related to classifications and related to policy	Shows all manual data elements that are related to classifications and Policy assets.

Search query	What it does
manual data elements related to classification with name 'Social Security Number'	Shows all manual data elements that are related to classifications with the name Social Security Number.
Policy related to (System DWH) and related to (System CMD)	Shows all Policy assets related to System assets with the name DWH and are related to System assets with the name CMD.
processes related to Subdomain Payroll*	Shows all Process assets related to Subdomain assets that start with Payroll.
subdomain related to policy GDPR*	Shows all Subdomain assets related to Policy assets that start with GDPR.
subdomain related to policies in policy CCPA*	Shows all Subdomain assets related to Policy assets that start with CCPA.
subdomain related to any	Shows all Subdomain assets related to any asset.
systems related to policy GDPR*	Shows all System assets that are related to Policy assets that start with GDPR.
systems related to process KYC*	Shows all System assets that are related to Process assets that start with KYC.

Stakeholder or user name search query examples

The following table lists some stakeholder or user name search query examples that you can try in the search box:

Search query	What it does
business terms with stakeholder @CurrentUser	Shows all Business Term assets with your user name in the Stakeholder field.
business terms with stakeholder @<username>	Shows all Business Term assets with a user name in the Stakeholder field.
business terms without stakeholder	Shows all Business Term assets with the Stakeholder field empty.
business term created by @CurrentUser	Shows all Business Term assets created by you.
business term created by @<username>	Shows all Business Term assets created by the user.
business term modified by @CurrentUser	Shows all Business Term assets modified by you.
business term modified by @<username>	Shows all Business Term assets modified by the user.
datasets with stakeholder @CurrentUser	Shows all Data Set assets with your user name in the Stakeholder field.

Search query	What it does
<code>datasets with stakeholder @<username></code>	Shows all Data Set assets with a user name in the Stakeholder field.
<code>datasets created by @CurrentUser</code>	Shows all Data Set assets created by you.
<code>datasets created by @<username></code>	Shows all Data Set assets created by the user.
<code>datasets modified by @CurrentUser</code>	Shows all Data Set assets modified by you.
<code>datasets modified by @<username></code>	Shows all Data Set assets modified by the user.
<code>domains with stakeholder @CurrentUser</code>	Shows all Domain assets with your user name in the Stakeholder field.
<code>domains with stakeholder @<username></code>	Shows all Domain assets with a user name in the Stakeholder field.
<code>domains without stakeholder</code>	Shows all Domain assets with the Stakeholder field empty.
<code>domains created by @CurrentUser</code>	Shows all Domain assets created by you.
<code>domains created by @<username></code>	Shows all Domain assets created by the user.
<code>domains modified by @CurrentUser</code>	Shows all Domain assets modified by you.
<code>domains modified by @<username></code>	Shows all Domain assets modified by the user.
<code>metric with stakeholder @CurrentUser</code>	Shows all Metric assets with your user name in the Stakeholder field.
<code>metric with stakeholder @<username></code>	Shows all Metric assets with a user name in the Stakeholder field.
<code>metric without stakeholder</code>	Shows all Metric assets with the Stakeholder field empty.
<code>metric created by @CurrentUser</code>	Shows all Metric assets created by you.
<code>metric created by @<username></code>	Shows all Metric assets created by the user.
<code>metric modified by @CurrentUser</code>	Shows all Metric assets modified by you.
<code>metric modified by @<username></code>	Shows all Metric assets modified by the user.
<code>policies with stakeholder @CurrentUser</code>	Shows all Policy assets with your user name in the Stakeholder field.
<code>policies with stakeholder @<username></code>	Shows all Policy assets with a user name in the Stakeholder field.
<code>policies without stakeholder</code>	Shows all Policy assets with the Stakeholder field empty.

Search query	What it does
policies created by @CurrentUser	Shows all Policy assets created by you.
policies created by @<username>	Shows all Policy assets created by the user.
policies modified by @CurrentUser	Shows all Policy assets modified by you.
policies modified by @<username>	Shows all Policy assets modified by the user.
processes with stakeholder @CurrentUser	Shows all Process assets with your user name in the Stakeholder field.
processes with stakeholder @<username>	Shows all Process assets with a user name in the Stakeholder field.
processes without stakeholder	Shows all Process assets with the Stakeholder field empty.
processes created by @CurrentUser	Shows all Process assets created by you.
processes created by @<username>	Shows all Process assets created by the user.
processes modified by @CurrentUser	Shows all Process assets modified by you.
processes modified by @<username>	Shows all Process assets modified by the user.
subdomain with stakeholder @CurrentUser	Shows all Subdomain assets with your user name in the Stakeholder field.
subdomain with stakeholder @<username>	Shows all Subdomain assets with a user name in the Stakeholder field.
subdomain without stakeholder	Shows all Subdomain assets with the Stakeholder field empty.
subdomain created by @CurrentUser	Shows all Subdomain assets created by you.
subdomain created by @<username>	Shows all Subdomain assets created by the user.
subdomain modified by @CurrentUser	Shows all Subdomain assets modified by you.
subdomain modified by @<username>	Shows all Subdomain assets modified by the user.
systems with stakeholder @CurrentUser	Shows all System assets with your user name in the Stakeholder field.

Search query	What it does
systems with stakeholder @<username>	Shows all System assets with a user name in the Stakeholder field.
systems without stakeholder	Shows all System assets with the Stakeholder field empty.
systems created by @CurrentUser	Shows all System assets created by you.
systems created by @<username>	Shows all System assets created by the user.
systems modified by @CurrentUser	Shows all System assets modified by you.
systems modified by @<username>	Shows all System assets modified by the user.

Lifecycle search query examples

The following table lists some lifecycle search query examples that you can try in the search box:

Search query	What it does
all where lifecycle is not Published	Shows all assets where the Lifecycle field is not in the Published status.
all with lifecycle Draft	Shows all assets where the Lifecycle field is in the Draft status.
business terms with lifecycle Draft	Shows all Business Term assets where the Lifecycle field is in the Draft status.
domains with lifecycle Draft	Shows all Domain assets where the Lifecycle field is in Draft status.
metric with lifecycle draft	Shows all Metric assets where the Lifecycle field is in the Draft status.
policies with lifecycle Draft	Shows all Policy assets where the Lifecycle field is in the Draft status.
subdomain with lifecycle Draft	Shows all Subdomain assets where the Lifecycle field is in the Draft status.
systems with lifecycle Draft	Shows all System assets where the Lifecycle field is in the Draft status.
Assets with Lifecycle (Draft, 'In Review')	Shows all assets where the Lifecycle field is in Draft or In Review status.
all with lifecycle 'Obsolete'	Shows all assets where the Lifecycle field is in Obsolete status.
business terms with lifecycle 'Obsolete'	Shows all Business Term assets where the Lifecycle field is in Obsolete status.

Collaboration search query examples

The following table lists some collaboration search query examples that you can try in the search box:

Search query	What it does
all with rating between 1 and 5	Shows all assets with rating between 1 and 5 stars.
all rated by @<username>	Shows all assets with a user name or user group in the Updated By field.
all rated within last 3 days	Shows all assets rated within last 3 days.
all commented by @username	Shows all assets with comments with a user name or user group in the Updated By field.
all commented within last 2 days	Shows all assets with comments within last 2 days.
all certified by @username	Shows all certified assets with a user name or user group in the Updated By field.
all certified within last 10 days	Shows all certified assets within the last 10 days.
technical datasets which are not certified	Shows all technical Data Set assets that are not certified.
all having ratings	Shows all assets with ratings.
all having comments	Shows all assets with comments.
all not having ratings	Shows all assets without ratings.
all not having comments	Shows all assets without comments.
all which are certified	Shows all technical Data Set assets that are certified.
tables which are certified	Shows all tables that are certified.
files which are certified	Shows all files that are certified.
business assets with rating between 1 and 5	Shows all assets with rating between 1 and 5 stars.
Business terms with rating less than 3	Shows all Business Term assets with rating less than 3 stars.
manual data elements having comments and commented by @<username>	Shows all manual data elements with comments and commented by a specific user.
Policies with rating equals 5	Shows all Policy assets with 5 star rating.
Processes with rating greater than 3	Shows all Process assets with 3 stars and above rating.

Search query	What it does
Business terms commented within last 2 days and with stakeholder @username	Shows all Business Term assets with comments within last 2 days and with a user name or user group in the Updated By field.
Business terms with rating less than 3 and with stakeholder @username	Shows all Business Term assets with rating less than 3 stars and with a user name or user group in the Updated By field.

Classifications search query examples

The following table lists some search query examples that you can use for searching classifications:

Search query	What it does
classification with sensitivity in (High, Medium)	Shows all data classifications that are marked with High and Medium sensitivity.
data elements related with curation status ACCEPTED to classification with sensitivity Medium	Shows all data elements for which the associated data classifications are in the accepted state and are marked with High sensitivity.
data elements related to classifications and related to policy	Shows all data elements that have associated classifications that are related to a policy.
generated classifications	Shows all automatically generated classifications in your organization.
generated classifications which are not promoted	Shows all automatically generated classifications that have not been promoted to data element classifications.
generated classifications which are promoted	Shows all automatically generated classifications that have been promoted to data element classifications.
classifications with sensitivity high	Shows all data classifications that are marked with High sensitivity.
classifications with sensitivity medium	Shows all data classifications that are marked with Medium sensitivity.
classifications with sensitivity low	Shows all data classifications that are marked with '-' for Low sensitivity.
assets related to classifications with sensitivity high	Shows all assets that are associated with classifications that are marked with High sensitivity.

Custom attributes search query examples

The following table lists some search query examples that you can use for searching custom attributes:

Search query	What it does
all with 'Geo location' USA	Shows all assets for which the custom attributes 'Geo location' value is USA.
assets with <text custom attribute> 'Hyderabad'	Shows all assets that have a text data type custom attributes and the value of the custom attributes is Hyderabad.
assets with <numeric custom attribute> greater than 80	Shows all assets that have a numeric data type custom attributes and the value of the custom attributes is greater than 80.
assets with <numeric custom attribute> less than 20	Shows all assets that have a numeric data type custom attributes and the value of the custom attributes is less than 20.
assets with <numeric custom attribute> equals 30	Shows all assets that have a numeric data type custom attributes and the value of the custom attributes is 30.
assets with <numeric custom attribute> between 50 and 60	Shows all assets that have a numeric data type custom attributes and the value of the custom attributes is in the range of 50 to 60.
assets <date type custom attribute> within last 7 hours	Shows all assets that have a date type custom attributes and the value of the custom attributes is within the last seven hours.
assets <date type custom time attribute> within last 4 days	Shows all assets that have a date type custom attributes and the value of the custom attributes is within the last four days.
assets which are <boolean type custom attribute>	Shows all assets that have a check box type custom attributes.
assets which are not <boolean type custom attribute>	Shows all assets that do not have a check box type custom attributes.

Data quality rule occurrences search query examples

The following table lists some data quality rule occurrences search query examples:

Search query	What it does
dq rule with threshold result in (good, acceptable, 'not acceptable') and related to data element related to dataset '<DATASET_NAME>'	Shows all data quality rule occurrences with the data quality score status as Good , Acceptable , and Not Acceptable and are related to the data elements in the specified data set.
dq rule with threshold result 'Good' and related to data element related to dataset '<DATASET_NAME>'	Shows all data quality rule occurrences with the data quality score status as Good and are related to data elements belonging to the specified data set.

Search query	What it does
dq rule with threshold result in (good, acceptable, 'not acceptable') and related to data element related to dataset related to system with name <DQ_ORCL_SYSTEM>	Shows all data quality rule occurrences with the data quality score status as Good , Acceptable , and Not Acceptable and are related to the data set belonging to a system with a specified system name.
dq rule with threshold result 'Good' and related to data element related to dataset related to system '<SYSTEM_NAME>'	Shows all data quality rule occurrences with the data quality score status as Good and are related to the data set belonging to a system with a specified system name.
dq rule with threshold result in (good, acceptable, 'not acceptable') and with stakeholder 'test_data_owner'	Shows all data quality rule occurrences with the data quality score status as Good , Acceptable , and Not Acceptable and with the assigned stakeholder that is specified.
dq rule with threshold result 'Good' and with stakeholder @{{DO}} role @role:test_data_owner	Shows all data quality rule occurrences with the data quality score as Good and with the specified stakeholder belonging to the specified role.
dq rule with threshold result in (good, acceptable, 'not acceptable') and without stakeholder	Shows all data quality rule occurrences with the data quality score status as Good , Acceptable , and Not Acceptable and are without any assigned stakeholder.
dq rule with threshold result in (good, acceptable, 'not acceptable') and with stakeholder 'test_data_owner' and related to data element related to dataset with name <DATASET_NAME>	Shows all data quality rule occurrences with the data quality score status as Good , Acceptable , and Not Acceptable and with the assigned stakeholder that is specified. These data quality rule occurrences are related to data elements belonging to the specified data set.
dq rule related to data element related to technical dataset employees	Shows all data quality rule occurrences that are related to a specified technical data set.
dq rule with threshold result in (good, acceptable, 'not acceptable') and related to data element related to business term which are cde	Shows all data quality rule occurrences with the data quality score status as Good , Acceptable , and Not Acceptable and are related to data elements belonging to specific business terms associated with critical data element attributes.
dq rule with threshold result in (good, acceptable, 'not acceptable') and related to data element related to datasets related to System related to Policy '<POLICY_NAME>'	Shows all data quality rule occurrences with the data quality score status as Good , Acceptable , and Not Acceptable and are related to the data set belonging to a system with a specified policy name.
dq rule with threshold result in (good, acceptable, 'not acceptable') and related to data element related to datasets related to System related to Policy	Shows all data quality rule occurrences with the data quality score status as Good , Acceptable , and Not Acceptable and are related to the data set belonging to a system with any policy name.

Search query	What it does
dq rule with threshold result in (good, acceptable, 'not acceptable') and related to data element related to datasets related to System related to Process	Shows all data quality rule occurrences with the data quality score status as Good , Acceptable , and Not Acceptable and are related to the data set belonging to a system with a process.
dq rule related to data element related to datasets related to System related to Process 'DQ_PAM_AZRSQL_PROP_PROCESS_001_10'	Shows all data quality rule occurrences with or without data quality score status and are related to the data set belonging to a system with a specified process.
dq rule related to data element related to datasets related to System related to Process ('<PROCESS_NAME>' , '<PROCESS_NAME_01>')	Shows all data quality rule occurrences with or without data quality score status and are related to the data set belonging to a system with two specified processes.
dq rule related to data element related to dataset related to system with stakeholder 'test_data_owner'	Shows all data quality rule occurrences with or without data quality score status and are related to a data set belonging to a system with the assigned stakeholder that is specified.

Glossary assets associations with data classifications search query examples

The following table lists some search query examples for the associations of the glossary assets with the data element and data entity classifications:

Search query	What it does
data classifications related to glossary	Shows all the data classifications that are related to the glossary assets.
data classifications related to glossary 'Country'	Shows all data classifications that are related to the glossary asset named Country.
data elements related to glossary 'Sales' and data element classification 'Email Address'	Shows all the data elements that are related to the glossary assets with the name Sales and the data element classifications with the name Email Address.
technical datasets related to glossary 'Sales' and data entity classification 'PCI'	Shows the technical data sets that are related to the glossary assets with the name Sales and data entity classifications with the name PCI.
data elements related to glossary 'Customer email' and data element classification 'Email Address'	Shows all the data elements that are related to the glossary assets with the name Customer email and data element classifications with the name Email Address.
glossary related to data elements	Shows all the glossary assets that are related to the data elements.
glossary related to data classification	Shows all the glossary assets that are related to the data classifications.

Search query	What it does
glossary related to data classifications 'Email Address'	Shows all the glossary assets that are related to the data classification named Email Address.
glossary not related to any data classifications	Shows all the glossary assets that are not related to any data classifications.