Introducción teórica: Git y Git Flow

¿Qué es Git?

Git es un sistema de control de versiones que permite guardar los cambios que hacemos en un proyecto. También permite recuperar versiones anteriores.

¿Qué es Git Flow?

Git Flow es una forma de organizar el trabajo con Git mediante diferentes ramas. Cada rama se utiliza para una tarea concreta.

Las ramas principales son main y develop. También se utilizan ramas feature para añadir nuevas funciones, release para preparar versiones y hotfix para corregir errores importantes.


¿Por qué utilizamos Git Flow?

Utilizamos Git Flow para tener el proyecto mejor organizado, trabajar de forma ordenada y evitar que los cambios de una tarea afecten al resto del proyecto. Además, podemos controlar las versiones y saber qué cambios se han realizado en cada momento.


2.Práctica

Usuario 1:

Primero descargamos el boilerplate desde el link

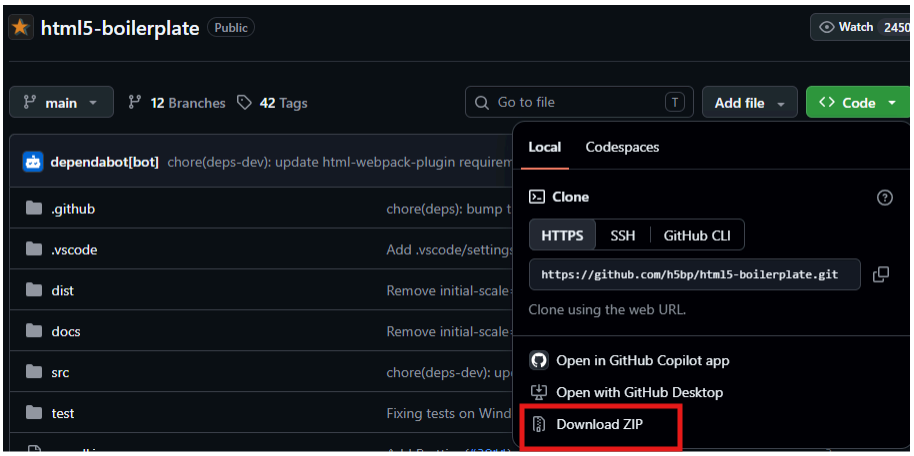

Ahora creamos el repositorio, lo ponemos publico y no añadimos README

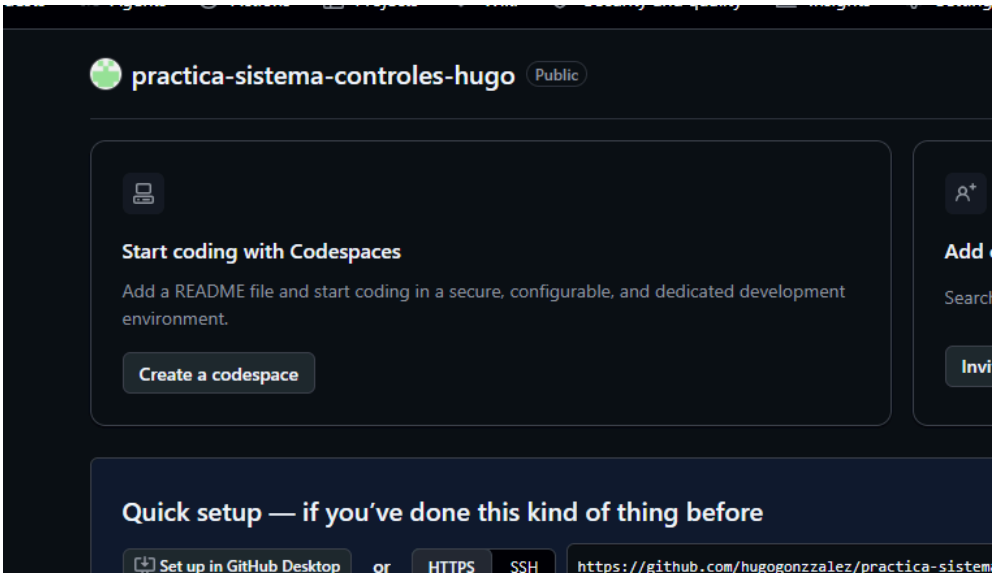

Conectamos la carpeta con el repositorio

```
$ git remote add origin https://github.com/hugogonzzalez/practica-sistema-controles-hugo

Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WEB Enrique/practica-siste
ma-controles (master)
$ git remote -v
origin  https://github.com/hugogonzzalez/practica-sistema-controles-hugo (fetch)
origin  https://github.com/hugogonzzalez/practica-sistema-controles-hugo (push)
```

Y ahora subimos los archivos al repositorio

```
Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WEB Enrique/practica-siste
ma-controles (master)
$ git commit -m "Usuario 1: añadir estructura inicial con HTML5 Boilerplate"
[master (root-commit) f3605b4] Usuario 1: añadir estructura inicial con HTML5 Boilerplate
 80 files changed, 8192 insertions(+)
 create mode 100644 .cspell.json
 create mode 100644 .editorconfig
 create mode 100644 .gitattributes
```

```
Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WEB En
ma-controles (master)
$ git push -u origin master
Enumerating objects: 74, done.
Counting objects: 100% (74/74), done.
Delta compression using up to 12 threads
Compressing objects: 100% (70/70), done.
Writing objects: 100% (74/74), 88.98 KiB | 5.93 MiB/s, done.
Total 74 (delta 3), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (3/3), done.
To https://github.com/hugogonzzalez/practica-sistema-controles-hugo
 * [new branch]      master -> master
branch 'master' set up to track 'origin/master'.
```

Ahora vamos con el GitFlow

Lo iniciamos

```
Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WEB Enrique/practica-siste
ma-controles (master)
$ git flow init

Which branch should be used for bringing forth production releases?
   - master
Branch name for production releases: [master] master
Branch name for "next release" development: [develop]

How to name your supporting branch prefixes?
Feature branches? [feature/]
Bugfix branches? [bugfix/]
Release branches? [release/]
Hotfix branches? [hotfix/]
Support branches? [support/]
Version tag prefix? []
Hooks and filters directory? [C:/Users/Hugo Gonzalez/Documents/Desplegament d'aplicacions WEB Enrique/p
ractica-sistema-controles/.git/hooks]
```

```
Hugo Gonzalez@DESKTOP-TGD
ma-controles (develop)
$ git branch
* develop
  master
```

Ahora subimos la rama develop

```
Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WEB Enrique/practica
ma-controles (develop)
$ git push -u origin develop
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'develop' on GitHub by visiting:
remote:      https://github.com/hugogonzzalez/practica-sistema-controles-hugo/pull/new/develop
remote:
To https://github.com/hugogonzzalez/practica-sistema-controles-hugo
 * [new branch]      develop -> develop
branch 'develop' set up to track 'origin/develop'.
```

Vamos ahora a modificar el html para que tenga cabecera, barra de navegación con acceso a home, footer y descripción del curso.

```
26
27    <!-- Add your site or application content here -->
28
29    <h1>Práctica Git Flow</h1>
30
31    <nav>
32      <a href="index.html">Home</a>
33    </nav>
34
35    <main>
36      <h2>Bienvenidos</h2>
37      <p>
38        En este curso aprenderemos a utilizar Git para controlar las versiones
39        de nuestros proyectos y Git Flow para organizar el trabajo mediante ramas.
40      </p>
41    </main>
42
43    <footer>
44      <p>Práctica de Sistemas de Control de Versiones</p>
45    </footer>
46    <script src="js/app.js"></script>
47
```

Práctica Git Flow

Home

Bienvenidos

En este curso aprenderemos a utilizar Git para controlar las versiones de nuestros proyectos y Git Flow para organizar el trabajo mediante ramas.

Práctica de Sistemas de Control de Versiones

Y subimos los cambios en la rama develop

```
Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WEB Enrique/practica-siste
ma-controles (develop)
$ git add index.html
fatal: pathspec 'index.html' did not match any files

Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WEB Enrique/practica-siste
ma-controles (develop)
$ git add src/index.html

Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WEB Enrique/practica-siste
ma-controles (develop)
$ git commit -m "Usuario 1: crear estructura inicial de la página"
[develop e4e96c9] Usuario 1: crear estructura inicial de la página
 1 file changed, 19 insertions(+), 2 deletions(-)

Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WEB Enrique/practica-siste
ma-controles (develop)
$ git push origin develop
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 12 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (4/4), 645 bytes | 645.00 KiB/s, done.
Total 4 (delta 3), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (3/3), completed with 3 local objects.
To https://github.com/hugogonzzalez/practica-sistema-controles-hugo
   f3605b4..e4e96c9  develop -> develop
```

Usuario 2:

Primero vamos a crear la rama feature/contingutHTML

```
Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WE
ma-controles (develop)
$ git flow feature start contingutHTML
Switched to a new branch 'feature/contingutHTML'

Summary of actions:
- A new branch 'feature/contingutHTML' was created, based on 'develop'
- You are now on branch 'feature/contingutHTML'

Now, start committing on your feature. When done, use:

     git flow feature finish contingutHTML
```

Ahora vamos a crear la sección Modificar contenido HTML

Primero añadimos al nav modificar contenido en el index.html

```
    <nav>
        <a href="index.html">Home</a>
        <a href="modificar-contenido.html">Modificar contenido HTML</a>
    </nav>

    <main>
```

Después creamos modificar-contenido.html

```
    <header>
        <h1>Práctica Git Flow</h1>
    </header>

    <nav>
        <a href="index.html">Home</a>
        <a href="modificar-contenido.html">Modificar contenido HTML</a>
    </nav>

    <main>
        <h2>Modificar contenido HTML</h2>

        <p id="demo">Este texto cambiará al pulsar el botón.</p>


        <button type="button" onclick="document.getElementById('demo').innerHTML = '¡Hol
            Cambiar contenido
        </button>

        <h3>Explicación del código</h3>

        <p>
            El método getElementById() busca el elemento que tiene el identificador demc
            La propiedad innerHTML permite cambiar el contenido de ese elemento.
            El evento onclick ejecuta el código cuando pulsamos el botón.
        </p>
    </main>

    <footer>
        <p>Práctica de Sistemas de Control de Versiones</p>
    </footer>

</body>
```

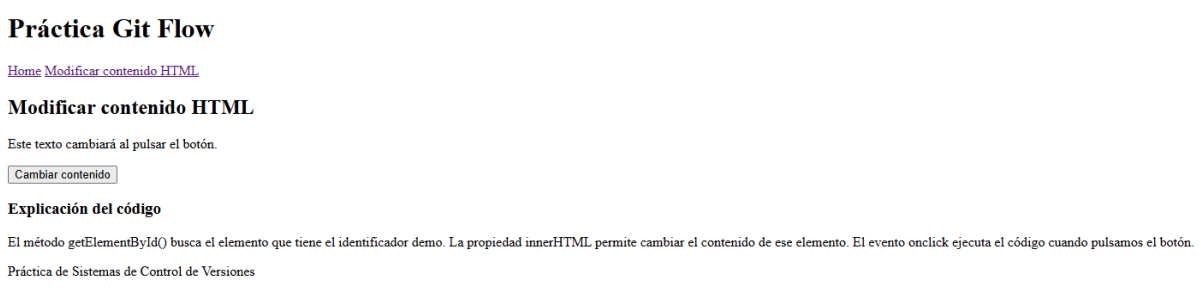

Práctica Git Flow

Home Modificar contenido HTML

Modificar contenido HTML

Este texto cambiará al pulsar el botón.

Cambiar contenido

Explicación del código

El método getElementById() busca el elemento que tiene el identificador demo. La propiedad innerHTML permite cambiar el contenido de ese elemento. El evento onclick ejecuta el código cuando pulsamos el botón.

Práctica de Sistemas de Control de Versiones

Ahora hacemos un add, un commit y finalizamos la feature y la unimos a develop

```
Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WEB Enrique/practica-siste
ma-controles (feature/contingutHTML)
$ git add src/index.html src/modificar-contenido.html
warning: in the working copy of 'src/modificar-contenido.html', CRLF will be replaced by LF the next ti
me Git touches it

Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WEB Enrique/practica-siste
ma-controles (feature/contingutHTML)
$ git commit -m "Usuario 2: añadir ejemplo de modificar contenido HTML"
[feature/contingutHTML 8af8b0c] Usuario 2: añadir ejemplo de modificar contenido HTML
 2 files changed, 47 insertions(+)
 create mode 100644 src/modificar-contenido.html

Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WEB Enrique/practica-siste
ma-controles (feature/contingutHTML)
$ git flow feature finish contingutHTML
Switched to branch 'develop'
Your branch is up to date with 'origin/develop'.
Updating e4e96c9..8af8b0c
Fast-forward
 src/index.html              |  1 +
 src/modificar-contenido.html | 46 ++++++++++++++++++++++++++++++++++++++++++++
 2 files changed, 47 insertions(+)
 create mode 100644 src/modificar-contenido.html
Deleted branch feature/contingutHTML (was 8af8b0c).

Summary of actions:
- The feature branch 'feature/contingutHTML' was merged into 'develop'
- Feature branch 'feature/contingutHTML' has been locally deleted
- You are now on branch 'develop'
```

Y finalmente subimos los cambios a gitHub

```
Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WEB Enriqu
ma-controles (develop)
$ git push origin develop
Enumerating objects: 8, done.
Counting objects: 100% (8/8), done.
Delta compression using up to 12 threads
Compressing objects: 100% (5/5), done.
Writing objects: 100% (5/5), 1.04 KiB | 1.04 MiB/s, done.
Total 5 (delta 3), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (3/3), completed with 3 local objects.
To https://github.com/hugogonzzalez/practica-sistema-controles-hugo
   e4e96c9..8af8b0c  develop -> develop
```

Ahora vamos con la segunda rama, primero la creamos se llamara feature/atributsHTML

```
Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions
ma-controles (develop)
$ git flow feature start atributsHTML
Switched to a new branch 'feature/atributsHTML'

Summary of actions:
- A new branch 'feature/atributsHTML' was created, based on 'develop'
- You are now on branch 'feature/atributsHTML'

Now, start committing on your feature. When done, use:

     git flow feature finish atributsHTML
```

Ahora añadimos el enlace en el nav-bar de modificar-atributos en index y en modificar-contenido

```html
<nav>
    <a href="index.html">Home</a>
    <a href="modificar-contenido.html">Modificar contenido HTML</a>
    <a href="modificar-atributos.html">Modificar atributos HTML</a>
</nav>
```

Y creamos modificar-atributos.html

```html
    <header>
        <h1>Práctica Git Flow</h1>
    </header>

    <nav>
        <a href="index.html">Home</a>
        <a href="modificar-contenido.html">Modificar contenido HTML</a>
        <a href="modificar-atributos.html">Modificar atributos HTML</a>
    </nav>

    <main>
        <h2>Modificar atributos HTML</h2>

        <p>Vamos a cambiar el atributo href de este enlace.</p>


        <a id="enlace" href="https://www.google.com">Enlace original</a>

        <p>
            <button type="button" onclick="document.getElementById('enlace').href = 'htt
                Cambiar enlace
            </button>
        </p>

        <h3>Explicación del código</h3>

        <p>
            El método getElementById() busca el enlace mediante su id.
            La propiedad href permite cambiar la dirección a la que lleva.
            El evento onclick ejecuta el cambio cuando pulsamos el botón.
        </p>
    </main>

    <footer>
        <p>Práctica de Sistemas de Control de Versiones</p>
    </footer>
```

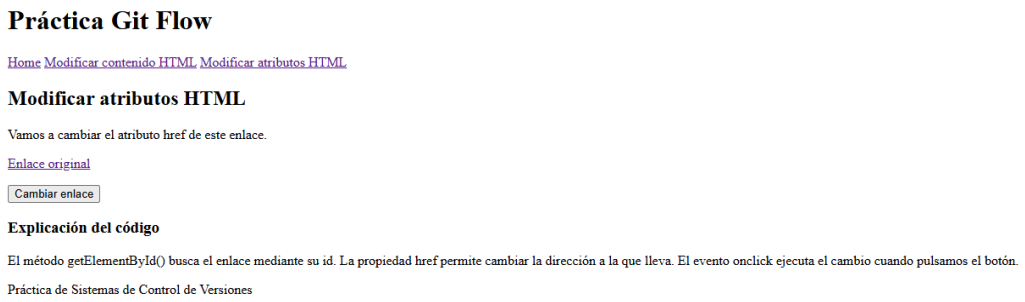

Al pulsar en enlace no lleva a google pero al pulsar cambiar enlace y entrar al enlace nos llevará a wikipedia

Hacemos un git add, un commit y finalizamos la feature y la unimos a develop

```
Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WEB Enrique/practica-siste
ma-controles (feature/atributsHTML)
$ git add src/index.html src/modificar-contenido.html src/modificar-atributos.html
warning: in the working copy of 'src/modificar-atributos.html', CRLF will be replaced by LF the next ti
me Git touches it

Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WEB Enrique/practica-siste
ma-controles (feature/atributsHTML)
$ git commit -m "Usuario 2: añadir ejemplo de modificar atributos HTML"
[feature/atributsHTML 0eec989] Usuario 2: añadir ejemplo de modificar atributos HTML
 3 files changed, 53 insertions(+)
 create mode 100644 src/modificar-atributos.html

Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WEB Enrique/practica-siste
ma-controles (feature/atributsHTML)
$ git flow feature finish atributsHTML
Switched to branch 'develop'
Your branch is up to date with 'origin/develop'.
Updating 8af8b0c..0eec989
Fast-forward
 src/index.html               |  1 +
 src/modificar-atributos.html | 51 ++++++++++++++++++++++++++++++++++++++++++++++++++
 src/modificar-contenido.html |  1 +
 3 files changed, 53 insertions(+)
 create mode 100644 src/modificar-atributos.html
Deleted branch feature/atributsHTML (was 0eec989).

Summary of actions:
- The feature branch 'feature/atributsHTML' was merged into 'develop'
- Feature branch 'feature/atributsHTML' has been locally deleted
- You are now on branch 'develop'
```

Y subimos los cambios a gitHub

```
Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WEB
ma-controles (develop)
$ git push origin develop
Enumerating objects: 10, done.
Counting objects: 100% (10/10), done.
Delta compression using up to 12 threads
Compressing objects: 100% (6/6), done.
Writing objects: 100% (6/6), 1.16 KiB | 1.16 MiB/s, done.
Total 6 (delta 4), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (4/4), completed with 4 local objects.
To https://github.com/hugogonzzalez/practica-sistema-controles-hugo
   8af8b0c..0eec989  develop -> develop
```

Usuario 3:

Primero creamos la rama feature/estilsCSS

```
Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions
ma-controles (develop)
$ git flow feature start estilsCSS
Switched to a new branch 'feature/estilsCSS'

Summary of actions:
- A new branch 'feature/estilsCSS' was created, based on 'develop'
- You are now on branch 'feature/estilsCSS'

Now, start committing on your feature. When done, use:

     git flow feature finish estilsCSS
```

Luego editamos los otros html apra añadir al nav bar el enlace de modificar-estilos.html

```html
<nav>
    <a href="index.html">Home</a>
    <a href="modificar-contenido.html">Modificar contenido HTML</a>
    <a href="modificar-estilos.html">Modificar estilos CSS</a>
    <a href="modificar-atributos.html">Modificar atributos HTML</a>
</nav>
```

Ahora creamos modificar-estilos.html

```html
<h1>Práctica Git Flow</h1>

<nav>
    <a href="index.html">Home</a>
    <a href="modificar-contenido.html">Modificar contenido HTML</a>
    <a href="modificar-estilos.html">Modificar estilos CSS</a>
    <a href="modificar-atributos.html">Modificar atributos HTML</a>


</nav>

<main>
    <h2>Bienvenidos</h2>
    <p>
        En este curso aprenderemos a utilizar Git para controlar las versiones
        de nuestros proyectos y Git Flow para organizar el trabajo mediante ramas.
    </p>
</main>

<footer>
    <p>Práctica de Sistemas de Control de Versiones</p>
</footer>
<script src="js/app.js"></script>

</body>

</html>
```

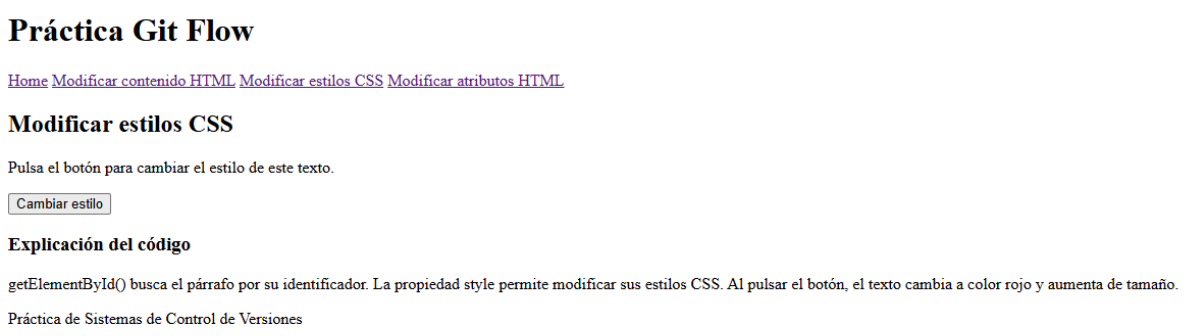

Práctica Git Flow

Home Modificar contenido HTML Modificar estilos CSS Modificar atributos HTML

Modificar estilos CSS

Pulsa el botón para cambiar el estilo de este texto.

Cambiar estilo

Explicación del código

getElementById() busca el párrafo por su identificador. La propiedad style permite modificar sus estilos CSS. Al pulsar el botón, el texto cambia a color rojo y aumenta de tamaño.

Práctica de Sistemas de Control de Versiones

Vale ahora he hecho unos ajustes en el css para que se vea el resultado final como pide el ejercicio el resultado se ve asi



El header es una foto

```css
header {
  background-image: url("../img/header.svg");
  background-size: cover;
  background-position: center;
  background-repeat: no-repeat;
  color: white;
  text-align: center;
  padding: 40px;
}
```

Ahora hacemos un git add, un commit y finalizamos el feature

```
ma-controles (feature/estilsCSS)
$ git add src/index.html src/modificar-contenido.html src/modificar-atributos.html src/modificar-estilo
s.html dist/css/style.css
warning: in the working copy of 'src/modificar-estilos.html', CRLF will be replaced by LF the next time
 Git touches it

Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WEB Enrique/practica-siste
ma-controles (feature/estilsCSS)
$ git commit -m "Usuario 3: añadir ejemplos para modificar estilos CSS"
[feature/estilsCSS a6c7c17] Usuario 3: añadir ejemplos para modificar estilos CSS
 5 files changed, 166 insertions(+), 9 deletions(-)
 create mode 100644 src/modificar-estilos.html
```

Se me olvido añadir la imagen del header y tuve que hacer otro commit

```
Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions WEB Enrique/practica-siste
ma-controles (feature/estilsCSS)
$ git commit -m "Usuario 3: añadir imagen de fondo a la cabecera"
[feature/estilsCSS bddd657] Usuario 3: añadir imagen de fondo a la cabecera
 2 files changed, 49 insertions(+), 1 deletion(-)
 create mode 100644 dist/img/header.svg
```

Ahora si finalizamos el feature

```
Switched to branch 'develop'
Your branch is up to date with 'origin/develop'.
Merge made by the 'ort' strategy.
 dist/css/style.css           | 108 ++++++++++++++++++++++++++++++++++++++++++++++++
 dist/img/header.svg          |  48 ++++++++++++++++++++
 dist/index.html              |   2 +-
 src/index.html               |   9 ++++--
 src/modificar-atributos.html |   3 +-
 src/modificar-contenido.html |   3 +-
 src/modificar-estilos.html   |  52 ++++++++++++++++++++++
 7 files changed, 215 insertions(+), 10 deletions(-)
 create mode 100644 dist/img/header.svg
 create mode 100644 src/modificar-estilos.html
Deleted branch feature/estilsCSS (was bddd657).
```

Y subimos los cambios a github

```
Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions W
ma-controles (develop)
$ git push origin develop
Enumerating objects: 27, done.
Counting objects: 100% (27/27), done.
Delta compression using up to 12 threads
Compressing objects: 100% (16/16), done.
Writing objects: 100% (17/17), 3.44 KiB | 3.44 MiB/s, done.
Total 17 (delta 12), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (12/12), completed with 8 local objects.
To https://github.com/hugogonzzalez/practica-sistema-controles-hugo
   0eec989..8a20cbf  develop -> develop
```

Ahora creamos la rama 1.0

```
Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament
ma-controles (develop)
$ git flow release start 1.0
Switched to a new branch 'release/1.0'

Summary of actions:
- A new branch 'release/1.0' was created, based on 'develop'
- You are now on branch 'release/1.0'

Follow-up actions:
- Bump the version number now!
- Start committing last-minute fixes in preparing your release
- When done, run:

     git flow release finish '1.0'
```

Vemos que está todo correcto

```
Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/
ma-controles (release/1.0)
$ git status
On branch release/1.0
nothing to commit, working tree clean
```

Y finalizamos la release

```
Switched to branch 'master'
Your branch is up to date with 'origin/master'.
Merge made by the 'ort' strategy.
 dist/css/style.css           | 108 ++++++++++++++++++++++++++++++++++++++++++++--
 dist/img/header.svg          |  48 ++++++++++++++++++
 dist/index.html              |   2 +-
 src/index.html               |  28 +++++++++--
 src/modificar-atributos.html |  52 ++++++++++++++++++++
 src/modificar-contenido.html |  48 ++++++++++++++++++
 src/modificar-estilos.html   |  52 ++++++++++++++++++++
 7 files changed, 330 insertions(+), 8 deletions(-)
 create mode 100644 dist/img/header.svg
 create mode 100644 src/modificar-atributos.html
 create mode 100644 src/modificar-contenido.html
 create mode 100644 src/modificar-estilos.html
Already on 'master'
Your branch is ahead of 'origin/master' by 7 commits.
  (use "git push" to publish your local commits)
fatal: no tag message?
Fatal: Tagging failed. Please run finish again to retry.
```

Subimos las ramas y la etiqueta a GitHub asi la etiquetara como v1.0

```
Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicacions
ma-controles (master)
$ git push origin master develop --tags
Enumerating objects: 1, done.
Counting objects: 100% (1/1), done.
Writing objects: 100% (1/1), 232 bytes | 232.00 KiB/s, done.
Total 1 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/hugogonzzalez/practica-sistema-controles-hugo
   f3605b4..6b89c92  master -> master
```

Volvemos a Usuario 1:

Creamos el hotfix

```
ma-controles (master)
$ git flow hotfix start milloresV_1_0
Switched to a new branch 'hotfix/milloresV_1_0'

Summary of actions:
- A new branch 'hotfix/milloresV_1_0' was created, based on 'master'
- You are now on branch 'hotfix/milloresV_1_0'

Follow-up actions:
- Start committing your hot fixes
- Bump the version number now!
- When done, run:

     git flow hotfix finish 'milloresV_1_0'
```

Cambiamos modificar contenido HTML para mejorarlo

```html
<main>
    <h2>Modificar el contenido HTML</h2>

    <p>
        JavaScript permite cambiar el contenido de los elementos HTML
        cuando el usuario realiza una acción.
    </p>


    <h3>Ejemplo práctico</h3>

    <p id="demo">Este texto cambiará al pulsar el botón.</p>

    <button type="button"
        onclick="document.getElementById('demo').innerHTML = '¡Hola! Has cambiado el
        Cambiar contenido
    </button>

    <h3>¿Cómo funciona?</h3>

    <p>
        <strong>getElementById()</strong> busca un elemento por su identificador.
        <strong>innerHTML</strong> cambia su contenido y
        <strong>onclick</strong> ejecuta la acción cuando pulsamos el botón.
    </p>
</main>
```

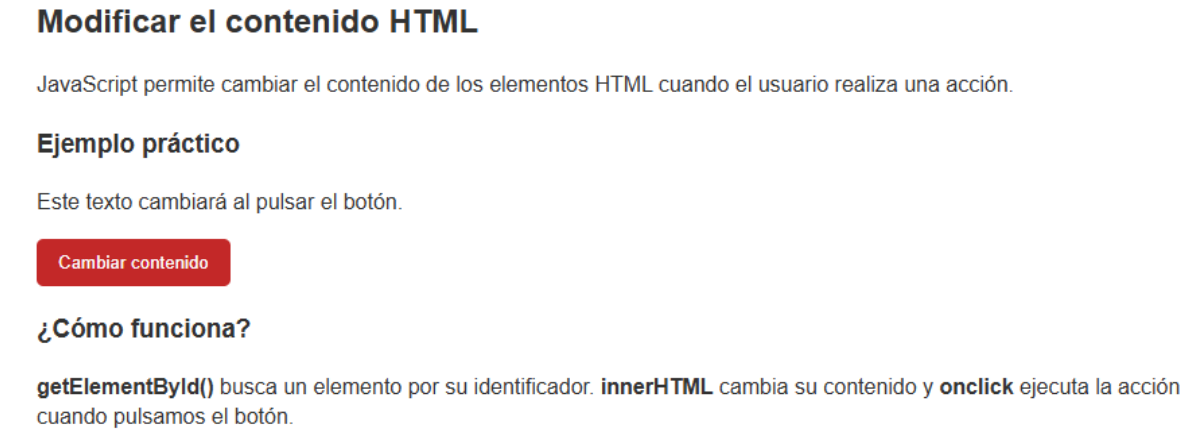

Ahora hacemos un git add, un commit y finalizamos el feature

```
Switched to branch 'master'
Your branch is up to date with 'origin/master'.
Merge made by the 'ort' strategy.
 src/modificar-contenido.html | 20 ++++++++++++++------
 1 file changed, 14 insertions(+), 6 deletions(-)
fatal: no tag message?
Fatal: Tagging failed. Please run finish again to retry.
```

Al hacer el feature no puedo hacer captura al commit pero si esta hecho

Subimos los cambios a Github

```
Hugo Gonzalez@DESKTOP-TGD3V31 MINGW64 ~/Documents/Desplegament d'aplicaci
ma-controles (master)
$ git push origin master develop --tags
Enumerating objects: 8, done.
Counting objects: 100% (8/8), done.
Delta compression using up to 12 threads
Compressing objects: 100% (5/5), done.
Writing objects: 100% (5/5), 762 bytes | 762.00 KiB/s, done.
Total 5 (delta 4), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (4/4), completed with 3 local objects.
To https://github.com/hugogonzzalez/practica-sistema-controles-hugo
   6b89c92..a67c912  master -> master
```

GH-PAGES

Ahora vamos a crear gh-pages

Lo meto en la carpeta y en la rama de gh-pages voy a meter este asique en el github solo saldra hasta aqui en el de aules saldra todo