

Chapter 3 – Classification

This notebook contains all the sample code and solutions to the exercises in chapter 3.

▼ Setup

First, let's import a few common modules, ensure Matplotlib plots figures inline and prepare a function to save the figures. We also check that Python 3.5 or later is installed (although Python 2.x may work, it is deprecated so we strongly recommend you use Python 3 instead), as well as Scikit-Learn ≥ 0.20 .

```
# Python ≥3.5 is required
import sys
assert sys.version_info >= (3, 5)

# Is this notebook running on Colab or Kaggle?
IS_COLAB = "google.colab" in sys.modules
IS_KAGGLE = "kaggle_secrets" in sys.modules

# Scikit-Learn ≥0.20 is required
import sklearn
assert sklearn.__version__ >= "0.20"

# Common imports
import numpy as np
import os

# to make this notebook's output stable across runs
np.random.seed(42)

# To plot pretty figures
%matplotlib inline
import matplotlib as mpl
import matplotlib.pyplot as plt
mpl.rc('axes', labelsize=14)
mpl.rc('xtick', labelsize=12)
mpl.rc('ytick', labelsize=12)

# Where to save the figures
PROJECT_ROOT_DIR = "."
CHAPTER_ID = "classification"
IMAGES_PATH = os.path.join(PROJECT_ROOT_DIR, "images", CHAPTER_ID)
```

```
os.makedirs(IMAGES_PATH, exist_ok=True)
```

```
def save_fig(fig_id, tight_layout=True, fig_extension="png", resolution=300):
    path = os.path.join(IMAGES_PATH, fig_id + "." + fig_extension)
    print("Saving figure", fig_id)
    if tight_layout:
        plt.tight_layout()
    plt.savefig(path, format=fig_extension, dpi=resolution)
```

▼ MNIST

Warning: since Scikit-Learn 0.24, `fetch_openml()` returns a Pandas DataFrame by default. To avoid this and keep the same code as in the book, we use `as_frame=False`.

```
from sklearn.datasets import fetch_openml
mnist = fetch_openml('mnist_784', version=1, as_frame=False)
mnist.keys()
```

```
dict_keys(['data', 'target', 'frame', 'feature_names', 'target_names', 'DESCR', 'details'])
```



```
X, y = mnist["data"], mnist["target"]
X.shape
```

```
(70000, 784)
```

```
y.shape
```

```
(70000,)
```

```
28 * 28
```


```
784
```

```
%matplotlib inline
import matplotlib as mpl
import matplotlib.pyplot as plt

some_digit = X[0]
some_digit_image = some_digit.reshape(28, 28)
plt.imshow(some_digit_image, cmap=mpl.cm.binary)
plt.axis("off")

save_fig("some_digit_plot")
plt.show()
```

```
Saving figure some_digit_plot
```

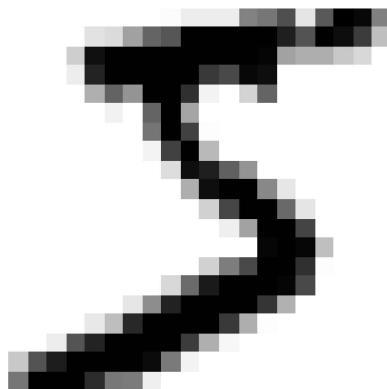

```
y[0]
```

```
'5'
```

```
y = y.astype(np.uint8)
```

```
def plot_digit(data):
```

```
    image = data.reshape(28, 28)
    plt.imshow(image, cmap = mpl.cm.binary,
               interpolation="nearest")
    plt.axis("off")
```

```
# EXTRA
```

```
def plot_digits(instances, images_per_row=10, **options):
    size = 28
    images_per_row = min(len(instances), images_per_row)
    images = [instance.reshape(size,size) for instance in instances]
    n_rows = (len(instances) - 1) // images_per_row + 1
    row_images = []
    n_empty = n_rows * images_per_row - len(instances)
    images.append(np.zeros((size, size * n_empty)))
    for row in range(n_rows):
        rimages = images[row * images_per_row : (row + 1) * images_per_row]
        row_images.append(np.concatenate(rimages, axis=1))
    image = np.concatenate(row_images, axis=0)
    plt.imshow(image, cmap = mpl.cm.binary, **options)
    plt.axis("off")
```

```
plt.figure(figsize=(9,9))
```

```
example_images = X[:100]
```

```
plot_digits(example_images, images_per_row=10)
```

```
save_fig("more_digits_plot")
plt.show()
```

Saving figure more_digits_plot



y[0]

5

```
X_train, X_test, y_train, y_test = X[:60000], X[60000:], y[:60000], y[60000:]
```

▼ Binary classifier

```
y_train_5 = (y_train == 5)
```

```
y_test_5 = (y_test == 5)
```

Note: some hyperparameters will have a different default value in future versions of Scikit-Learn, such as `max_iter` and `tol`. To be future-proof, we explicitly set these hyperparameters to their future default values. For simplicity, this is not shown in the book.

```
from sklearn.linear_model import SGDClassifier

sgd_clf = SGDClassifier(max_iter=1000, tol=1e-3, random_state=42)
sgd_clf.fit(X_train, y_train_5)

SGDClassifier(alpha=0.0001, average=False, class_weight=None,
              early_stopping=False, epsilon=0.1, eta0=0.0, fit_intercept=True,
              l1_ratio=0.15, learning_rate='optimal', loss='hinge',
              max_iter=1000, n_iter_no_change=5, n_jobs=None, penalty='l2',
              power_t=0.5, random_state=42, shuffle=True, tol=0.001,
              validation_fraction=0.1, verbose=0, warm_start=False)

sgd_clf.predict([some_digit])

array([ True])

from sklearn.model_selection import cross_val_score
cross_val_score(sgd_clf, X_train, y_train_5, cv=3, scoring="accuracy")

array([0.95035, 0.96035, 0.9604 ])

from sklearn.model_selection import StratifiedKFold
from sklearn.base import clone

skfolds = StratifiedKFold(n_splits=3, shuffle=True, random_state=42)

for train_index, test_index in skfolds.split(X_train, y_train_5):
    clone_clf = clone(sgd_clf)
    X_train_folds = X_train[train_index]
    y_train_folds = y_train_5[train_index]
    X_test_fold = X_train[test_index]
    y_test_fold = y_train_5[test_index]

    clone_clf.fit(X_train_folds, y_train_folds)
    y_pred = clone_clf.predict(X_test_fold)
    n_correct = sum(y_pred == y_test_fold)
    print(n_correct / len(y_pred))

0.9669
0.91625
0.96785
```

Note: shuffle=True was omitted by mistake in previous releases of the book.

```
from sklearn.base import BaseEstimator
class Never5Classifier(BaseEstimator):
    def fit(self, X, y=None):
        pass
    def predict(self, X):
        return np.zeros((len(X), 1), dtype=bool)

never_5_clf = Never5Classifier()
cross_val_score(never_5_clf, X_train, y_train_5, cv=3, scoring="accuracy")
array([0.91125, 0.90855, 0.90915])

from sklearn.model_selection import cross_val_predict

y_train_pred = cross_val_predict(sgd_clf, X_train, y_train_5, cv=3)

from sklearn.metrics import confusion_matrix

confusion_matrix(y_train_5, y_train_pred)
array([[53892,    687],
       [1891,  3530]])

y_train_perfect_predictions = y_train_5 # pretend we reached perfection
confusion_matrix(y_train_5, y_train_perfect_predictions)

array([[54579,      0],
       [     0,  5421]])

from sklearn.metrics import precision_score, recall_score

precision_score(y_train_5, y_train_pred)
0.8370879772350012

cm = confusion_matrix(y_train_5, y_train_pred)
cm[1, 1] / (cm[0, 1] + cm[1, 1])
0.8370879772350012

recall_score(y_train_5, y_train_pred)
0.6511713705958311
```

```
cm[1, 1] / (cm[1, 0] + cm[1, 1])
```

```
0.6511713705958311
```

```
from sklearn.metrics import f1_score
```

```
f1_score(y_train_5, y_train_pred)
```

```
0.7325171197343846
```

```
cm[1, 1] / (cm[1, 1] + (cm[1, 0] + cm[0, 1]) / 2)
```

```
0.7325171197343847
```

```
y_scores = sgd_clf.decision_function([some_digit])  
y_scores
```

```
array([2164.22030239])
```

```
threshold = 0
```

```
y_some_digit_pred = (y_scores > threshold)
```

```
y_some_digit_pred
```

```
array([ True])
```

```
threshold = 8000
```

```
y_some_digit_pred = (y_scores > threshold)
```

```
y_some_digit_pred
```

```
array([False])
```

```
y_scores = cross_val_predict(sgd_clf, X_train, y_train_5, cv=3,  
                             method="decision_function")
```

```
from sklearn.metrics import precision_recall_curve
```

```
precisions, recalls, thresholds = precision_recall_curve(y_train_5, y_scores)
```

```
def plot_precision_recall_vs_threshold(precisions, recalls, thresholds):
```

```
    plt.plot(thresholds, precisions[:-1], "b--", label="Precision", linewidth=2)  
    plt.plot(thresholds, recalls[:-1], "g-", label="Recall", linewidth=2)  
    plt.legend(loc="center right", fontsize=16) # Not shown in the book  
    plt.xlabel("Threshold", fontsize=16) # Not shown  
    plt.grid(True) # Not shown  
    plt.axis([-50000, 50000, 0, 1]) # Not shown
```

```

recall_90_precision = recalls[np.argmax(precisions >= 0.90)]
threshold_90_precision = thresholds[np.argmax(precisions >= 0.90)] #
```

```

plt.figure(figsize=(8, 4)) #
```

```

plot_precision_recall_vs_threshold(precisions, recalls, thresholds) #
```

```

plt.plot([threshold_90_precision, threshold_90_precision], [0., 0.9], "r:") #
```

```

plt.plot([-50000, threshold_90_precision], [0.9, 0.9], "r:") #
```

```

plt.plot([-50000, threshold_90_precision], [recall_90_precision, recall_90_precision], "r:")#
```

```

plt.plot([threshold_90_precision], [0.9], "ro") #
```

```

plt.plot([threshold_90_precision], [recall_90_precision], "ro") #
```


```

save_fig("precision_recall_vs_threshold_plot") #
```

```

plt.show() #
```

Saving figure precision_recall_vs_threshold_plot

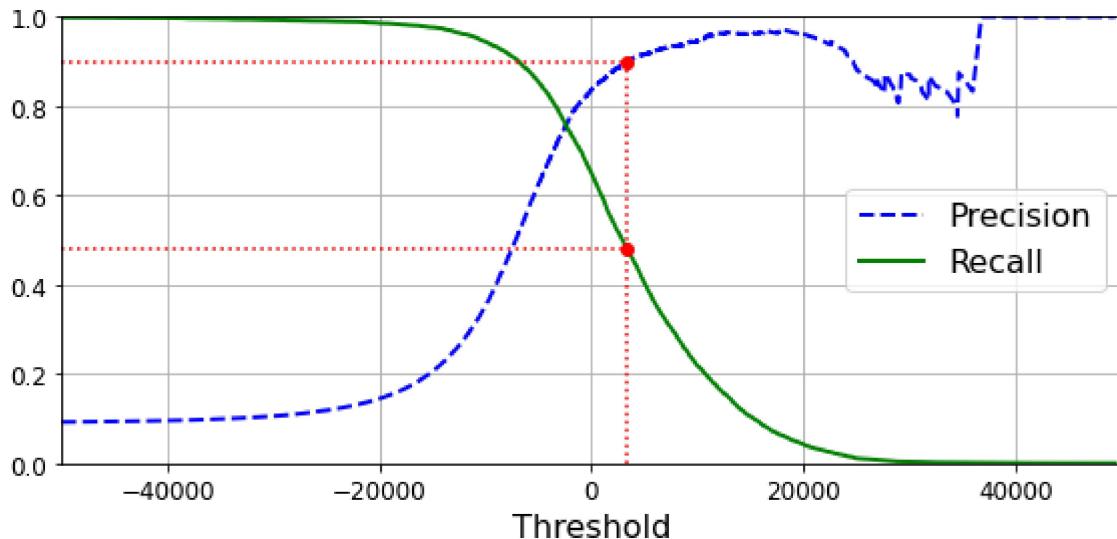

```
(y_train_pred == (y_scores > 0)).all()
```

True


```

def plot_precision_vs_recall(precisions, recalls):
    plt.plot(recalls, precisions, "b-", linewidth=2)
    plt.xlabel("Recall", fontsize=16)
    plt.ylabel("Precision", fontsize=16)
    plt.axis([0, 1, 0, 1])
    plt.grid(True)

plt.figure(figsize=(8, 6))
plot_precision_vs_recall(precisions, recalls)
plt.plot([recall_90_precision, recall_90_precision], [0., 0.9], "r:")
plt.plot([0.0, recall_90_precision], [0.9, 0.9], "r:")
plt.plot([recall_90_precision], [0.9], "ro")
save_fig("precision_vs_recall_plot")
```

```
savefig('precision_vs_recall_plot')
plt.show()
```

Saving figure precision_vs_recall_plot

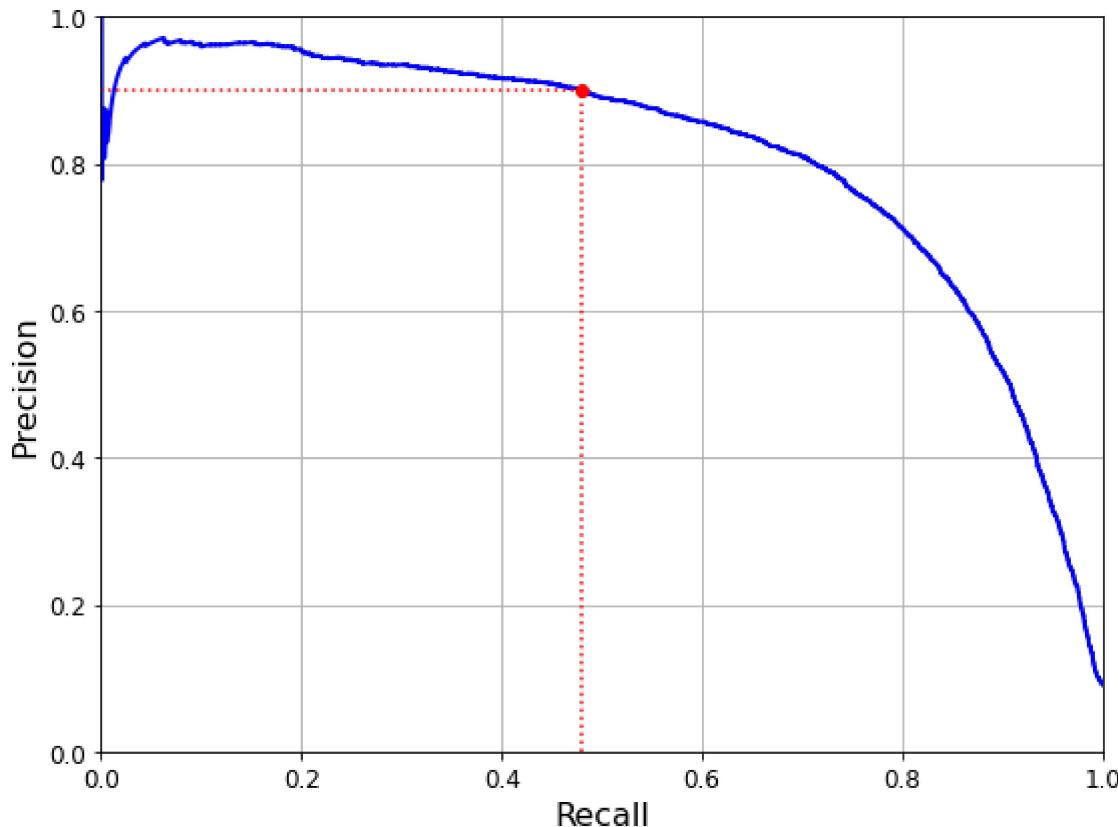

```
threshold_90_precision = thresholds[np.argmax(precisions >= 0.90)]
```

```
threshold_90_precision
```

```
3370.0194991439557
```

```
y_train_pred_90 = (y_scores >= threshold_90_precision)
```

```
precision_score(y_train_5, y_train_pred_90)
```

```
0.9000345901072293
```

```
recall_score(y_train_5, y_train_pred_90)
```

```
0.4799852425751706
```

▼ ROC curves

```
from sklearn.metrics import roc_curve
```


<https://colab.research.google.com/drive/1-8WuPU6TeU8pQncTHDX5mzhO7tDXE415#scrollTo=xPAU0lZL4JU9&printMode=true>

```
fpr, tpr, thresholds = roc_curve(y_train_5, y_scores)

def plot_roc_curve(fpr, tpr, label=None):
    plt.plot(fpr, tpr, linewidth=2, label=label)
    plt.plot([0, 1], [0, 1], 'k--') # dashed diagonal
    plt.axis([0, 1, 0, 1]) # Not shown in the book
    plt.xlabel('False Positive Rate (Fall-Out)', fontsize=16) # Not shown
    plt.ylabel('True Positive Rate (Recall)', fontsize=16) # Not shown
    plt.grid(True) # Not shown

plt.figure(figsize=(8, 6)) # Not shown
plot_roc_curve(fpr, tpr)
fpr_90 = fpr[np.argmax(tpr >= recall_90_precision)] # Not shown
plt.plot([fpr_90, fpr_90], [0., recall_90_precision], "r:") # Not shown
plt.plot([0.0, fpr_90], [recall_90_precision, recall_90_precision], "r:") # Not shown
plt.plot([fpr_90], [recall_90_precision], "ro") # Not shown
save_fig("roc_curve_plot") # Not shown
plt.show()
```

Saving figure roc_curve_plot

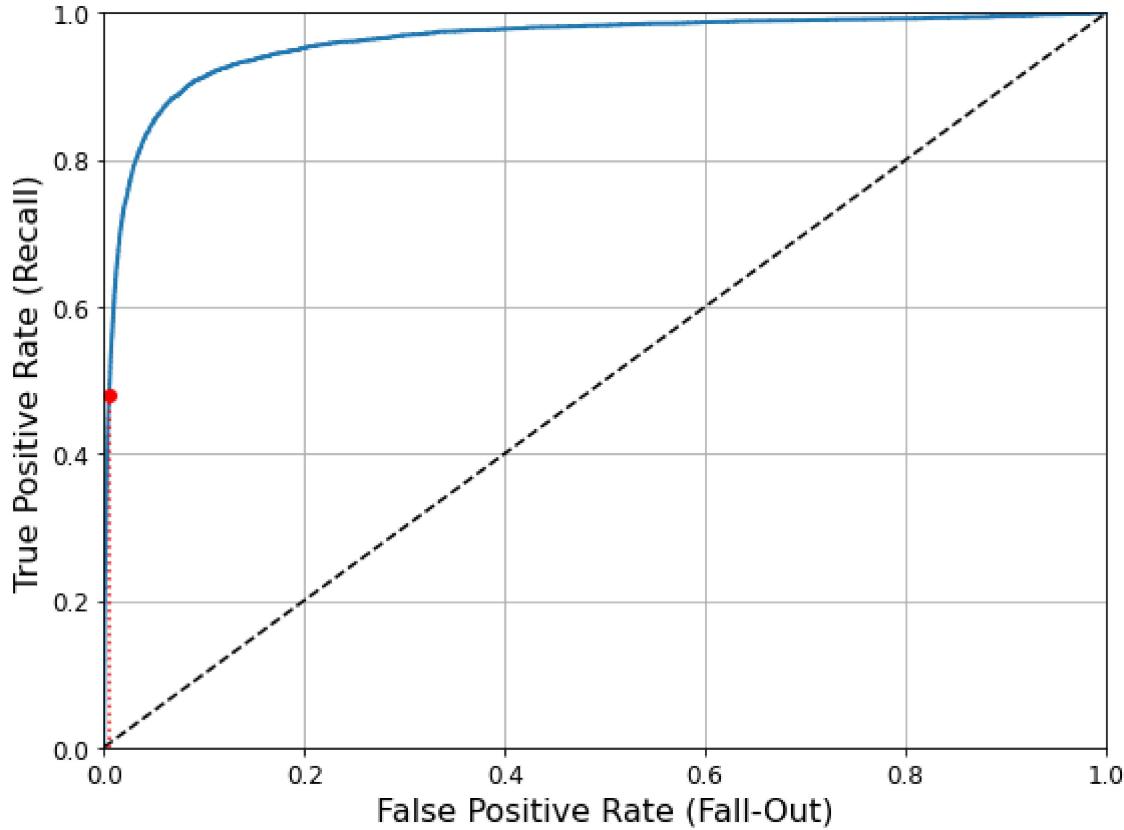

```
from sklearn.metrics import roc_auc_score
```

```
roc_auc_score(y_train_5, y_scores)
```

0.9604938554008616

Note: we set `n_estimators=100` to be future-proof since this will be the default value in Scikit-Learn 0.22.

```
from sklearn.ensemble import RandomForestClassifier
forest_clf = RandomForestClassifier(n_estimators=100, random_state=42)
y_probas_forest = cross_val_predict(forest_clf, X_train, y_train_5, cv=3,
                                     method="predict_proba")

y_scores_forest = y_probas_forest[:, 1] # score = proba of positive class
fpr_forest, tpr_forest, thresholds_forest = roc_curve(y_train_5,y_scores_forest)

recall_for_forest = tpr_forest[np.argmax(fpr_forest >= fpr_90)]

plt.figure(figsize=(8, 6))
plt.plot(fpr, tpr, "b:", linewidth=2, label="SGD")
plot_roc_curve(fpr_forest, tpr_forest, "Random Forest")
plt.plot([fpr_90, fpr_90], [0., recall_90_precision], "r:")
plt.plot([0.0, fpr_90], [recall_90_precision, recall_90_precision], "r:")
plt.plot([fpr_90], [recall_90_precision], "ro")
plt.plot([fpr_90, fpr_90], [0., recall_for_forest], "r:")
plt.plot([fpr_90], [recall_for_forest], "ro")
plt.grid(True)
plt.legend(loc="lower right", fontsize=16)
save_fig("roc_curve_comparison_plot")
plt.show()
```

```
Saving figure roc_curve_comparison_plot
```



```
roc_auc_score(y_train_5, y_scores_forest)
```

```
0.9983436731328145
```




```
y_train_pred_forest = cross_val_predict(forest_clf, X_train, y_train_5, cv=3)
precision_score(y_train_5, y_train_pred_forest)
```

```
0.9905083315756169
```



```
recall_score(y_train_5, y_train_pred_forest)
```

```
0.8662608374838591
```



▼ Multiclass classification



```
from sklearn.svm import SVC
```

```
svm_clf = SVC(gamma="auto", random_state=42)
svm_clf.fit(X_train[:1000], y_train[:1000]) # y_train, not y_train_5
svm_clf.predict([some_digit])
```

```
array([5], dtype=uint8)
```

```
some_digit_scores = svm_clf.decision_function([some_digit])
some_digit_scores
```

```
array([[ 2.81585438,  7.09167958,  3.82972099,  0.79365551,  5.8885703 ,
        9.29718395,  1.79862509,  8.10392157, -0.228207 ,  4.83753243]])
```

```
np.argmax(some_digit_scores)
```

```
5
```

```
svm_clf.classes_
```

```
array([0, 1, 2, 3, 4, 5, 6, 7, 8, 9], dtype=uint8)
```

```
svm_clf.classes_[5]
```

```
5
```

```
from sklearn.multiclass import OneVsRestClassifier
```

```

ovr_clf = OneVsRestClassifier(SVC(gamma="auto", random_state=42))
ovr_clf.fit(X_train[:1000], y_train[:1000])
ovr_clf.predict([some_digit])

array([5], dtype=uint8)

len(ovr_clf.estimators_)

10

sgd_clf.fit(X_train, y_train)
sgd_clf.predict([some_digit])

array([3], dtype=uint8)

sgd_clf.decision_function([some_digit])

array([[ -31893.03095419, -34419.69069632, -9530.63950739,
       1823.73154031, -22320.14822878, -1385.80478895,
      -26188.91070951, -16147.51323997, -4604.35491274,
      -12050.767298 ]])

```

Warning: the following two cells may take close to 30 minutes to run, or more depending on your hardware.

```

cross_val_score(sgd_clf, X_train, y_train, cv=3, scoring="accuracy")

array([0.87365, 0.85835, 0.8689 ])

from sklearn.preprocessing import StandardScaler
scaler = StandardScaler()
X_train_scaled = scaler.fit_transform(X_train.astype(np.float64))
cross_val_score(sgd_clf, X_train_scaled, y_train, cv=3, scoring="accuracy")

array([0.8983, 0.891 , 0.9018])

```

▼ Error analysis

```

y_train_pred = cross_val_predict(sgd_clf, X_train_scaled, y_train, cv=3)
conf_mx = confusion_matrix(y_train, y_train_pred)
conf_mx

array([[5577,      0,    22,      5,      8,     43,     36,      6,   225,      1],
       [  0,  6400,    37,    24,      4,     44,      4,      7,   212,     10],
       [ 27,     27,  5220,    92,    73,     27,     67,     36,   378,     11],


```

```
[ 22,   17,  117, 5227,     2,   203,   27,   40,   403,   73],
[ 12,   14,   41,     9, 5182,    12,   34,   27,  347,  164],
[ 27,   15,   30,  168,    53, 4444,   75,   14,  535,   60],
[ 30,   15,   42,     3,   44,   97, 5552,     3,  131,     1],
[ 21,   10,   51,   30,   49,   12,     3, 5684,  195,  210],
[ 17,   63,   48,   86,     3, 126,   25,   10, 5429,   44],
[ 25,   18,   30,   64, 118,   36,     1, 179,  371, 5107]])
```

```
# since sklearn 0.22, you can use sklearn.metrics.plot_confusion_matrix()
def plot_confusion_matrix(matrix):
    """If you prefer color and a colorbar"""
    fig = plt.figure(figsize=(8,8))
    ax = fig.add_subplot(111)
    cax = ax.matshow(matrix)
    fig.colorbar(cax)

plt.matshow(conf_mx, cmap=plt.cm.gray)
save_fig("confusion_matrix_plot", tight_layout=False)
plt.show()
```


Saving figure confusion_matrix_plot

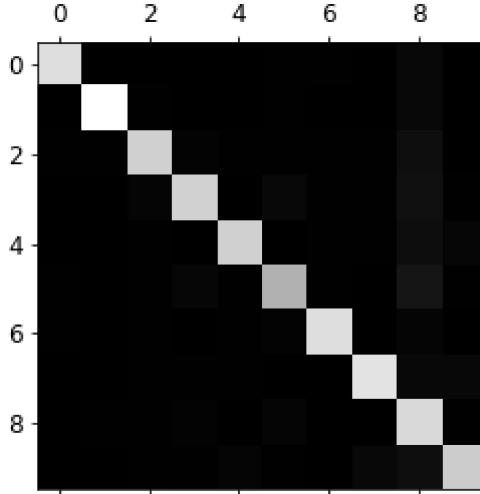

```
row_sums = conf_mx.sum(axis=1, keepdims=True)
norm_conf_mx = conf_mx / row_sums

np.fill_diagonal(norm_conf_mx, 0)
plt.matshow(norm_conf_mx, cmap=plt.cm.gray)
save_fig("confusion_matrix_errors_plot", tight_layout=False)
plt.show()
```


```
Saving figure confusion_matrix_errors_plot
```

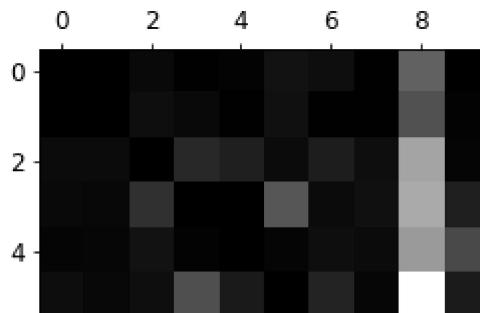

```
cl_a, cl_b = 3, 5
X_aa = X_train[(y_train == cl_a) & (y_train_pred == cl_a)]
X_ab = X_train[(y_train == cl_a) & (y_train_pred == cl_b)]
X_ba = X_train[(y_train == cl_b) & (y_train_pred == cl_a)]
X_bb = X_train[(y_train == cl_b) & (y_train_pred == cl_b)]

plt.figure(figsize=(8,8))
plt.subplot(221); plot_digits(X_aa[:25], images_per_row=5)
plt.subplot(222); plot_digits(X_ab[:25], images_per_row=5)
plt.subplot(223); plot_digits(X_ba[:25], images_per_row=5)
plt.subplot(224); plot_digits(X_bb[:25], images_per_row=5)
save_fig("error_analysis_digits_plot")
plt.show()
```

Saving figure error_analysis_digits_plot



▼ Multilabel classification



```
from sklearn.neighbors import KNeighborsClassifier
```

```
y_train_large = (y_train >= 7)
y_train_odd = (y_train % 2 == 1)
y_multilabel = np.c_[y_train_large, y_train_odd]
```

```
knn_clf = KNeighborsClassifier()
knn_clf.fit(X_train, y_multilabel)
```

```
KNeighborsClassifier(algorithm='auto', leaf_size=30, metric='minkowski',
                     metric_params=None, n_jobs=None, n_neighbors=5, p=2,
                     weights='uniform')
```



```
knn_clf.predict([some_digit])
```

```
array([[False,  True]])
```



Warning: the following cell may take a very long time (possibly hours depending on your hardware).



```
y_train_knn_pred = cross_val_predict(knn_clf, X_train, y_multilabel, cv=3)
f1_score(y_multilabel, y_train_knn_pred, average="macro")
```

```
0.976410265560605
```



▼ Multioutput classification

```
noise = np.random.randint(0, 100, (len(X_train), 784))
X_train_mod = X_train + noise
noise = np.random.randint(0, 100, (len(X_test), 784))
X_test_mod = X_test + noise
y_train_mod = y_train
y_test_mod = y_test
```

```
some_index = 0
plt.subplot(121); plot_digit(X_test_mod[some_index])
plt.subplot(122); plot_digit(y_test_mod[some_index])
save_fig("noisy digit example plot")
```


```
plt.show()
```

Saving figure noisy_digit_example_plot

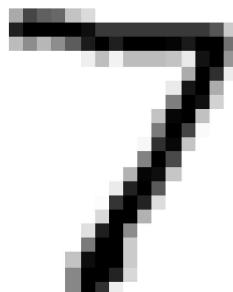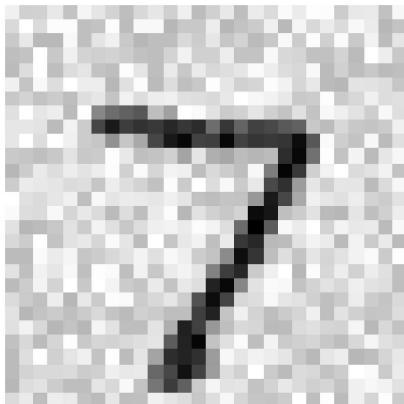

```
knn_clf.fit(X_train_mod, y_train_mod)  
clean_digit = knn_clf.predict([X_test_mod[some_index]])  
plot_digit(clean_digit)  
save_fig("cleaned_digit_example_plot")
```

Saving figure cleaned_digit_example_plot

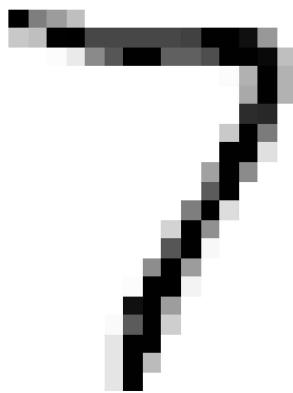


▼ Extra material

▼ Dummy (ie. random) classifier

```
from sklearn.dummy import DummyClassifier  
dmy_clf = DummyClassifier(strategy="prior")  
y_probas_dmy = cross_val_predict(dmy_clf, X_train, y_train_5, cv=3, method="predict_proba")  
y_scores_dmy = y_probas_dmy[:, 1]
```

```
fpr, tpr, thresholds = roc_curve(y_train_5, y_scores_dmy)
plot_roc_curve(fpr, tpr)
```

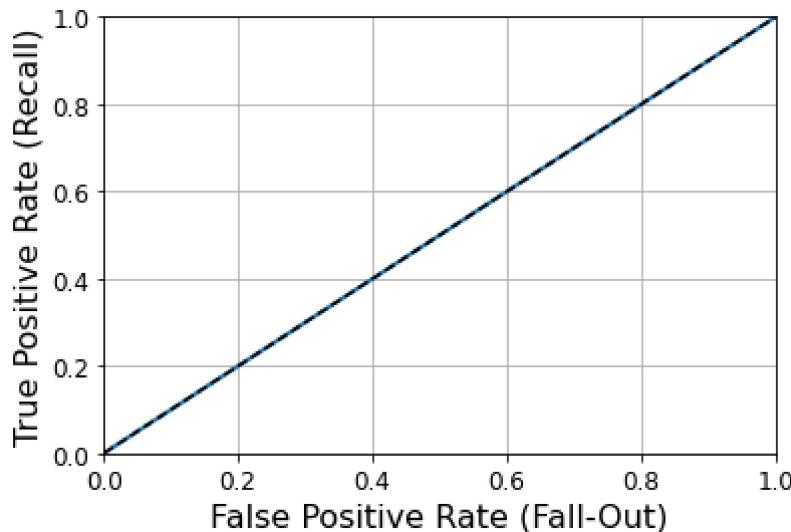

▼ KNN classifier

```
from sklearn.neighbors import KNeighborsClassifier
knn_clf = KNeighborsClassifier(weights='distance', n_neighbors=4)
knn_clf.fit(X_train, y_train)

KNeighborsClassifier(algorithm='auto', leaf_size=30, metric='minkowski',
                     metric_params=None, n_jobs=None, n_neighbors=4, p=2,
                     weights='distance')


y_knn_pred = knn_clf.predict(X_test)

from sklearn.metrics import accuracy_score
accuracy_score(y_test, y_knn_pred)

0.9714

from scipy.ndimage.interpolation import shift
def shift_digit(digit_array, dx, dy, new=0):
    return shift(digit_array.reshape(28, 28), [dy, dx], cval=new).reshape(784)

plot_digit(shift_digit(some_digit, 5, 1, new=100))
```

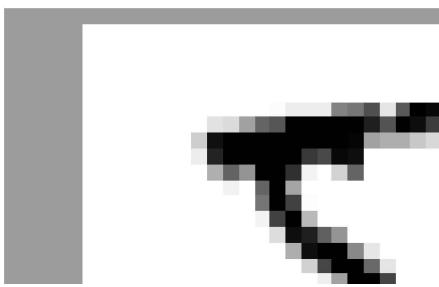

```
X_train_expanded = [X_train]
y_train_expanded = [y_train]
for dx, dy in ((1, 0), (-1, 0), (0, 1), (0, -1)):
    shifted_images = np.apply_along_axis(shift_digit, axis=1, arr=X_train, dx=dx, dy=dy)
    X_train_expanded.append(shifted_images)
    y_train_expanded.append(y_train)

X_train_expanded = np.concatenate(X_train_expanded)
y_train_expanded = np.concatenate(y_train_expanded)
X_train_expanded.shape, y_train_expanded.shape

((300000, 784), (300000,))

knn_clf.fit(X_train_expanded, y_train_expanded)

KNeighborsClassifier(algorithm='auto', leaf_size=30, metric='minkowski',
                     metric_params=None, n_jobs=None, n_neighbors=4, p=2,
                     weights='distance')

y_knn_expanded_pred = knn_clf.predict(X_test)

accuracy_score(y_test, y_knn_expanded_pred)

0.9763

ambiguous_digit = X_test[2589]
knn_clf.predict_proba([ambiguous_digit])

array([[0.24579675, 0.          , 0.          , 0.          , 0.          ,
       0.          , 0.          , 0.          , 0.75420325]])
```

plot_digit(ambiguous_digit)



▼ Exercise solutions

▼ 1. An MNIST Classifier With Over 97% Accuracy

Warning: the next cell may take close to 16 hours to run, or more depending on your hardware.

```
from sklearn.model_selection import GridSearchCV

param_grid = [ {'weights': ["uniform", "distance"], 'n_neighbors': [3, 4, 5]}]

knn_clf = KNeighborsClassifier()
grid_search = GridSearchCV(knn_clf, param_grid, cv=5, verbose=3)
grid_search.fit(X_train, y_train)

Fitting 5 folds for each of 6 candidates, totalling 30 fits
[CV] n_neighbors=3, weights=uniform .....
[Parallel(n_jobs=1)]: Using backend SequentialBackend with 1 concurrent workers.
[CV] ..... n_neighbors=3, weights=uniform, score=0.972, total=17.0min
[CV] n_neighbors=3, weights=uniform .....
[Parallel(n_jobs=1)]: Done 1 out of 1 | elapsed: 17.0min remaining: 0.0s
[CV] ..... n_neighbors=3, weights=uniform, score=0.971, total=17.0min
[CV] n_neighbors=3, weights=uniform .....
[Parallel(n_jobs=1)]: Done 2 out of 2 | elapsed: 34.0min remaining: 0.0s
[CV] ..... n_neighbors=3, weights=uniform, score=0.969, total=17.0min
[CV] n_neighbors=3, weights=uniform .....
[CV] ..... n_neighbors=3, weights=uniform, score=0.969, total=16.9min
[CV] n_neighbors=3, weights=uniform .....
[CV] ..... n_neighbors=3, weights=uniform, score=0.970, total=17.0min
[CV] n_neighbors=3, weights=distance .....
[CV] ..... n_neighbors=3, weights=distance, score=0.972, total=16.9min
[CV] n_neighbors=3, weights=distance .....
[CV] ..... n_neighbors=3, weights=distance, score=0.972, total=17.0min
[CV] n_neighbors=3, weights=distance .....
[CV] ..... n_neighbors=3, weights=distance, score=0.970, total=16.9min
[CV] n_neighbors=3, weights=distance .....
```

```
grid_search.best_params_
```

```
grid_search.best_score_
```

```
from sklearn.metrics import accuracy_score

y_pred = grid_search.predict(X_test)
accuracy_score(y_test, y_pred)
```

▼ 2. Data Augmentation

```
from scipy.ndimage.interpolation import shift

def shift_image(image, dx, dy):
    image = image.reshape((28, 28))
    shifted_image = shift(image, [dy, dx], cval=0, mode="constant")
    return shifted_image.reshape([-1])

image = X_train[1000]
shifted_image_down = shift_image(image, 0, 5)
shifted_image_left = shift_image(image, -5, 0)

plt.figure(figsize=(12,3))
plt.subplot(131)
plt.title("Original", fontsize=14)
plt.imshow(image.reshape(28, 28), interpolation="nearest", cmap="Greys")
plt.subplot(132)
plt.title("Shifted down", fontsize=14)
plt.imshow(shifted_image_down.reshape(28, 28), interpolation="nearest", cmap="Greys")
plt.subplot(133)
plt.title("Shifted left", fontsize=14)
plt.imshow(shifted_image_left.reshape(28, 28), interpolation="nearest", cmap="Greys")
plt.show()

X_train_augmented = [image for image in X_train]
y_train_augmented = [label for label in y_train]

for dx, dy in ((1, 0), (-1, 0), (0, 1), (0, -1)):
    for image, label in zip(X_train, y_train):
        X_train_augmented.append(shift_image(image, dx, dy))
        y_train_augmented.append(label)

X_train_augmented = np.array(X_train_augmented)
y_train_augmented = np.array(y_train_augmented)

shuffle_idx = np.random.permutation(len(X_train_augmented))
X_train_augmented = X_train_augmented[shuffle_idx]
y_train_augmented = y_train_augmented[shuffle_idx]

knn_clf = KNeighborsClassifier(**grid_search.best_params_)
```

```
knn_clf.fit(X_train_augmented, y_train_augmented)
```

Warning: the following cell may take close to an hour to run, depending on your hardware.

```
y_pred = knn_clf.predict(X_test)  
accuracy_score(y_test, y_pred)
```

By simply augmenting the data, we got a 0.5% accuracy boost. :)

▼ 3. Tackle the Titanic dataset

The goal is to predict whether or not a passenger survived based on attributes such as their age, sex, passenger class, where they embarked and so on.

First, login to [Kaggle](#) and go to the [Titanic challenge](#) to download `train.csv` and `test.csv`. Save them to the `datasets/titanic` directory.

Next, let's load the data:

```
import os  
  
TITANIC_PATH = os.path.join("datasets", "titanic")  
  
import pandas as pd  
  
def load_titanic_data(filename, titanic_path=TITANIC_PATH):  
    csv_path = os.path.join(titanic_path, filename)  
    return pd.read_csv(csv_path)  
  
train_data = load_titanic_data("train.csv")  
test_data = load_titanic_data("test.csv")
```

The data is already split into a training set and a test set. However, the test data does *not* contain the labels: your goal is to train the best model you can using the training data, then make your predictions on the test data and upload them to Kaggle to see your final score.

Let's take a peek at the top few rows of the training set:

```
train_data.head()
```

The attributes have the following meaning:

- **Survived**: that's the target, 0 means the passenger did not survive, while 1 means he/she survived.
- **Pclass**: passenger class.
- **Name, Sex, Age**: self-explanatory
- **SibSp**: how many siblings & spouses of the passenger aboard the Titanic.
- **Parch**: how many children & parents of the passenger aboard the Titanic.
- **Ticket**: ticket id
- **Fare**: price paid (in pounds)
- **Cabin**: passenger's cabin number
- **Embarked**: where the passenger embarked the Titanic

Let's get more info to see how much data is missing:

```
train_data.info()
```

Okay, the **Age**, **Cabin** and **Embarked** attributes are sometimes null (less than 891 non-null), especially the **Cabin** (77% are null). We will ignore the **Cabin** for now and focus on the rest. The **Age** attribute has about 19% null values, so we will need to decide what to do with them. Replacing null values with the median age seems reasonable.

The **Name** and **Ticket** attributes may have some value, but they will be a bit tricky to convert into useful numbers that a model can consume. So for now, we will ignore them.

Let's take a look at the numerical attributes:

```
train_data.describe()
```

- Yikes, only 38% **Survived**. :(That's close enough to 40%, so accuracy will be a reasonable metric to evaluate our model.
- The mean **Fare** was £32.20, which does not seem so expensive (but it was probably a lot of money back then).
- The mean **Age** was less than 30 years old.

Let's check that the target is indeed 0 or 1:

```
train_data["Survived"].value_counts()
```

Now let's take a quick look at all the categorical attributes:

```
train_data["Pclass"].value_counts()
```

```
train_data["Sex"].value_counts()
```

```
train_data["Embarked"].value_counts()
```

The Embarked attribute tells us where the passenger embarked: C=Cherbourg, Q=Queenstown, S=Southampton.

Note: the code below uses a mix of `Pipeline`, `FeatureUnion` and a custom `DataFrameSelector` to preprocess some columns differently. Since Scikit-Learn 0.20, it is preferable to use a `ColumnTransformer`, like in the previous chapter.

Now let's build our preprocessing pipelines. We will reuse the `DataframeSelector` we built in the previous chapter to select specific attributes from the `DataFrame`:

```
from sklearn.base import BaseEstimator, TransformerMixin

class DataFrameSelector(BaseEstimator, TransformerMixin):
    def __init__(self, attribute_names):
        self.attribute_names = attribute_names
    def fit(self, X, y=None):
        return self
    def transform(self, X):
        return X[self.attribute_names]
```

Let's build the pipeline for the numerical attributes:

```
from sklearn.pipeline import Pipeline
from sklearn.impute import SimpleImputer

num_pipeline = Pipeline([
    ("select_numeric", DataFrameSelector(["Age", "SibSp", "Parch", "Fare"])),
    ("imputer", SimpleImputer(strategy="median")),
])

```

```
num_pipeline.fit_transform(train_data)
```

We will also need an imputer for the string categorical columns (the regular `SimpleImputer` does not work on those):

```
# Inspired from stackoverflow.com/questions/25239958
class MostFrequentImputer(BaseEstimator, TransformerMixin):
    def fit(self, X, y=None):
        self.most_frequent_ = pd.Series([X[c].value_counts().index[0] for c in X],
                                        index=X.columns)
        return self
    def transform(self, X, y=None):
        return X.fillna(self.most_frequent_)

from sklearn.preprocessing import OneHotEncoder
```

Now we can build the pipeline for the categorical attributes:

```
cat_pipeline = Pipeline([
    ("select_cat", DataFrameSelector(["Pclass", "Sex", "Embarked"])),
    ("imputer", MostFrequentImputer()),
    ("cat_encoder", OneHotEncoder(sparse=False)),
])
cat_pipeline.fit_transform(train_data)
```

Finally, let's join the numerical and categorical pipelines:

```
from sklearn.pipeline import FeatureUnion
preprocess_pipeline = FeatureUnion(transformer_list=[
    ("num_pipeline", num_pipeline),
    ("cat_pipeline", cat_pipeline),
])
```

Cool! Now we have a nice preprocessing pipeline that takes the raw data and outputs numerical input features that we can feed to any Machine Learning model we want.

```
X_train = preprocess_pipeline.fit_transform(train_data)
X_train
```

Let's not forget to get the labels:

```
y_train = train_data["Survived"]
```

We are now ready to train a classifier. Let's start with an SVC:

```
from sklearn.svm import SVC  
  
svm_clf = SVC(gamma="auto")  
svm_clf.fit(X_train, y_train)
```

Great, our model is trained, let's use it to make predictions on the test set:

```
X_test = preprocess_pipeline.transform(test_data)  
y_pred = svm_clf.predict(X_test)
```

And now we could just build a CSV file with these predictions (respecting the format excepted by Kaggle), then upload it and hope for the best. But wait! We can do better than hope. Why don't we use cross-validation to have an idea of how good our model is?

```
from sklearn.model_selection import cross_val_score  
  
svm_scores = cross_val_score(svm_clf, X_train, y_train, cv=10)  
svm_scores.mean()
```

Okay, over 73% accuracy, clearly better than random chance, but it's not a great score. Looking at the [leaderboard](#) for the Titanic competition on Kaggle, you can see that you need to reach above 80% accuracy to be within the top 10% Kagglers. Some reached 100%, but since you can easily find the [list of victims](#) of the Titanic, it seems likely that there was little Machine Learning involved in their performance! ;-) So let's try to build a model that reaches 80% accuracy.

Let's try a RandomForestClassifier:

```
from sklearn.ensemble import RandomForestClassifier  
  
forest_clf = RandomForestClassifier(n_estimators=100, random_state=42)  
forest_scores = cross_val_score(forest_clf, X_train, y_train, cv=10)  
forest_scores.mean()
```

That's much better!

Instead of just looking at the mean accuracy across the 10 cross-validation folds, let's plot all 10 scores for each model, along with a box plot highlighting the lower and upper quartiles, and "whiskers" showing the extent of the scores (thanks to Nevin Yilmaz for suggesting this visualization). Note that the `boxplot()` function detects outliers (called "fliers") and does not include them within the whiskers. Specifically, if the lower quartile is Q_1 and the upper quartile is Q_3 , then the interquartile range $IQR = Q_3 - Q_1$ (this is the box's height), and any score lower than $Q_1 - 1.5 \times IQR$ is a flier, and so is any score greater than $Q_3 + 1.5 \times IQR$.

```
plt.figure(figsize=(8, 4))
plt.plot([1]*10, svm_scores, ".")
plt.plot([2]*10, forest_scores, ".")
plt.boxplot([svm_scores, forest_scores], labels=("SVM", "Random Forest"))
plt.ylabel("Accuracy", fontsize=14)
plt.show()
```

To improve this result further, you could:

- Compare many more models and tune hyperparameters using cross validation and grid search,
- Do more feature engineering, for example:
 - replace **SibSp** and **Parch** with their sum,
 - try to identify parts of names that correlate well with the **Survived** attribute (e.g. if the name contains "Countess", then survival seems more likely),
- try to convert numerical attributes to categorical attributes: for example, different age groups had very different survival rates (see below), so it may help to create an age bucket category and use it instead of the age. Similarly, it may be useful to have a special category for people traveling alone since only 30% of them survived (see below).

```
train_data["AgeBucket"] = train_data["Age"] // 15 * 15
train_data[["AgeBucket", "Survived"]].groupby(['AgeBucket']).mean()

train_data["RelativesOnboard"] = train_data["SibSp"] + train_data["Parch"]
train_data[["RelativesOnboard", "Survived"]].groupby(['RelativesOnboard']).mean()
```

▼ 4. Spam classifier

First, let's fetch the data:

```
import os
https://colab.research.google.com/drive/1-8WuPU6TeU8pQncTHDX5mzhO7tDXE415#scrollTo=xPAU0IZL4JU9&printMode=true
```

```

import tarfile
import urllib.request

DOWNLOAD_ROOT = "http://spamassassin.apache.org/old/publiccorpus/"
HAM_URL = DOWNLOAD_ROOT + "20030228_easy_ham.tar.bz2"
SPAM_URL = DOWNLOAD_ROOT + "20030228_spam.tar.bz2"
SPAM_PATH = os.path.join("datasets", "spam")

def fetch_spam_data(ham_url=HAM_URL, spam_url=SPAM_URL, spam_path=SPAM_PATH):
    if not os.path.isdir(spam_path):
        os.makedirs(spam_path)
    for filename, url in (("ham.tar.bz2", ham_url), ("spam.tar.bz2", spam_url)):
        path = os.path.join(spam_path, filename)
        if not os.path.isfile(path):
            urllib.request.urlretrieve(url, path)
            tar_bz2_file = tarfile.open(path)
            tar_bz2_file.extractall(path=spam_path)
            tar_bz2_file.close()

fetch_spam_data()

```

Next, let's load all the emails:

```

HAM_DIR = os.path.join(SPAM_PATH, "easy_ham")
SPAM_DIR = os.path.join(SPAM_PATH, "spam")
ham_filenames = [name for name in sorted(os.listdir(HAM_DIR)) if len(name) > 20]
spam_filenames = [name for name in sorted(os.listdir(SPAM_DIR)) if len(name) > 20]

len(ham_filenames)

len(spam_filenames)

```

We can use Python's `email` module to parse these emails (this handles headers, encoding, and so on):

```

import email
import email.policy

def load_email(is_spam, filename, spam_path=SPAM_PATH):
    directory = "spam" if is_spam else "easy_ham"
    with open(os.path.join(spam_path, directory, filename), "rb") as f:
        return email.parser.BytesParser(policy=email.policy.default).parse(f)

ham_emails = [load_email(is_spam=False, filename=name) for name in ham_filenames]
spam_emails = [load_email(is_spam=True, filename=name) for name in spam_filenames]

```

Let's look at one example of ham and one example of spam, to get a feel of what the data looks like:

```
print(ham_emails[1].get_content().strip())
```

```
print(spam_emails[6].get_content().strip())
```

Some emails are actually multipart, with images and attachments (which can have their own attachments). Let's look at the various types of structures we have:

```
def get_email_structure(email):
    if isinstance(email, str):
        return email
    payload = email.get_payload()
    if isinstance(payload, list):
        return "multipart({})".format(", ".join([
            get_email_structure(sub_email)
            for sub_email in payload
        ]))
    else:
        return email.get_content_type()
```

```
from collections import Counter
```

```
def structures_counter(emails):
    structures = Counter()
    for email in emails:
        structure = get_email_structure(email)
        structures[structure] += 1
    return structures
```

```
structures_counter(ham_emails).most_common()
```

```
structures_counter(spam_emails).most_common()
```

It seems that the ham emails are more often plain text, while spam has quite a lot of HTML. Moreover, quite a few ham emails are signed using PGP, while no spam is. In short, it seems that the email structure is useful information to have.

Now let's take a look at the email headers:

```
for header, value in spam_emails[0].items():
    print(header,":",value)
```

There's probably a lot of useful information in there, such as the sender's email address (12a1mailbot1@web.de looks fishy), but we will just focus on the `Subject` header:

```
spam_emails[0]["Subject"]
```

Okay, before we learn too much about the data, let's not forget to split it into a training set and a test set:

```
import numpy as np
from sklearn.model_selection import train_test_split

X = np.array(ham_emails + spam_emails, dtype=object)
y = np.array([0] * len(ham_emails) + [1] * len(spam_emails))

X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.2, random_state=42)
```

Okay, let's start writing the preprocessing functions. First, we will need a function to convert HTML to plain text. Arguably the best way to do this would be to use the great [BeautifulSoup](#) library, but I would like to avoid adding another dependency to this project, so let's hack a quick & dirty solution using regular expressions (at the risk of [unholy radiańcę destroying all enlightenment](#)). The following function first drops the `<head>` section, then converts all `<a>` tags to the word HYPERLINK, then it gets rid of all HTML tags, leaving only the plain text. For readability, it also replaces multiple newlines with single newlines, and finally it unescapes html entities (such as `>` or `&nbsp`):

```
import re
from html import unescape

def html_to_plain_text(html):
    text = re.sub('<head.*?>.*?</head>', '', html, flags=re.M | re.S | re.I)
    text = re.sub('<a\s.*?>', ' HYPERLINK ', text, flags=re.M | re.S | re.I)
    text = re.sub('<.*?>', '', text, flags=re.M | re.S)
    text = re.sub(r'(\s*\n)+', '\n', text, flags=re.M | re.S)
    return unescape(text)
```

Let's see if it works. This is HTML spam:

```
html_spam_emails = [email for email in X_train[y_train==1]
                    if get_email_structure(email) == "text/html"]
```

```
sample_html_spam = html_spam_emails[1]
print(sample_html_spam.get_content().strip()[:1000], "...")
```

And this is the resulting plain text:

```
print(html_to_plain_text(sample_html_spam.get_content())[:1000], "...")
```

Great! Now let's write a function that takes an email as input and returns its content as plain text, whatever its format is:

```
def email_to_text(email):
    html = None
    for part in email.walk():
        ctype = part.get_content_type()
        if not ctype in ("text/plain", "text/html"):
            continue
        try:
            content = part.get_content()
        except: # in case of encoding issues
            content = str(part.get_payload())
        if ctype == "text/plain":
            return content
        else:
            html = content
    if html:
        return html_to_plain_text(html)
```

```
print(email_to_text(sample_html_spam)[:100], "...")
```

Let's throw in some stemming! For this to work, you need to install the Natural Language Toolkit ([NLTK](#)). It's as simple as running the following command (don't forget to activate your virtualenv first; if you don't have one, you will likely need administrator rights, or use the --user option):

```
$ pip3 install nltk
```

```
try:  
    import nltk  
  
    stemmer = nltk.PorterStemmer()  
    for word in ("Computations", "Computation", "Computing", "Computed", "Compute", "Compulsi  
        print(word, "=>", stemmer.stem(word))  
except ImportError:  
    print("Error: stemming requires the NLTK module.")  
    stemmer = None
```

We will also need a way to replace URLs with the word "URL". For this, we could use hard core [regular expressions](#) but we will just use the [urlextract](#) library. You can install it with the following command (don't forget to activate your virtualenv first; if you don't have one, you will likely need administrator rights, or use the --user option):

```
$ pip3 install urlextract
```

```
# if running this notebook on Colab or Kaggle, we just pip install urlextract
if IS_COLAB or IS_KAGGLE:
    !pip install -q -U urlextract

try:
    import urlextract # may require an Internet connection to download root domain names

    url_extractor = urlextract.URLExtract()
    print(url_extractor.find_urls("Will it detect github.com and https://youtu.be/7Pq-S557XQU"))
except ImportError:
    print("Error: replacing URLs requires the urlextract module.")
    url_extractor = None
```

We are ready to put all this together into a transformer that we will use to convert emails to word counters. Note that we split sentences into words using Python's `split()` method, which uses whitespaces for word boundaries. This works for many written languages, but not all. For example, Chinese and Japanese scripts generally don't use spaces between words, and Vietnamese often uses spaces even between syllables. It's okay in this exercise, because the dataset is (mostly) in English.

```
from sklearn.base import BaseEstimator, TransformerMixin

class EmailToWordCounterTransformer(BaseEstimator, TransformerMixin):
    def __init__(self, strip_headers=True, lower_case=True, remove_punctuation=True,
                 replace_urls=True, replace_numbers=True, stemming=True):
        self.strip_headers = strip_headers
        self.lower_case = lower_case
        self.remove_punctuation = remove_punctuation
        self.replace_urls = replace_urls
        self.replace_numbers = replace_numbers
        self.stemming = stemming
    def fit(self, X, y=None):
        return self
    def transform(self, X, y=None):
        X_transformed = []
        for email in X:
            text = email_to_text(email) or ""
            if self.lower_case:
```

```

        text = text.lower()
    if self.replace_urls and url_extractor is not None:
        urls = list(set(url_extractor.find_urls(text)))
        urls.sort(key=lambda url: len(url), reverse=True)
        for url in urls:
            text = text.replace(url, " URL ")
    if self.replace_numbers:
        text = re.sub(r'\d+(?:\.\d*)?(?:[eE][+-]?\d+)?', 'NUMBER', text)
    if self.remove_punctuation:
        text = re.sub(r'\W+', ' ', text, flags=re.M)
    word_counts = Counter(text.split())
    if self.stemming and stemmer is not None:
        stemmed_word_counts = Counter()
        for word, count in word_counts.items():
            stemmed_word = stemmer.stem(word)
            stemmed_word_counts[stemmed_word] += count
        word_counts = stemmed_word_counts
    X_transformed.append(word_counts)
return np.array(X_transformed)

```

Let's try this transformer on a few emails:

```

X_few = X_train[:3]
X_few_wordcounts = EmailToWordCounterTransformer().fit_transform(X_few)
X_few_wordcounts

```

This looks about right!

Now we have the word counts, and we need to convert them to vectors. For this, we will build another transformer whose `fit()` method will build the vocabulary (an ordered list of the most common words) and whose `transform()` method will use the vocabulary to convert word counts to vectors. The output is a sparse matrix.

```

from scipy.sparse import csr_matrix

class WordCounterVectorizer(TransformerMixin):
    def __init__(self, vocabulary_size=1000):
        self.vocabulary_size = vocabulary_size
    def fit(self, X, y=None):
        total_count = Counter()
        for word_count in X:
            for word, count in word_count.items():
                total_count[word] += min(count, 10)
        most_common = total_count.most_common()[:self.vocabulary_size]
        self.vocabulary_ = {word: index + 1 for index, (word, count) in enumerate(most_common)}
        return self
    def transform(self, X, v=None):

```

```

rows = []
cols = []
data = []
for row, word_count in enumerate(X):
    for word, count in word_count.items():
        rows.append(row)
        cols.append(self.vocabulary_.get(word, 0))
        data.append(count)
return csr_matrix((data, (rows, cols)), shape=(len(X), self.vocabulary_size + 1))

vocab_transformer = WordCounterToVectorTransformer(vocabulary_size=10)
X_few_vectors = vocab_transformer.fit_transform(X_few_wordcounts)
X_few_vectors

X_few_vectors.toarray()

```

What does this matrix mean? Well, the 99 in the second row, first column, means that the second email contains 99 words that are not part of the vocabulary. The 11 next to it means that the first word in the vocabulary is present 11 times in this email. The 9 next to it means that the second word is present 9 times, and so on. You can look at the vocabulary to know which words we are talking about. The first word is "the", the second word is "of", etc.

```
vocab_transformer.vocabulary_
```

We are now ready to train our first spam classifier! Let's transform the whole dataset:

```

from sklearn.pipeline import Pipeline

preprocess_pipeline = Pipeline([
    ("email_to_wordcount", EmailToWordCounterTransformer()),
    ("wordcount_to_vector", WordCounterToVectorTransformer()),
])
X_train_transformed = preprocess_pipeline.fit_transform(X_train)

```

Note: to be future-proof, we set `solver="lbfgs"` since this will be the default value in Scikit-Learn 0.22.

```

from sklearn.linear_model import LogisticRegression
from sklearn.model_selection import cross_val_score

log_clf = LogisticRegression(solver="lbfgs", max_iter=1000, random_state=42)
score = cross_val_score(log_clf, X_train_transformed, y_train, cv=3, verbose=3)
score.mean()

```

Over 98.5%, not bad for a first try! :) However, remember that we are using the "easy" dataset. You can try with the harder datasets, the results won't be so amazing. You would have to try multiple models, select the best ones and fine-tune them using cross-validation, and so on.

But you get the picture, so let's stop now, and just print out the precision/recall we get on the test set:

```
from sklearn.metrics import precision_score, recall_score

X_test_transformed = preprocess_pipeline.transform(X_test)

log_clf = LogisticRegression(solver="lbfgs", max_iter=1000, random_state=42)
log_clf.fit(X_train_transformed, y_train)

y_pred = log_clf.predict(X_test_transformed)

print("Precision: {:.2f}%".format(100 * precision_score(y_test, y_pred)))
print("Recall: {:.2f}%".format(100 * recall_score(y_test, y_pred)))
```

● ×

Could not connect to the reCAPTCHA service. Please check your internet connection and reload to get a reCAPTCHA challenge.