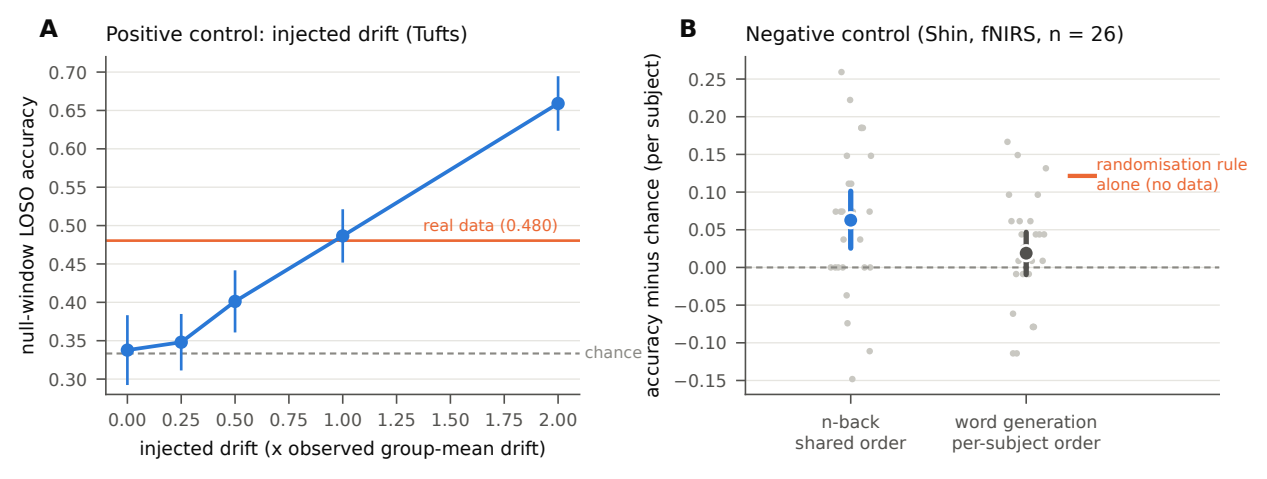
A
Positive control: injected drift (Tufts)
null-window LOSO accuracy
0.70
0.65
0.60
0.55
0.50
0.45
0.40
0.35
0.30
real data (0.480)
chance
0.00
0.25
0.50
0.75
1.00
1.25
1.50
1.75
2.00
injected drift (x observed group-mean drift)
B
Negative control (Shin, fNIRS, n = 26)
accuracy minus chance (per subject)
0.25
0.20
0.15
0.10
0.05
0.00
−0.05
−0.10
−0.15
randomisation rule
alone (no data)
n-back
shared order
word generation
per-subject order