
CSE 4303
Data Structures

Topic: Deletion on Binary Search Trees

Sabbir Ahmed
Assistant Prof | CSE | IUT
sabbirahmed@iut-dhaka.edu


Example-1

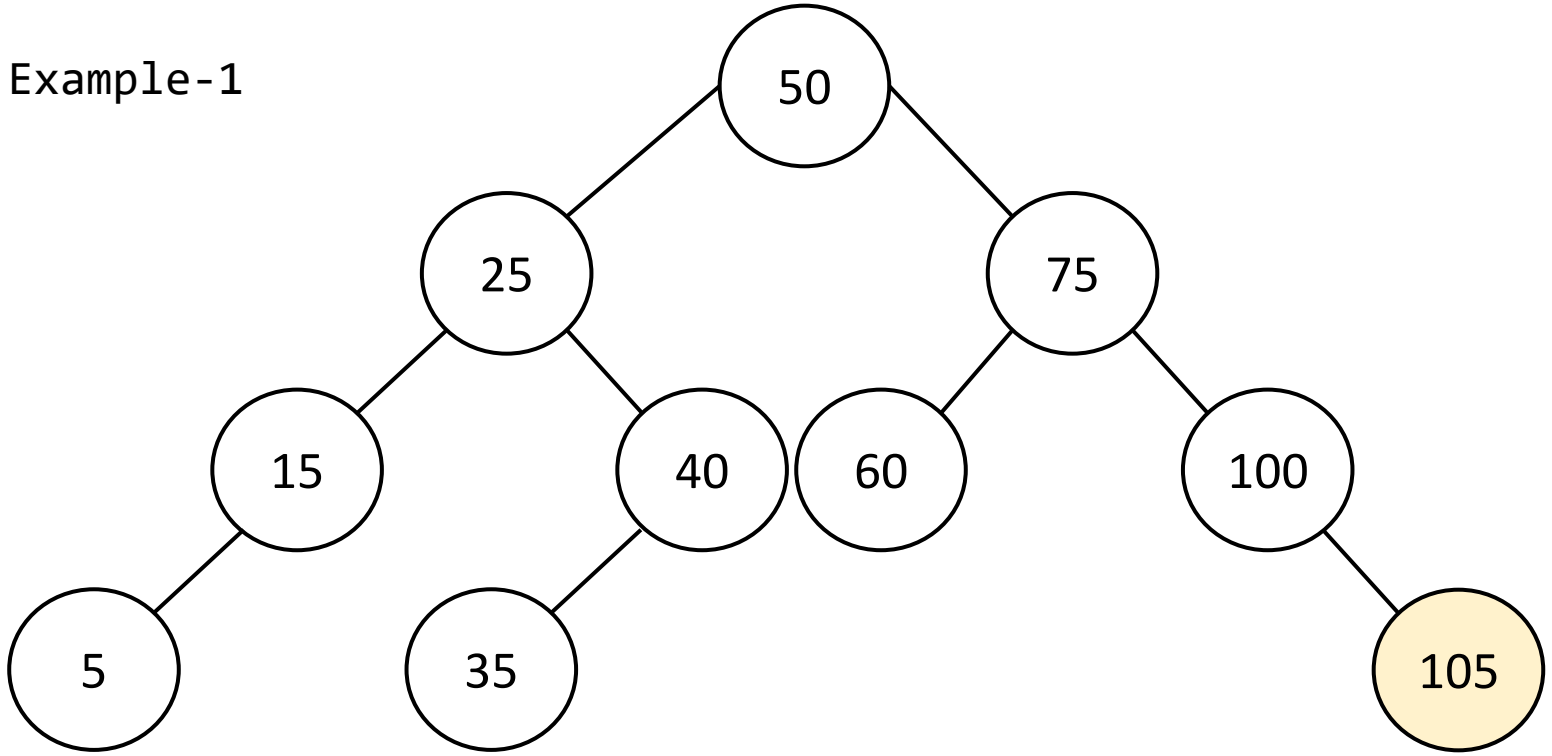

Delete Leaf

Delete(105)

Example-1

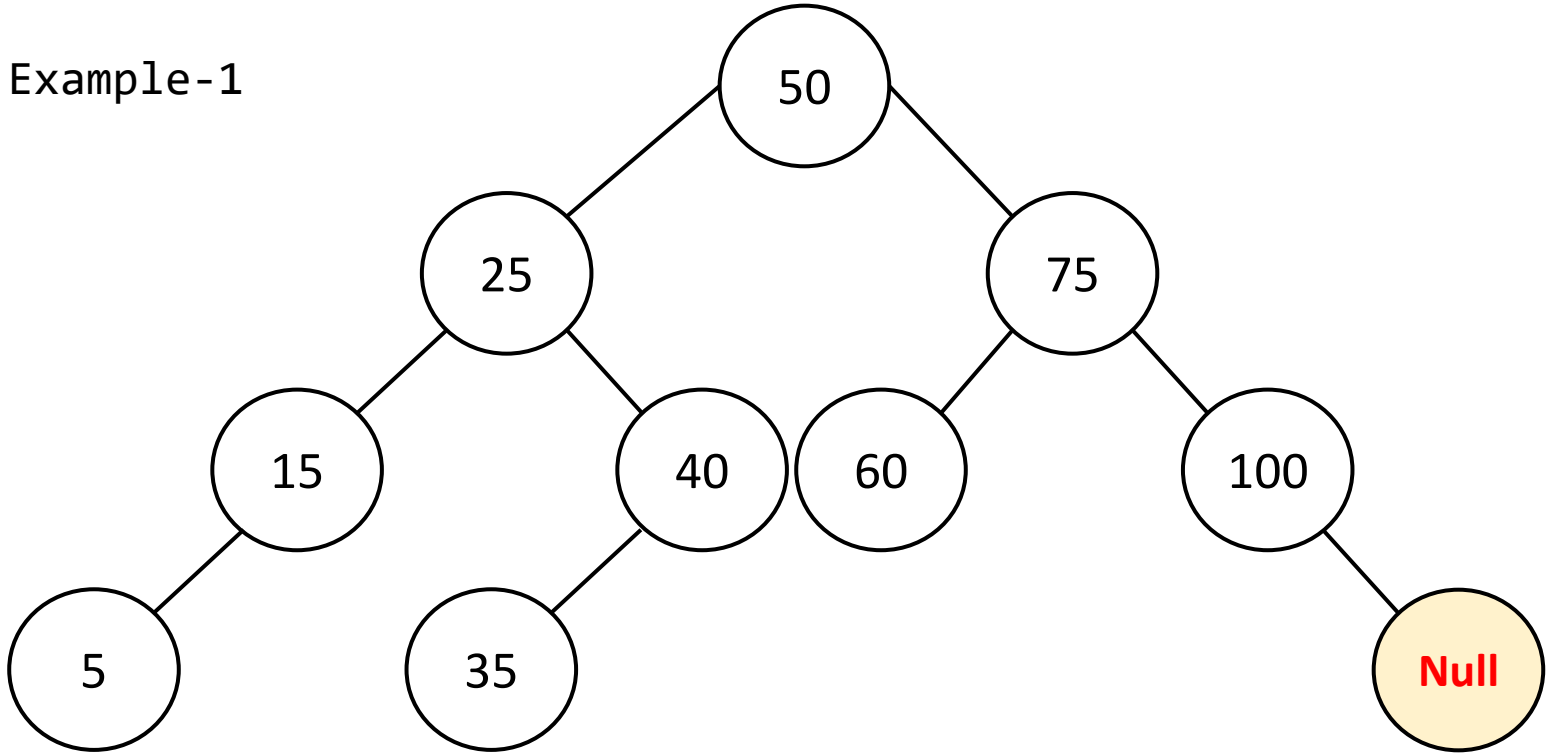


Delete Leaf

Delete(105)

- 105 has No child (leaf)
- Can be replaced by Null!

Example-1

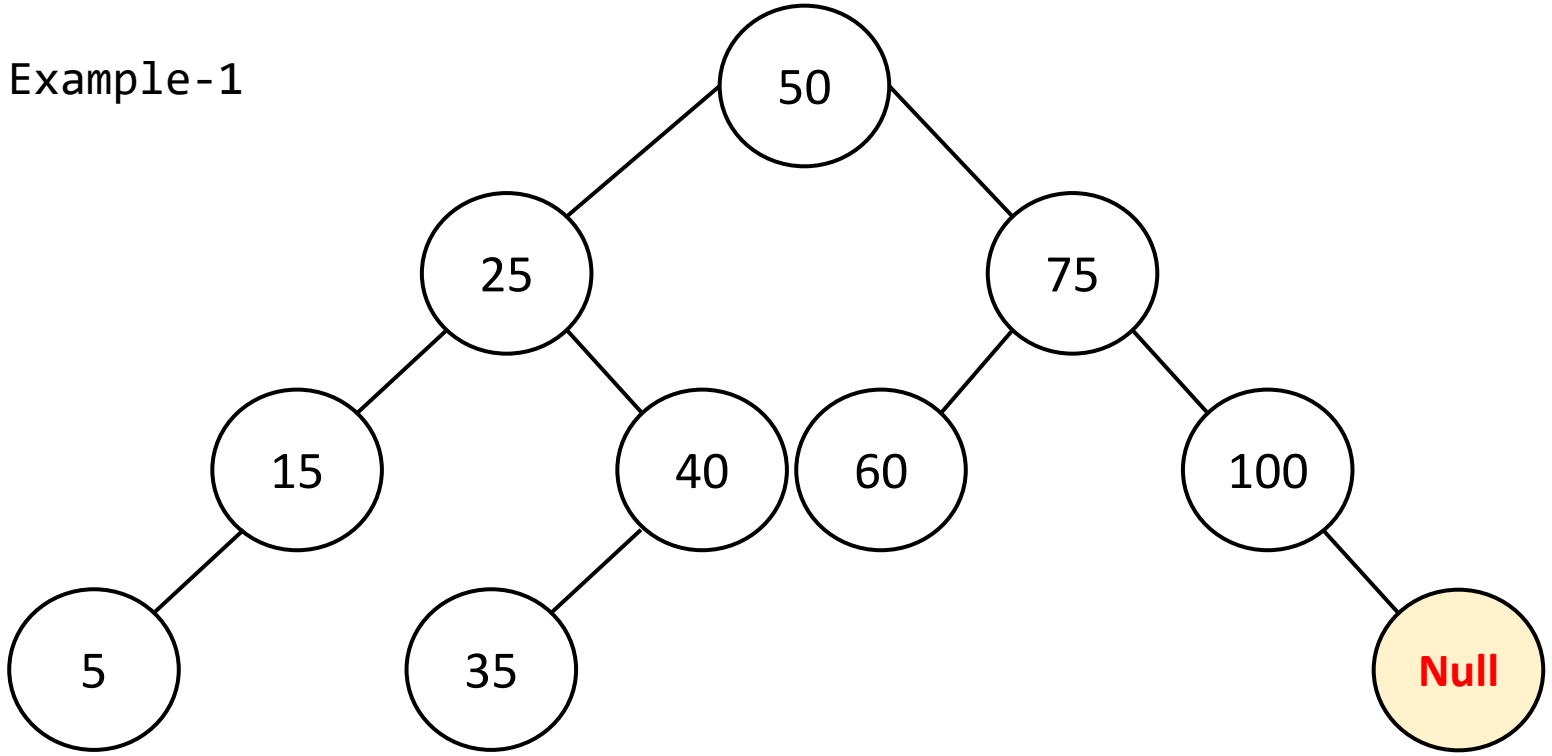


Delete Leaf

Delete(105)

- 105 has No child (leaf)
- Can be replaced by Null!

Let, z = 105 (z is the node to be deleted)

Example-1

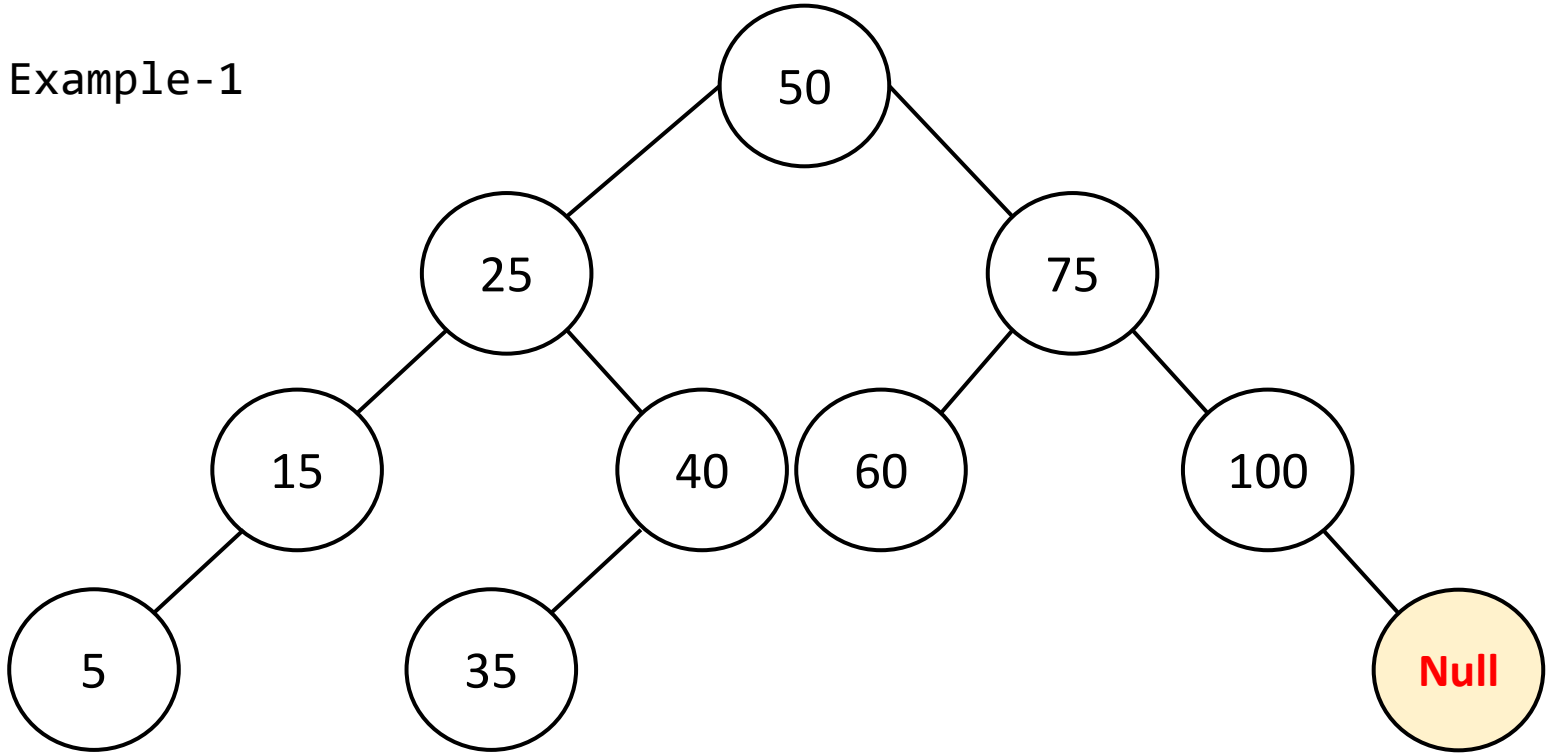

Delete Leaf


Delete(105)

- 105 has No child (leaf)
- Can be replaced by Null!

Let, z = 105 (z is the node to be deleted)

If z is the right of its parent,
z.p.right = Null

Example-1

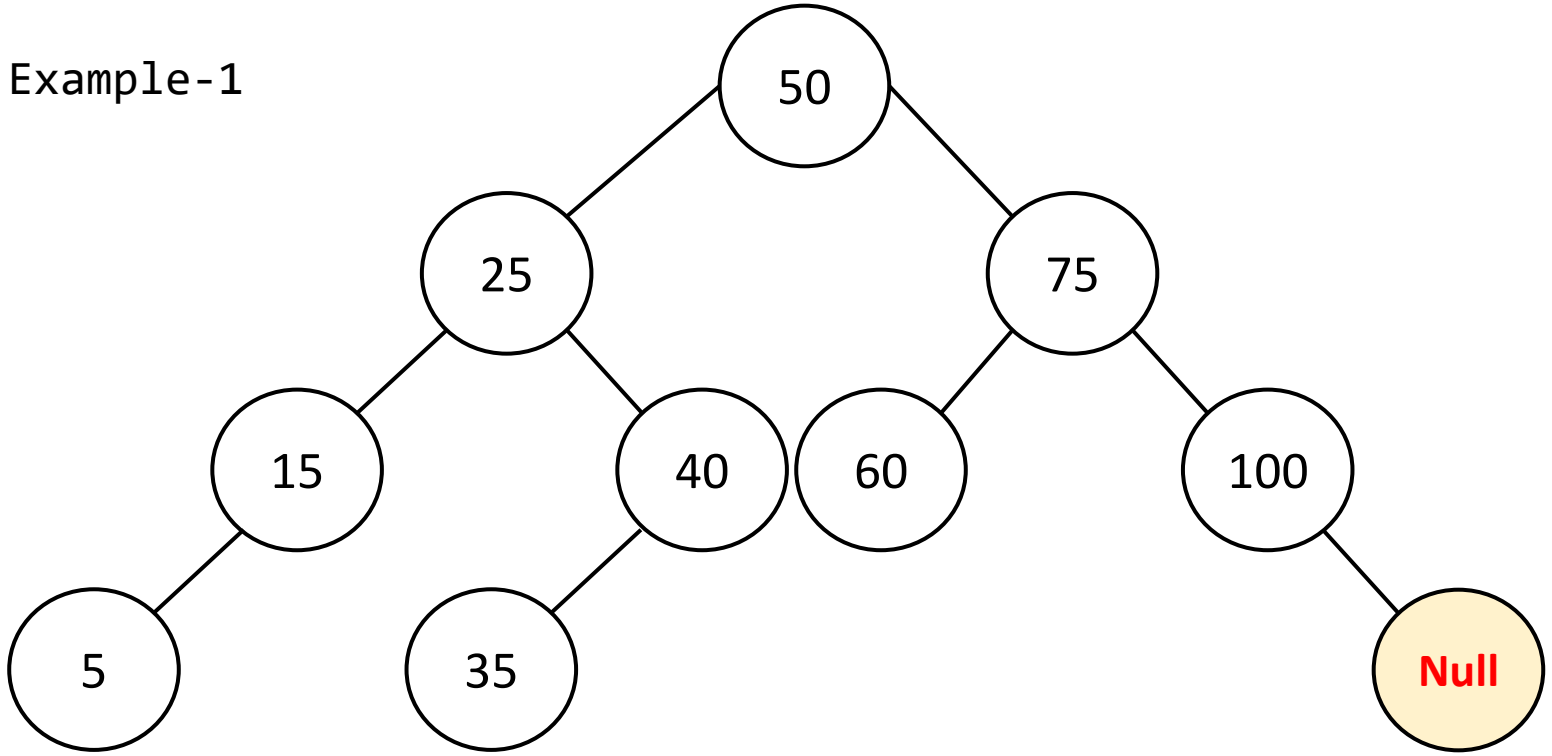

Delete Leaf

Delete(105)


- 105 has No child (leaf)
- Can be replaced by Null!

Let, z = 105 (z is the node to be deleted)

If z is the right of its parent,
z.p.right = Null

Else z.p.left = Null


Example-2

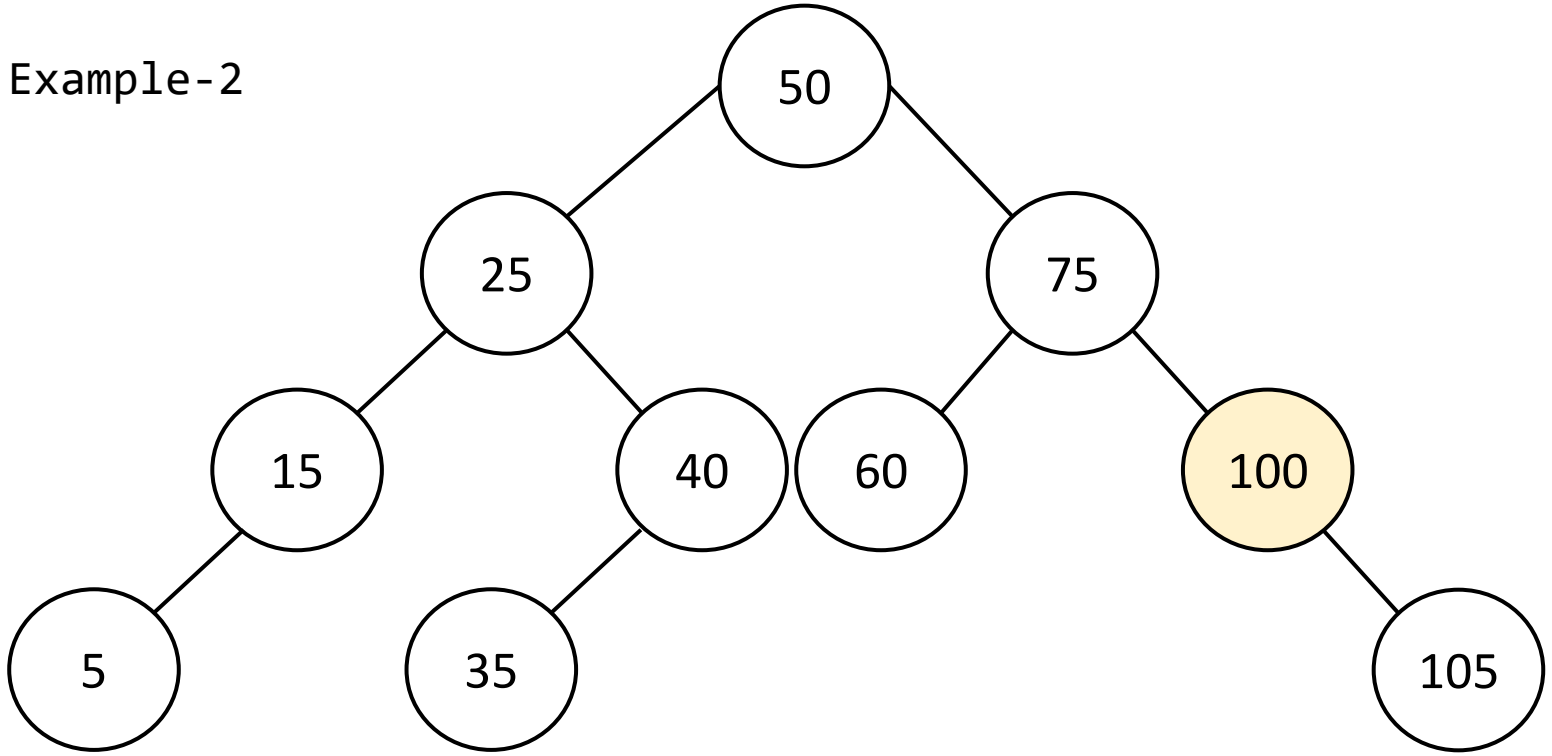

Delete Node with 1 child

Delete(100)

Example-2

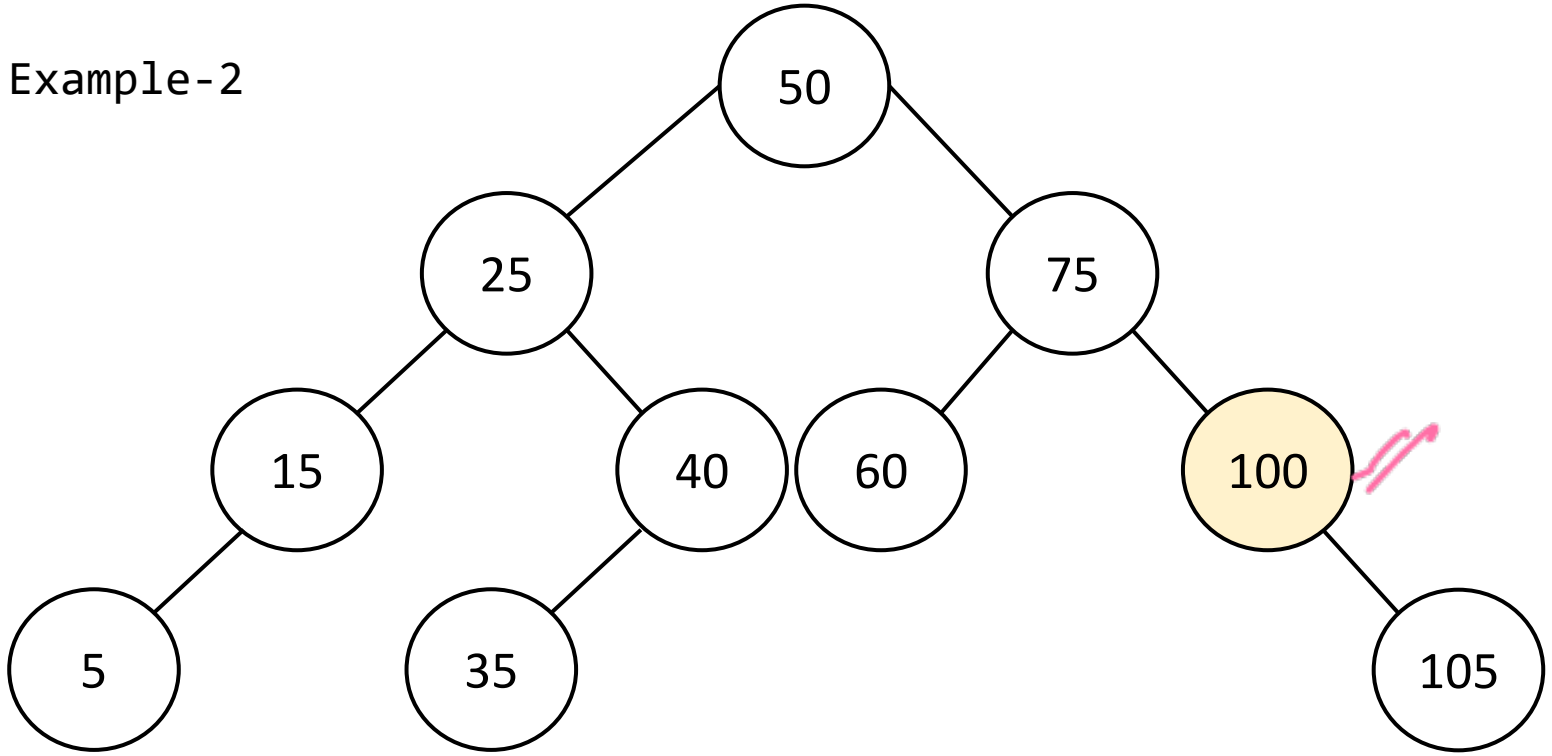


Delete Node with 1 child

Delete(100)

- z=100, has 1 subtree
- z.right in not Null, but z.left is Null

Example-2

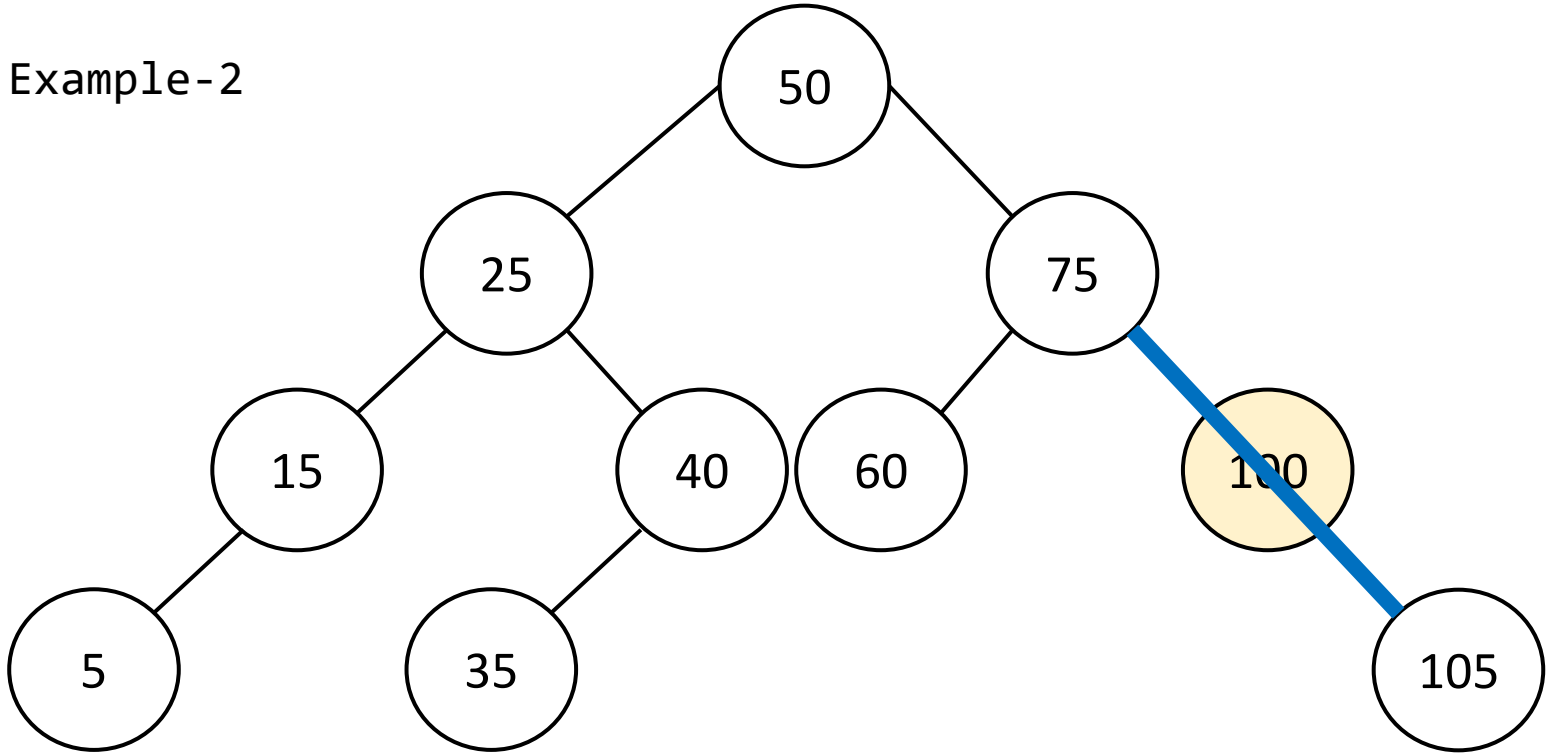


Delete Node with 1 child

Delete(100)

- z=100 has 1 subtree
- z.right in not Null, but z.left is Null

So z.right can be connected with z.p

Example-2

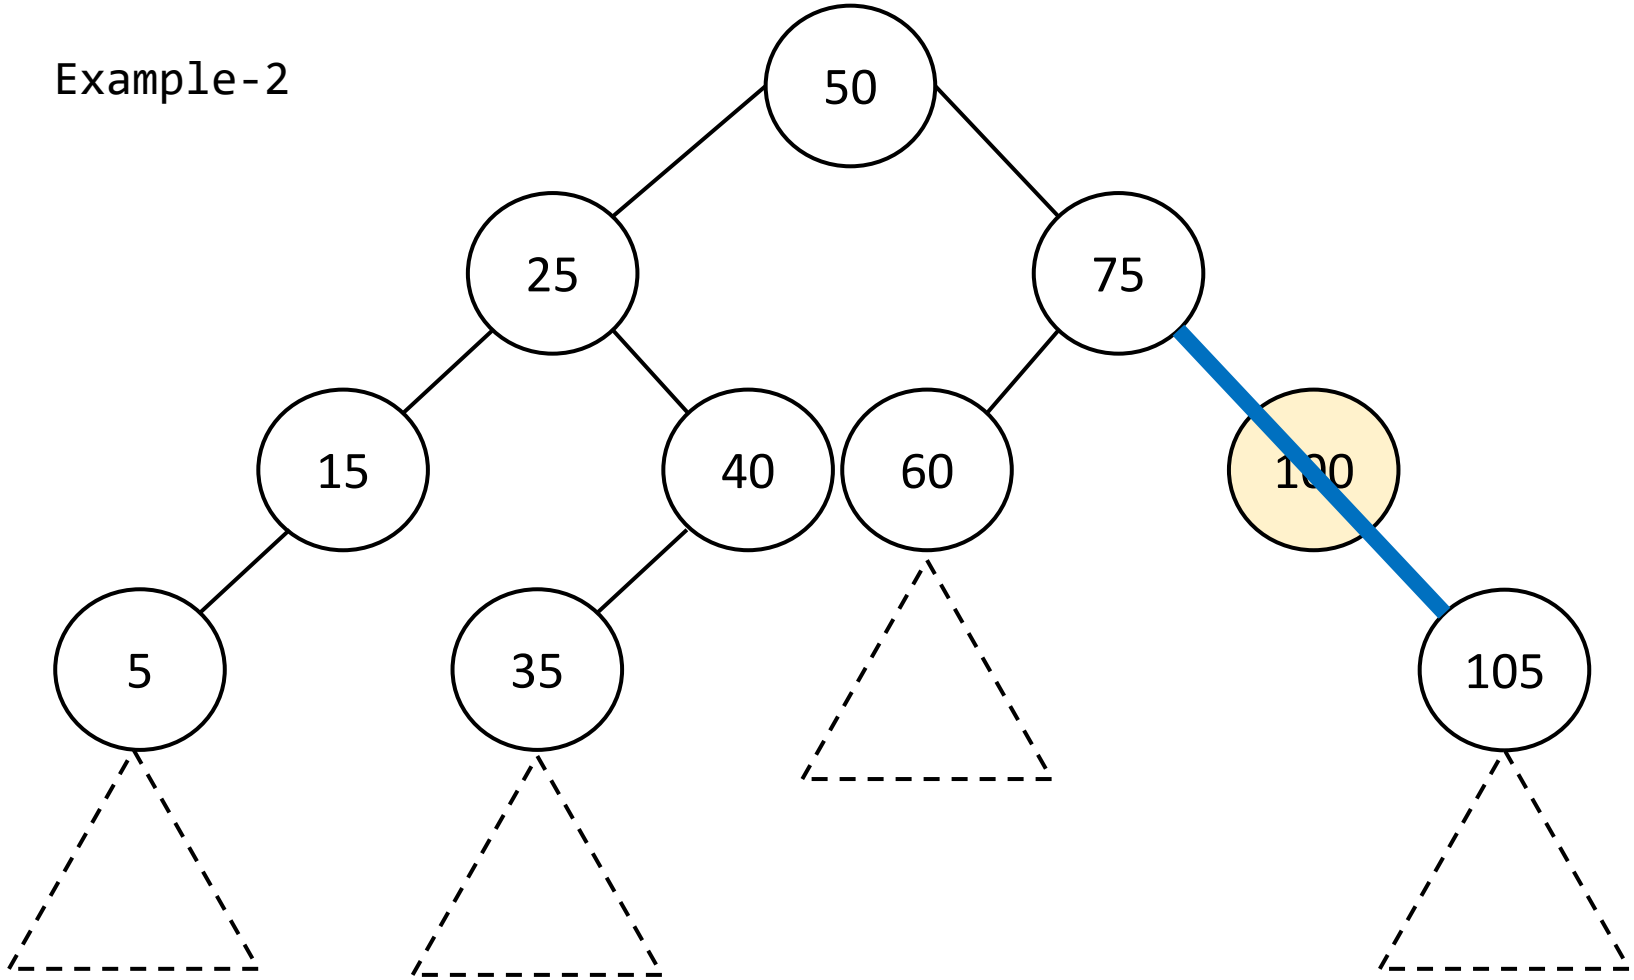

Delete Node with 1 child

Delete(100)


- z=100 has 1 subtree
- z.right in not Null, but z.left is Null

So z.right can be connected with z.p

Assume, each node has a subtree under it.

One a node is connected, the entire subtree gets connected


Example-3

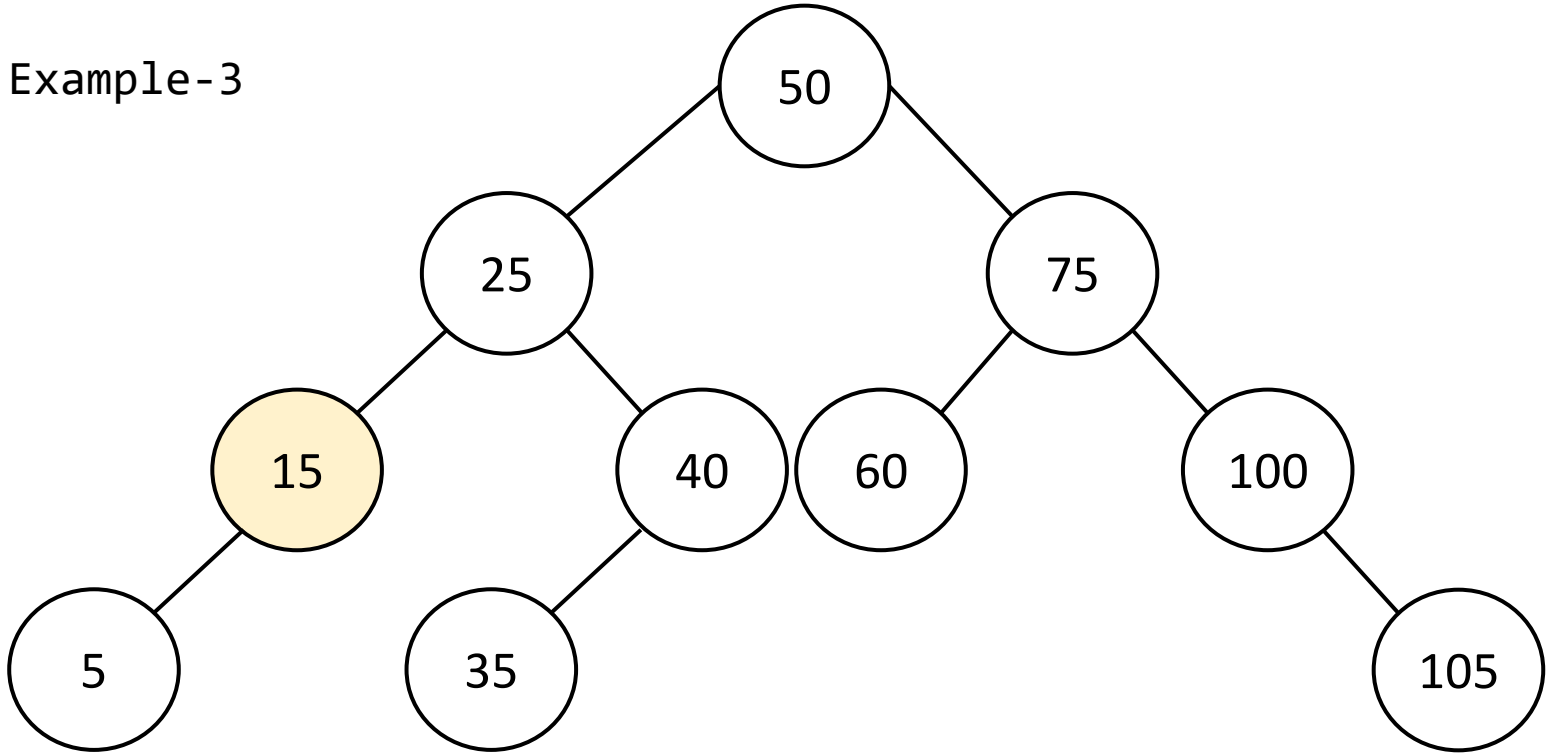

Delete Node with 1 child

Delete(15)

Example-3

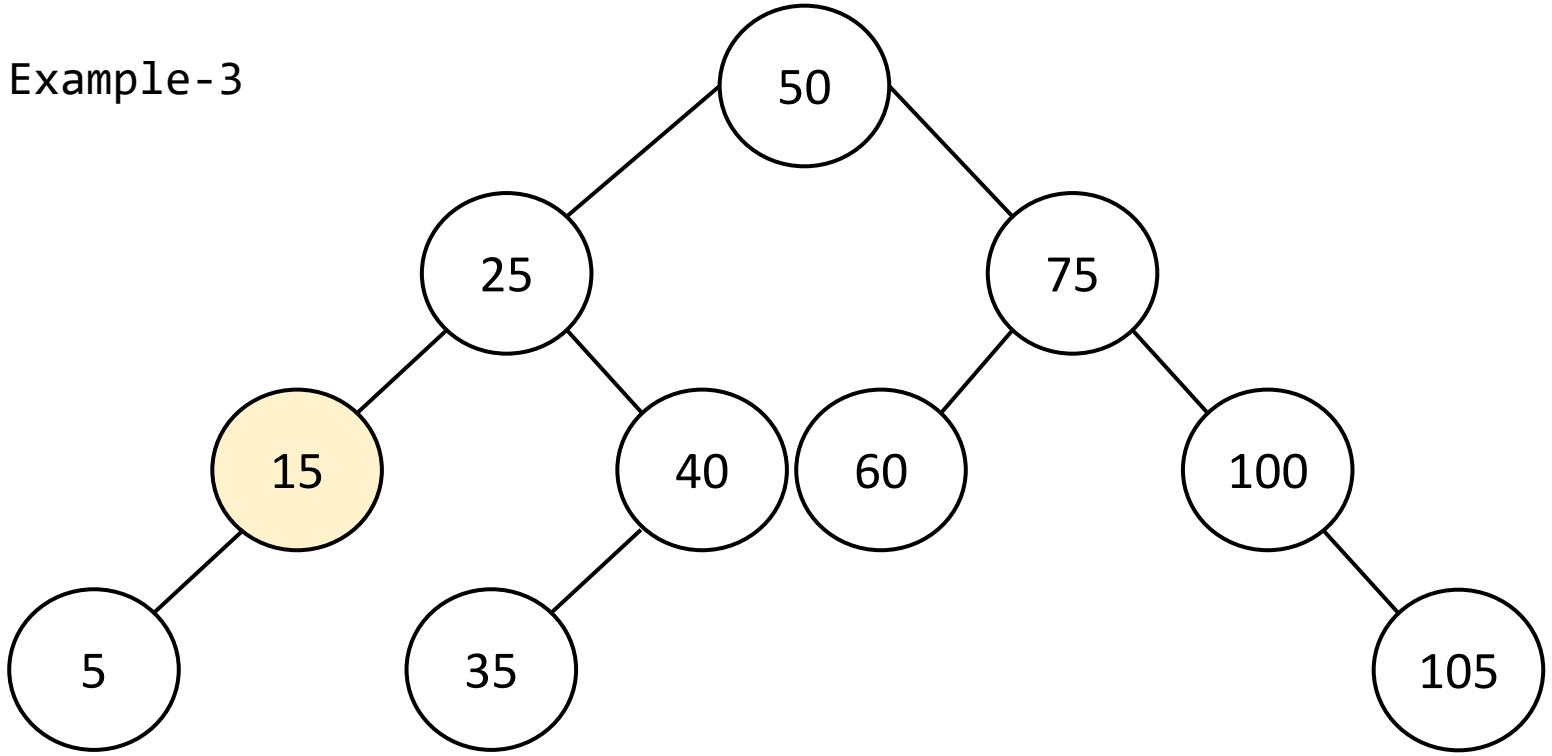


Delete Node with 1 child

Delete(15)

- z=15 has 1 subtree
- z.left is not Null, but z.right is Null

Example-3

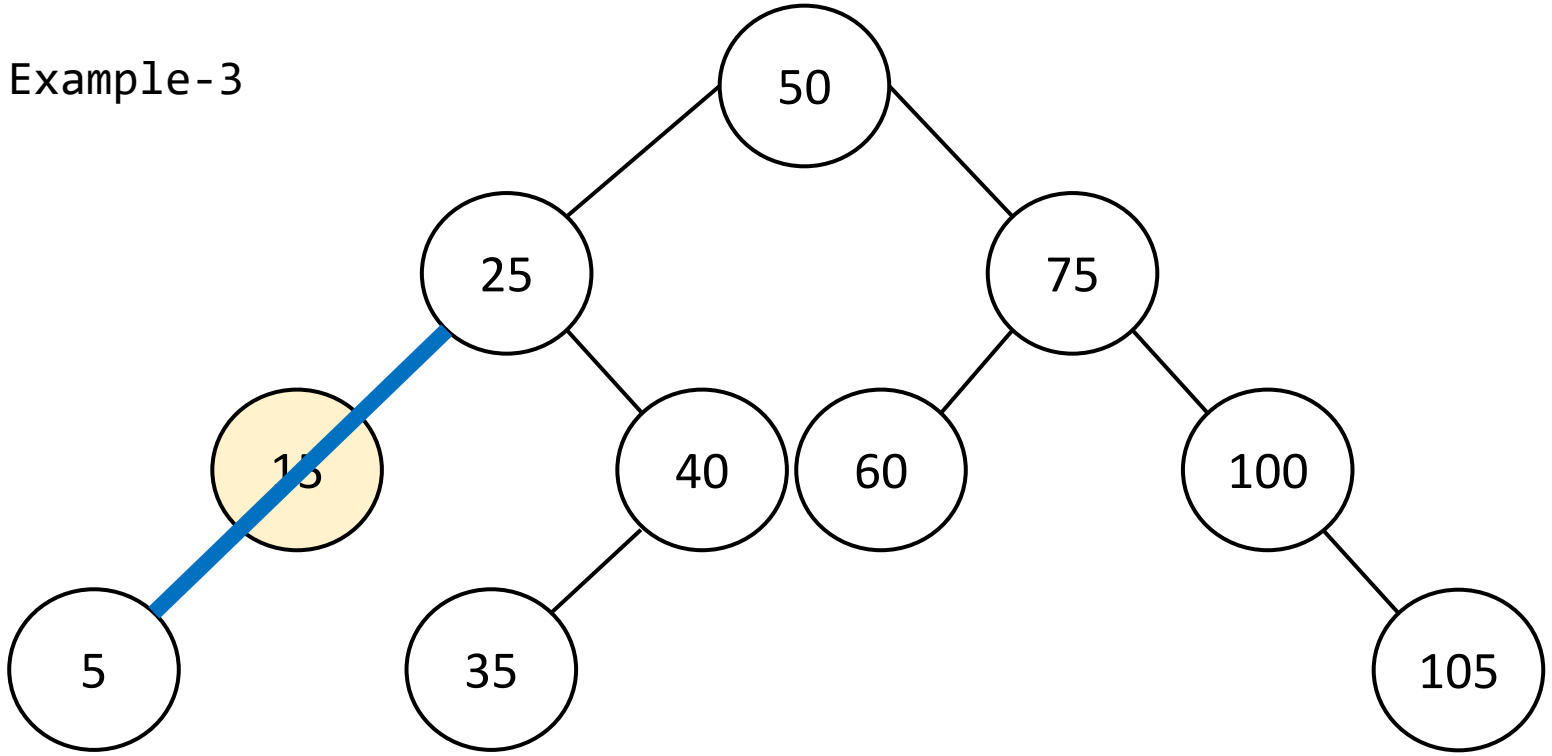


Delete Node with 1 child

Delete(15)

- z=15 has 1 subtree
- z.left is not Null, but z.right is Null

So z.left can be connected with z.p


Example-4

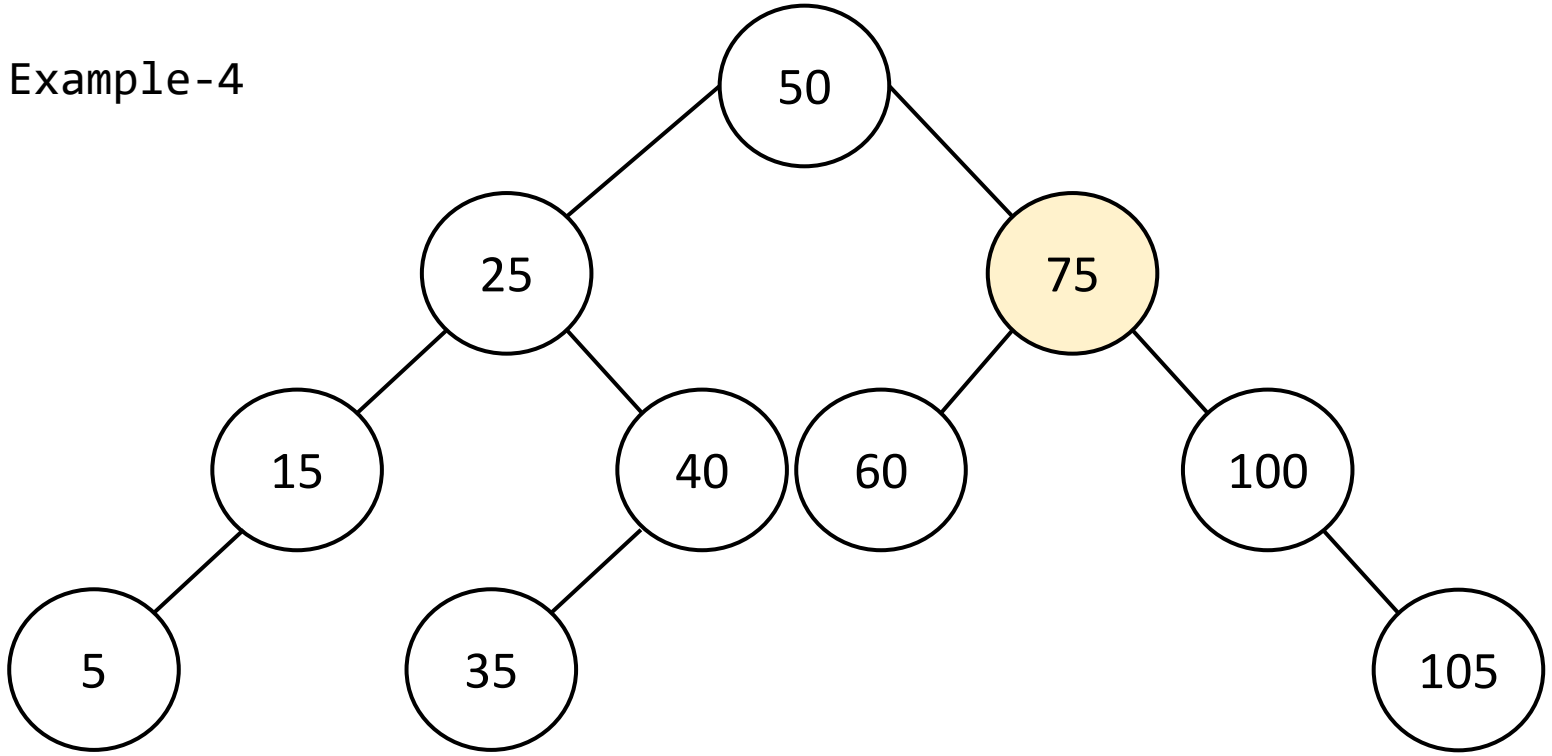

Delete Node with 2 child

Delete(75)

Example-4

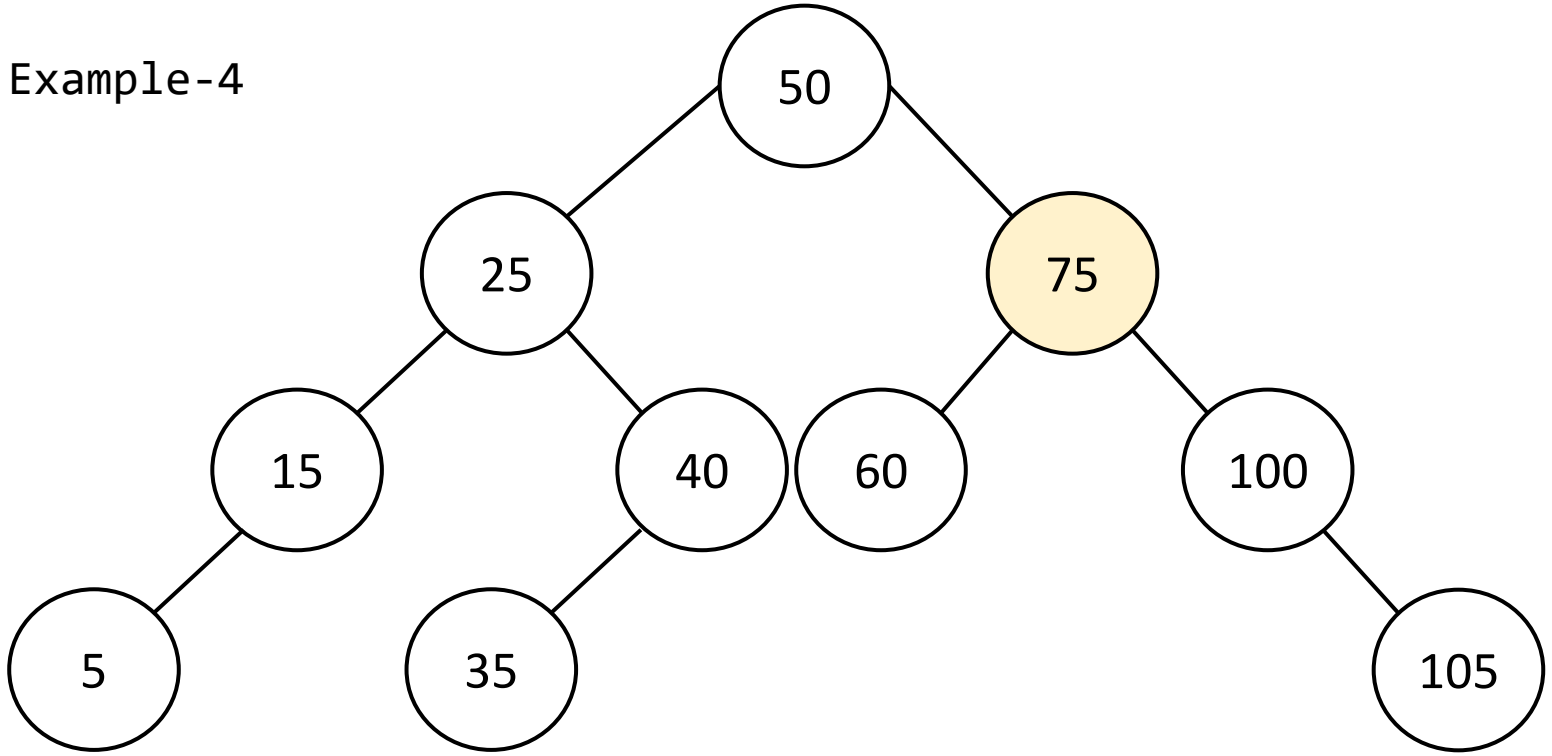


Delete Node with 2 child

Delete(75)

- z=75 has 2 subtrees
- z.left and z.right both exist

Example-4

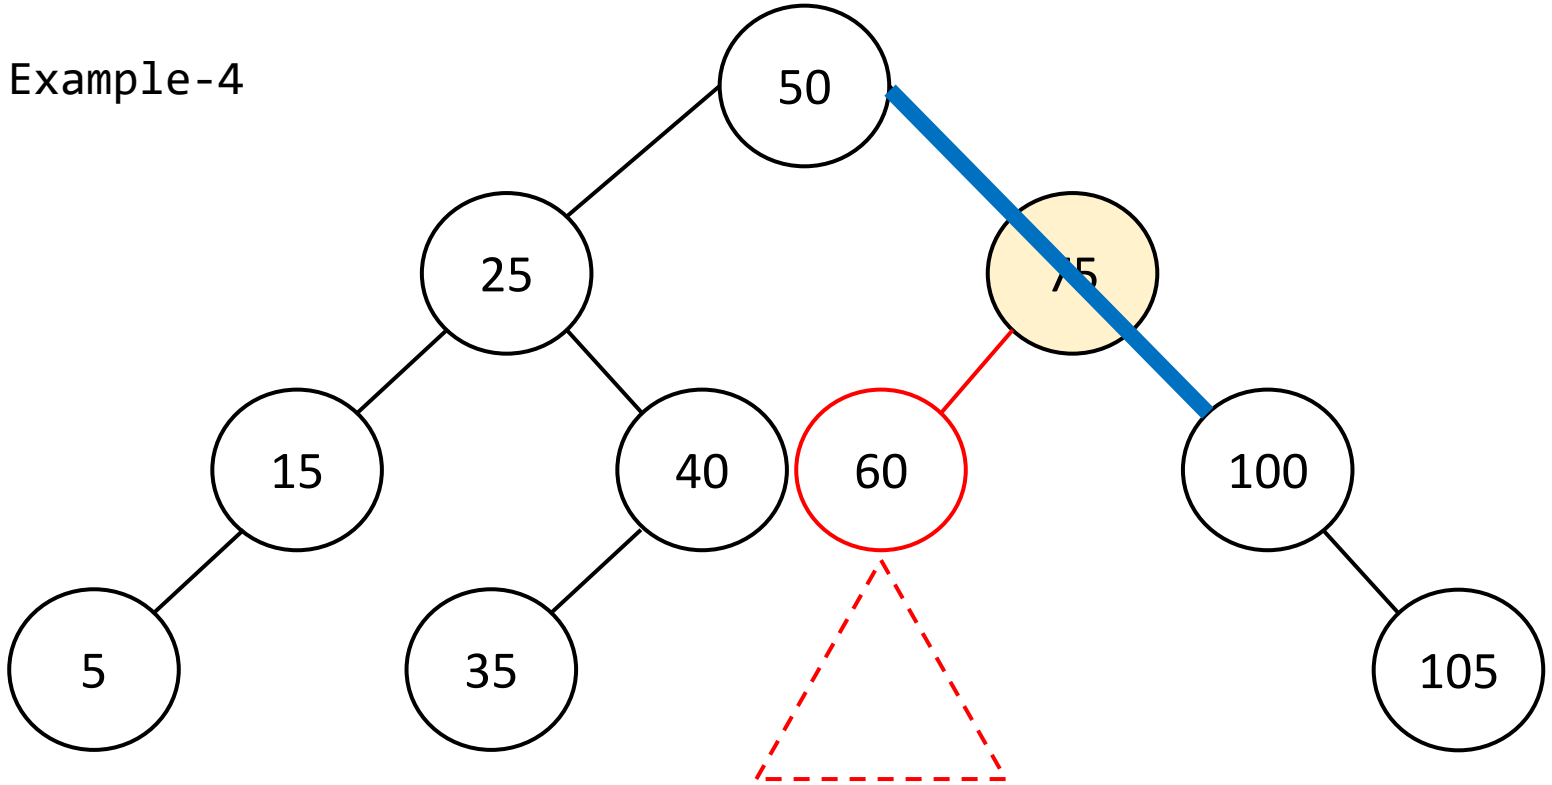


Delete Node with 2 child

Delete(75)

- z=75 has 2 subtrees
- z.left and z.right both exist

- z.p can be connected with z.right
- But what about z.left subtree?

Example-4

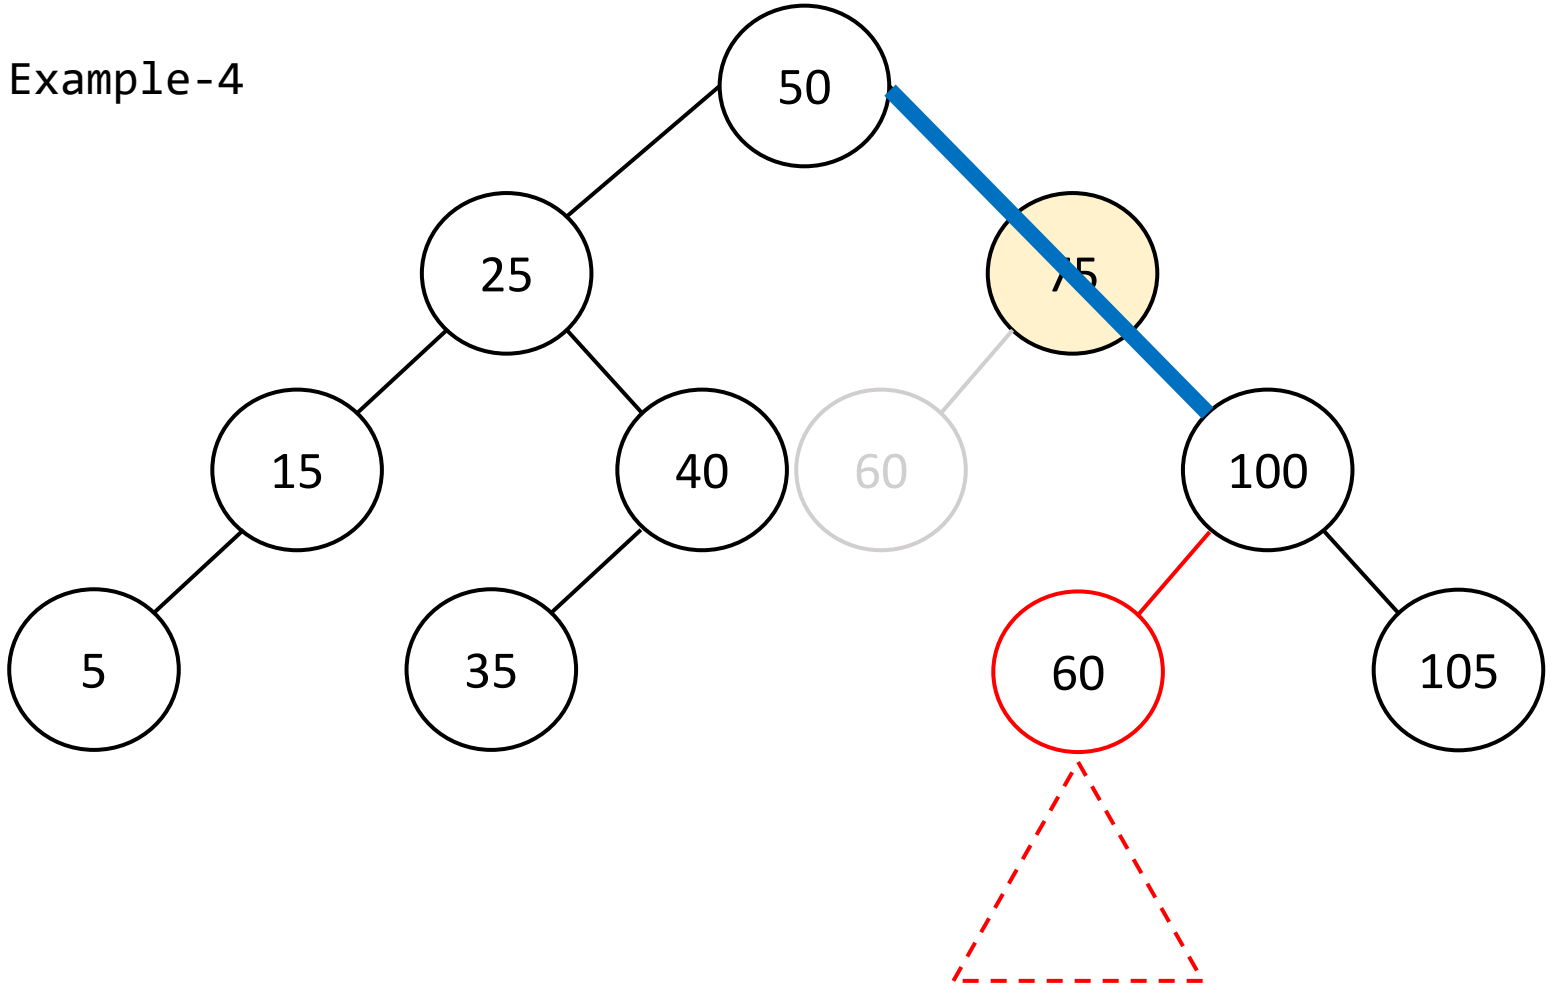


Delete Node with 2 child

Delete(75)

- z=75 has 2 subtrees
- z.left and z.right both exist

- z.p can be connected with z.right
- But what about z.left subtree?
- **Seems it can be connected with 100.left**

Example-4

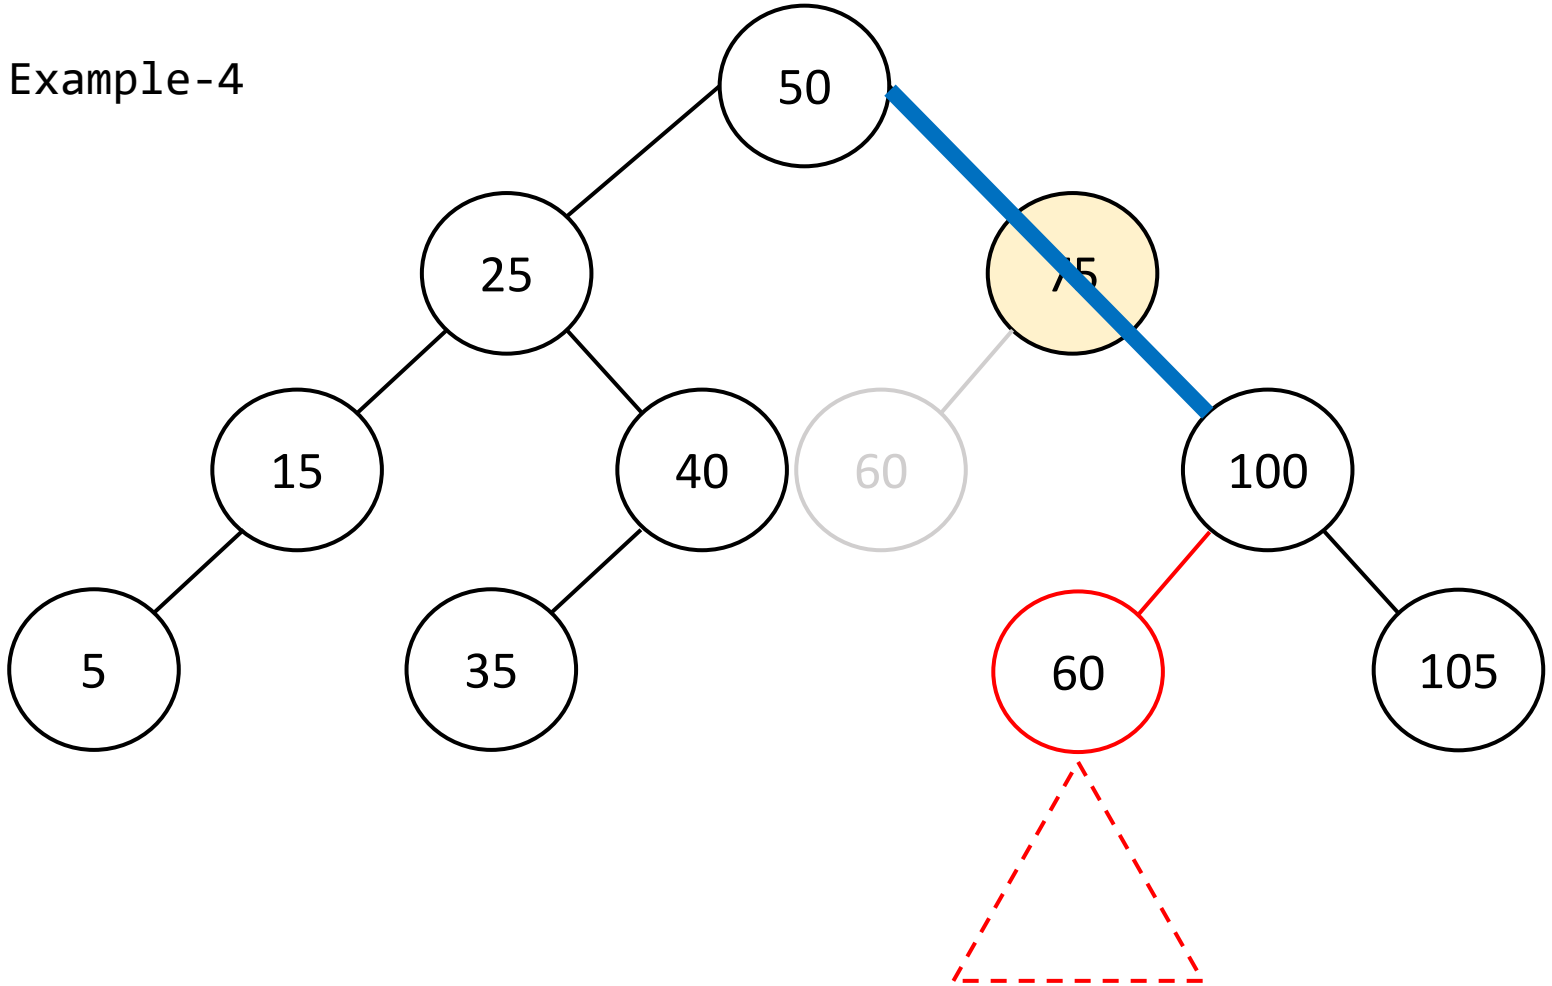


Delete Node with 2 child

Delete(75)

- z=75 has 2 subtrees
- z.left and z.right both exist

- z.p can be connected with z.right
- But what about z.left subtree?
- **Seems it can be connected with 100.left-** but is it always possible?

Example-4

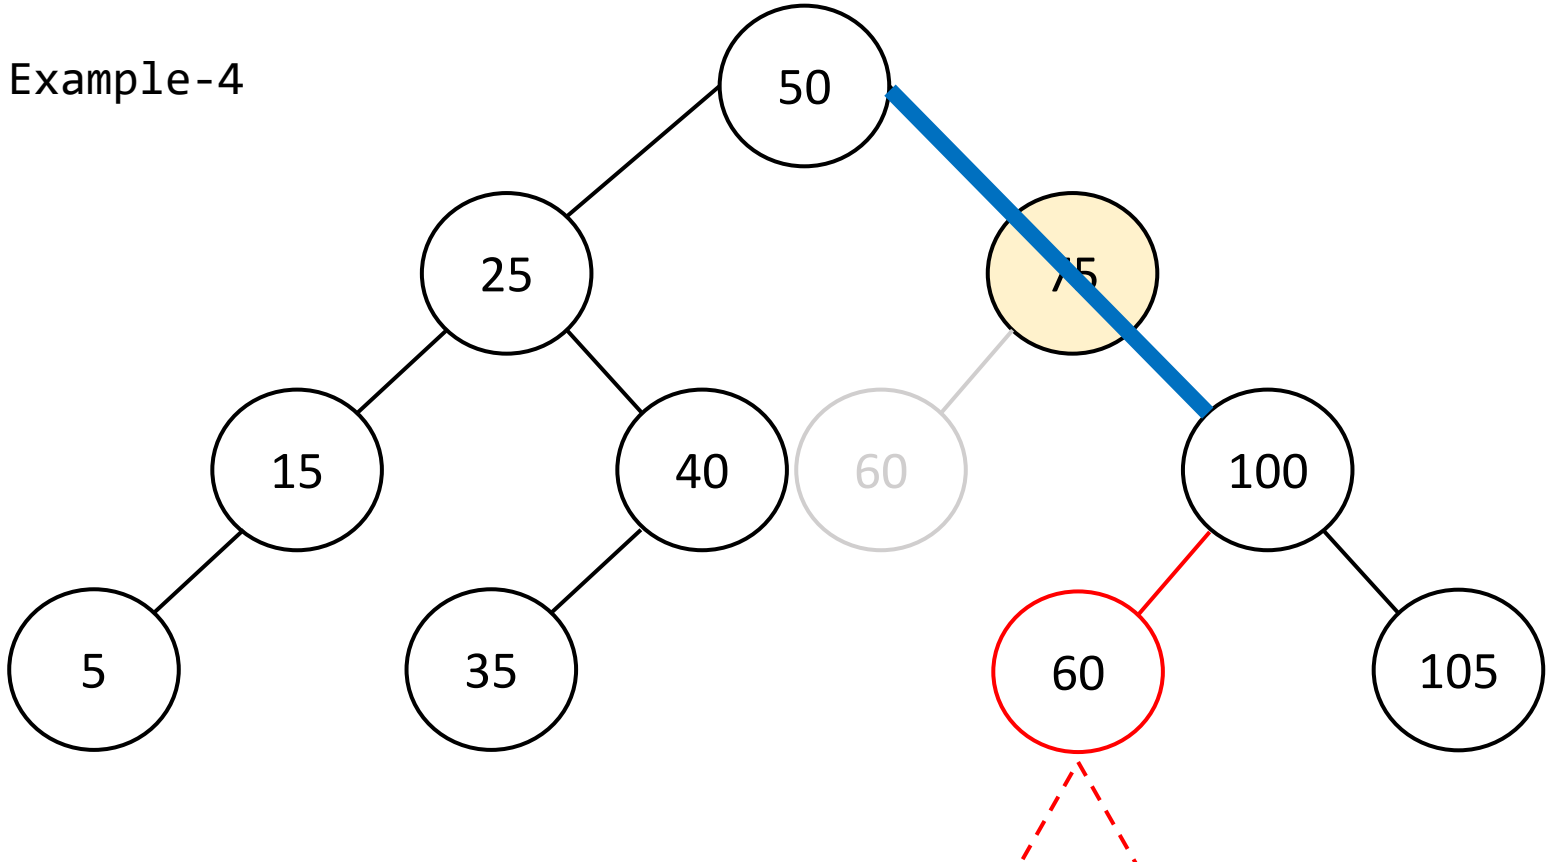

Can't guarantee that 100's (z.right's) left subtree is always free so that z.left can go there!


Delete Node with 2 child

Delete(75)

- z=75 has 2 subtrees
- z.left and z.right both exist

- z.p can be connected with z.right
- But what about z.left subtree?
- **Seems it can be connected with 100.left-** but is it always possible?

Example-4

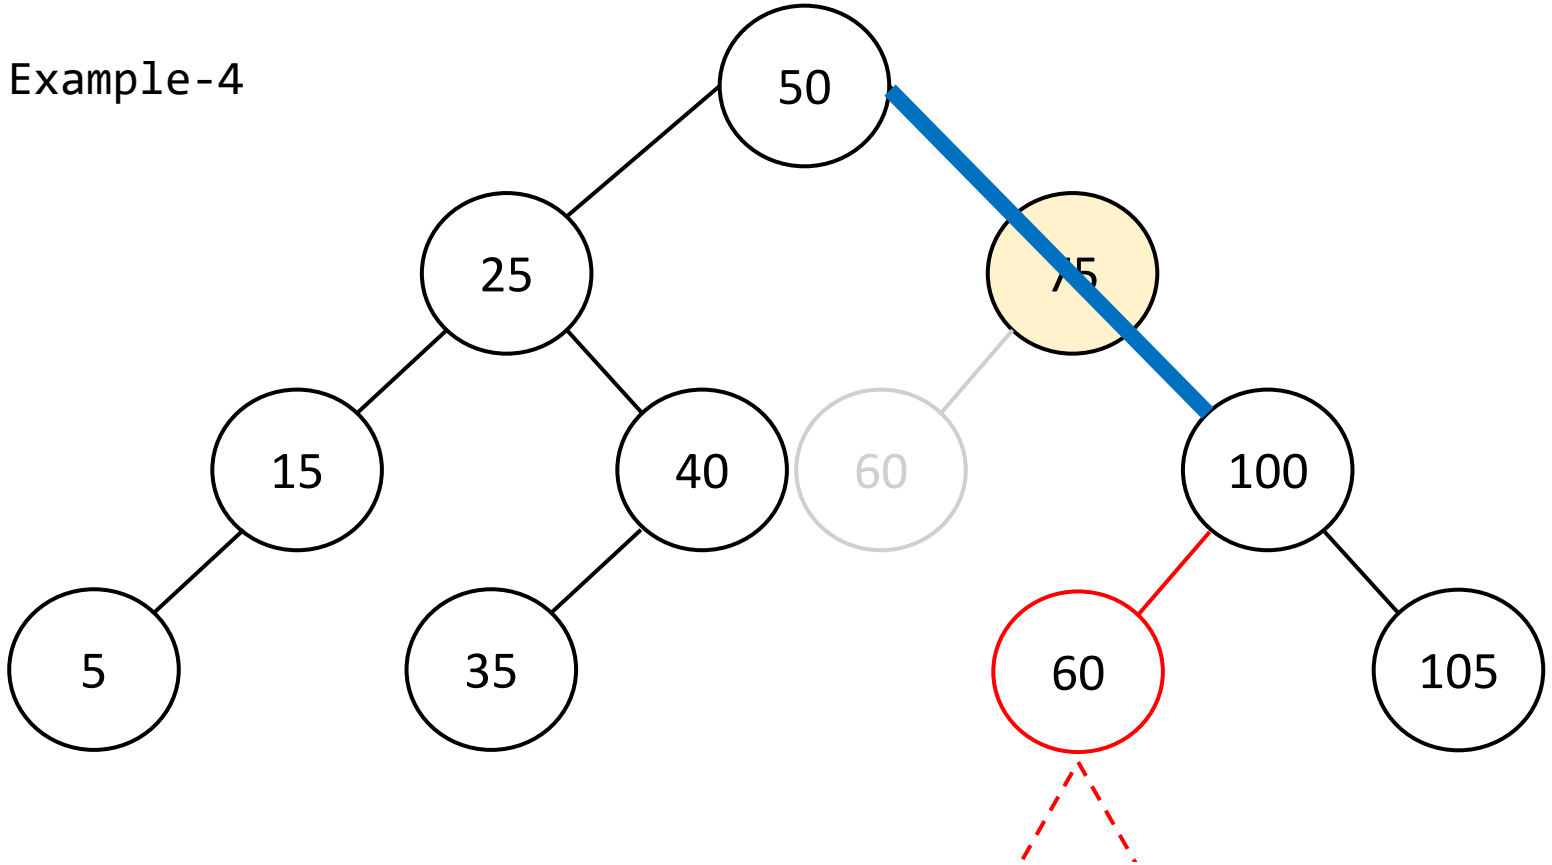

Can't guarantee that 100's (z.right's) left subtree is always free so that z.left can go there!

Which node provides such a guarantee?


Delete Node with 2 child

Delete(75)

- z=75 has 2 subtrees
- z.left and z.right both exist

- z.p can be connected with z.right
- But what about z.left subtree?
- **Seems it can be connected with 100.left-** but is it always possible?

Example-4

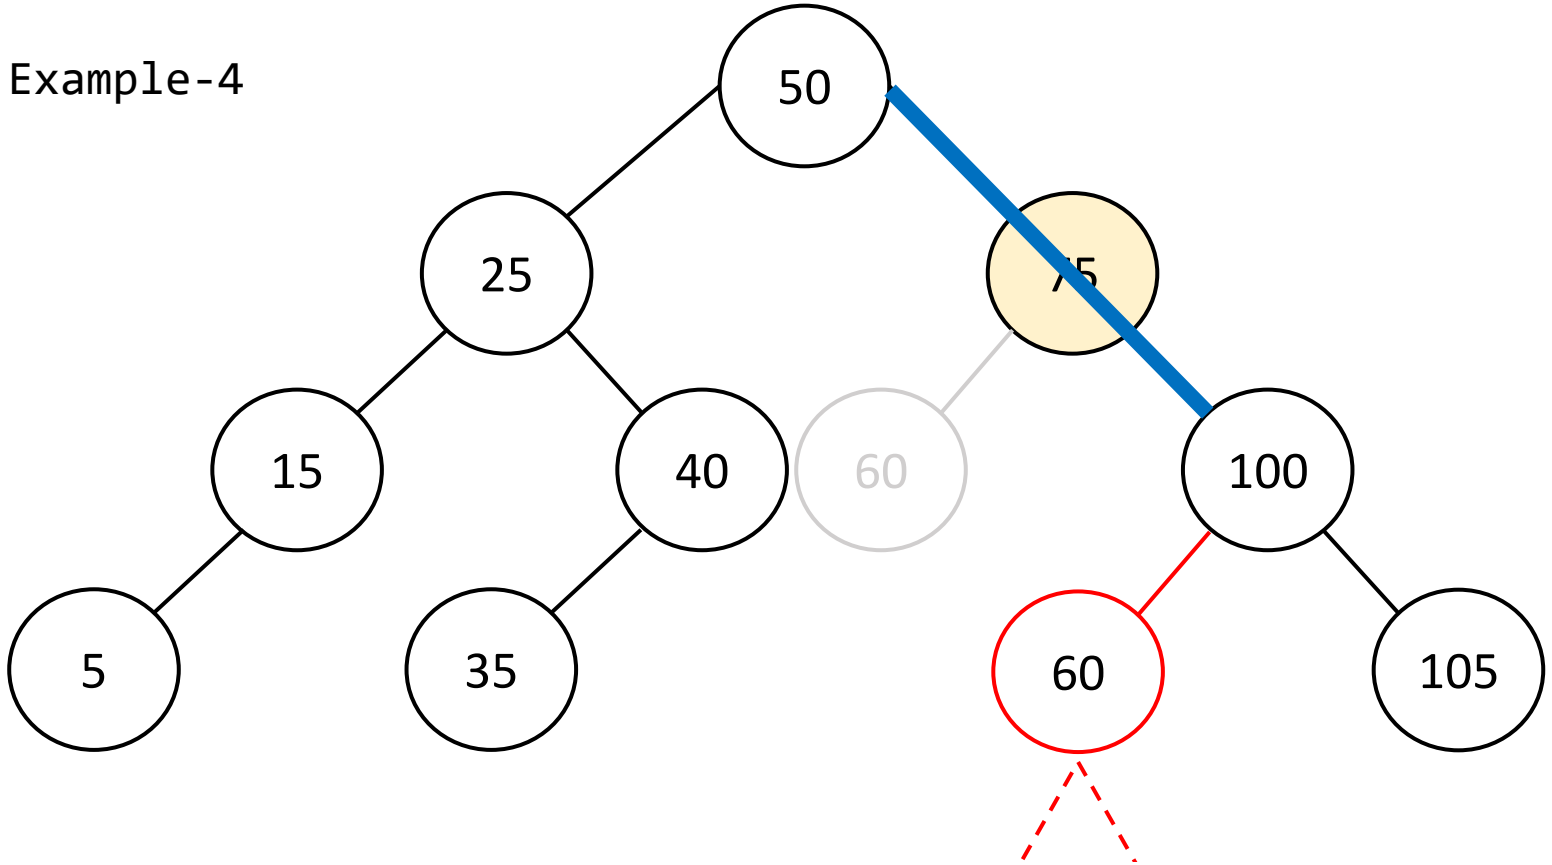

Can't guarantee that 100's (z.right's) left subtree is always free so that z.left can go there!

Which node provides such a guarantee?

Successor(z)

Delete Node with 2 child


Delete(75)

- z=75 has 2 subtrees
- z.left and z.right both exist


- z.p can be connected with z.right
- But what about z.left subtree?
- **Seems it can be connected with 100.left-** but is it always possible?

Let’s summarize the different scenarios…


Case-A

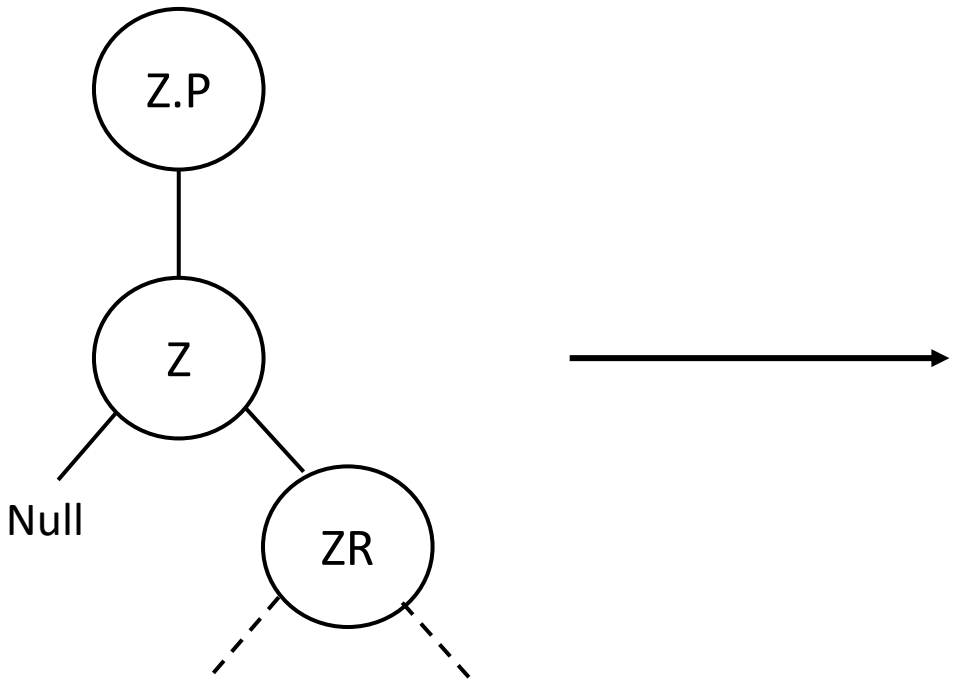


Case-A

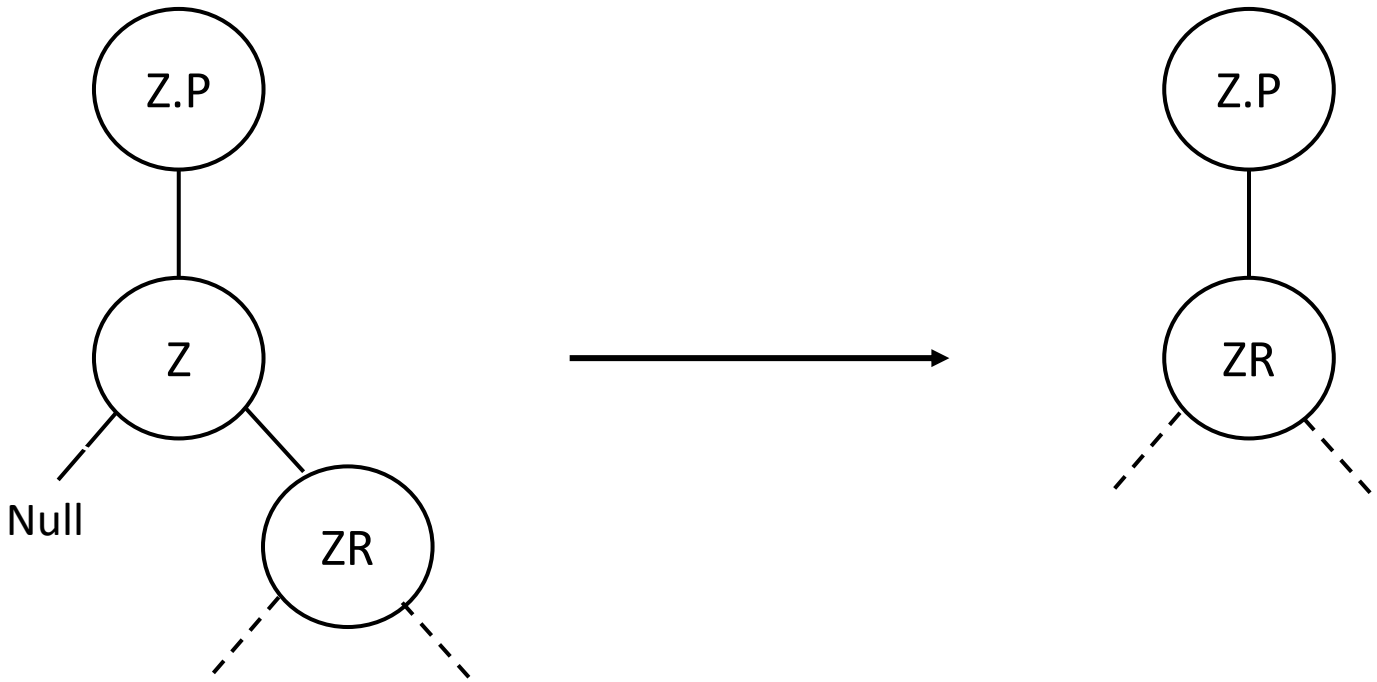

Case-B

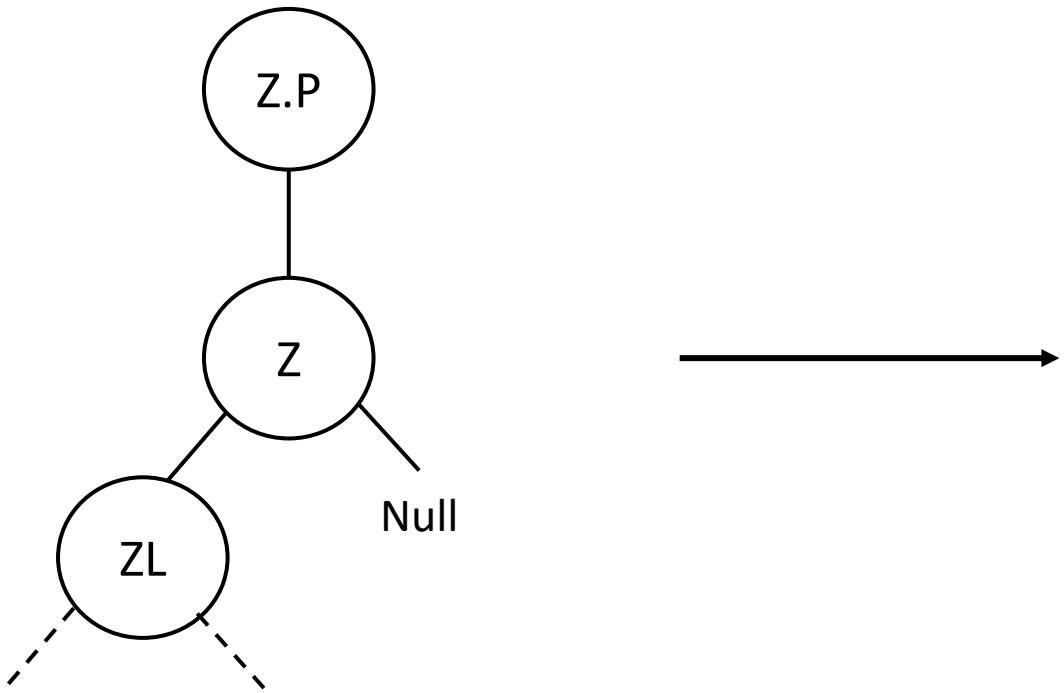

Case-B

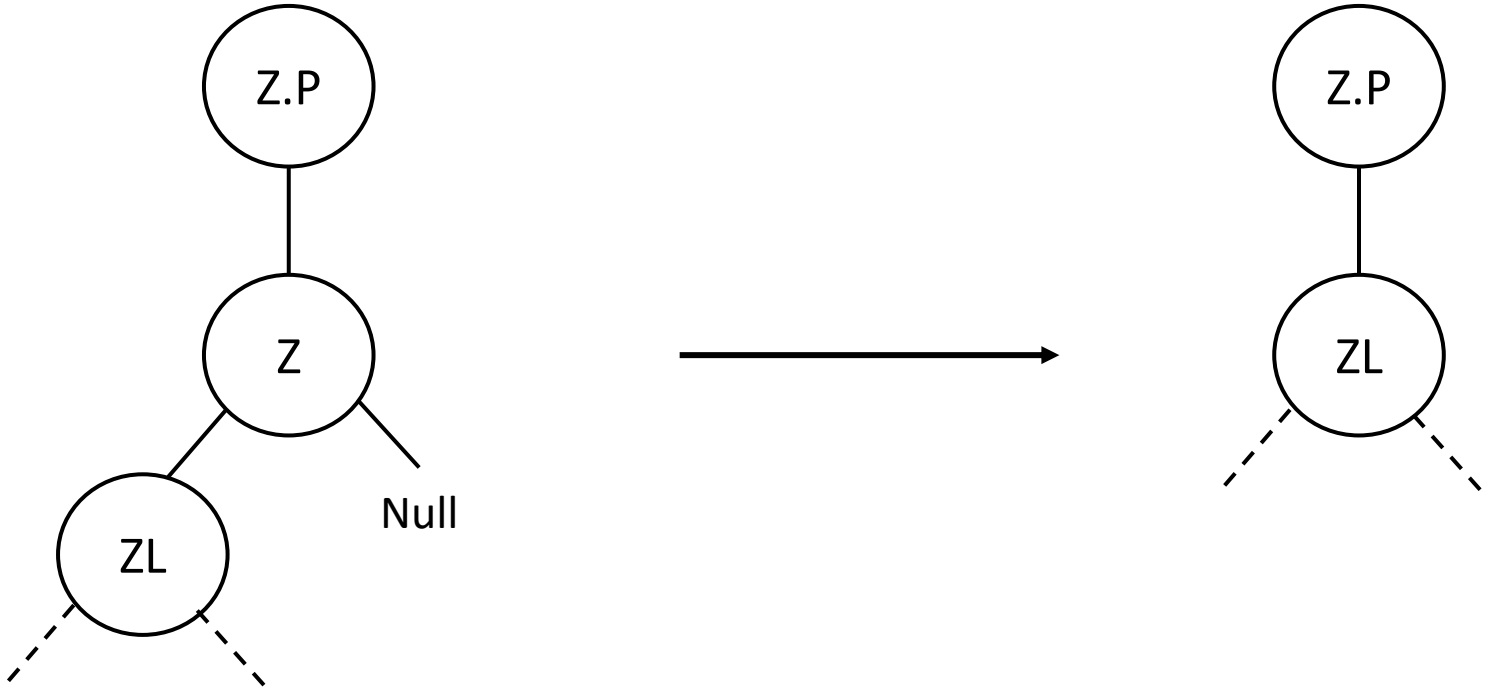

```
transplant (u,v){
    // connects u.p with v as appropriate child

}
```

```
transplant (u,v){
    // connects u.p with v as appropriate child

    if (u.p == Null):
        root = v

}
```

```
transplant (u,v){
    // connects u.p with v as appropriate child

    if (u.p == Null):
        root = v
    else if (u == u.p.left):
        u.p.left = v
    else
        u.p.right = v



}
```

```
transplant (u,v){
    // connects u.p with v as appropriate child

    if (u.p == Null):
        root = v
    else if (u == u.p.left):
        u.p.left = v
    else
        u.p.right = v
    if (v!=Null):
        v.p = u.p
}
```

handshake 2


Case-A

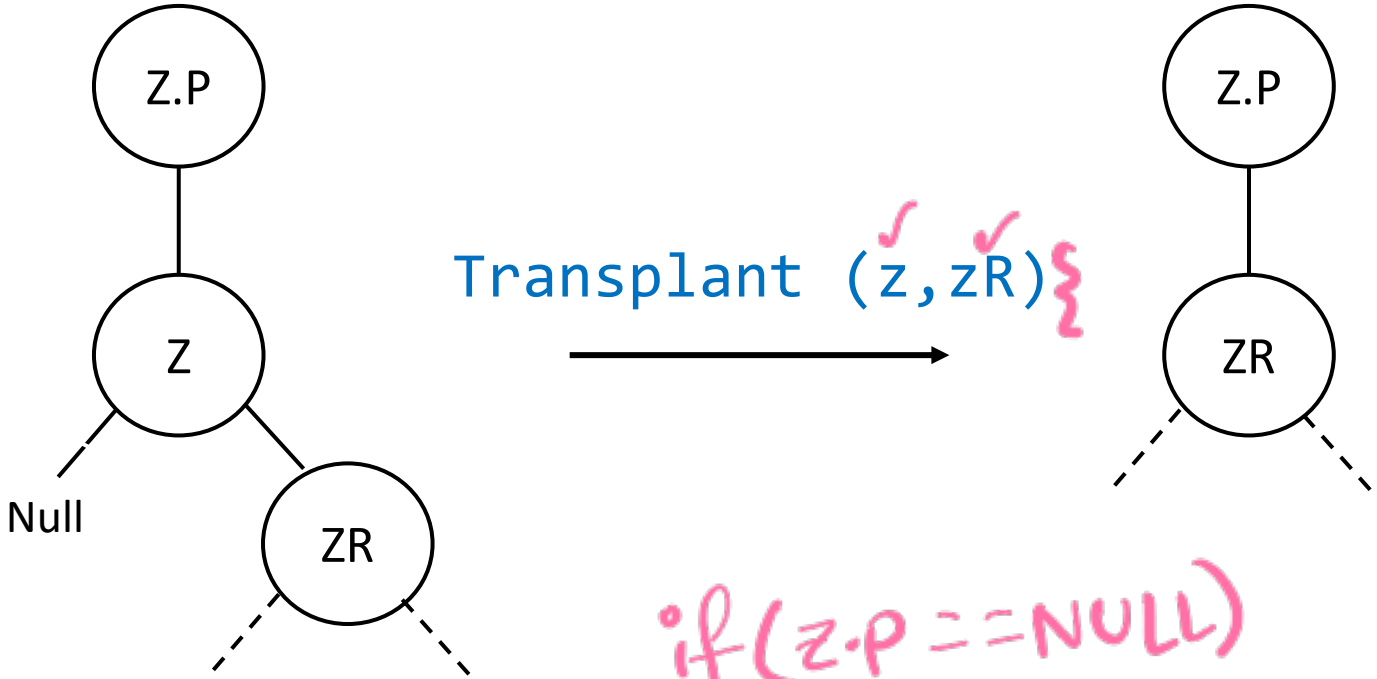



```
if(z.p == NULL)
  root = ZR
else if (z == z.p.left)
  z.p.left = zR
else z.p.right = ZR
```

Case-B

if (ZR! = Null)
ZR.P = Z.P

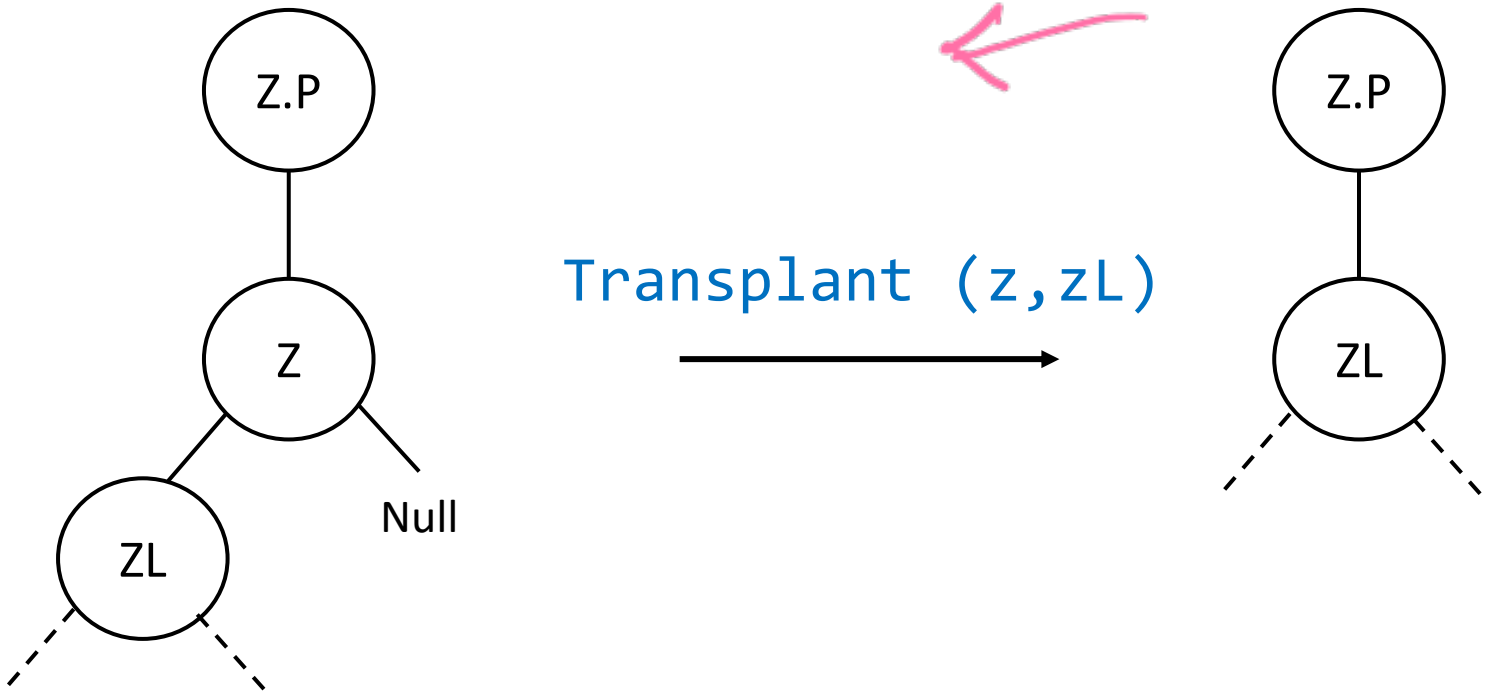


Z has two subtrees.
So lets find y = successor(z)

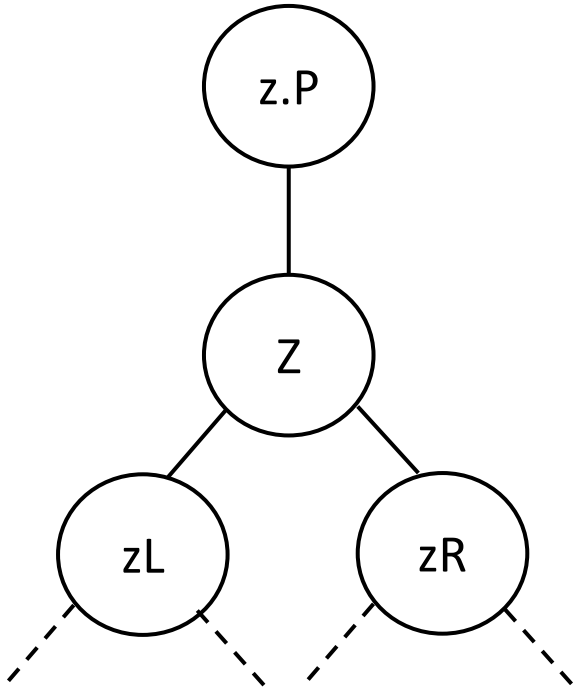


Z has two subtrees.
So lets find y = successor(z)

Case-C

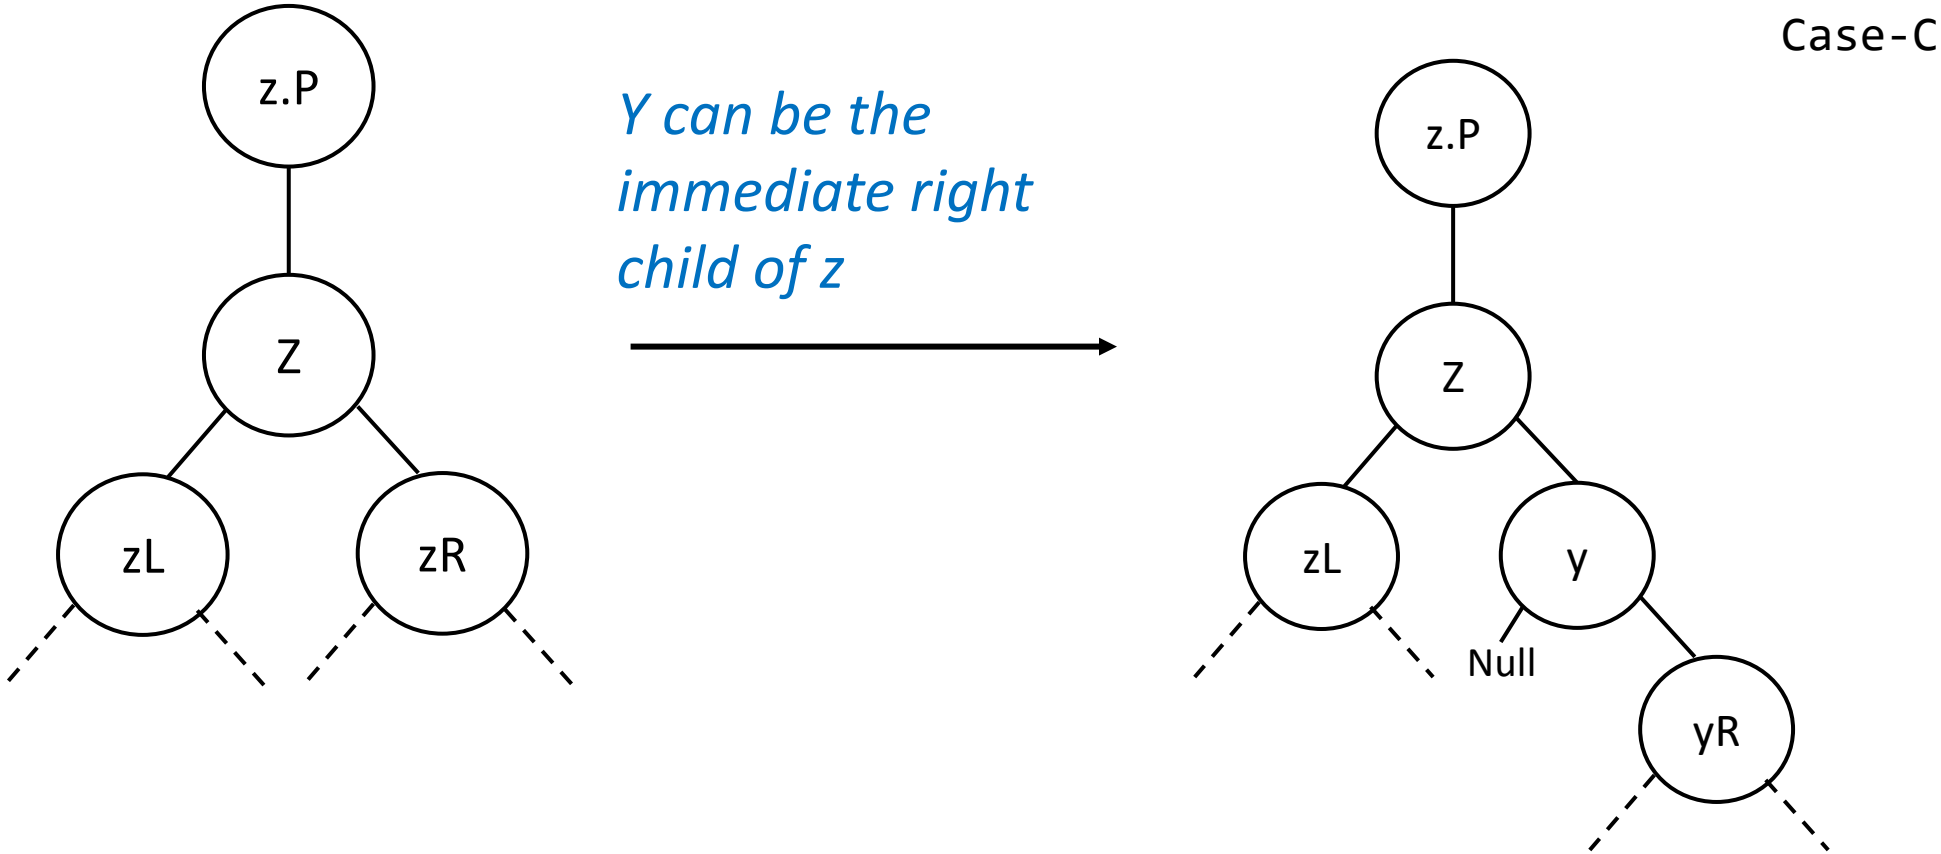


Z has two subtrees.
So lets find y = successor(z)

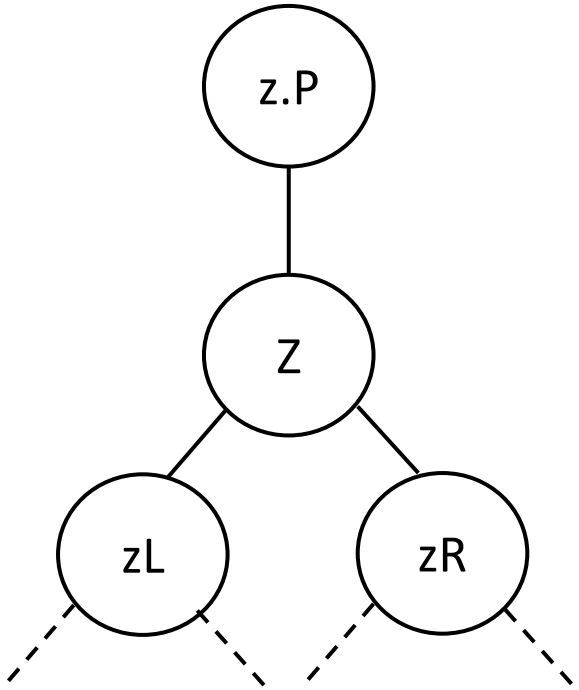


Y can be the immediate right child of z

Otherwise, y will be minimum(z.right)


Case-D

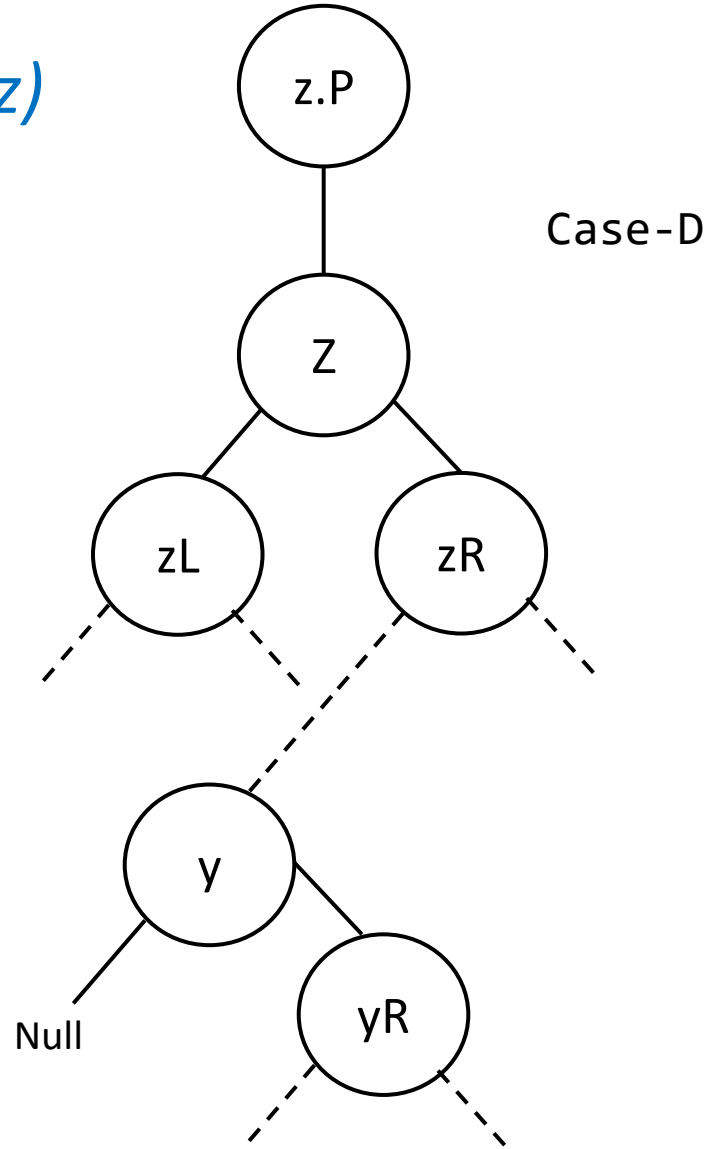

Case-C

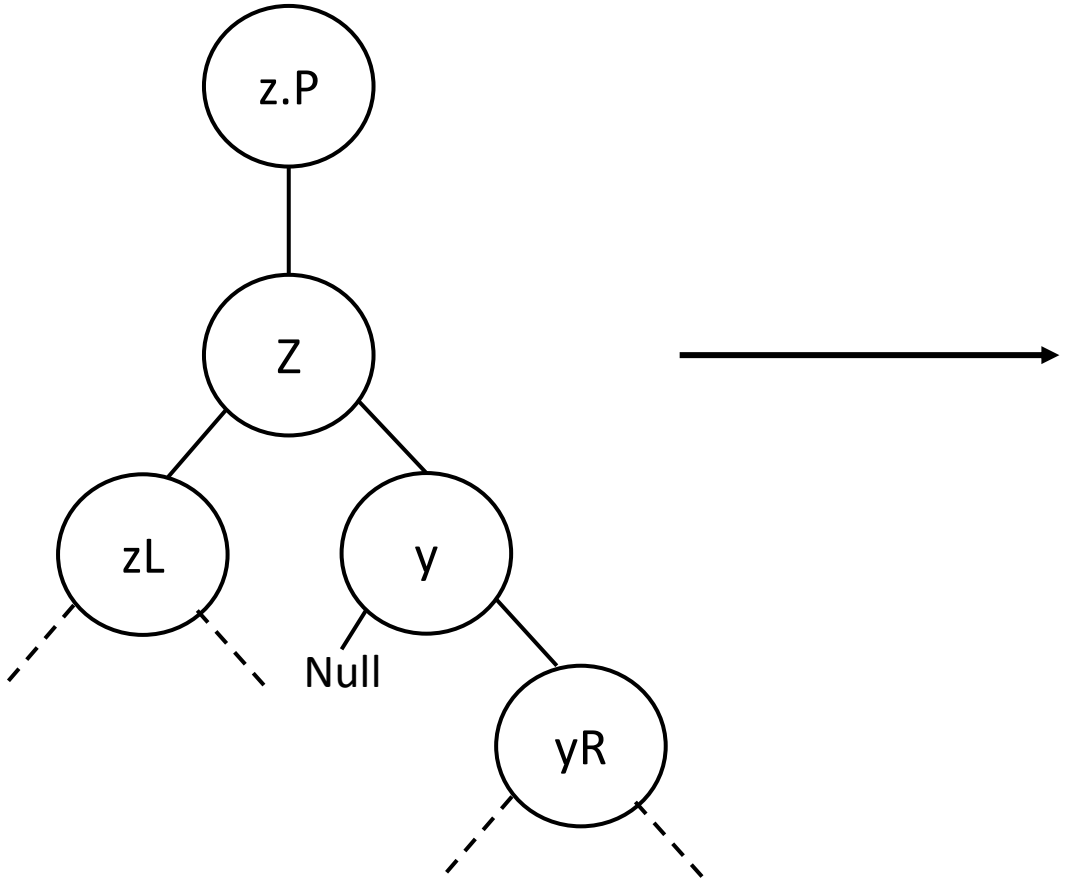


Case-C

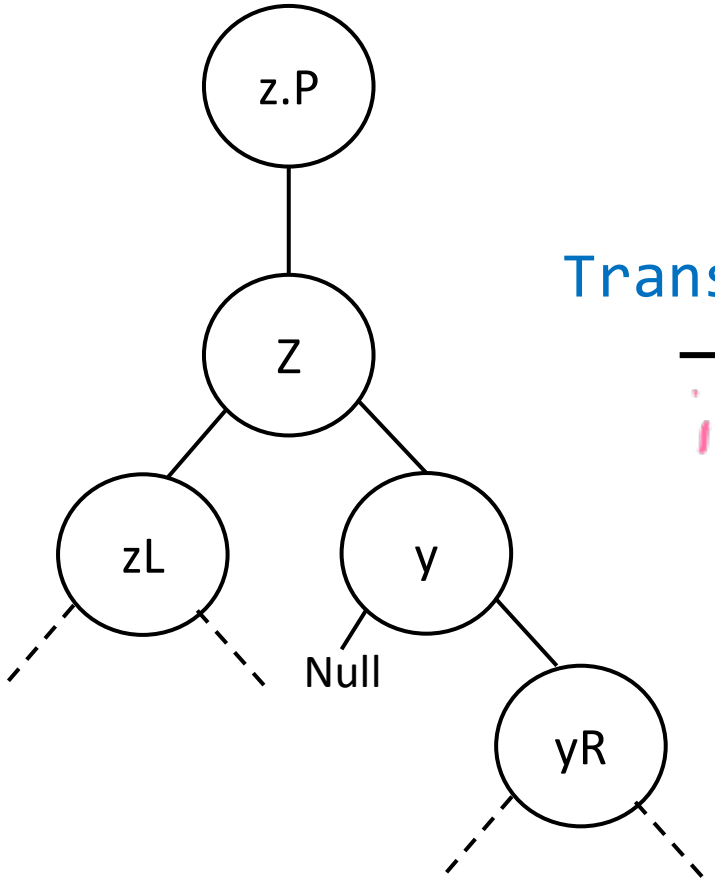


Transplant (Z,y)

```
if (z.p == null)
    root = y
else if (z.p == z.p.left
    z.p.left = y
else
    z.p.right = y
if  y != NULL
    y.p = z.p
```


Case-C

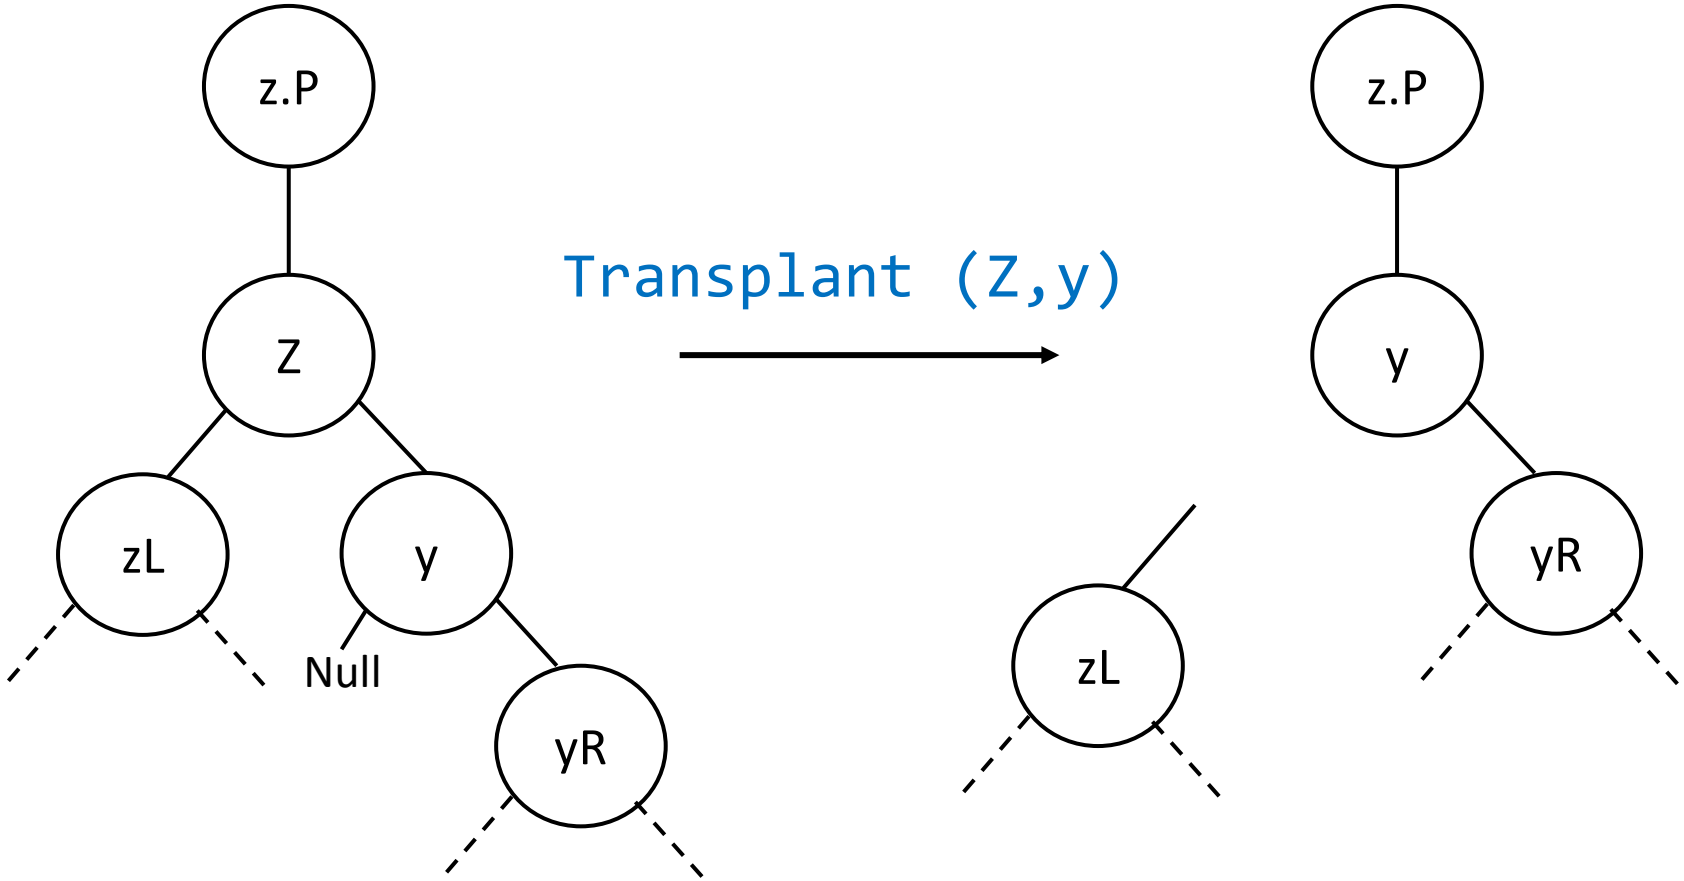


Case-C

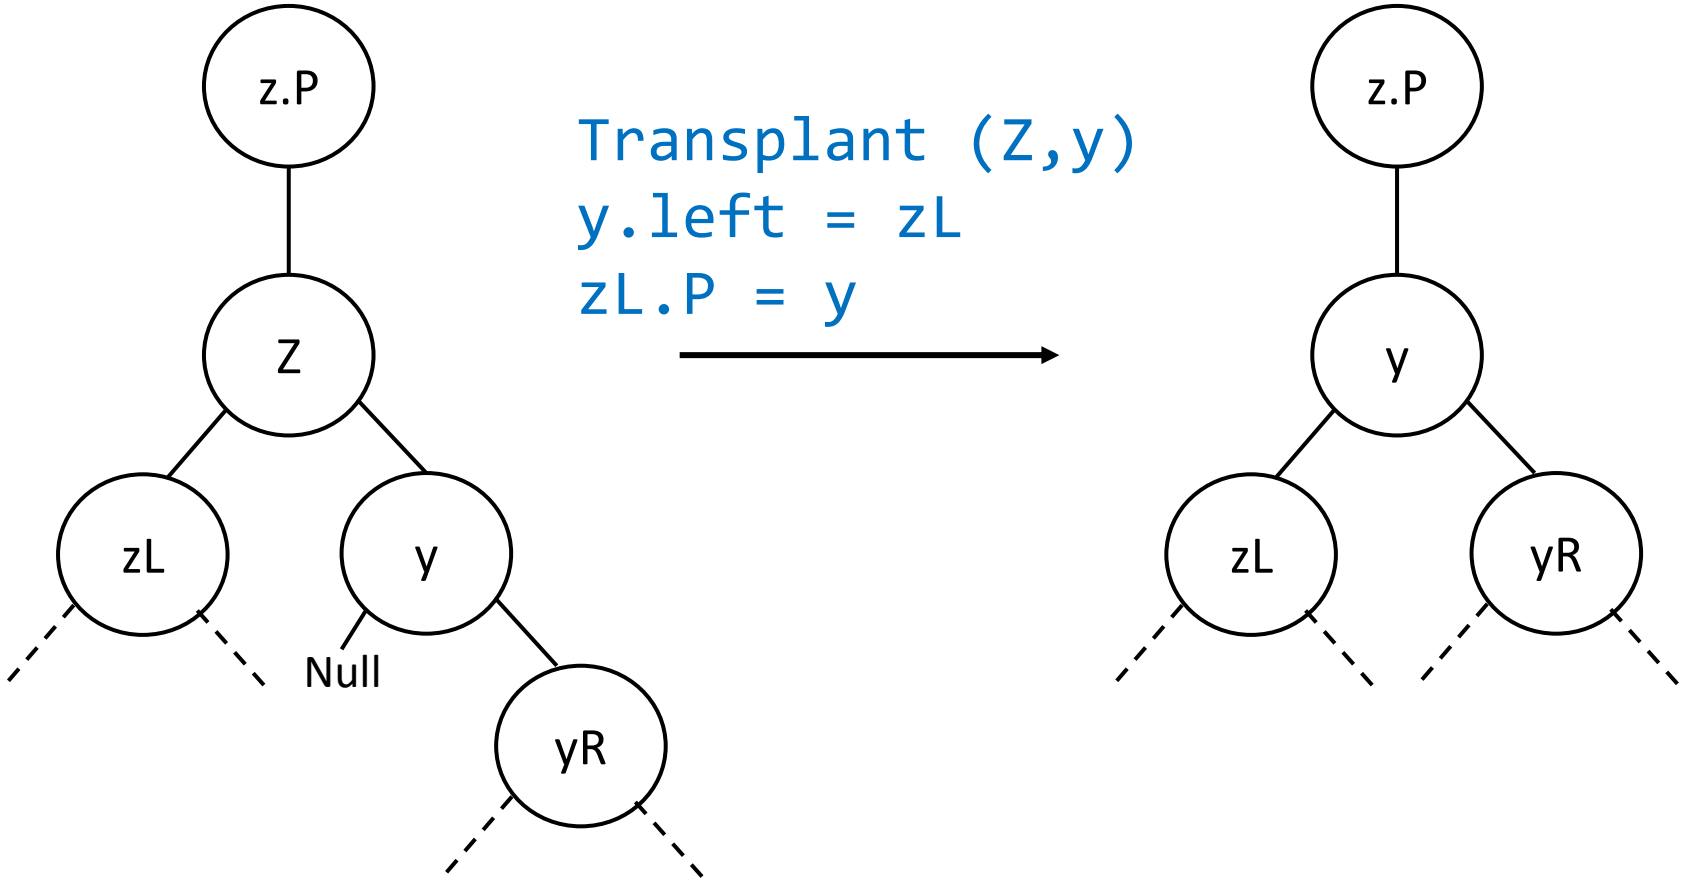

Case-D

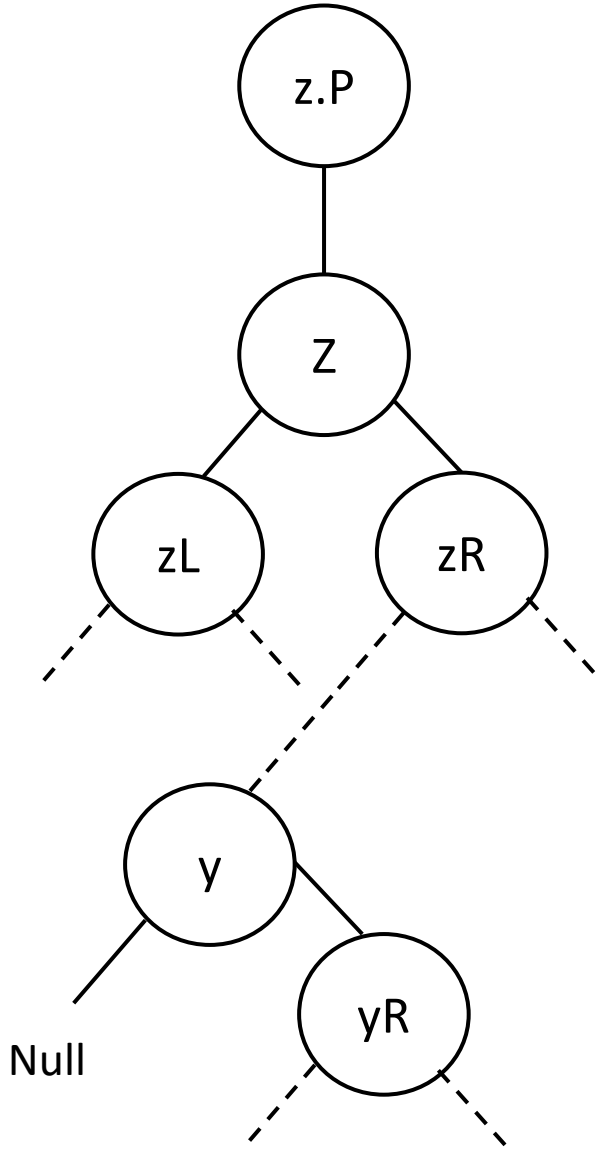


Case-D

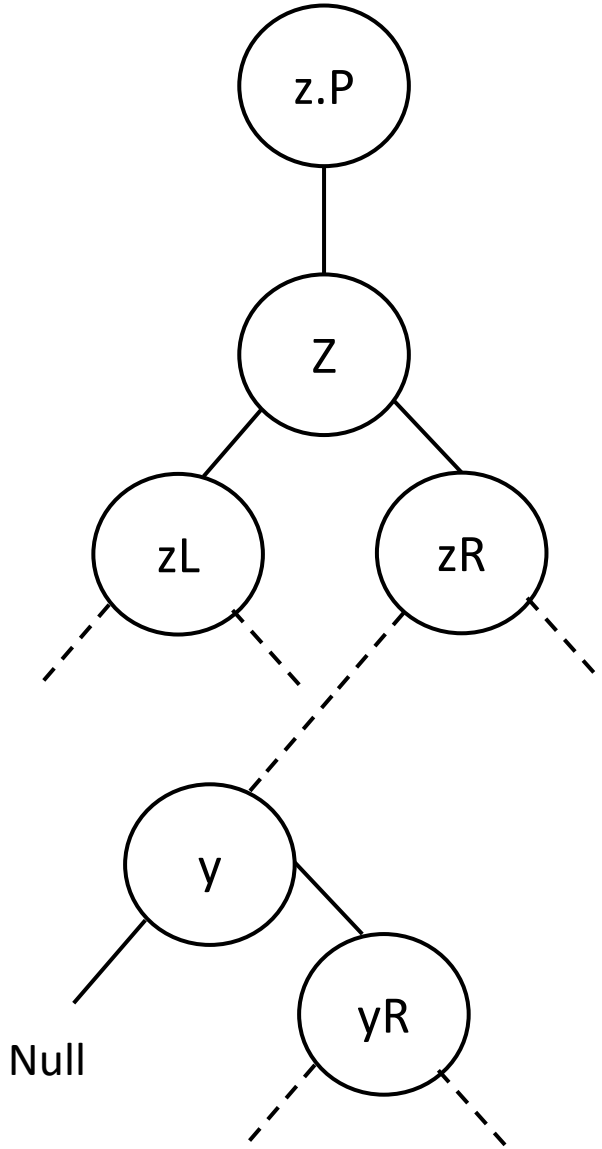

Plan:
y should come above, replace Z, catch zL & zR


Case-D

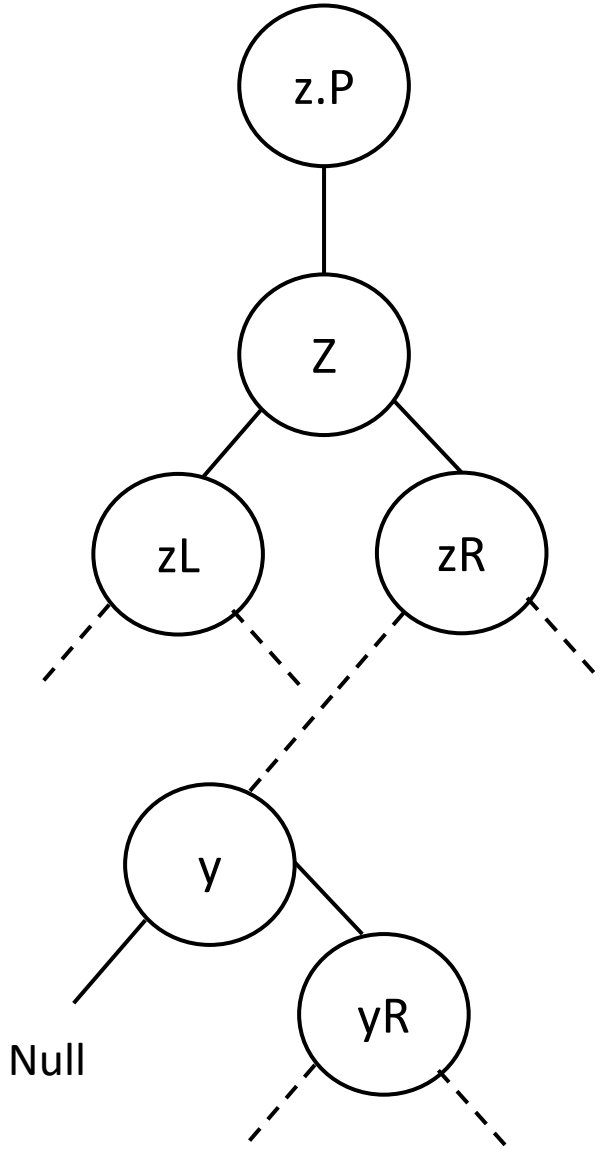

Plan:
y should come above, replace Z, catch zL & zR

To enable y to catch zL, zR ---
First y should be free!!!

Case-D

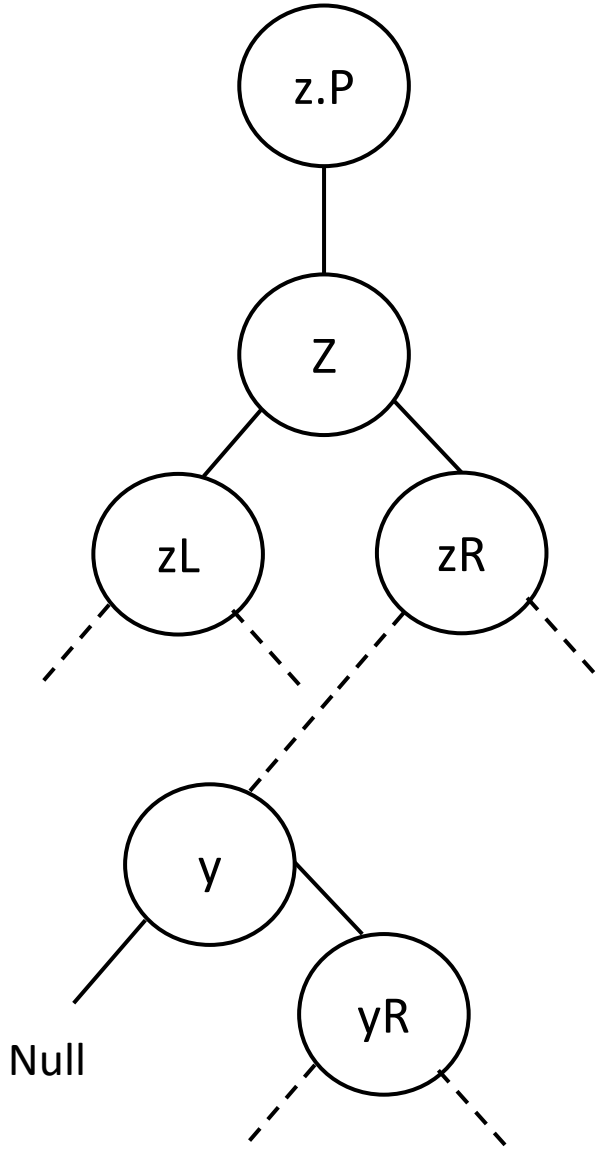


Plan:
y should come above, replace Z, catch zL & zR


To enable y to catch zL, zR ---
First y should be free!!!

yR becomes orphan
So, yR should be connected with y.p


Case-D

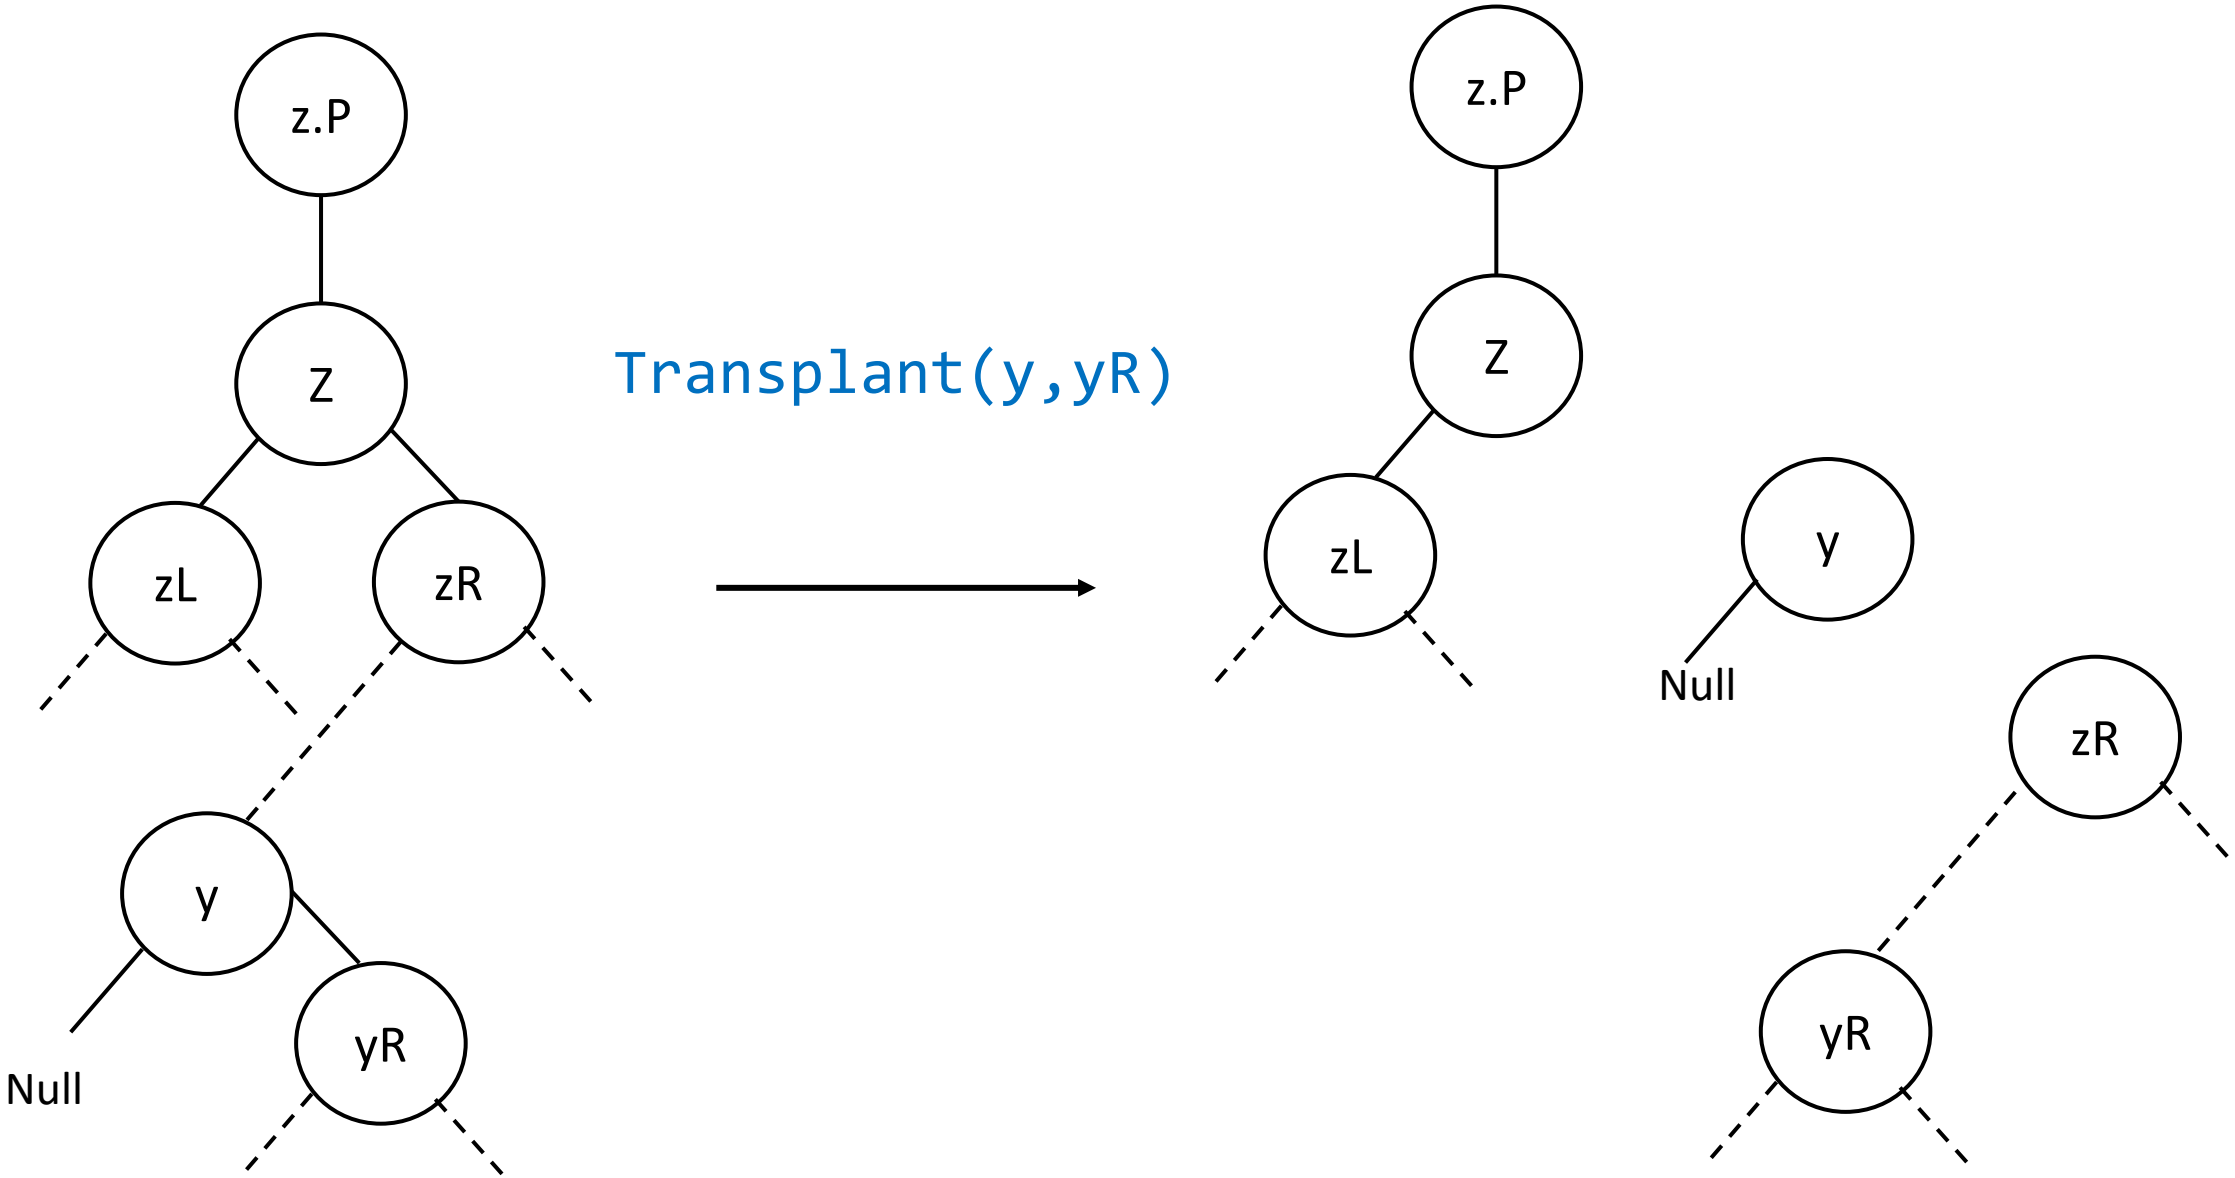


Case-D

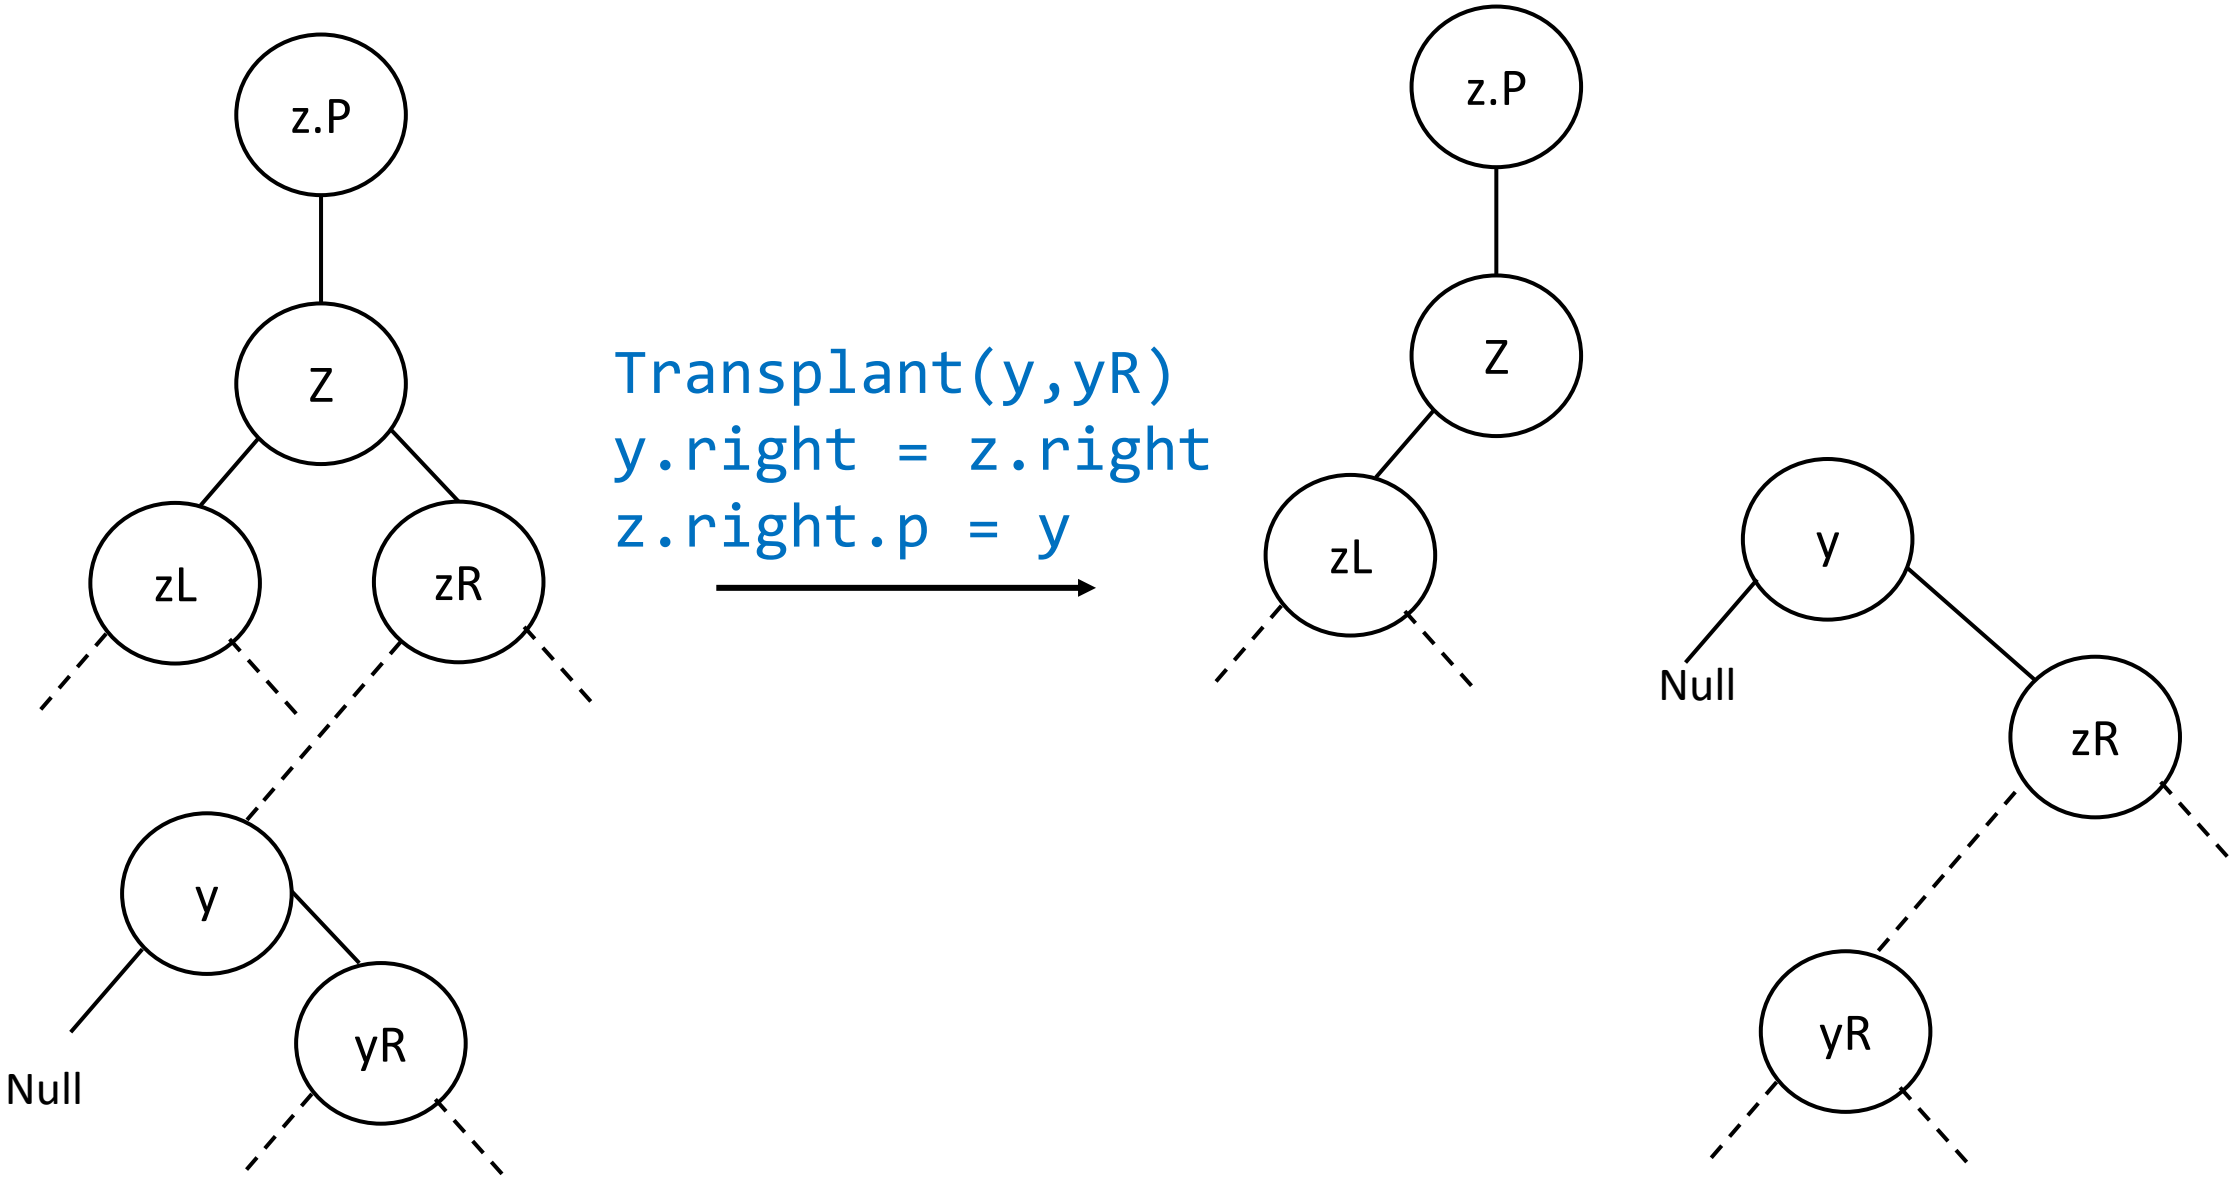
z.P
z
zL
zR
y
Null
yR
Transplant(y,yR)
y.right = z.right
z.right.p = y
z.P
z
zL
y
Null
zR
yR


Case-D

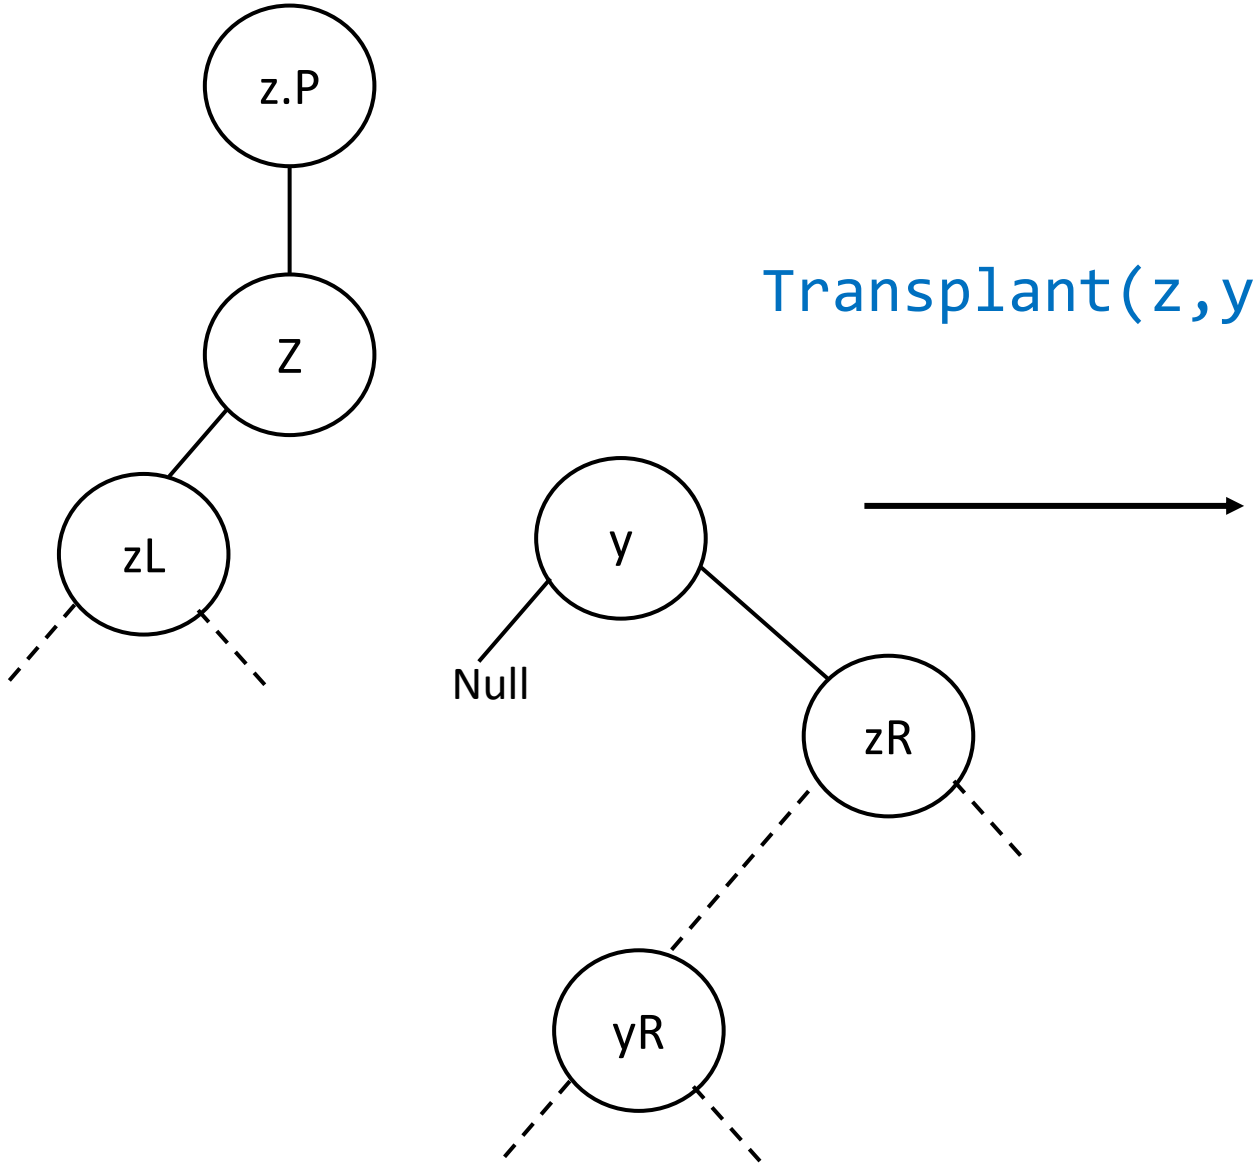


Case-D

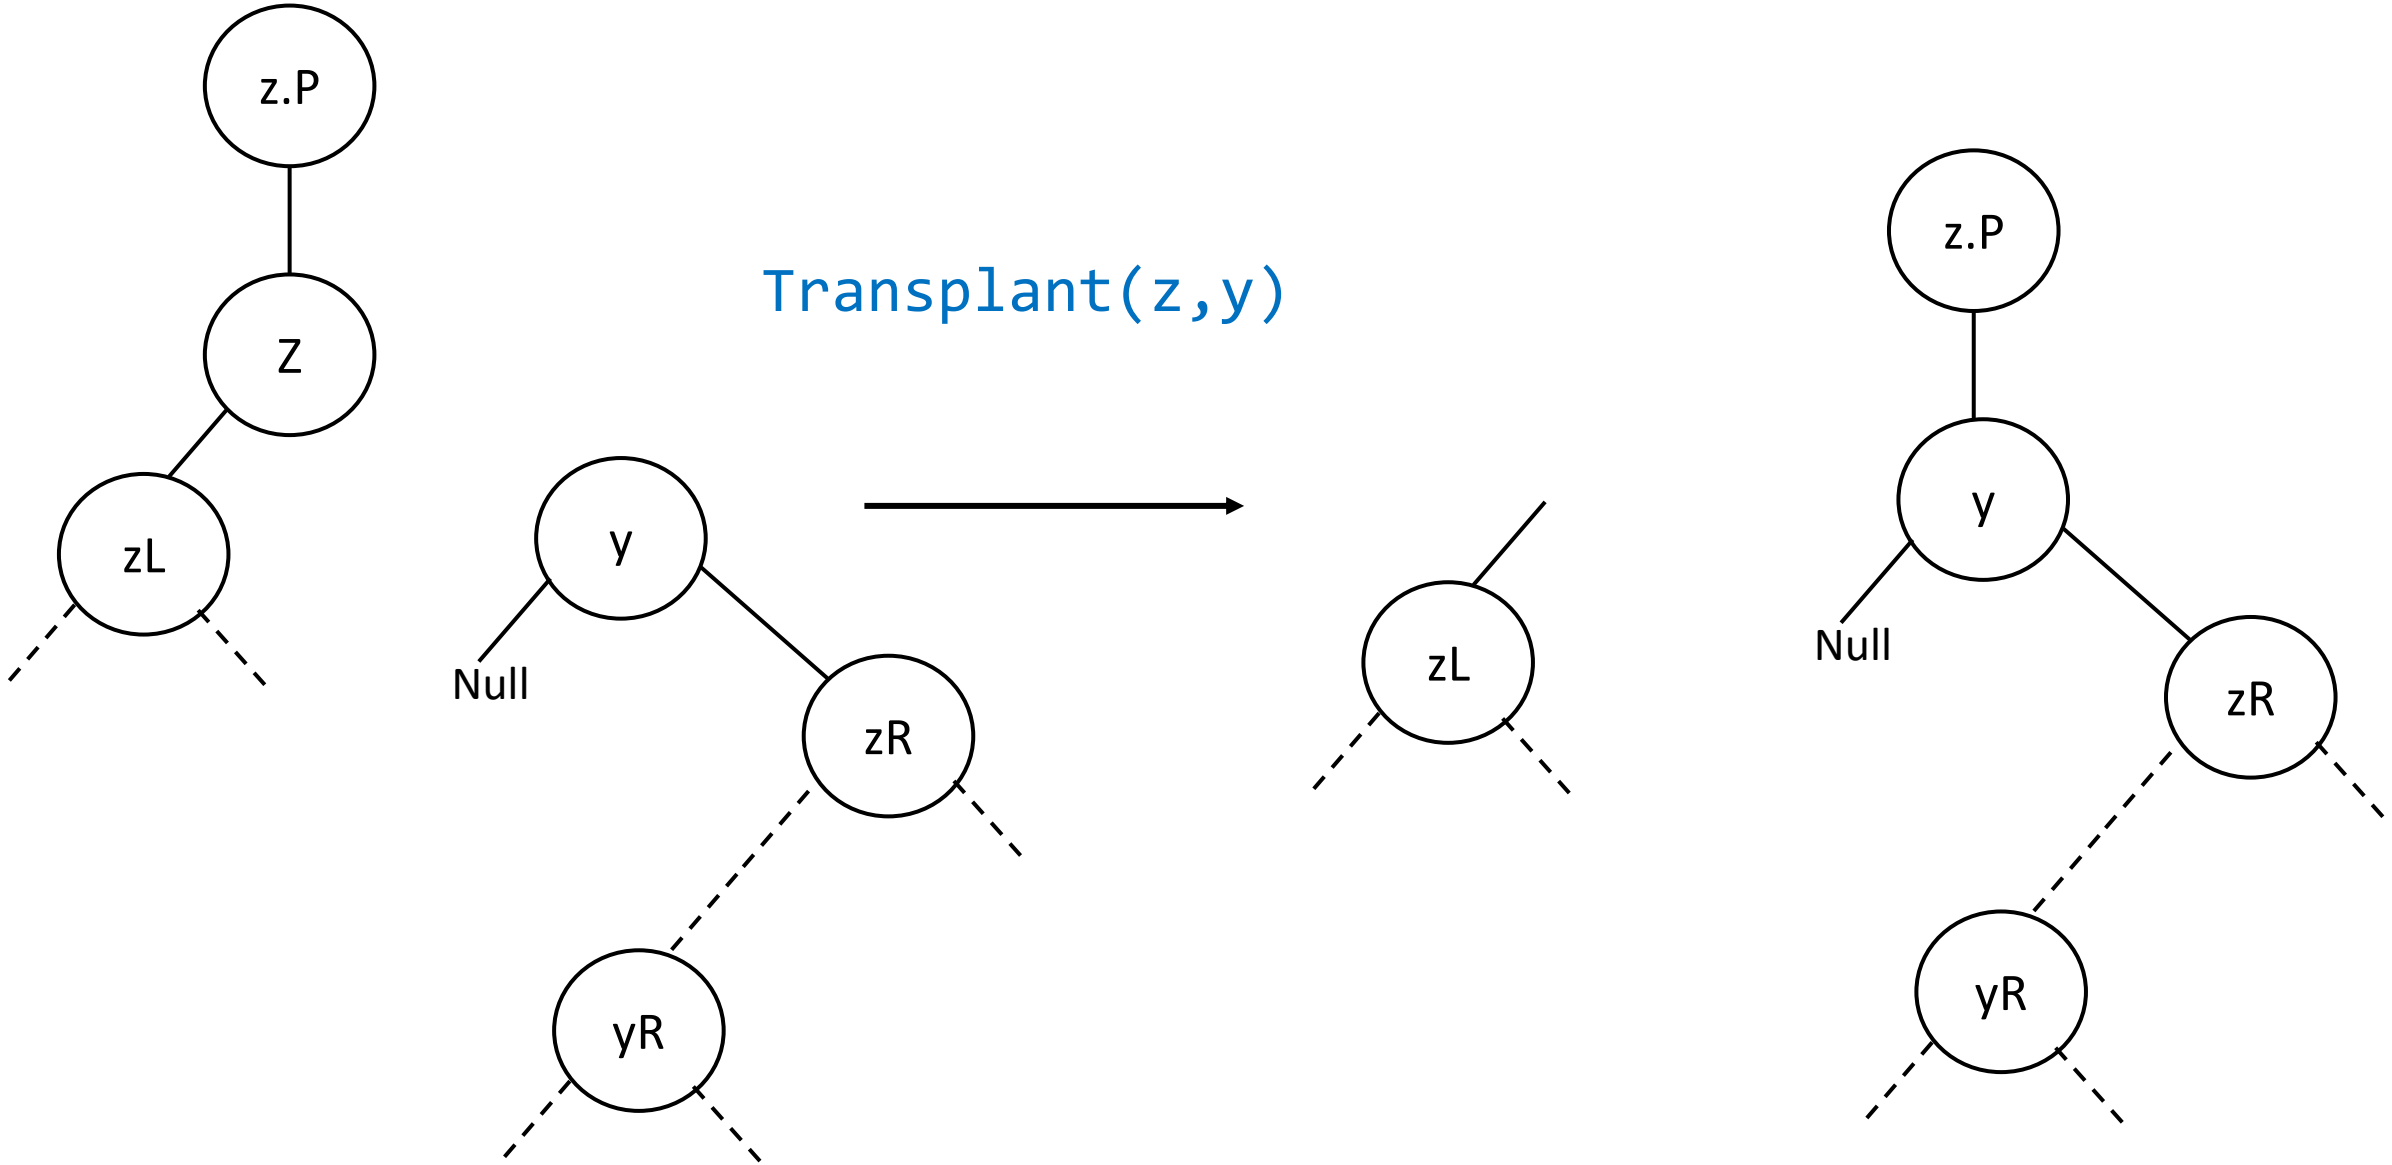


Case-D

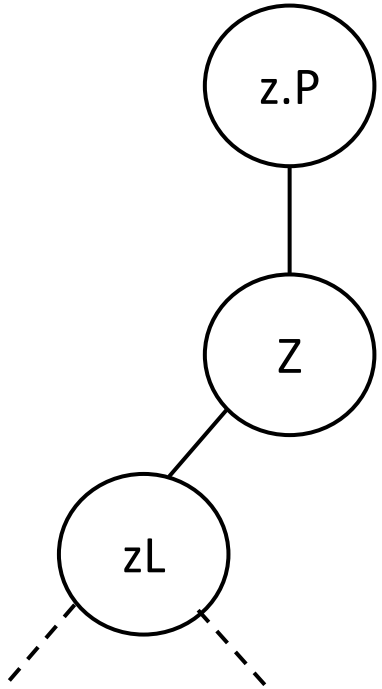


```
Transplant(z,y)
y.left = z.left
z.left.p = y
```

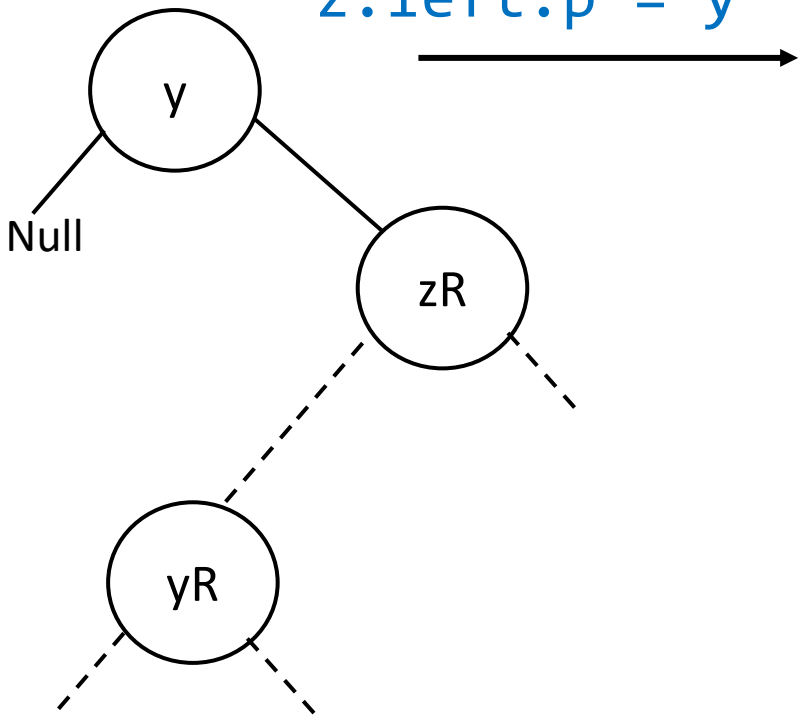


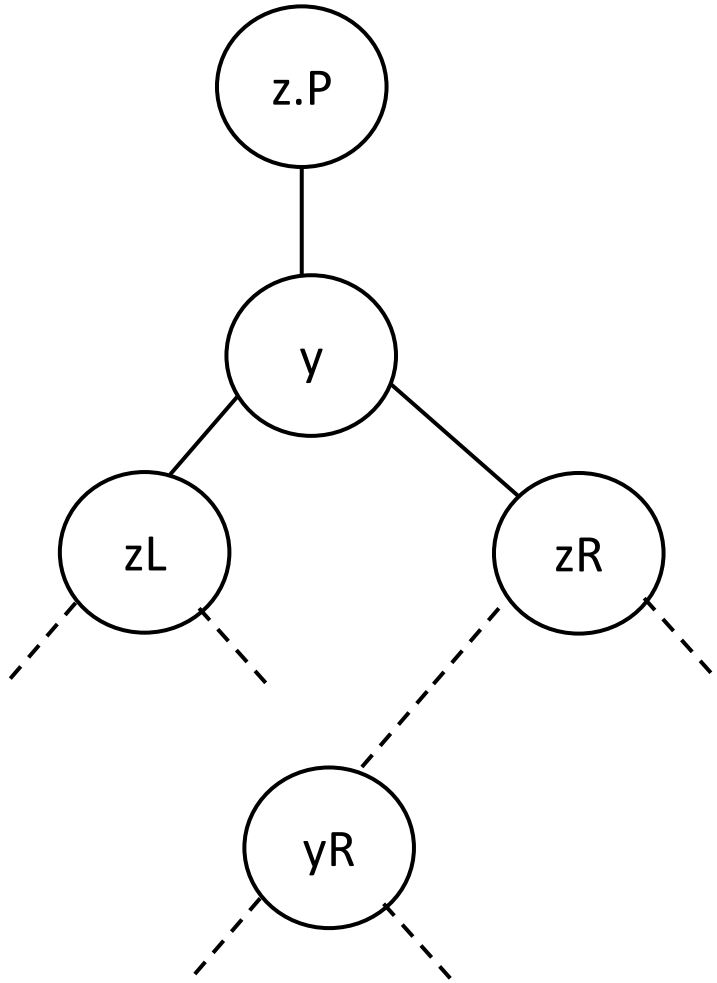


```
Tree_delete(int key):
```

```
Tree_delete(int key):
      Node* z = search(key)
```

```
Tree_delete(int key):
      Node* z = search(key)
      if z.left == Null:
            transplant(z, z.right)
```

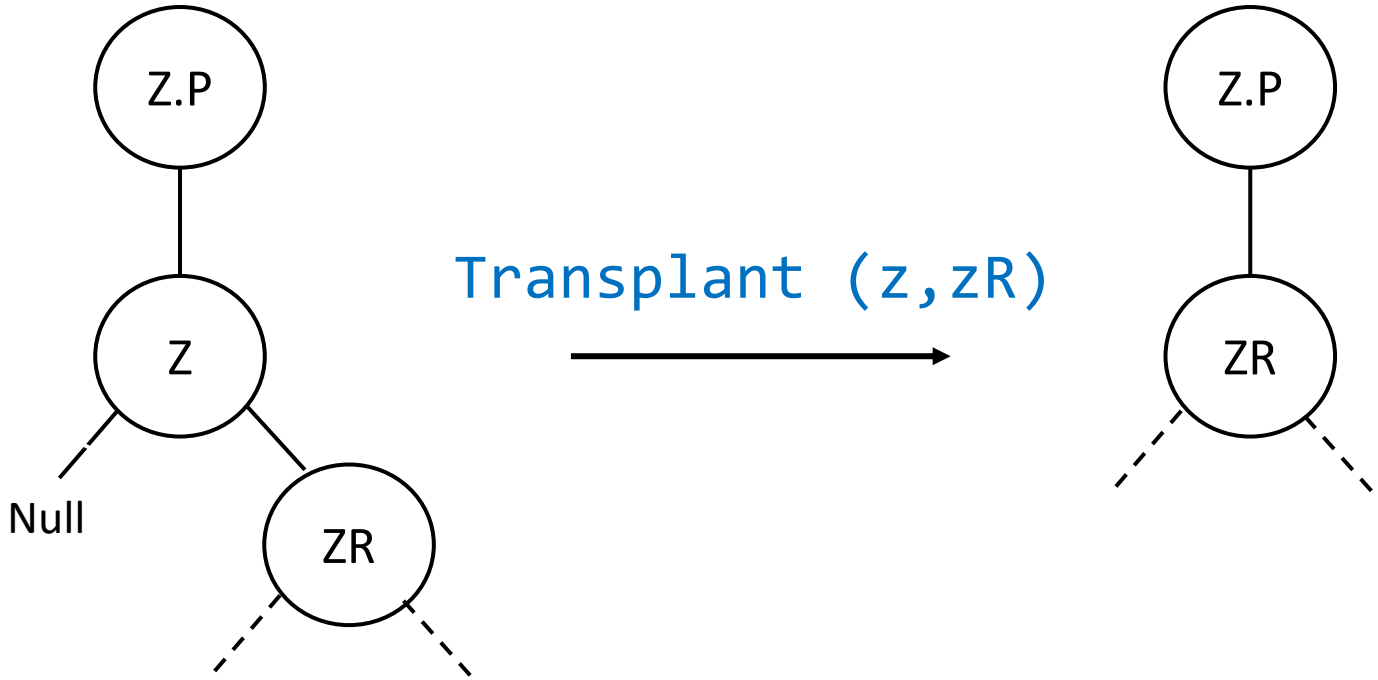


```
Tree_delete(int key):
      Node* z = search(key)
      if z.left == Null:
            transplant(z, z.right)
      else if z.right == Null:
            transplant(z, z.left)
```

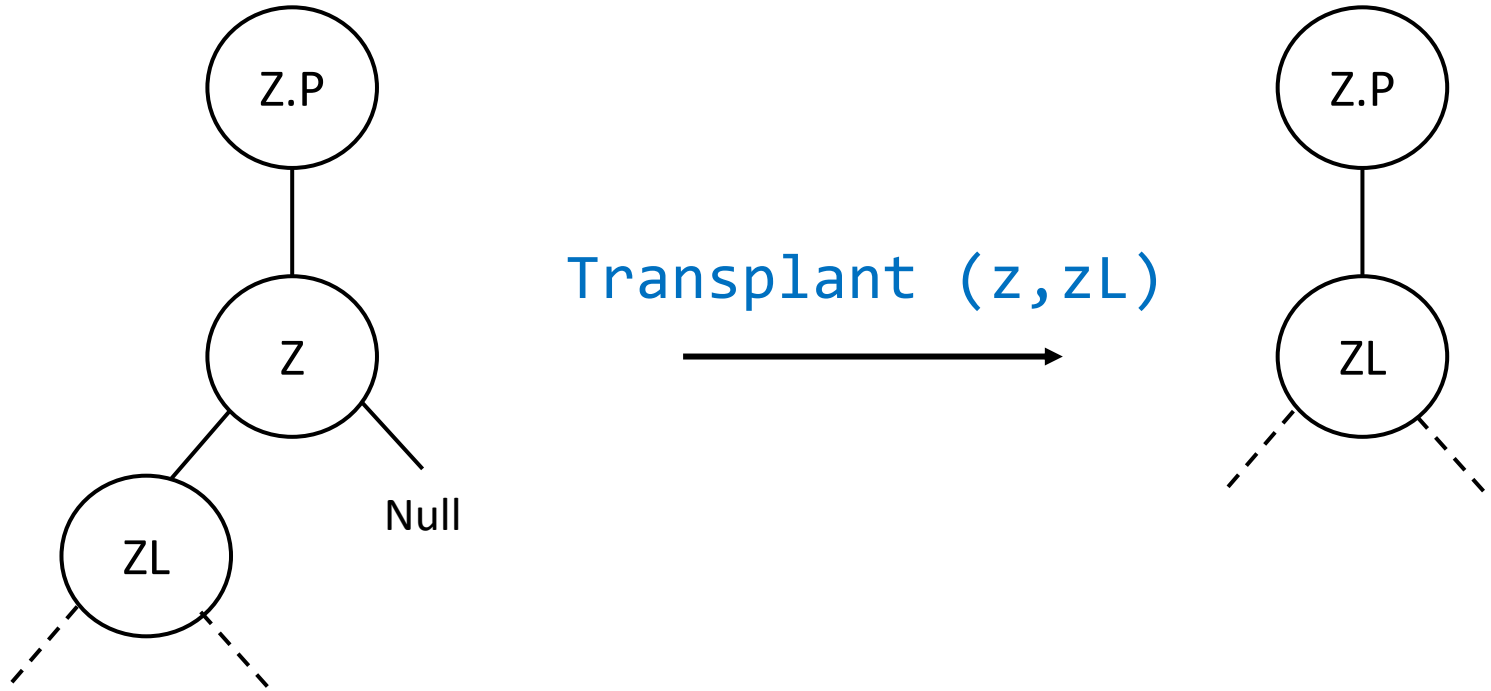


```
Tree_delete(int key):
      Node* z = search(key)
      if z.left == Null:
            transplant(z, z.right)
      else if z.right == Null:
            transplant(z, z.left)
      else
            y == minimum(z.right)

            transplant(z,y)
            y.left = z.left
            z.left.p = y
```


(Assuming y.p == z)

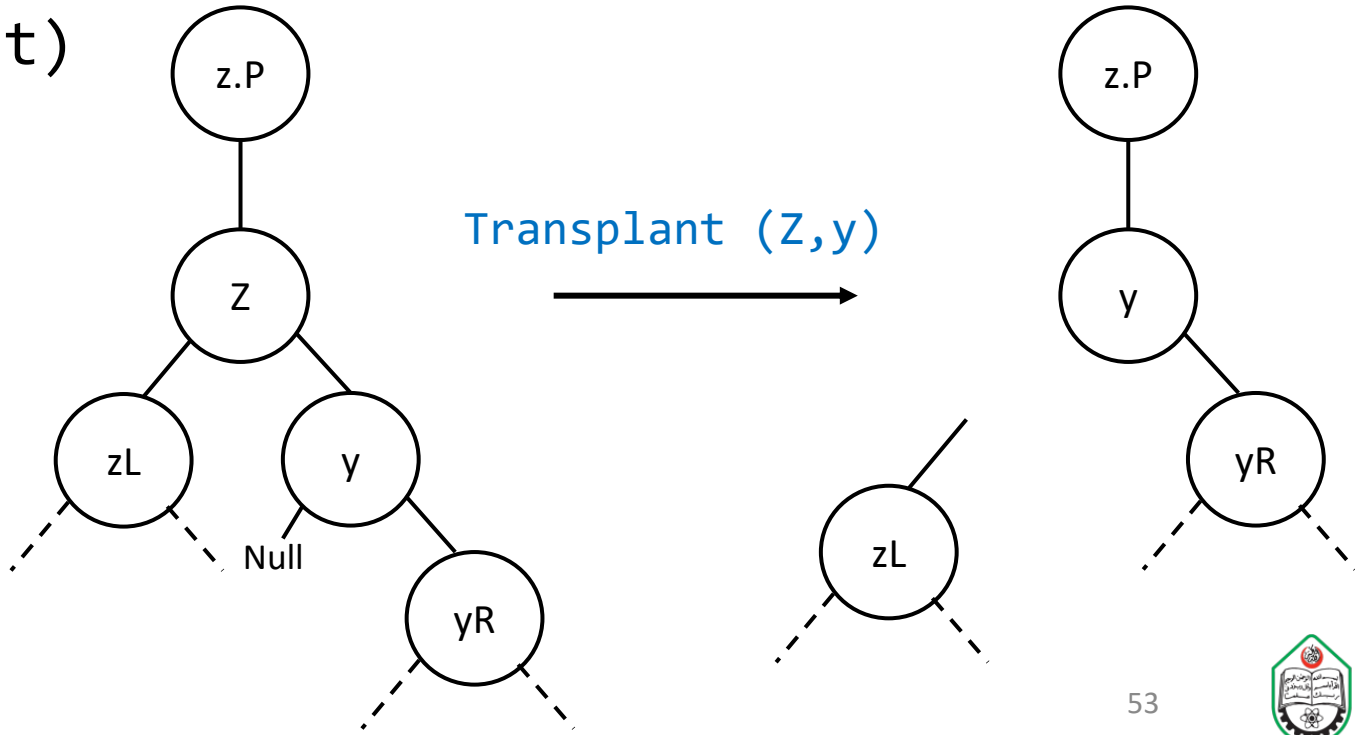

```
Tree_delete(int key):
      Node* z = search(key)
      if z.left == Null:
            transplant(z, z.right)
      else if z.right == Null:
            transplant(z, z.left)
      else
            y == minimum(z.right)
            if y.p != z:
                  transplant(y, y.right)
                  y.right = z.right
                  z.right.p = y
            transplant(z,y)
            y.left = z.left
            z.left.p = y
```

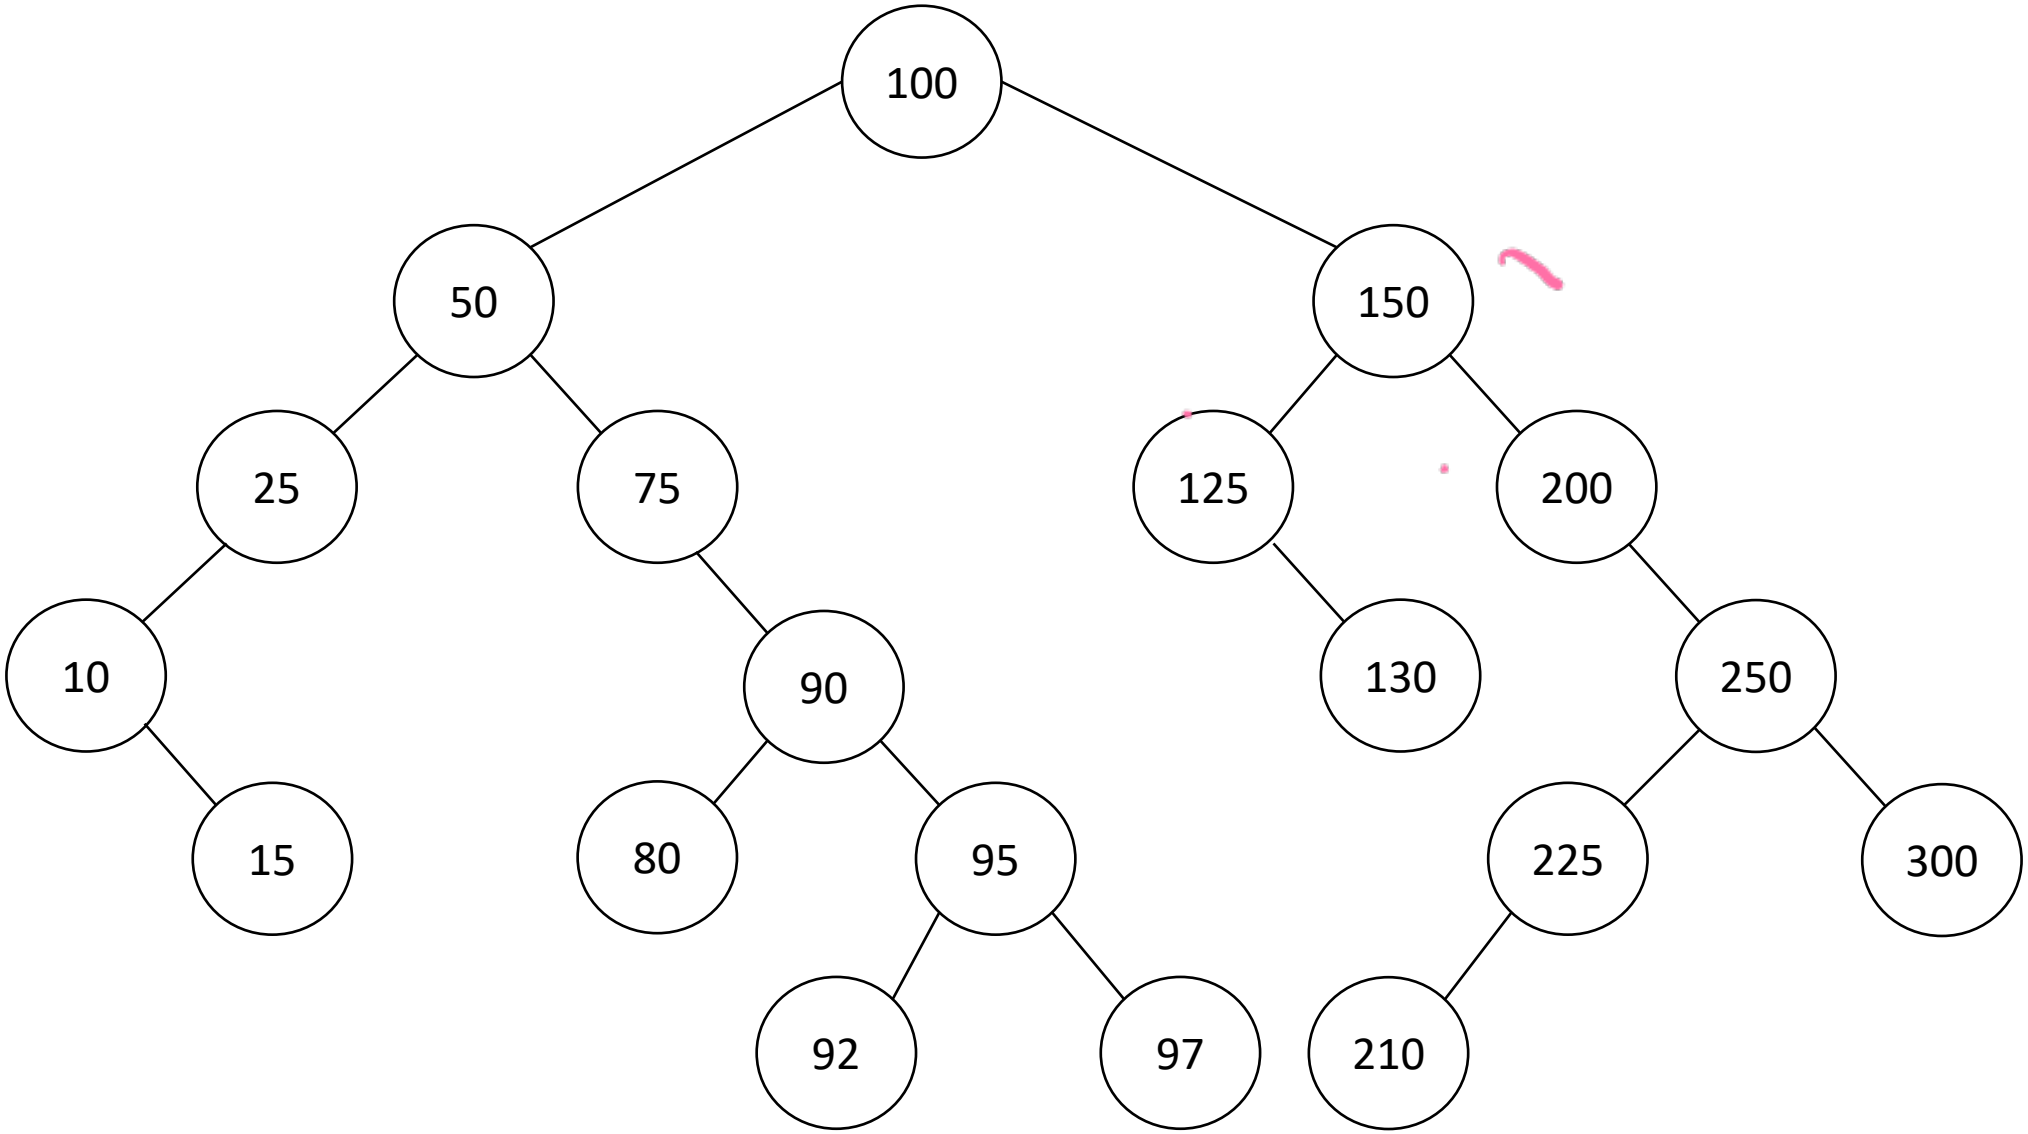

100
50
150
25
75
125
200
10
90
130
250
15
80
95
225
300
92
97
210

Delete (15)

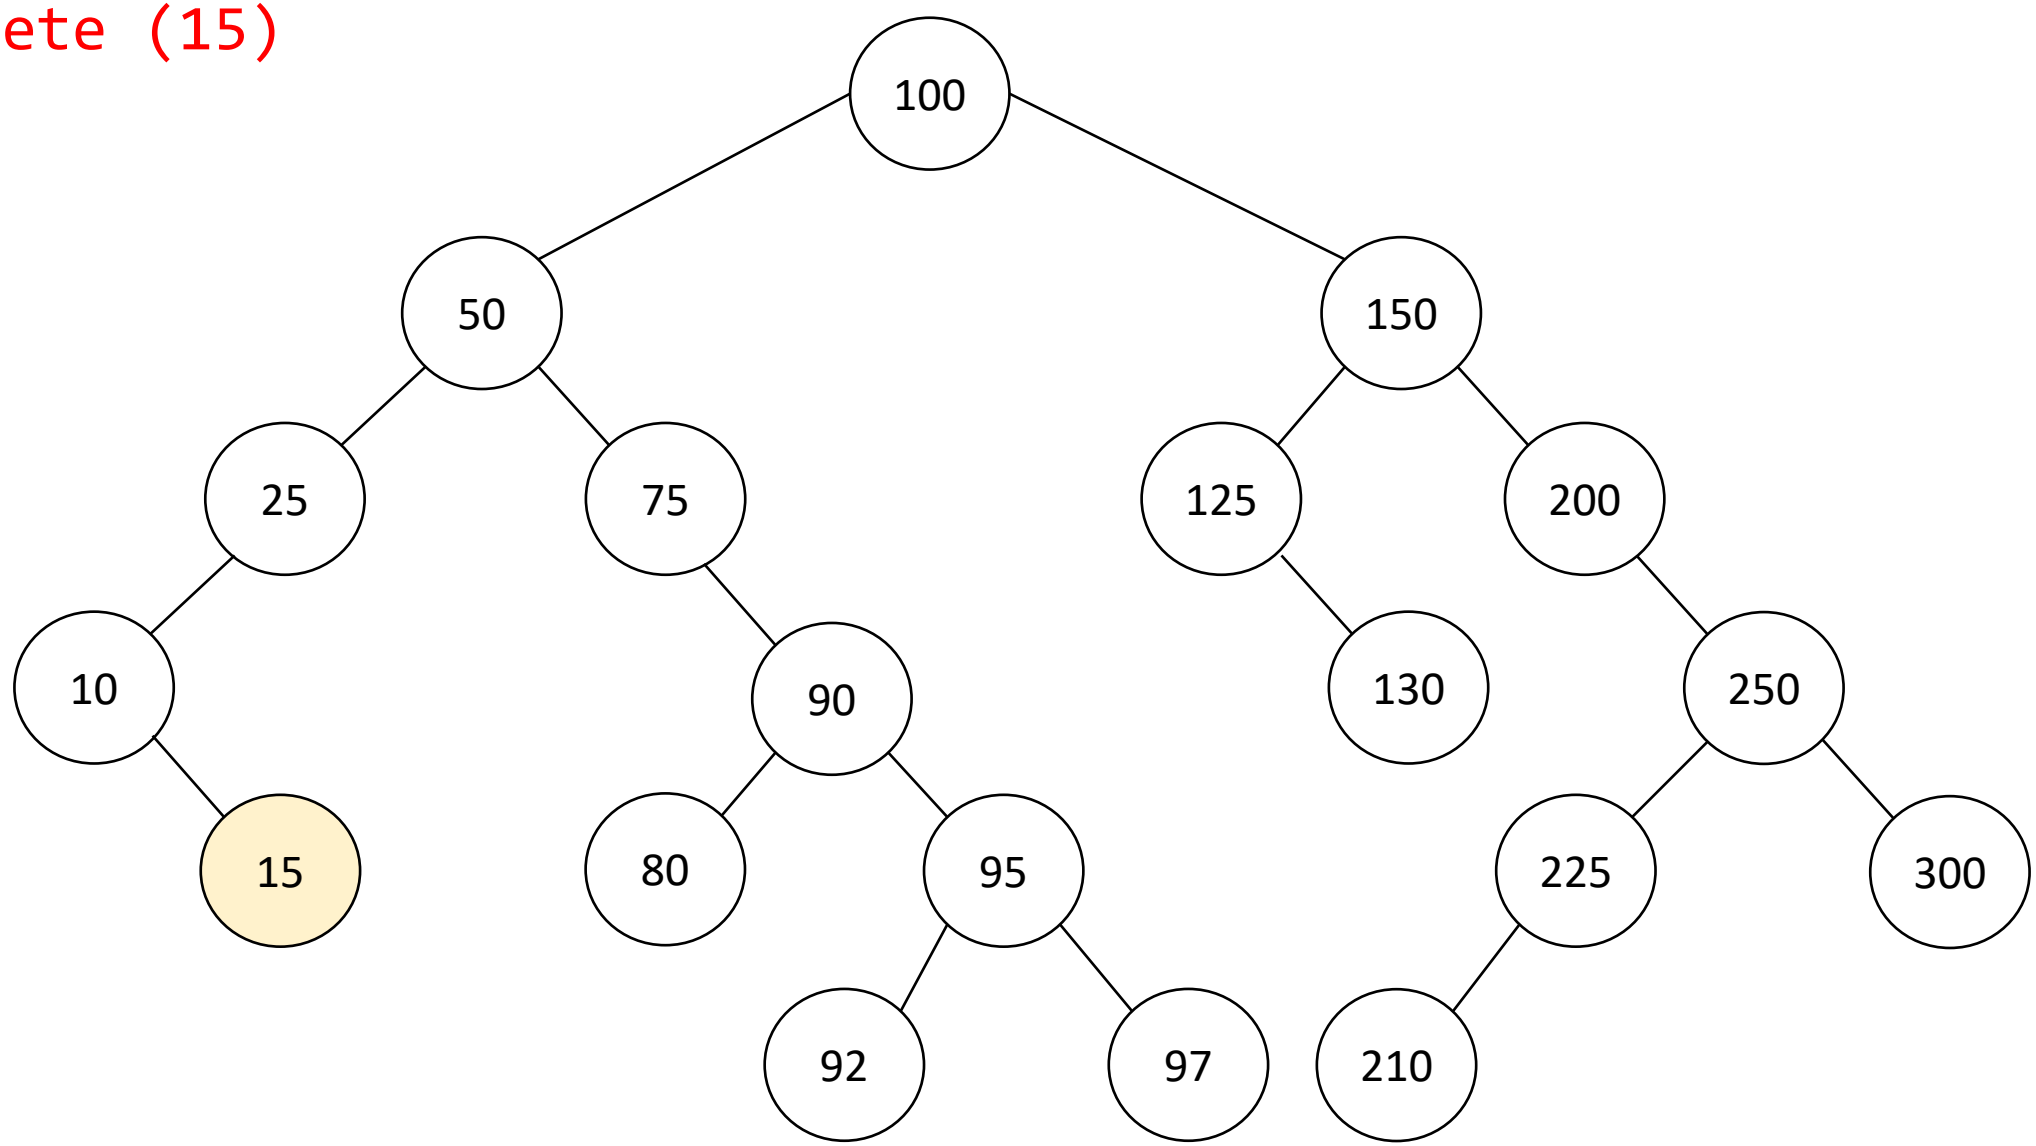

Delete (15)


z=15, z.left=Null
Case-A

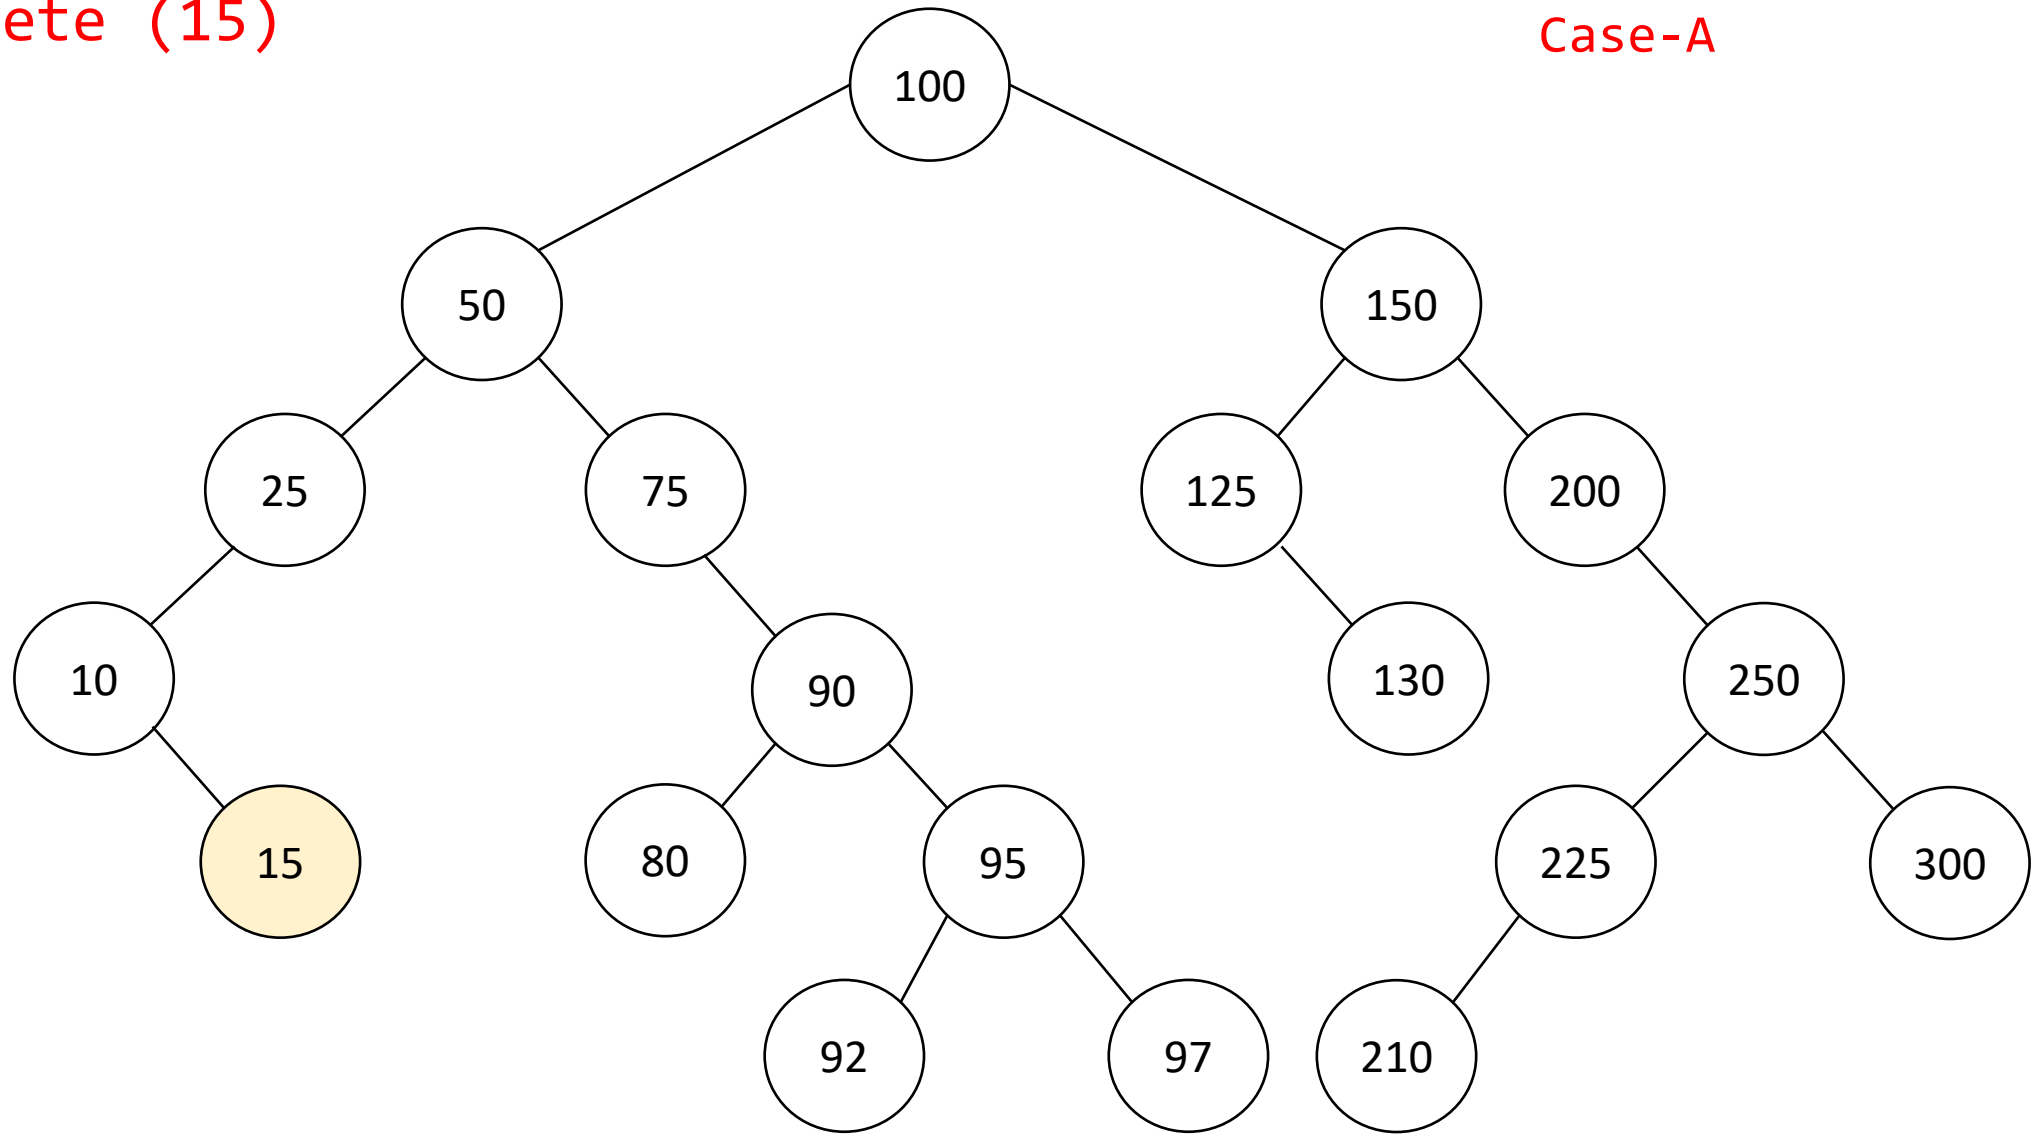

Delete (15)

z=15, z.left=Null
Case-A


Transplant(z, z.right)
~transplant(15, Null)

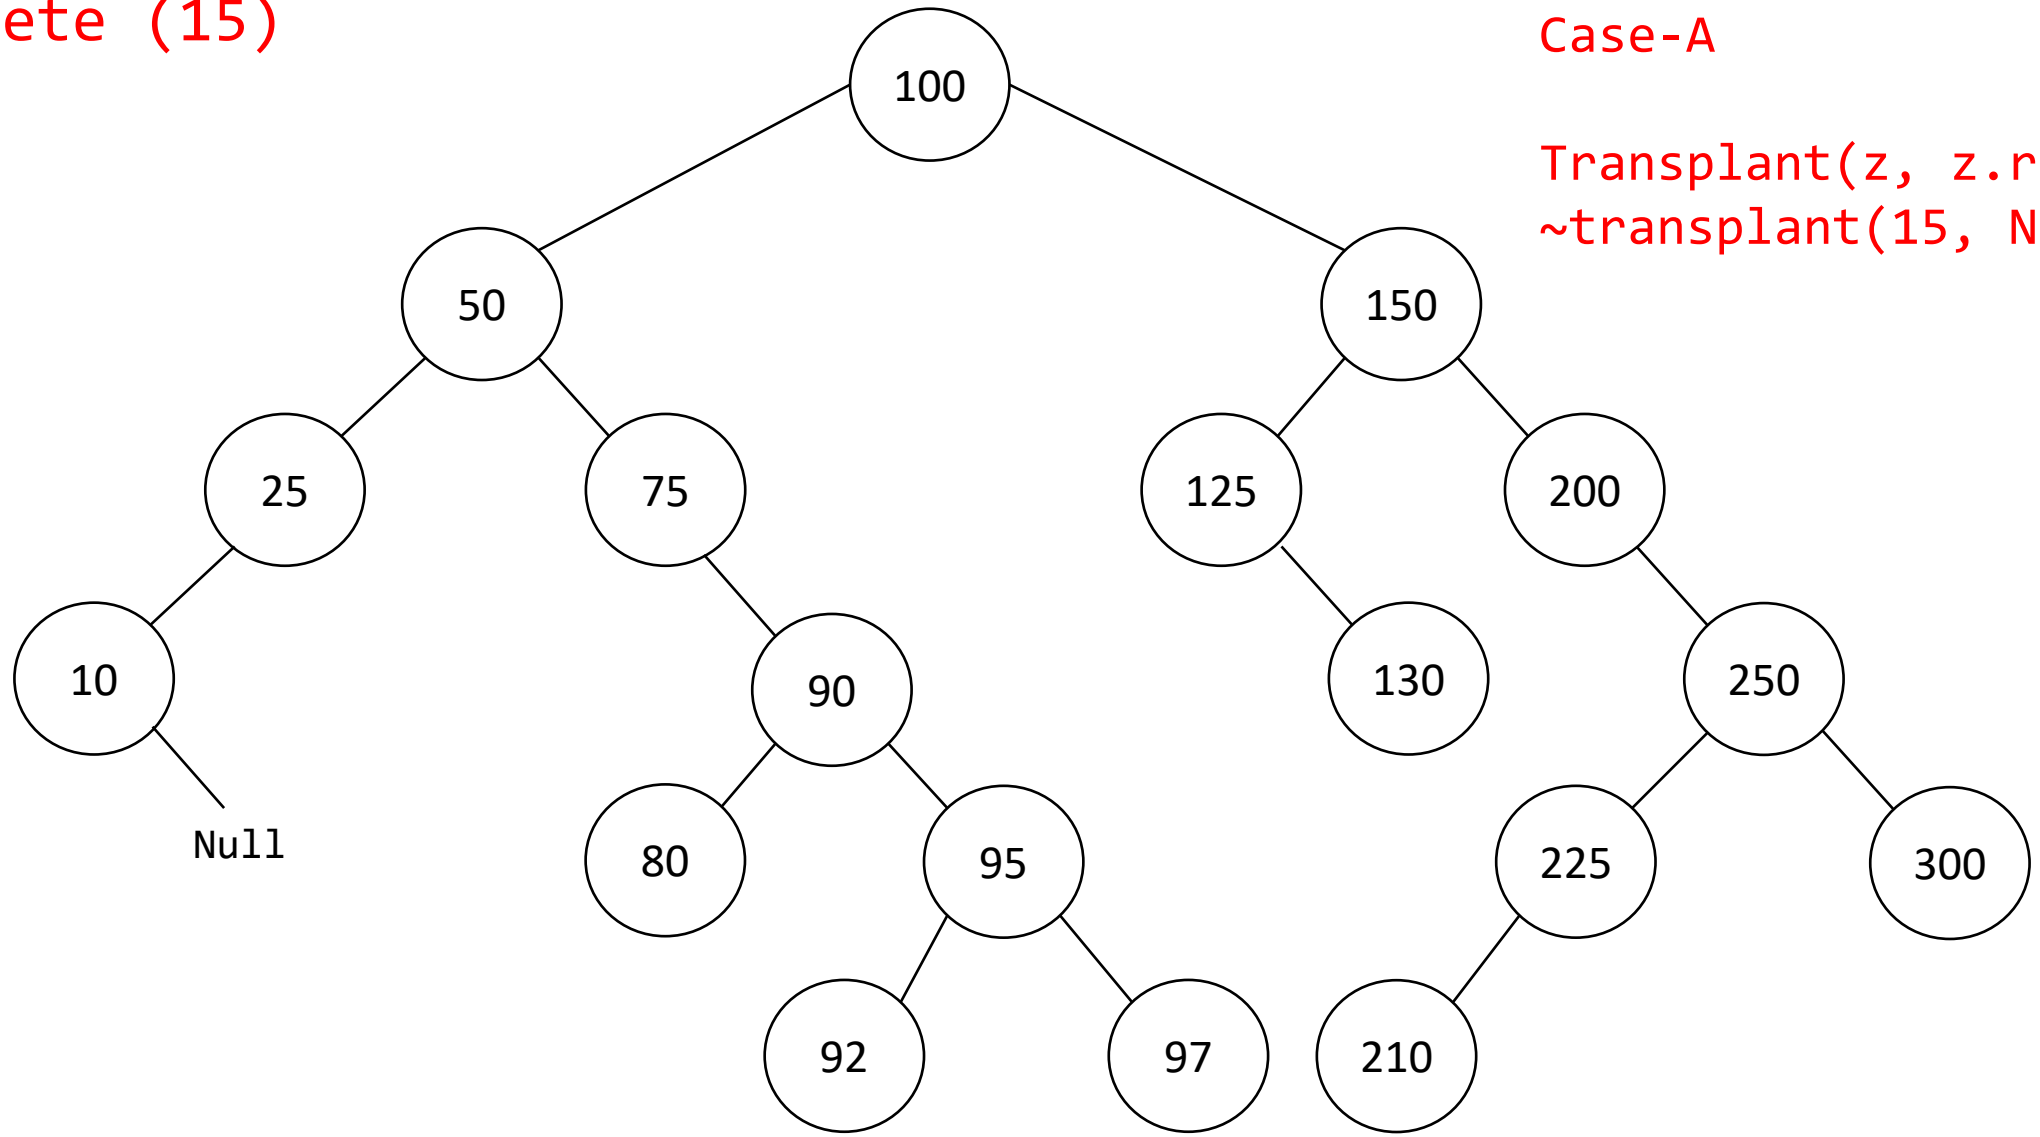


Delete (25)

z=25, z.right=Null
Case-B

Transplant(z, z.left)
~transplant(25,10)

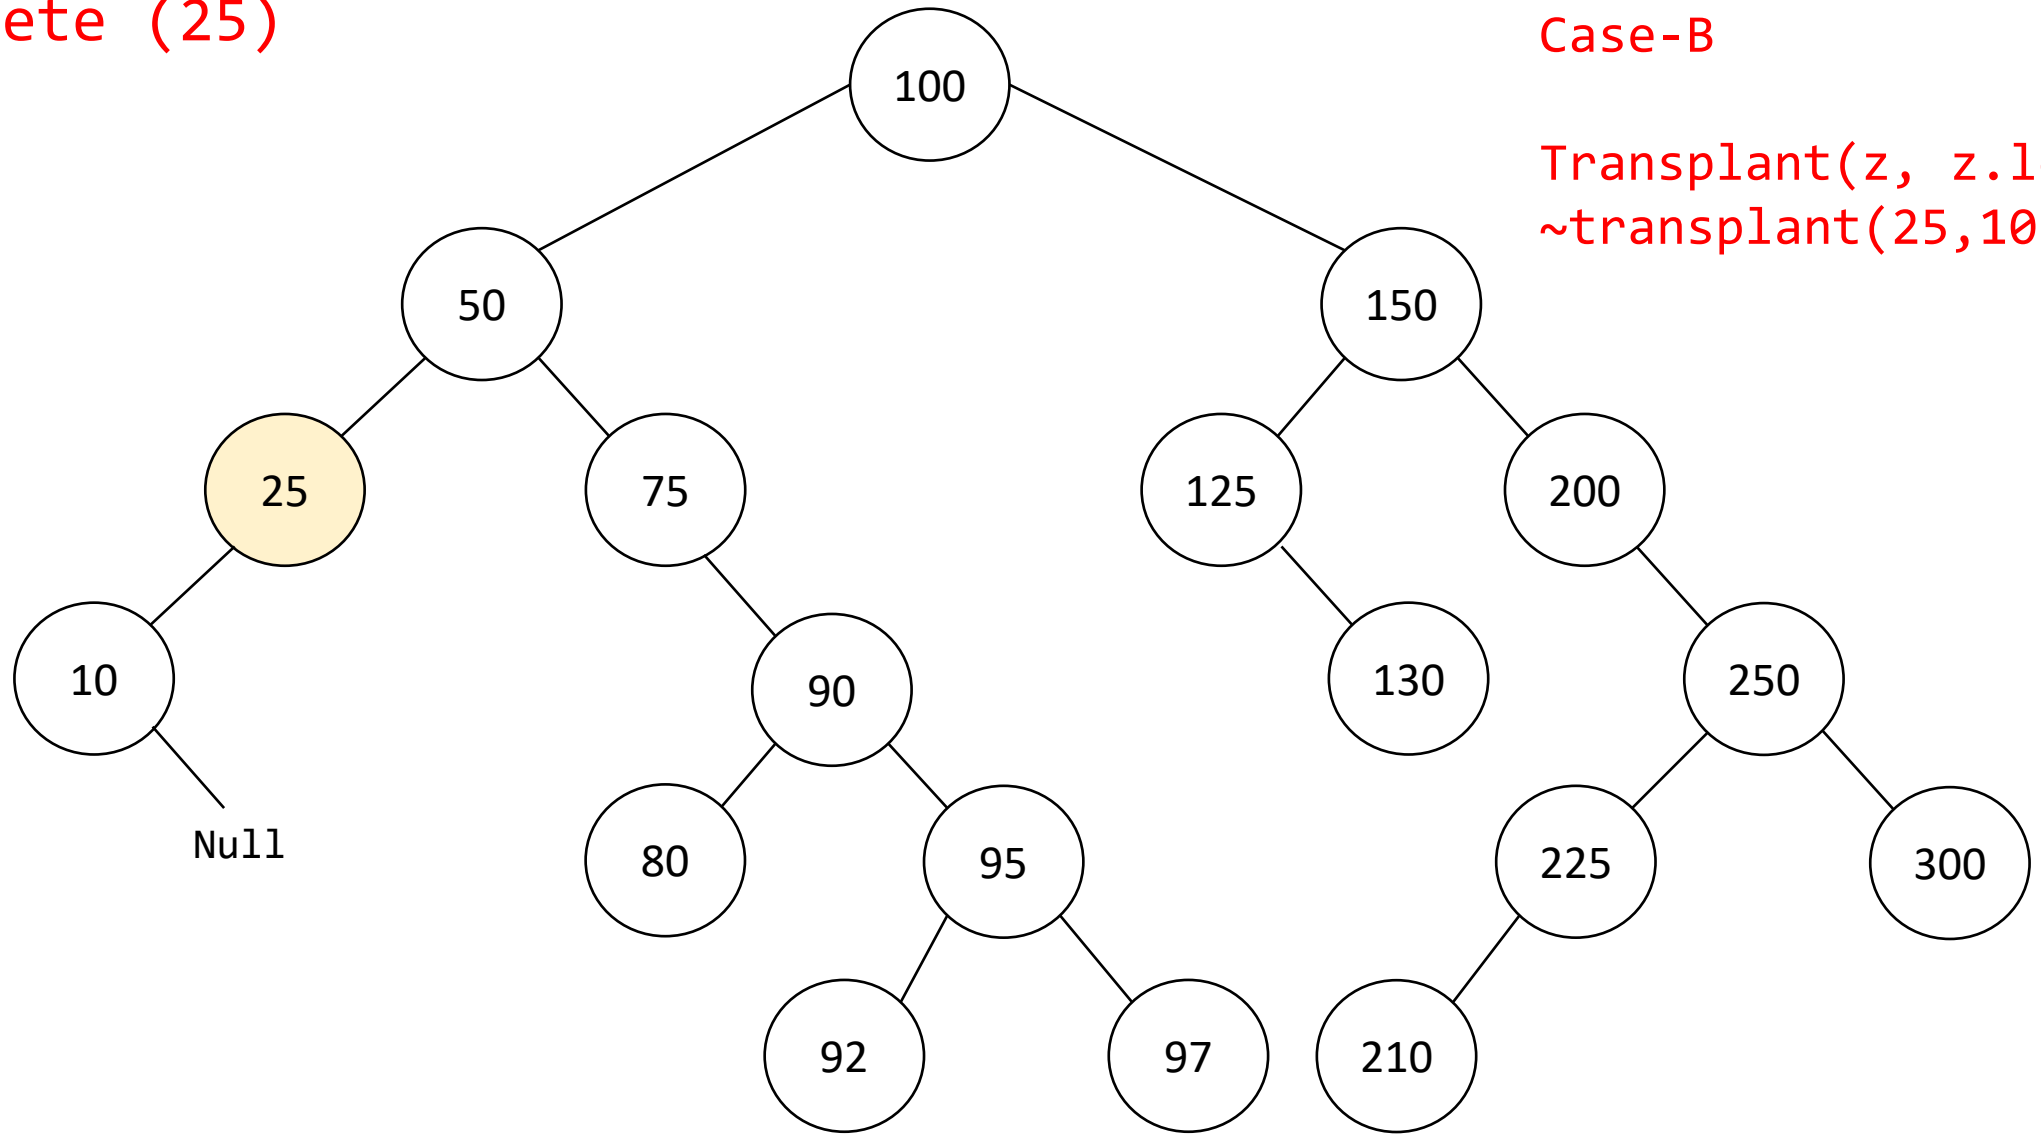


Delete (25)

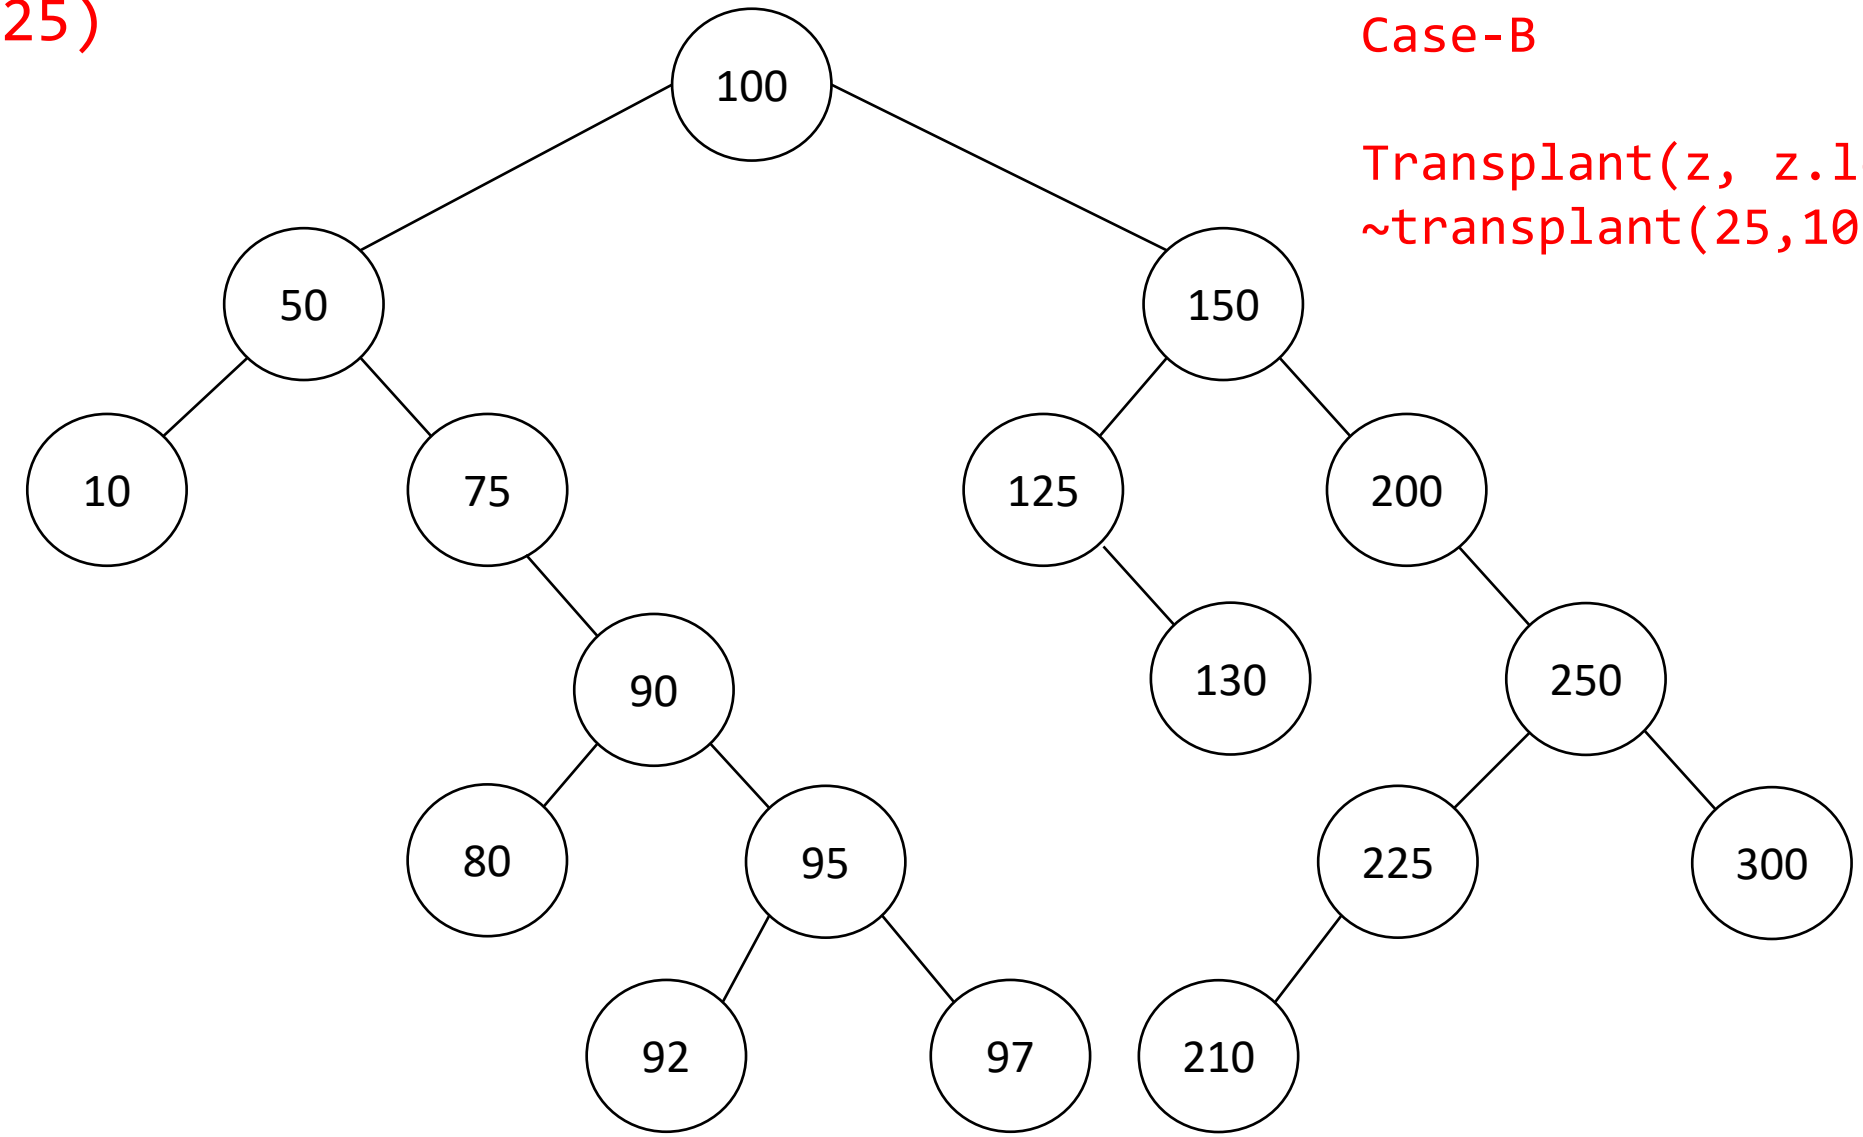

z=25, z.right=Null
Case-B

Transplant(z, z.left)
~transplant(25,10)


Delete (125)

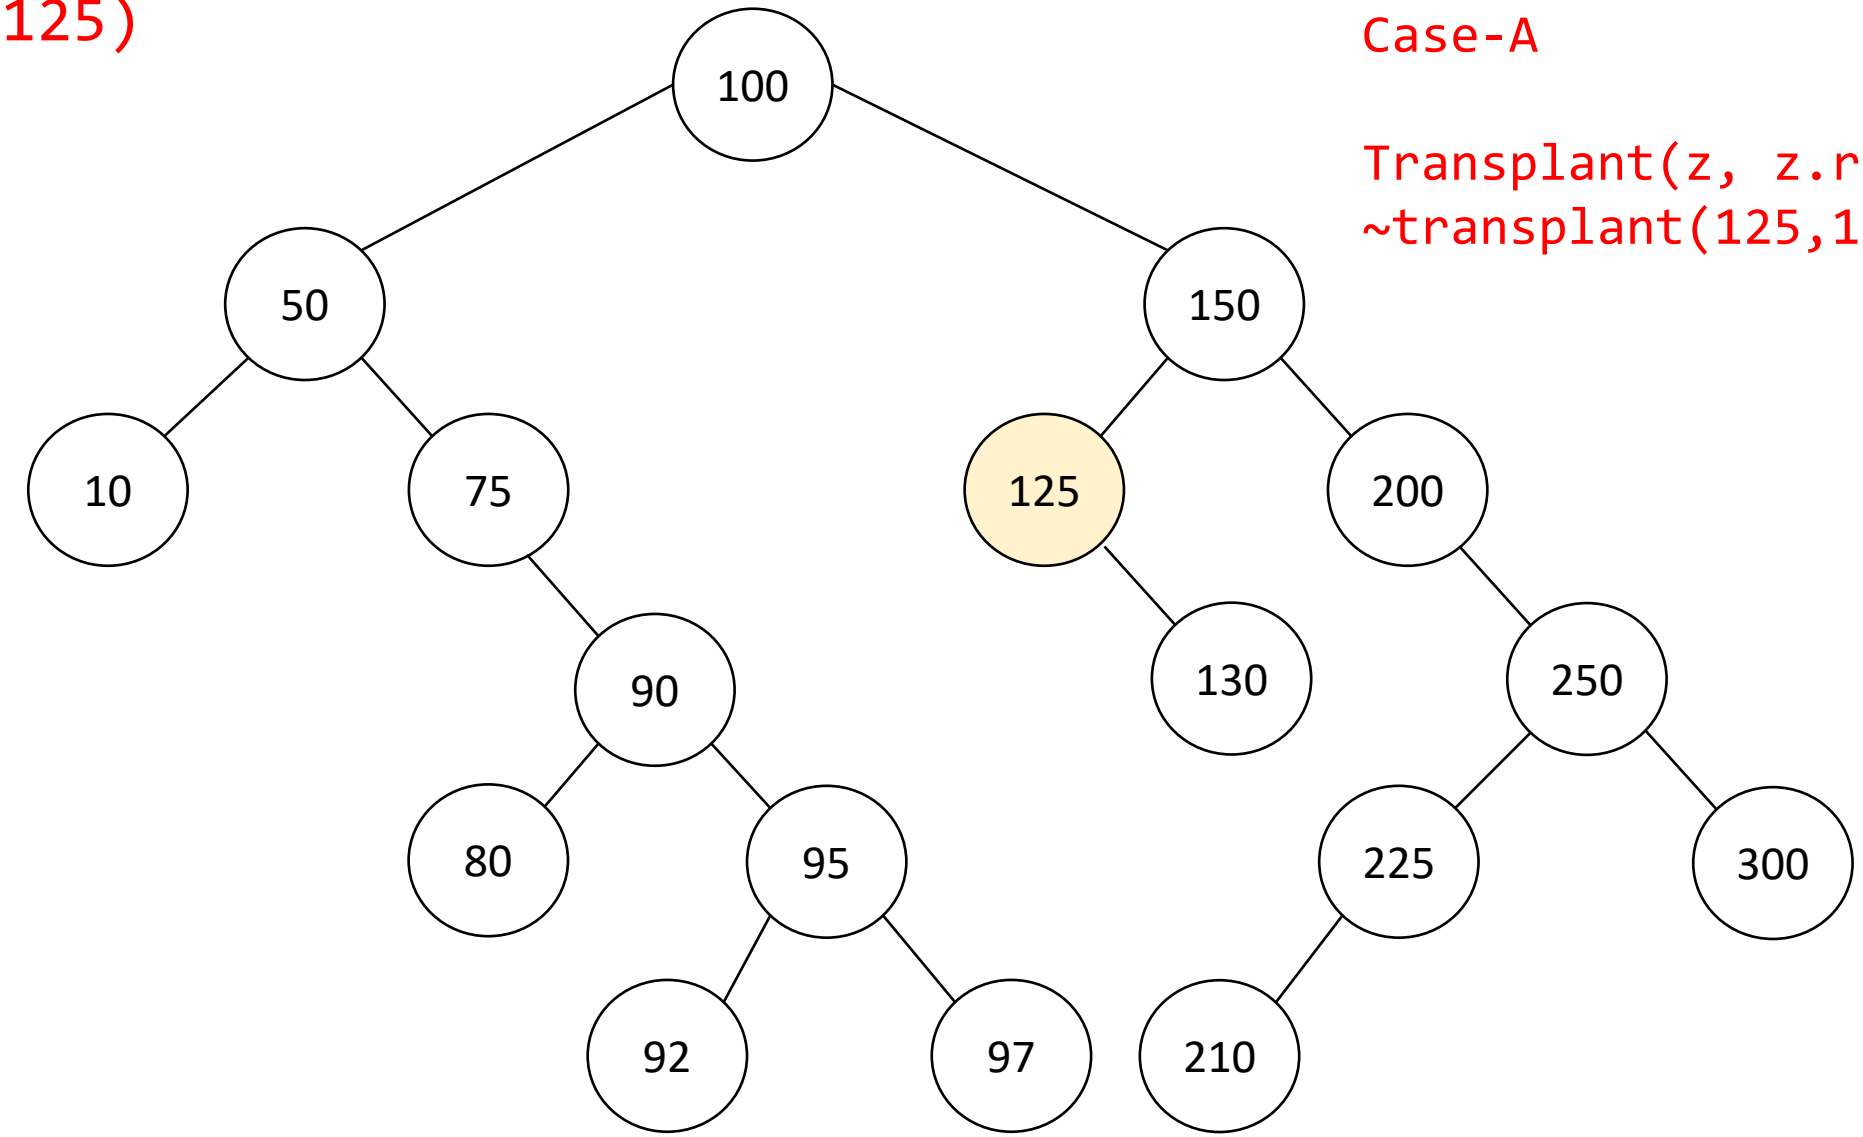

z=125, z.left=Null
Case-A

Transplant(z, z.right)
~transplant(125,130)


Delete (125)

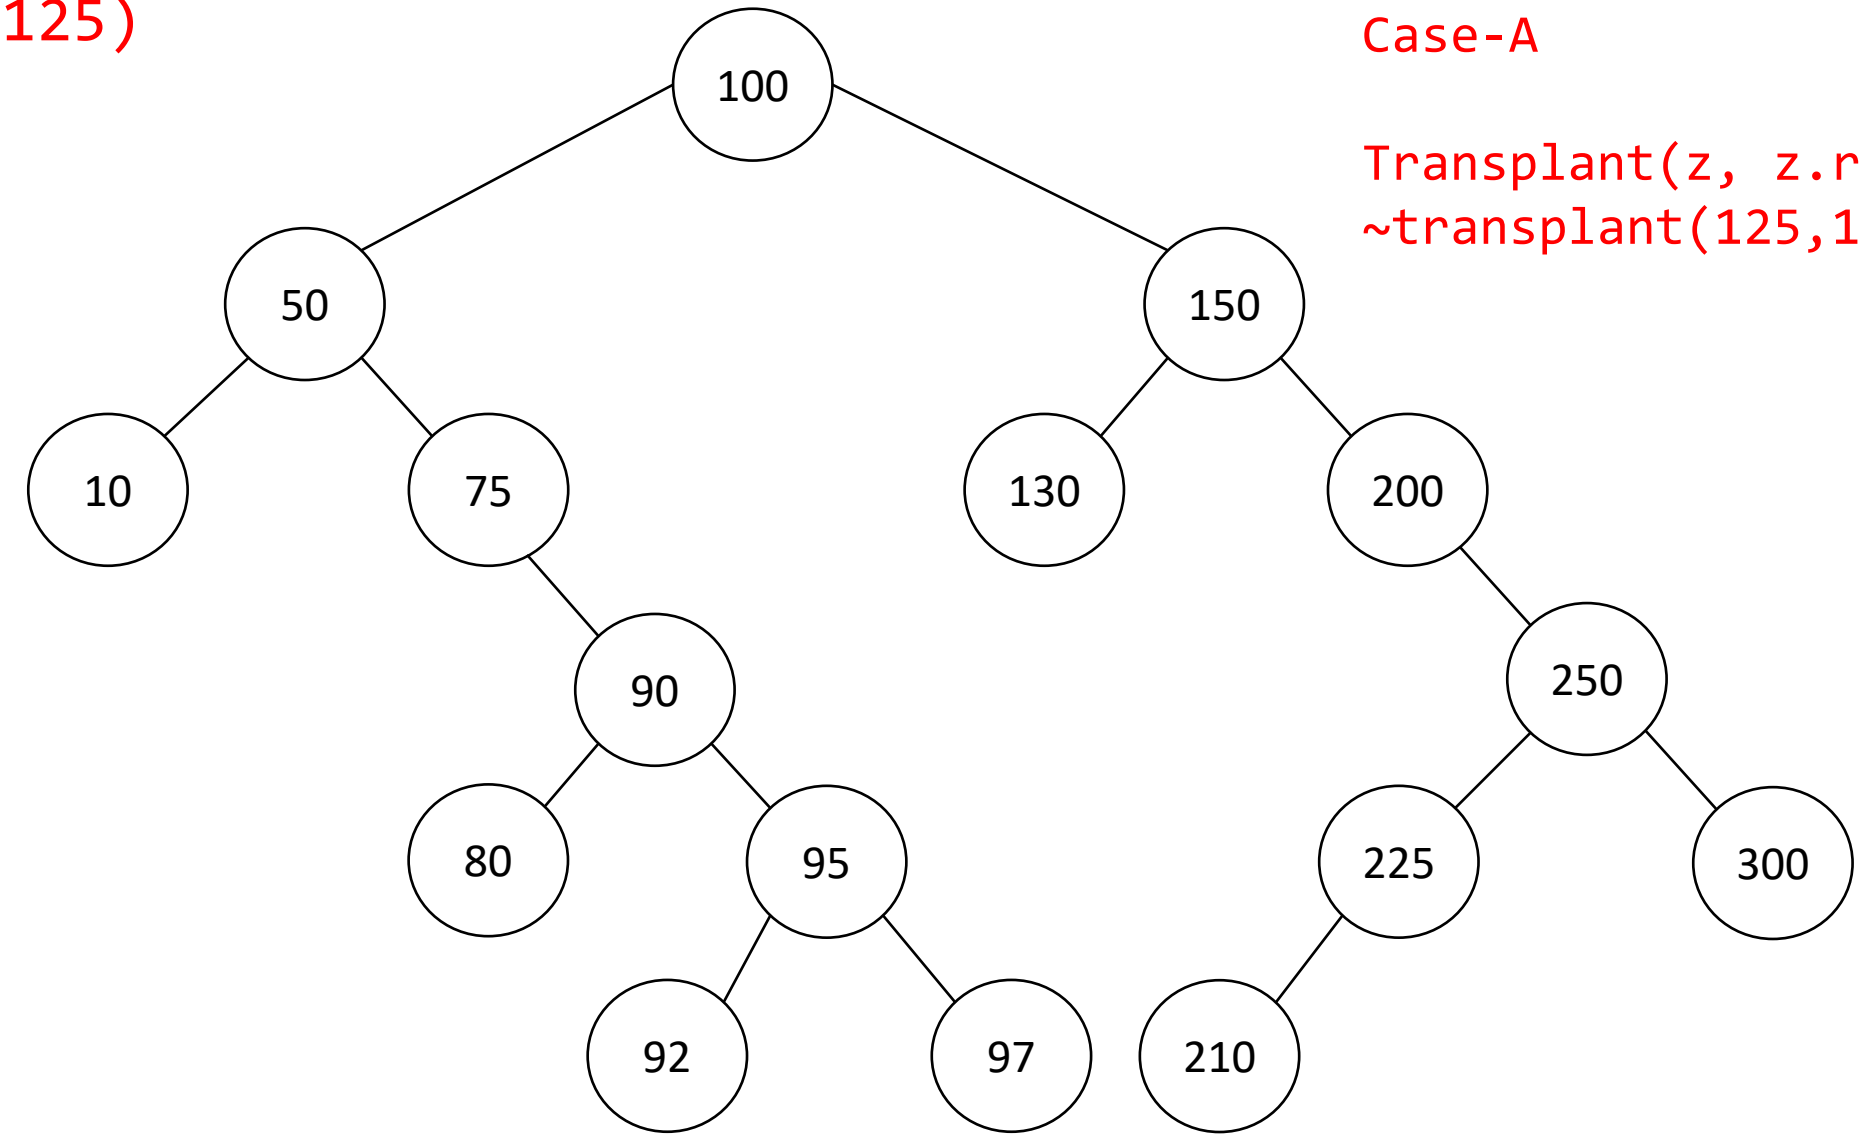

z=125, z.left=Null
Case-A

Transplant(z, z.right)
~transplant(125,130)

Delete (50)

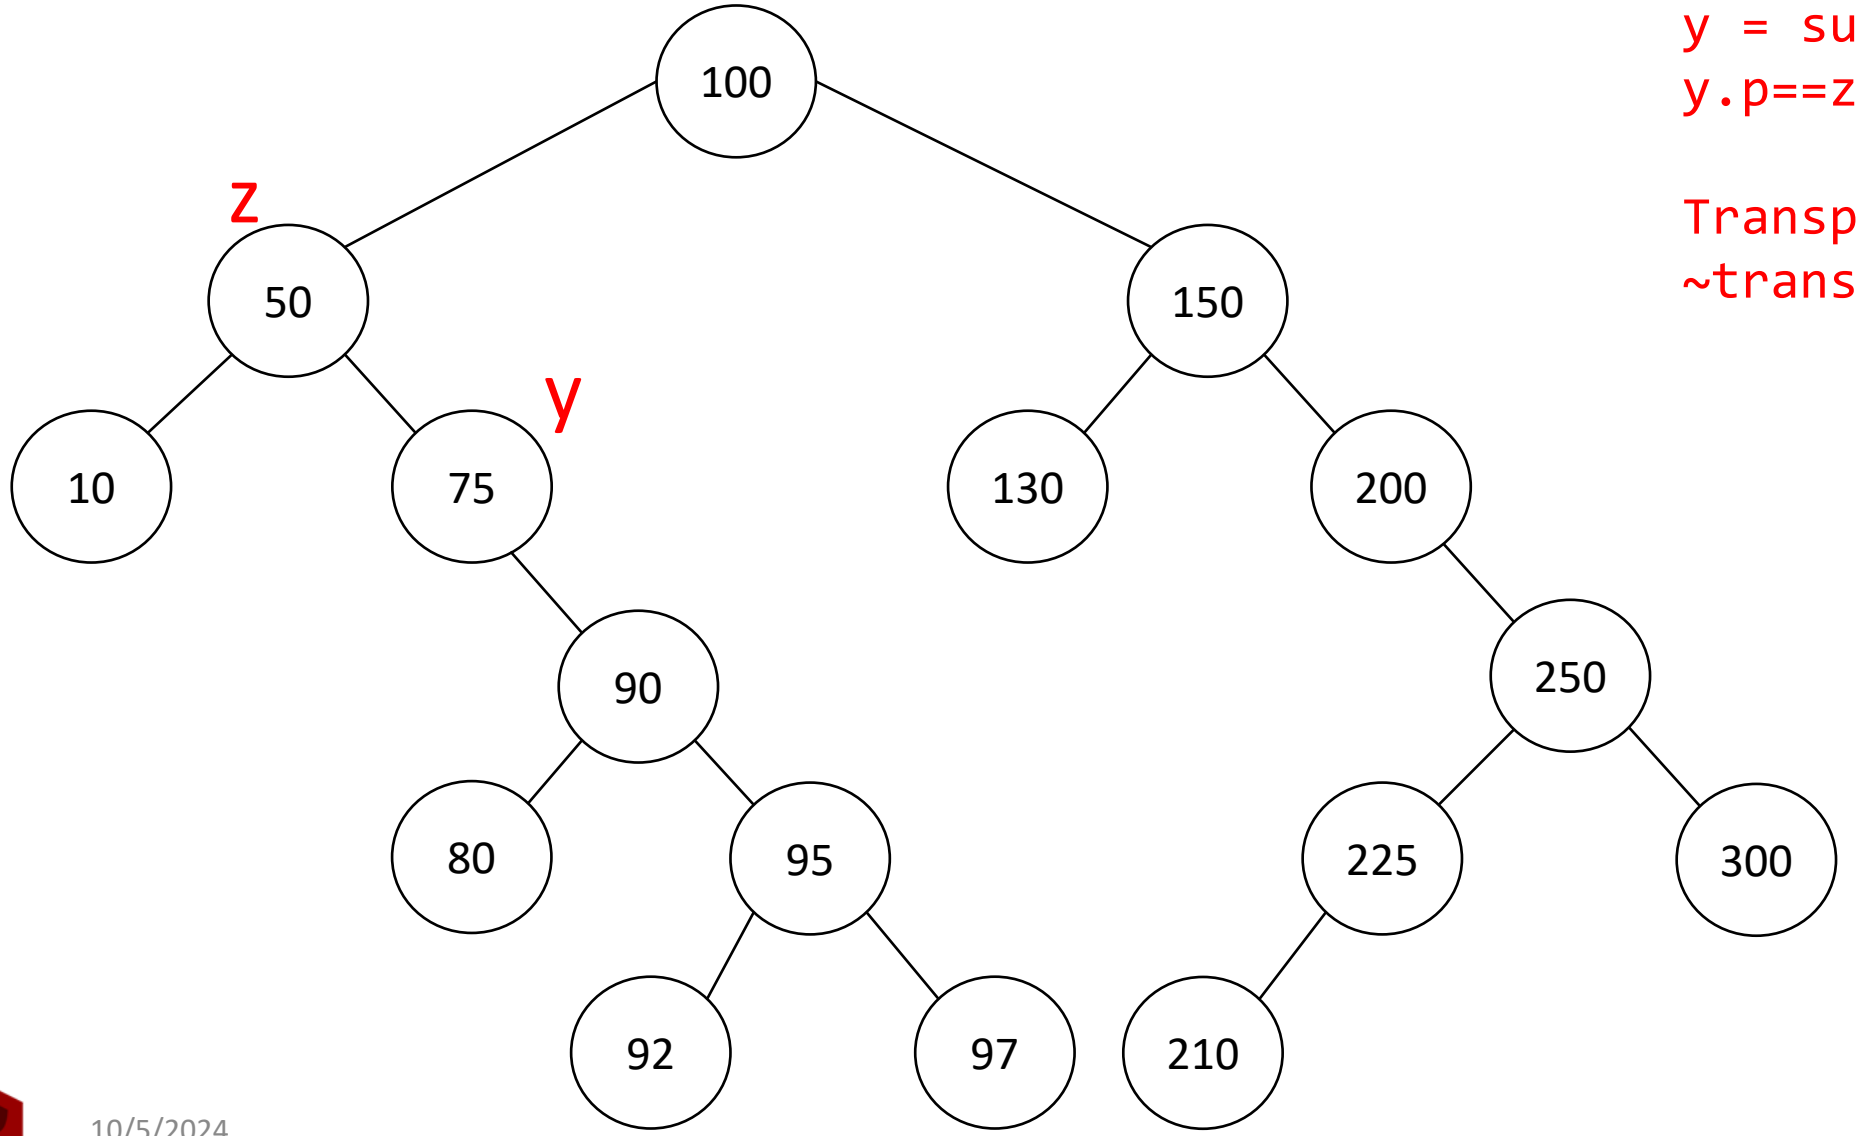


z=50, z.left!=Null,
z.right!=Null

y = successor(50) = 75
y.p==z, case-C

Transplant(z, y)
~transplant(50,75)

Delete (50)

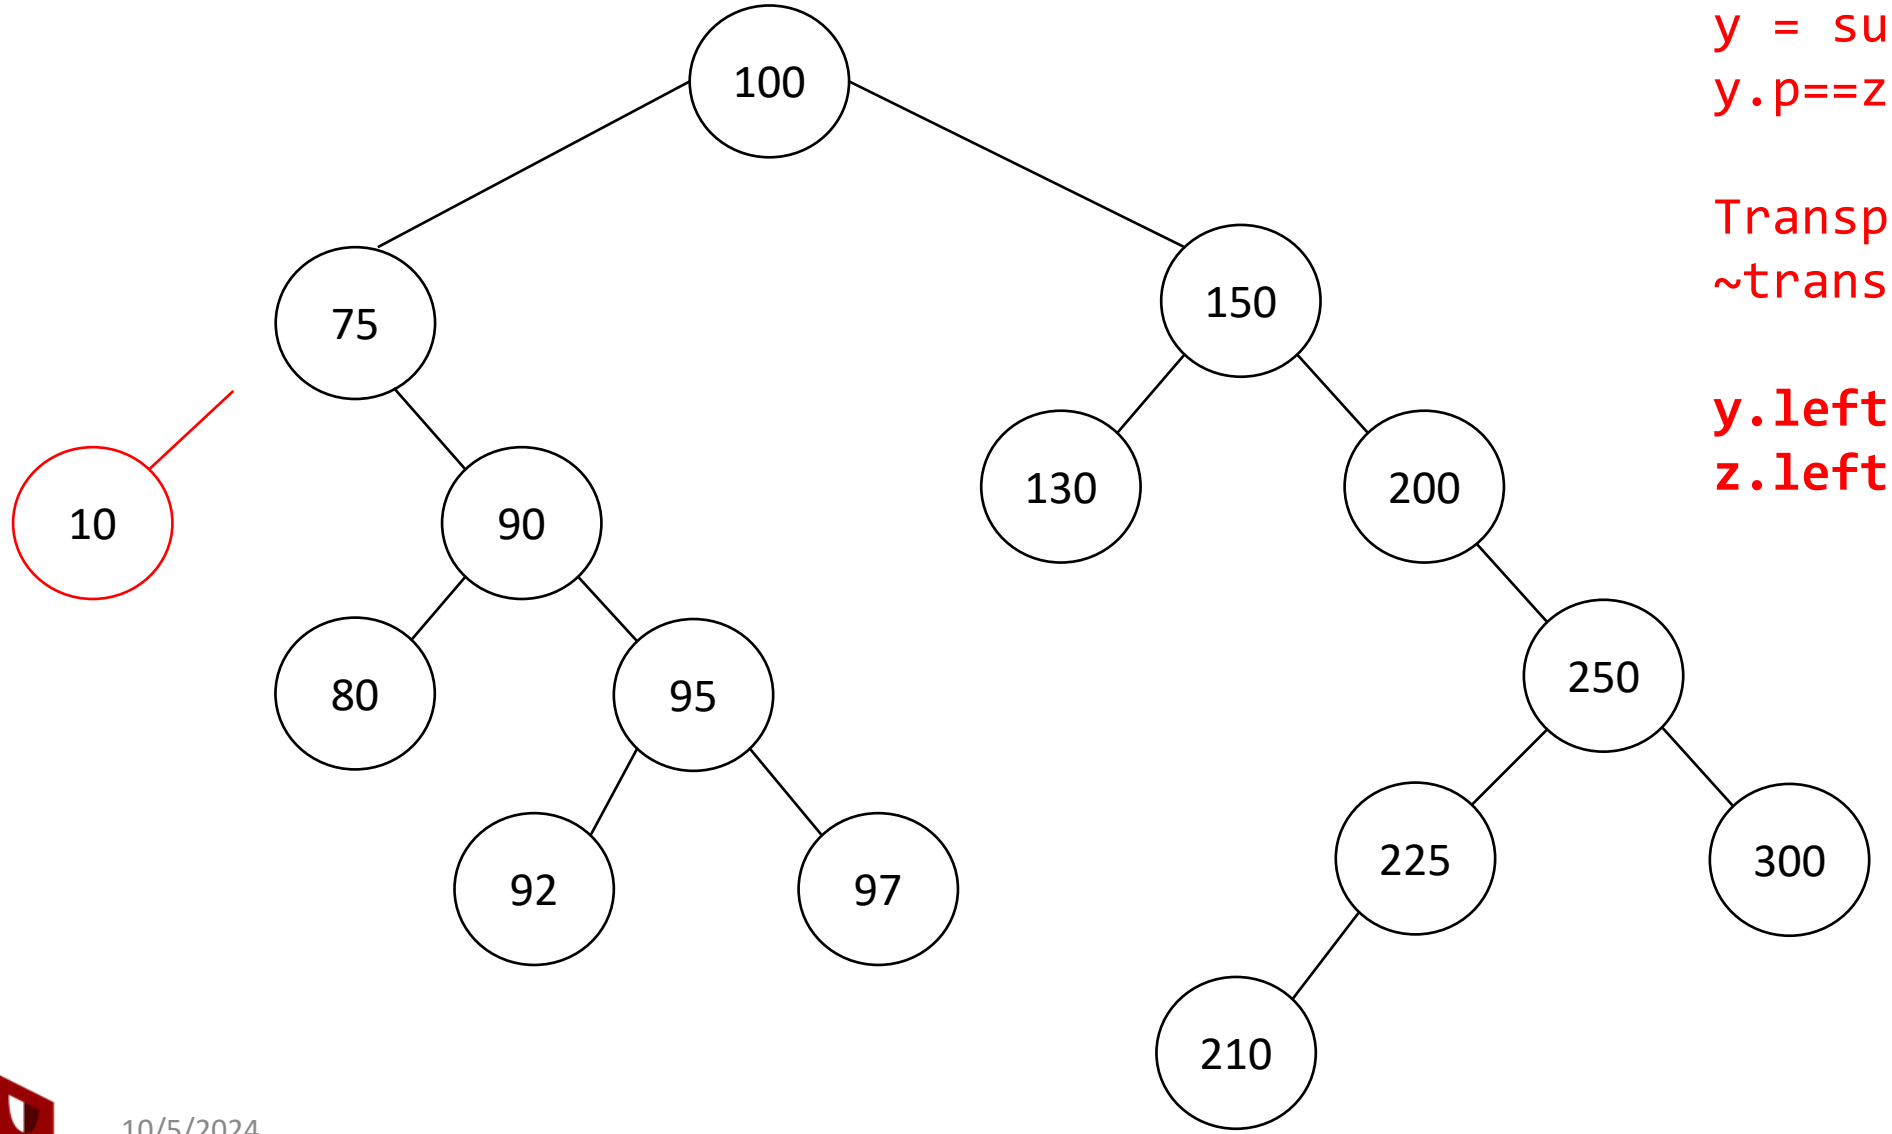


z=50, z.left!=Null,
z.right!=Null

y = successor(50) = 75
y.p==z, case-C

Transplant(z, y)
~transplant(50,75)

y.left = z.left
z.left.p = y

Delete (50)

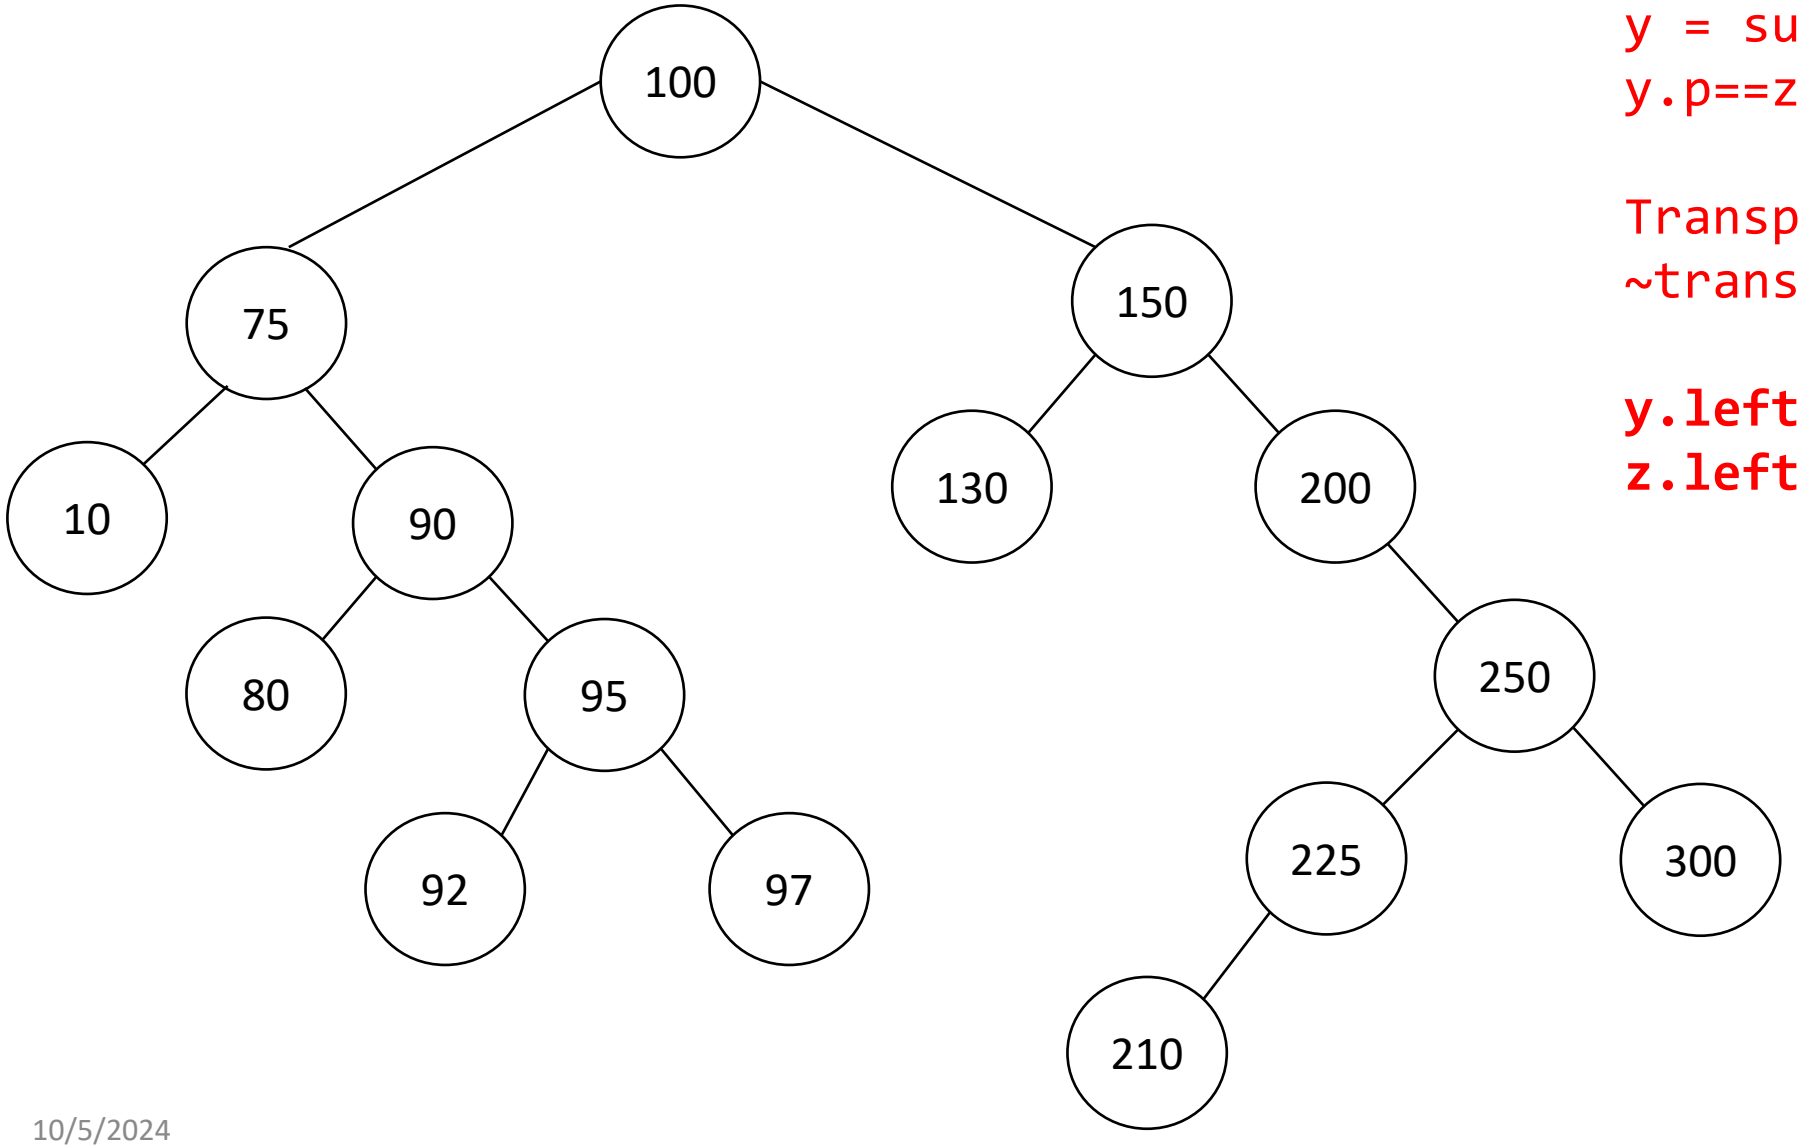


z=50, z.left!=Null,
z.right!=Null

y = successor(50) = 75
y.p==z, case-C


Transplant(z, y)
~transplant(50,75)

y.left = z.left
z.left.p = y

Delete (150)

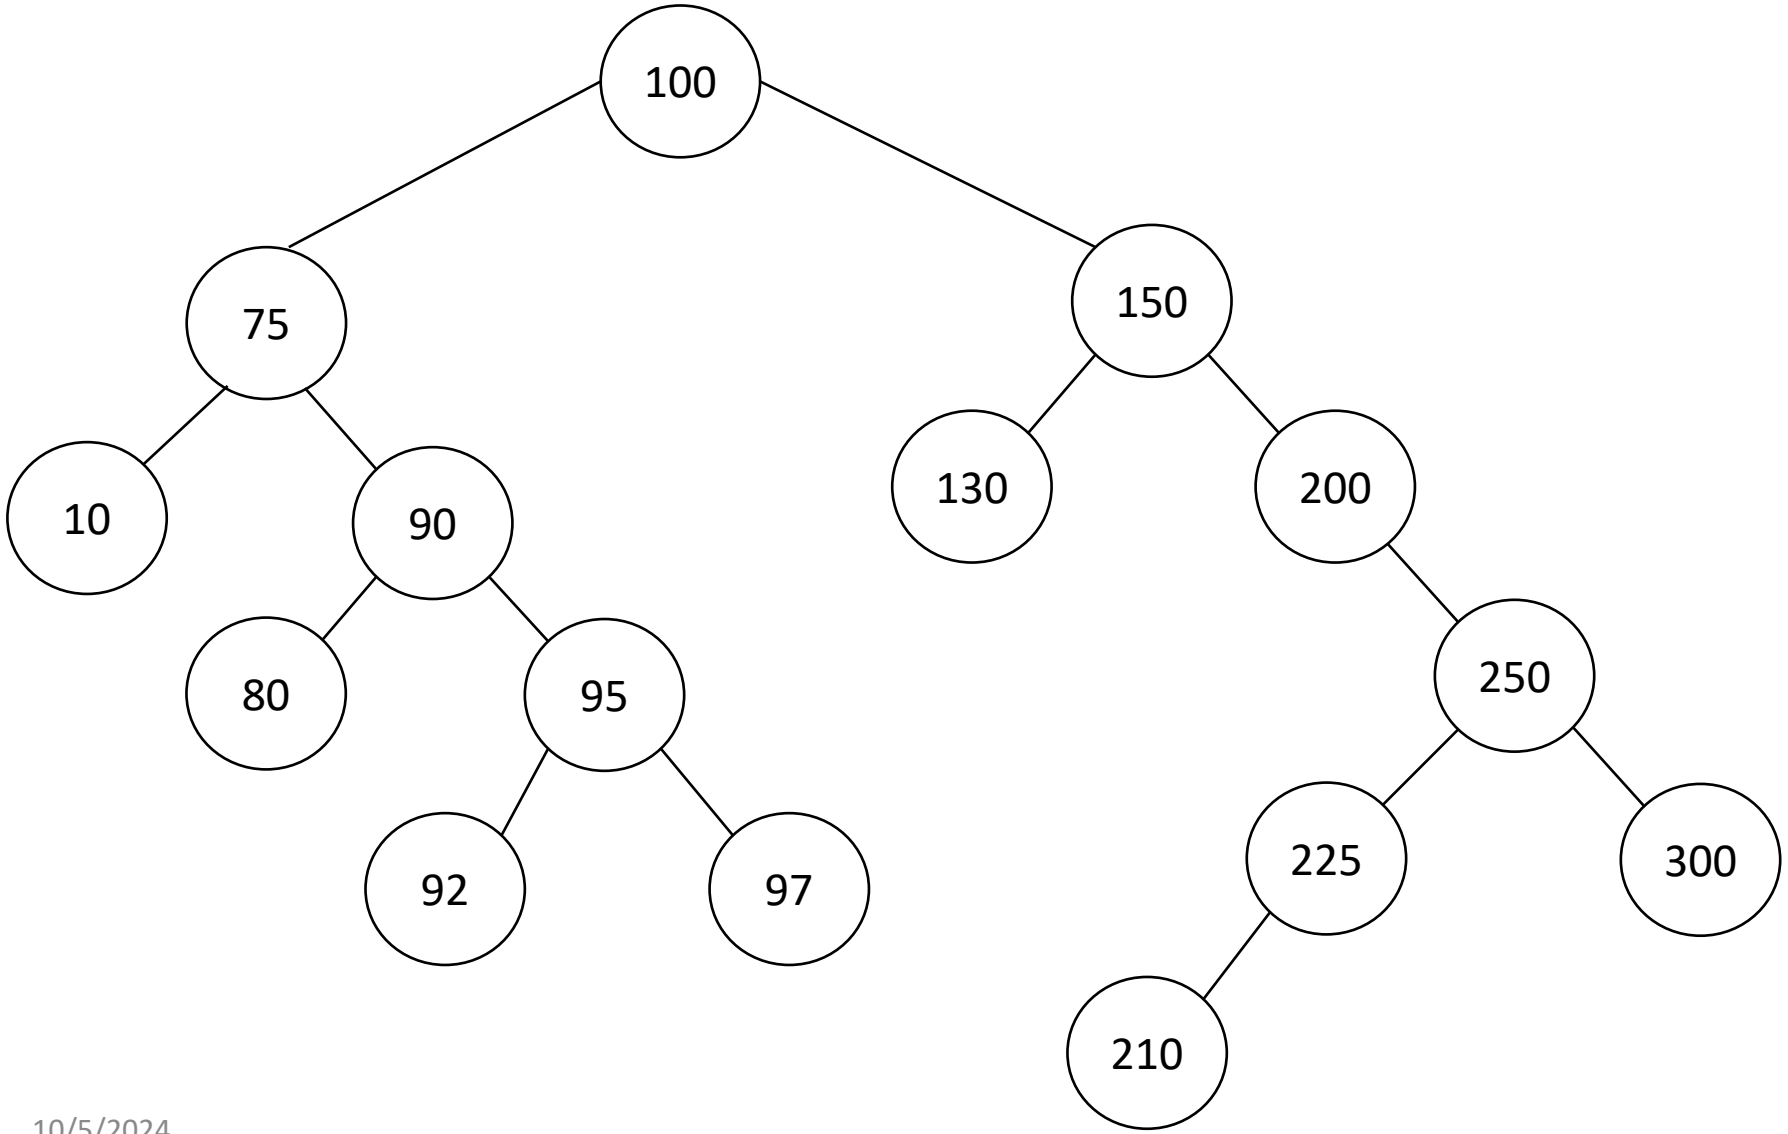

Delete (150)

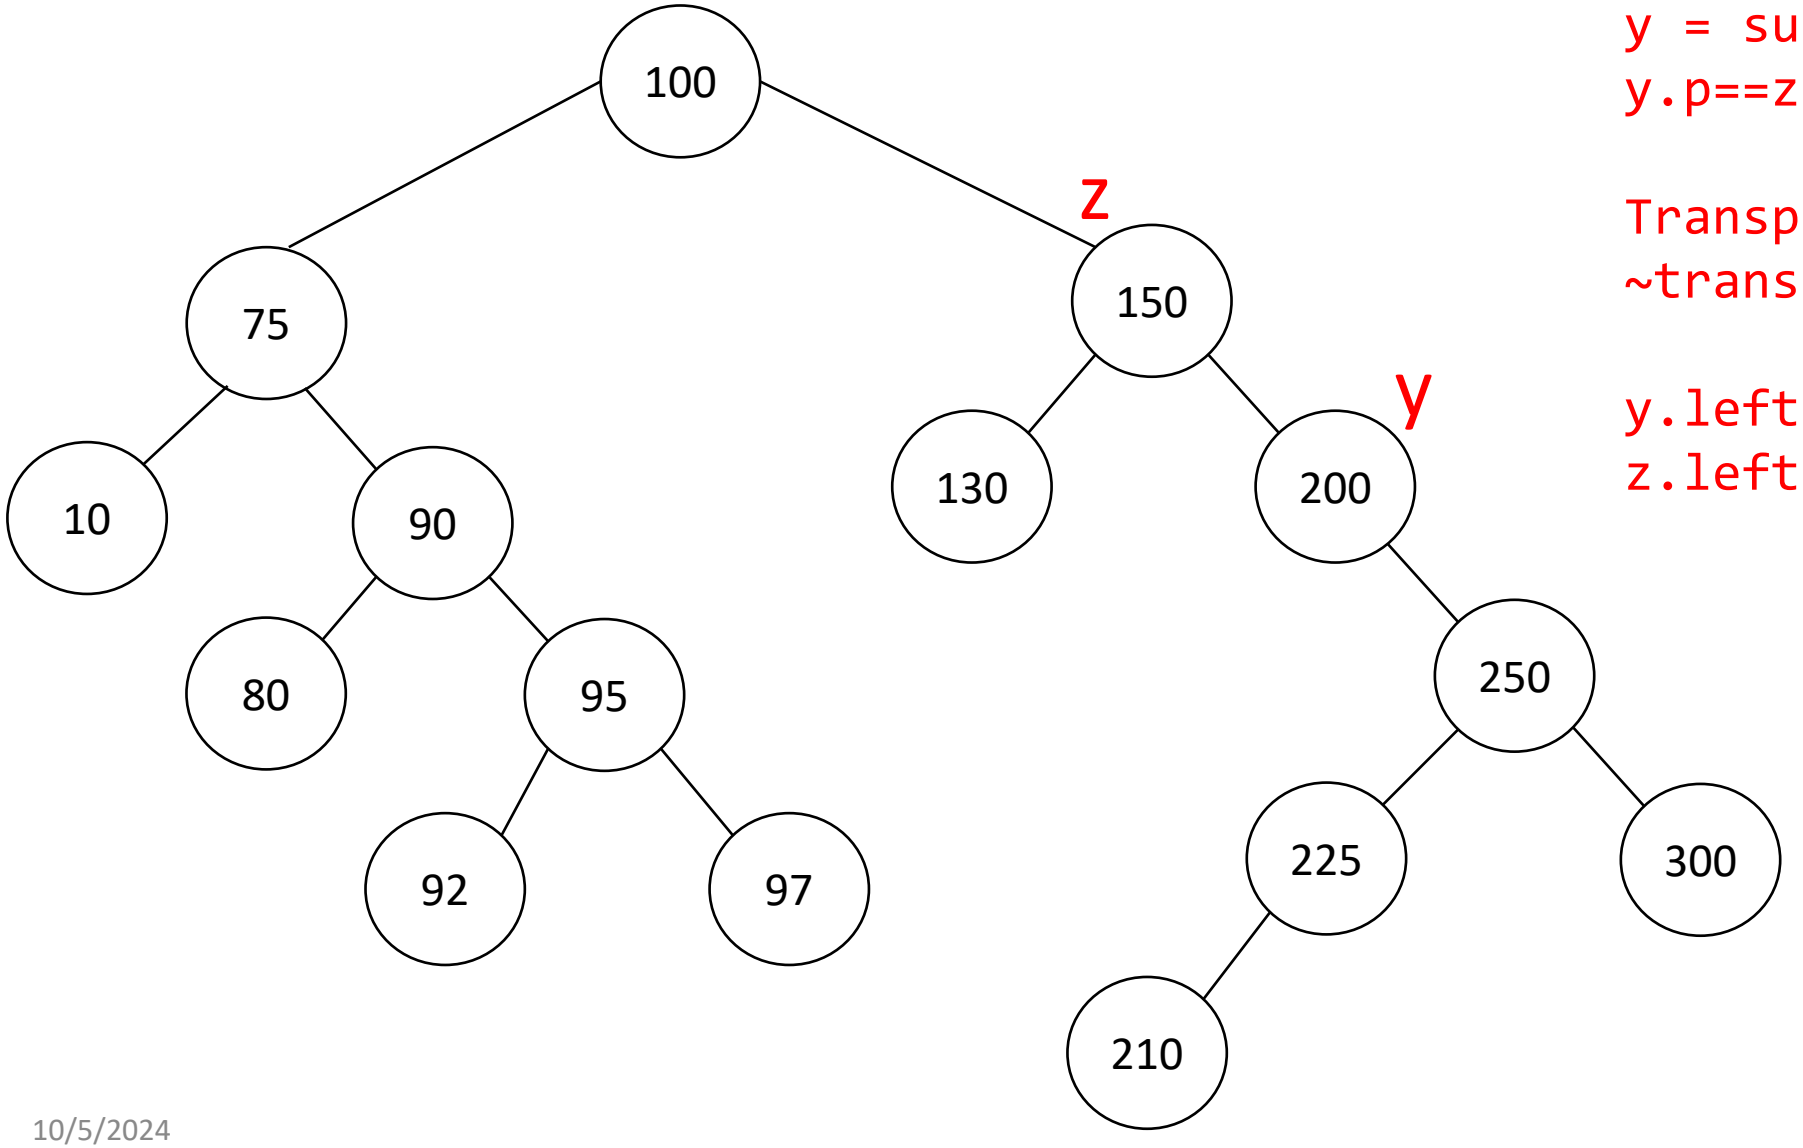


z=150, z.left!=Null,
z.right!=Null

y = successor(150)=200
y.p==z, case-C

Transplant(z, y)
~transplant(150,200)

y.left = z.left
z.left.p = y

Delete (150)

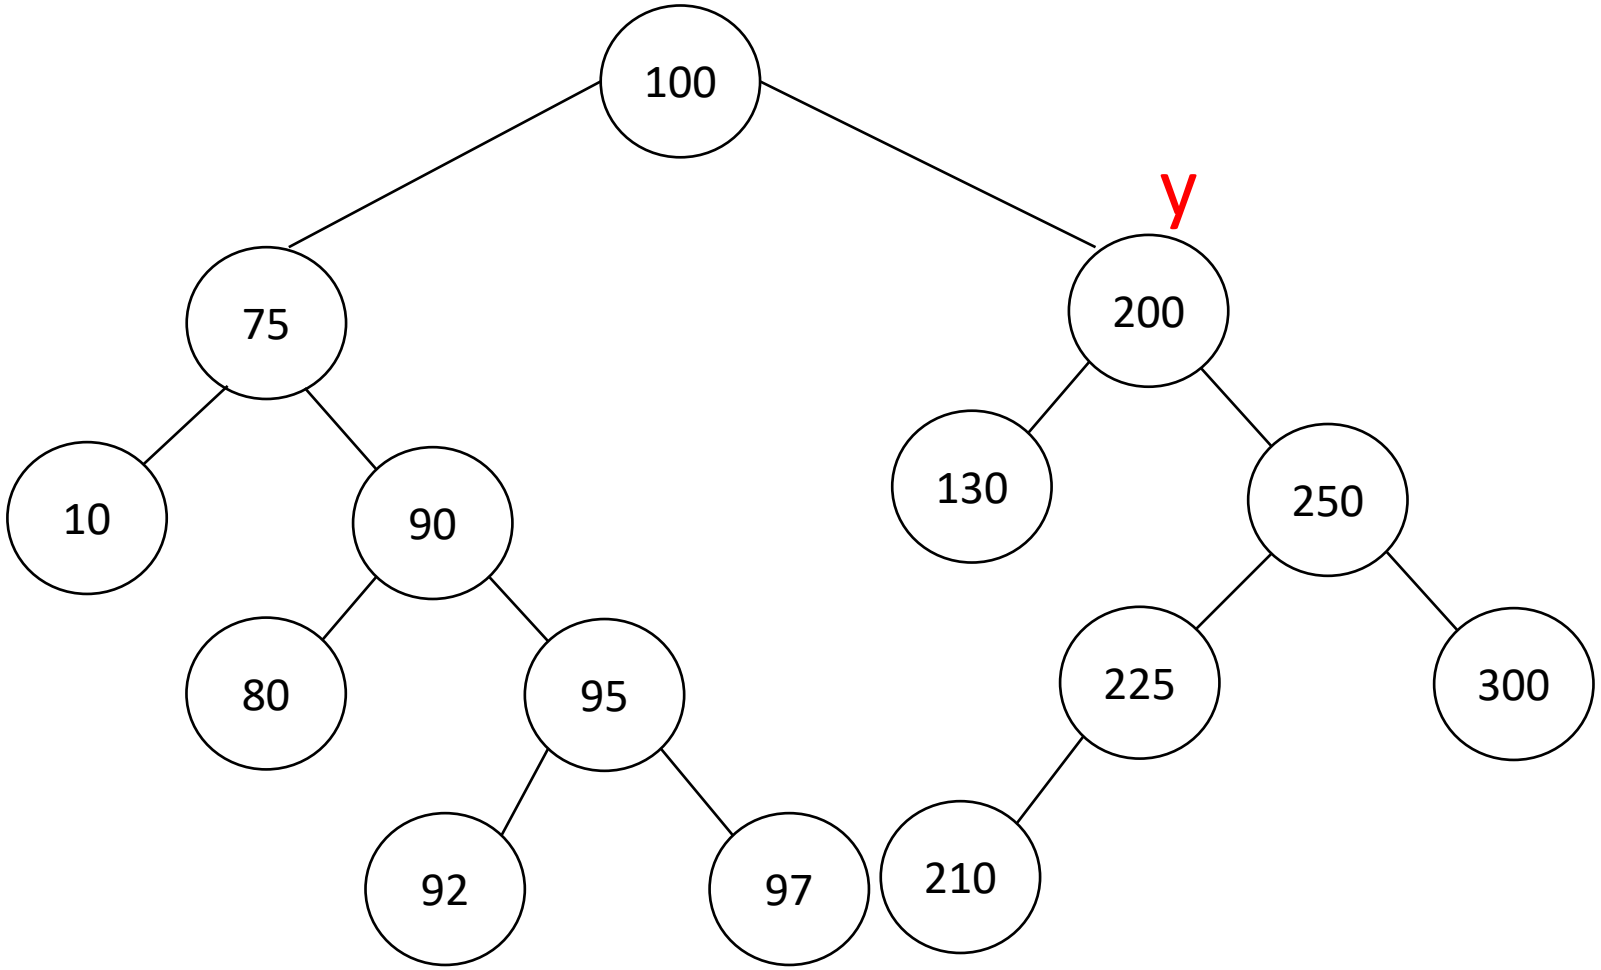


z=150, z.left!=Null, z.right!=Null

y = successor(150)=200
y.p==z, case-C


Transplant(z, y)
~transplant(150,200)

y.left = z.left
z.left.p = y

Delete(75)

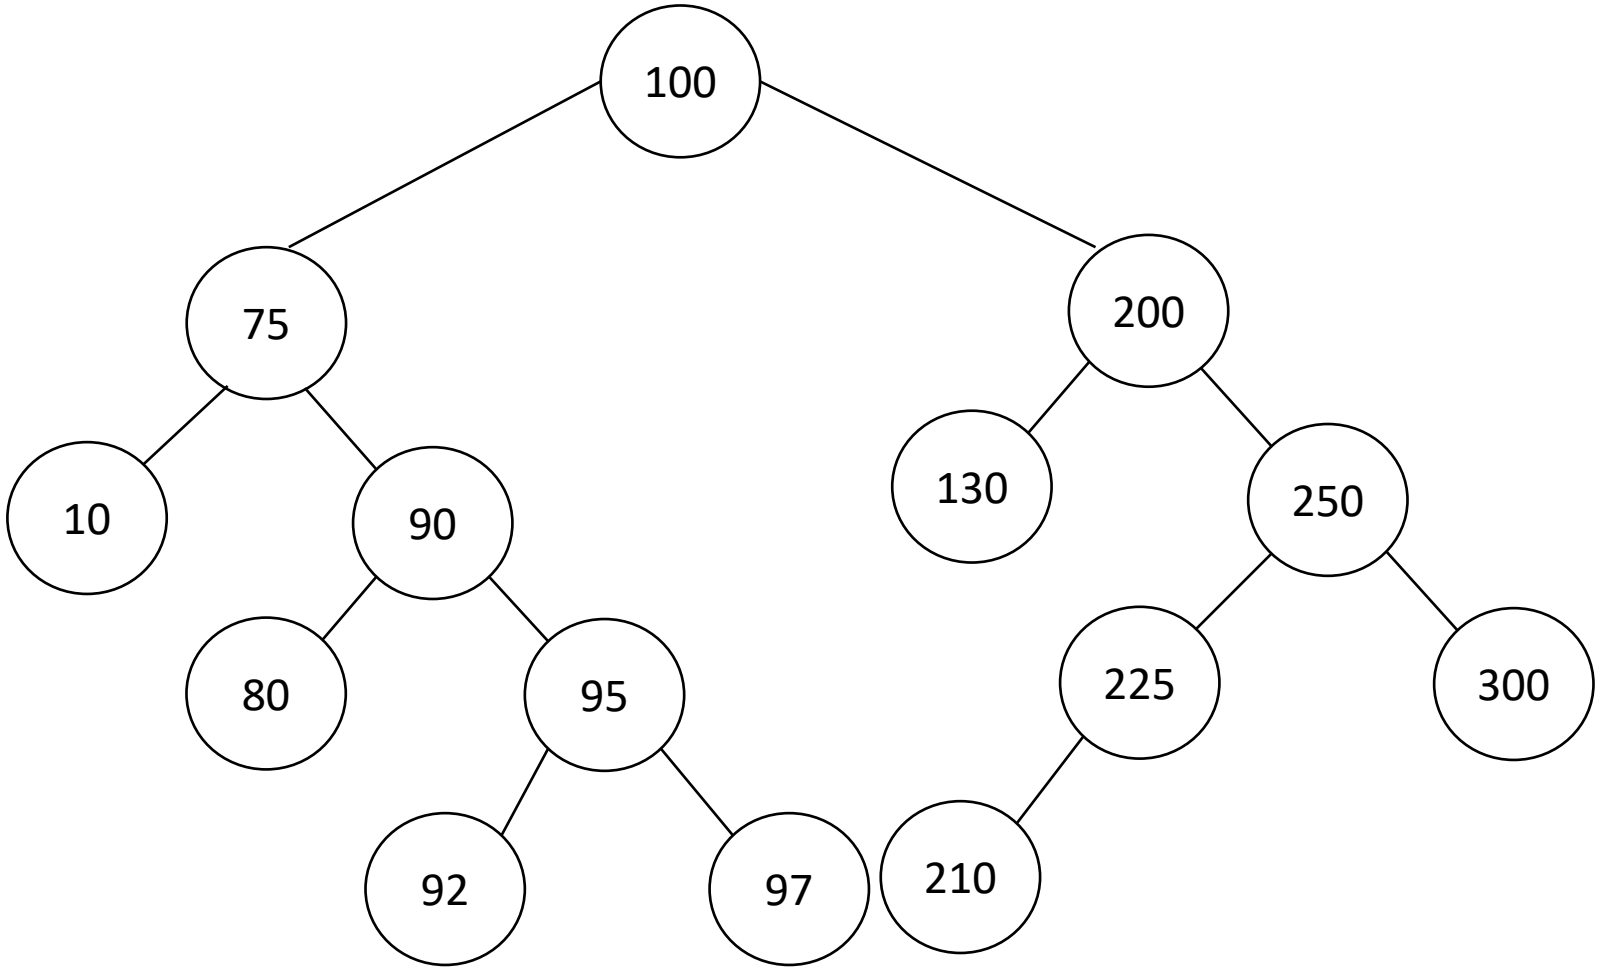

Delete(75)

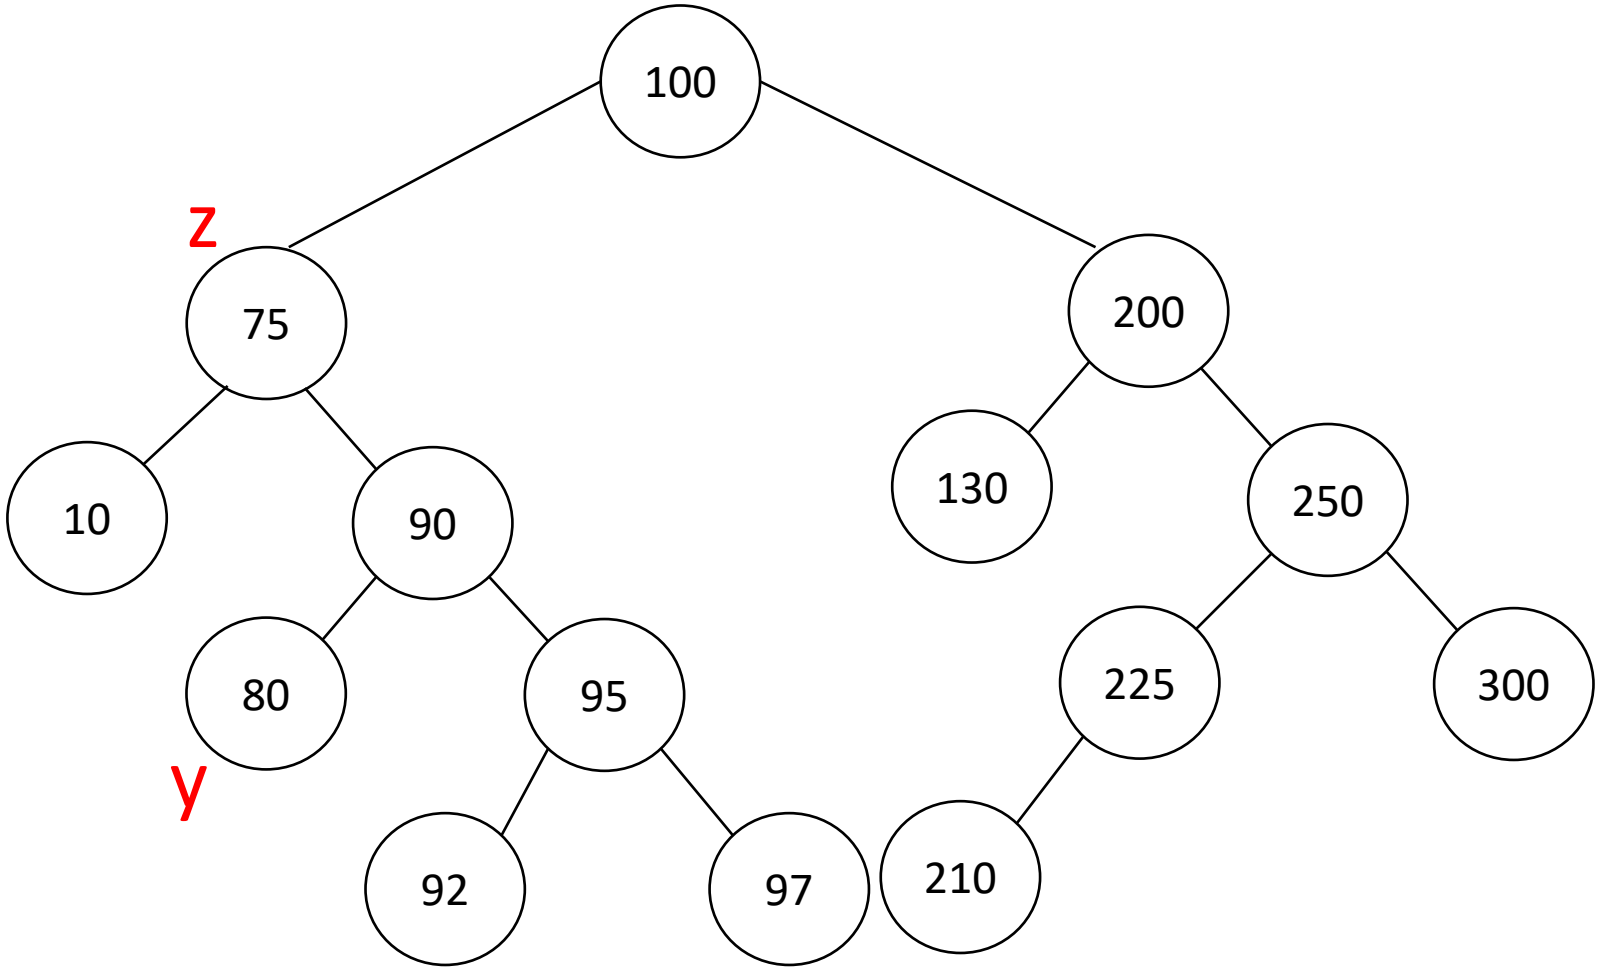


z=75, z.left!=Null,
z.right!=Null

y = successor(75)=80
y.p!=z, case-D

Transplant(y, y.right)
~Transplant(80, Null)

Delete(75)

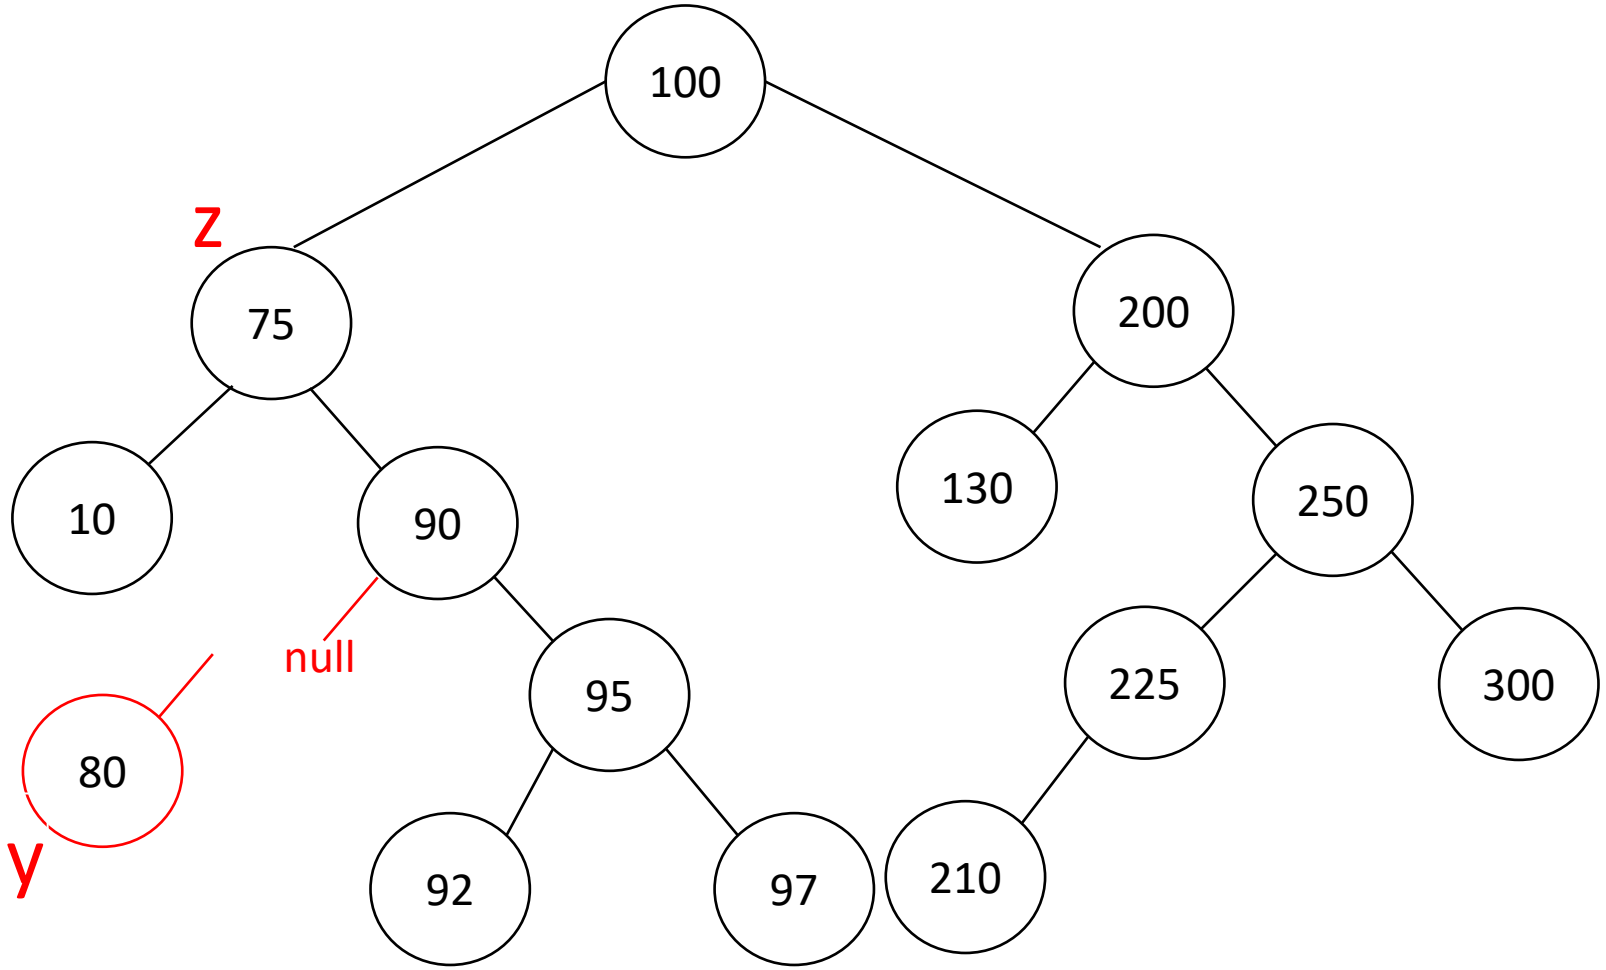


z=75, z.left!=Null,
z.right!=Null

y = successor(75)=80
y.p!=z, case-D

Transplant(y, y.right)
~Transplant(80, Null)

Delete(75)

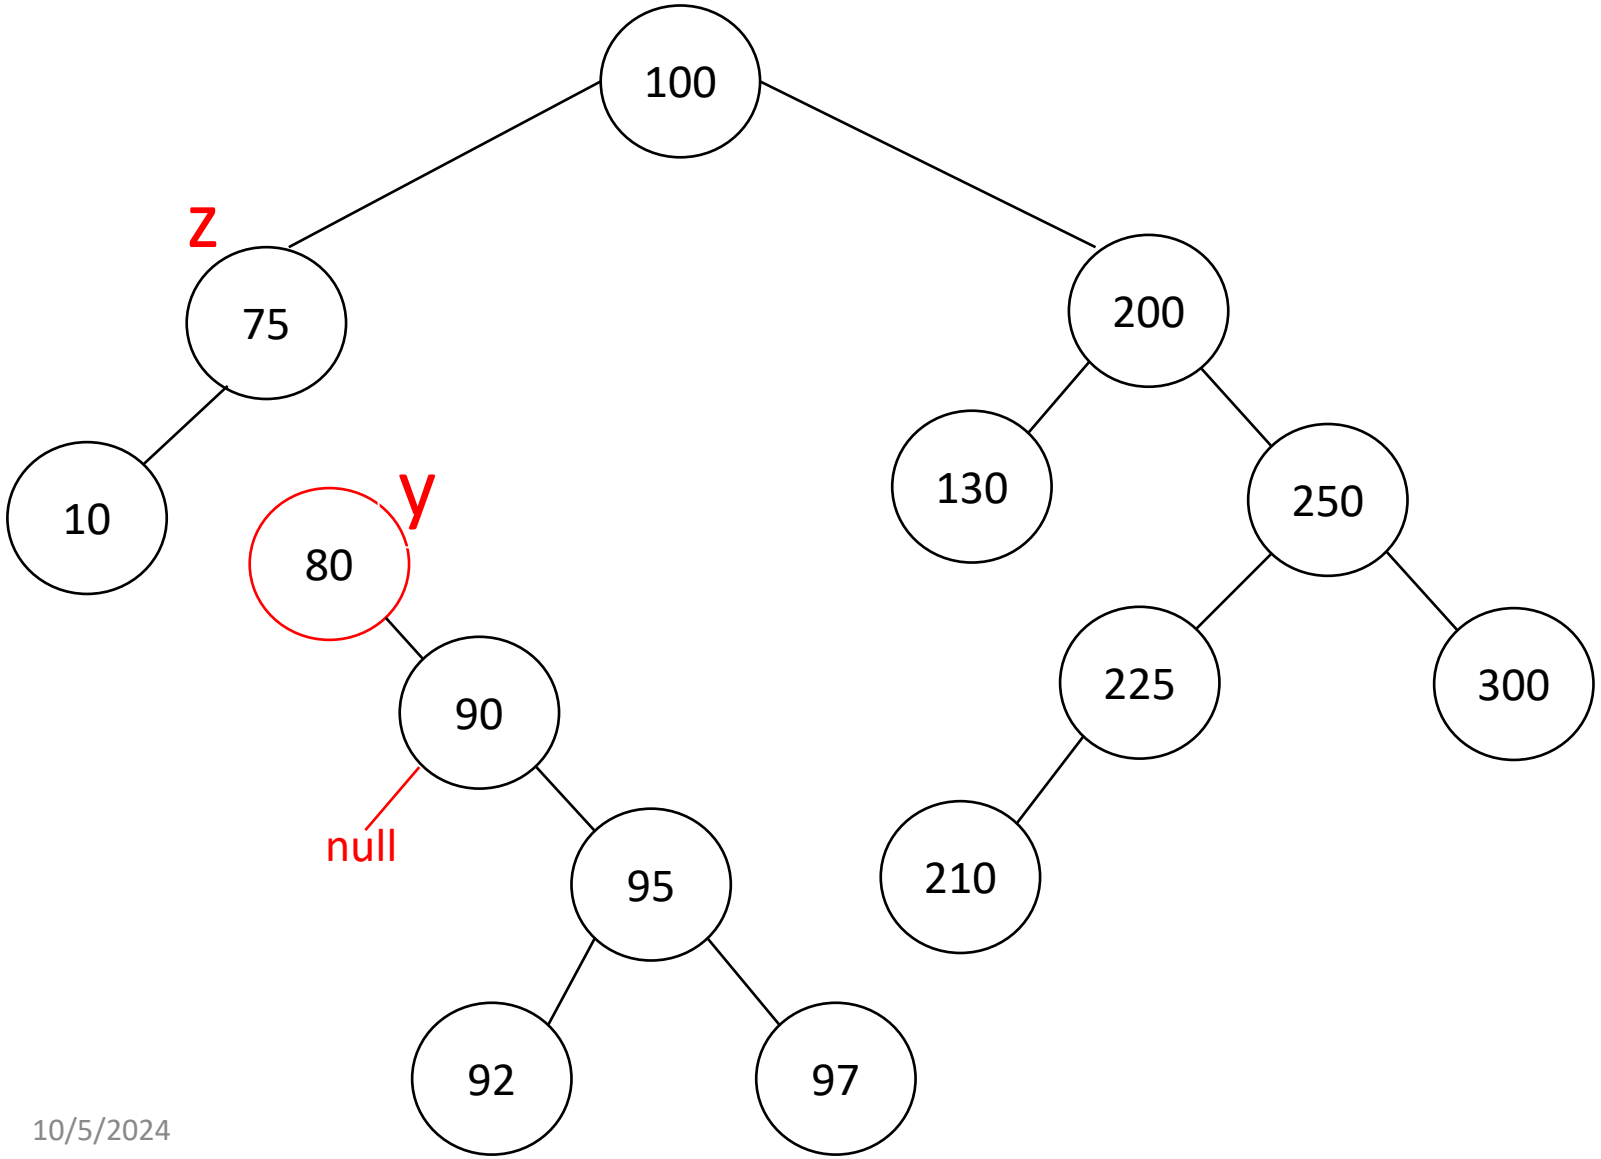


z=75, z.left!=Null,
z.right!=Null

y = successor(75)=80
y.p!=z, case-D

Transplant(y, y.right)
~Transplant(80, Null)

y.right = z.right
z.right.p = y

Delete(75)

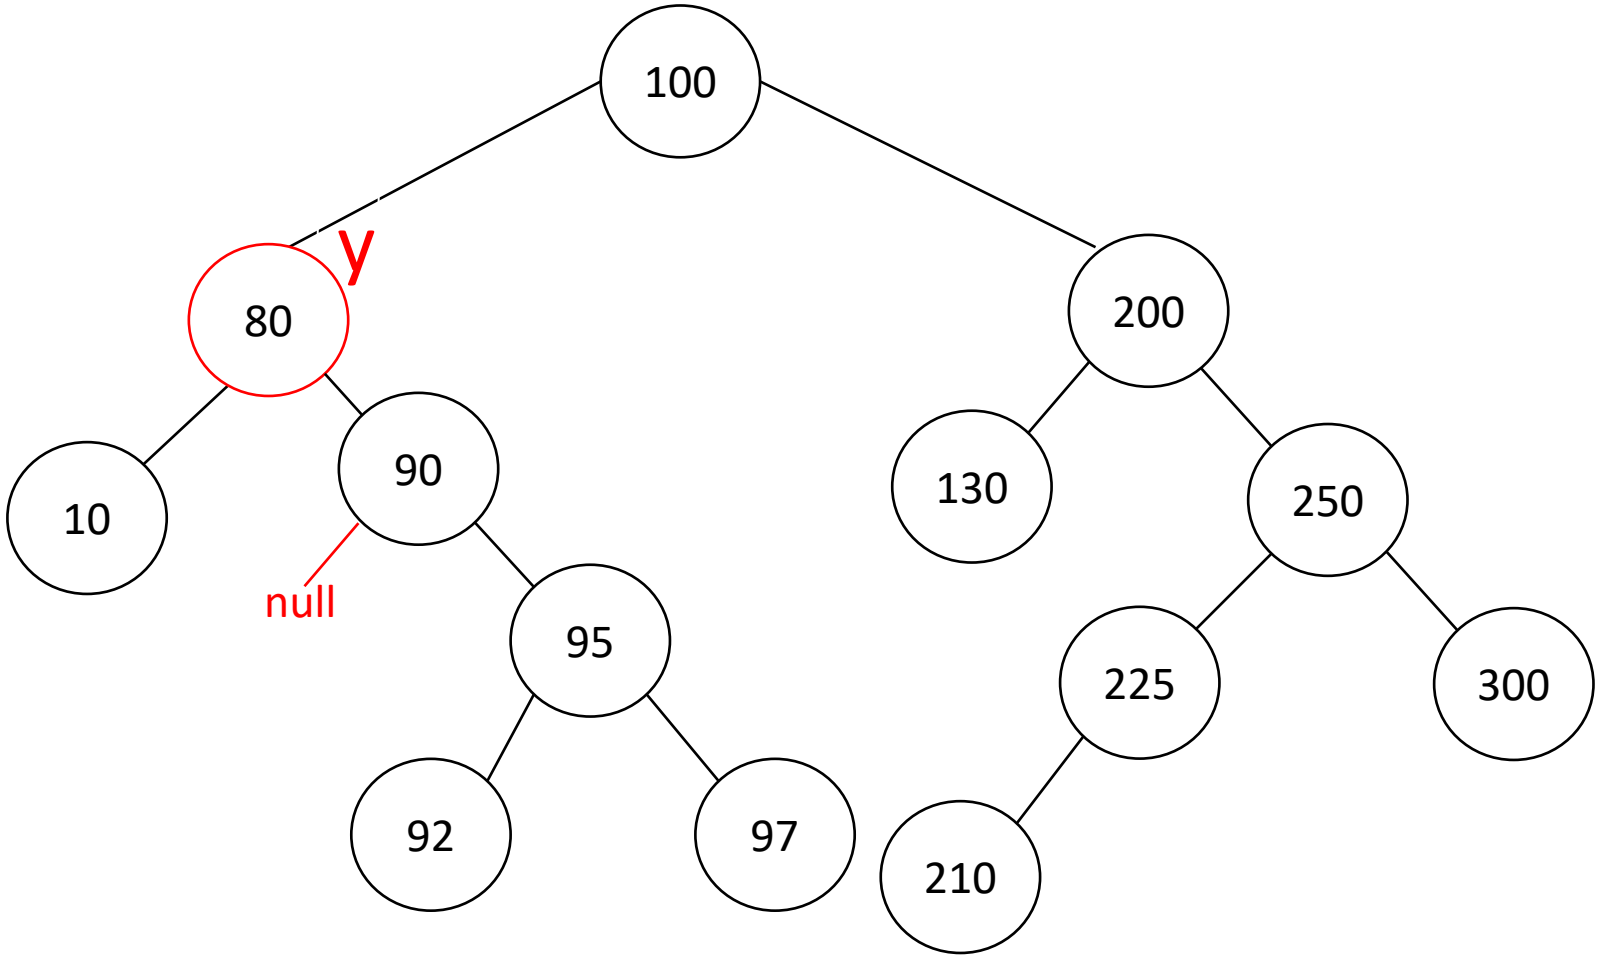

z=75, z.left!=Null,
z.right!=Null

y = successor(75)=80
y.p!=z, case-D


Transplant(y, y.right)
~Transplant(80, Null)

y.right = z.right
z.right.p = y

Transplant(z,y)
~transplant(75,80)

y.left = z.left
z.left.p=y


Insert(215)
Insert(220)
Delete(200)

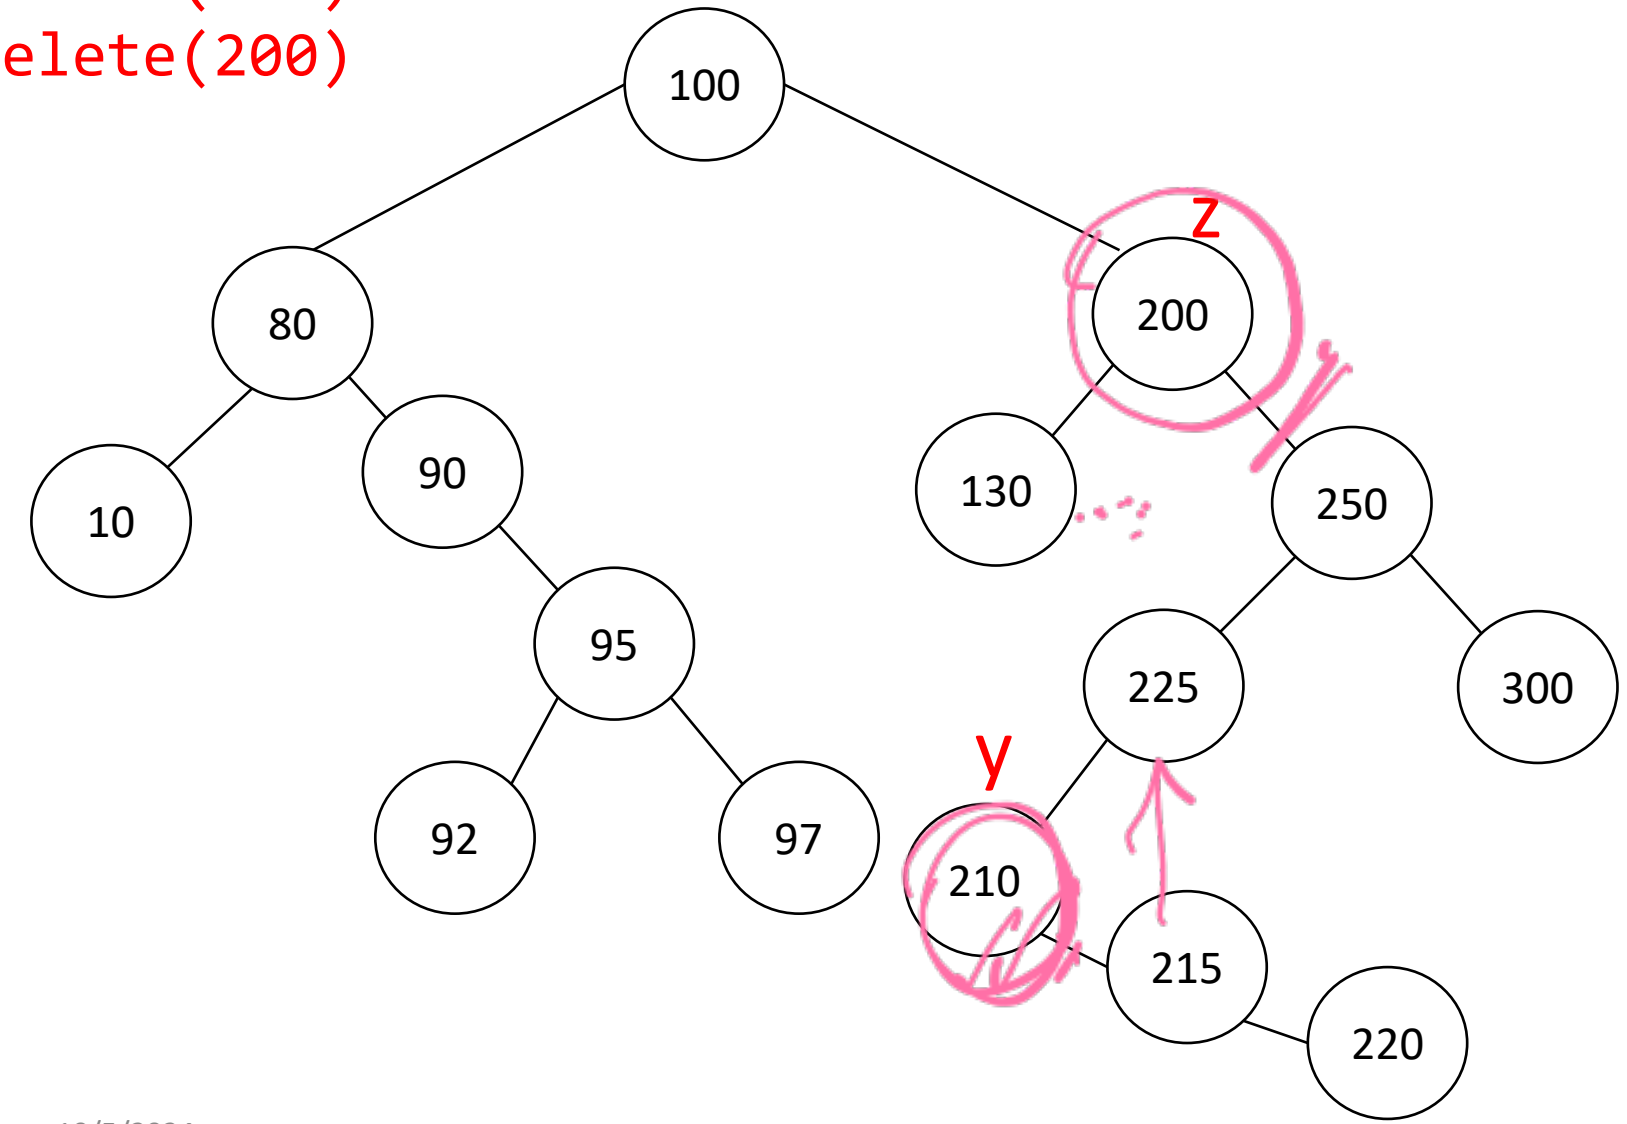

z=200, z.left!=Null, z.right!=Null

y = successor(200)=210
y.p!=z, case-D

Insert(215)
Insert(220)
Delete(200)

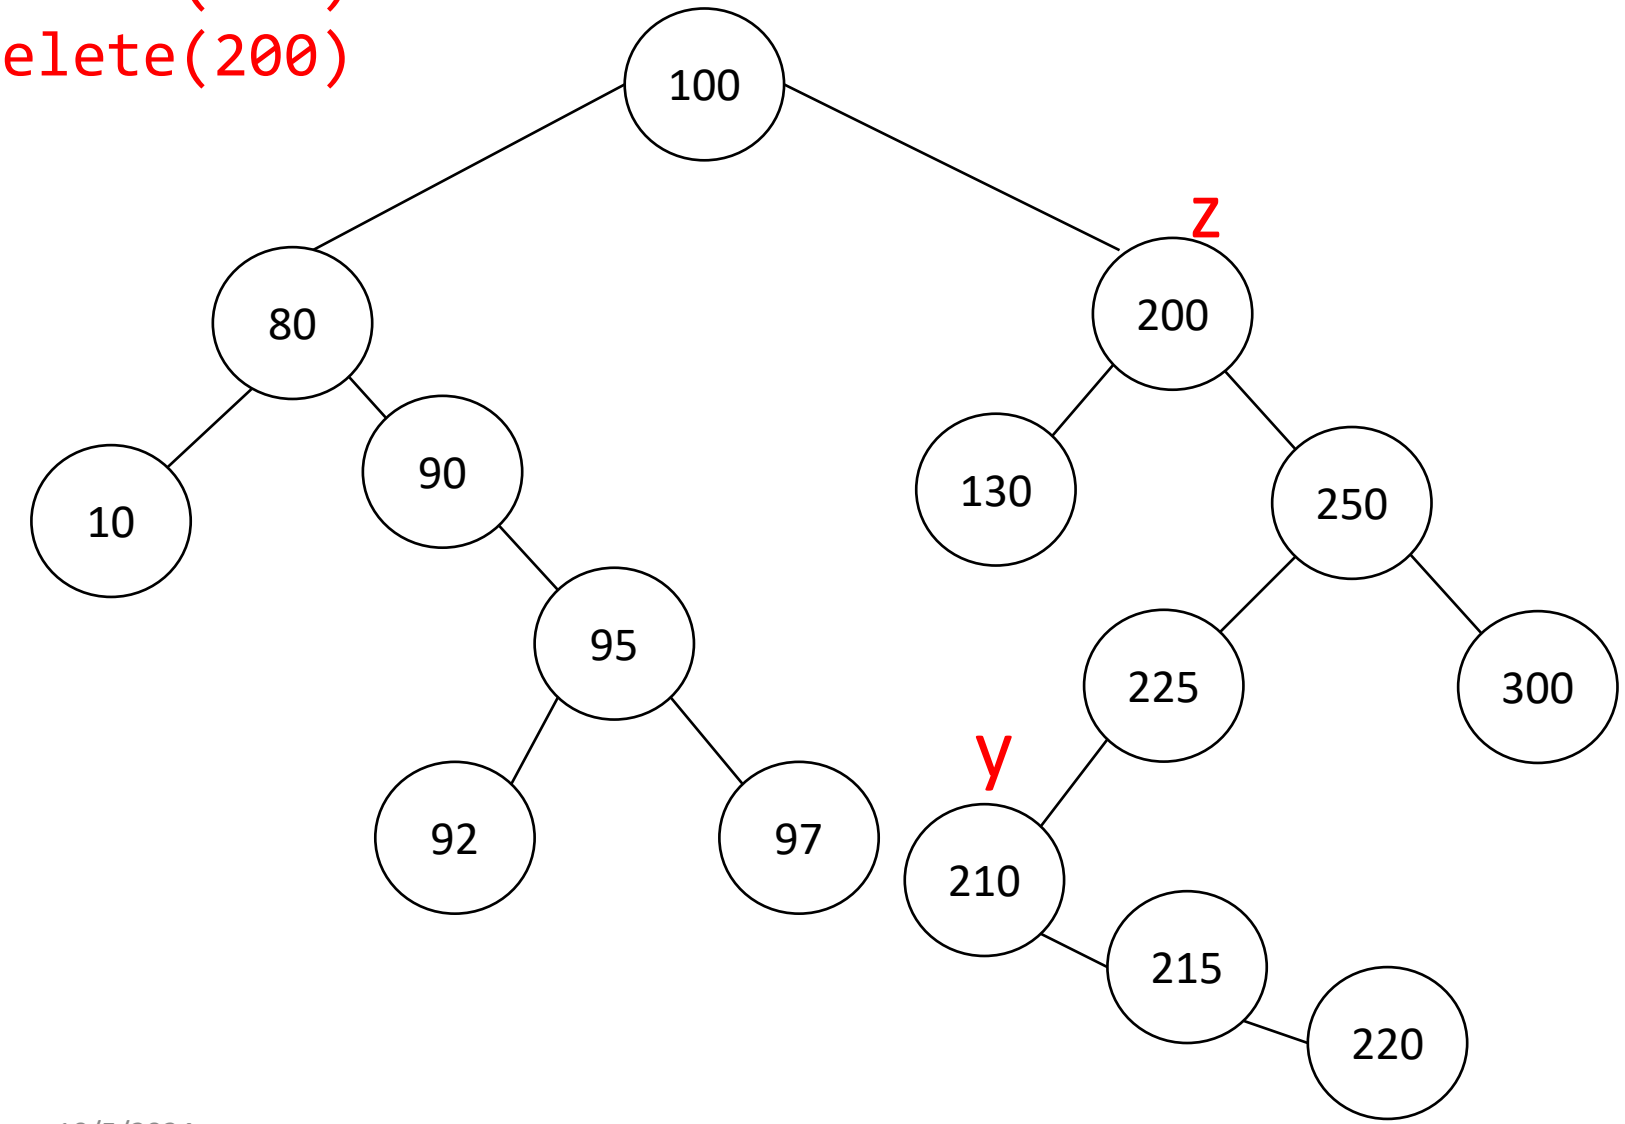


z=200, z.left!=Null, z.right!=Null

y = successor(200)=210
y.p!=z, case-D

Transplant(y, y.right)
~Transplant(210, 215)

Insert(215)
Insert(220)
Delete(200)

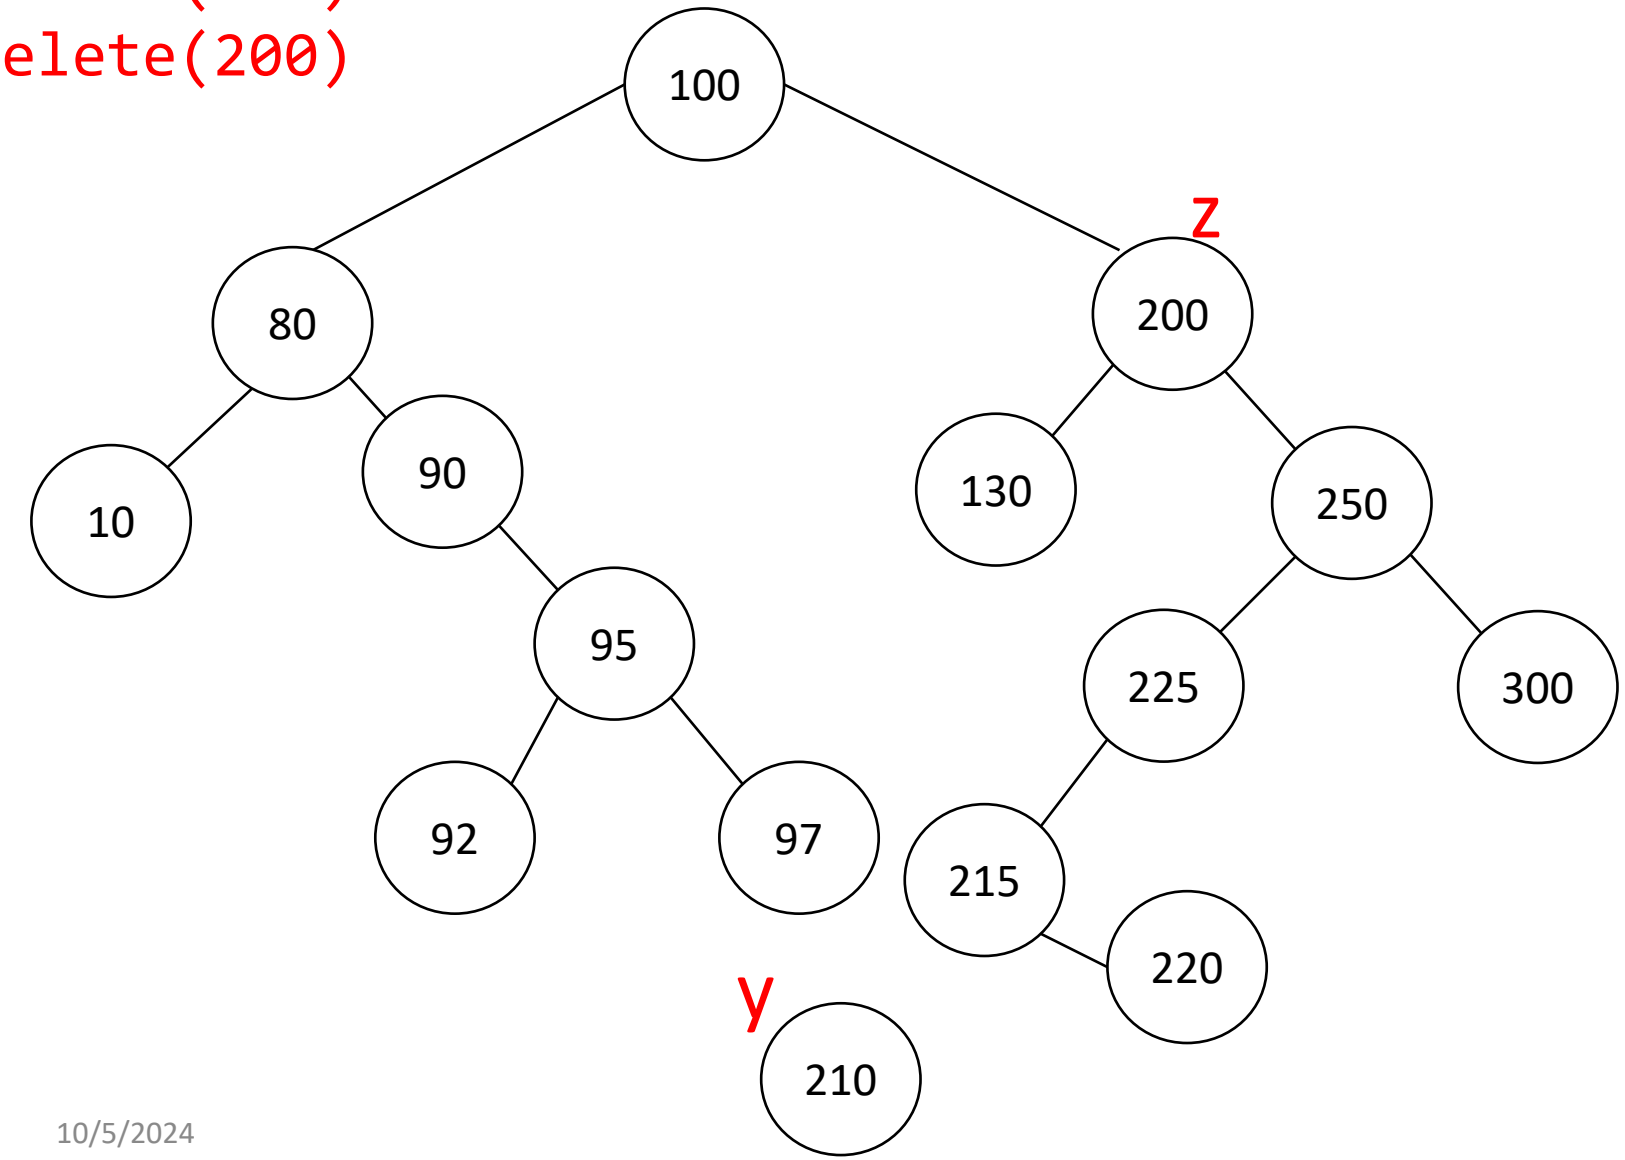


z=200, z.left!=Null, z.right!=Null

y = successor(200)=210
y.p!=z, case-D

Transplant(y, y.right)
~Transplant(210, 215)

null

Insert(215)
Insert(220)
Delete(200)

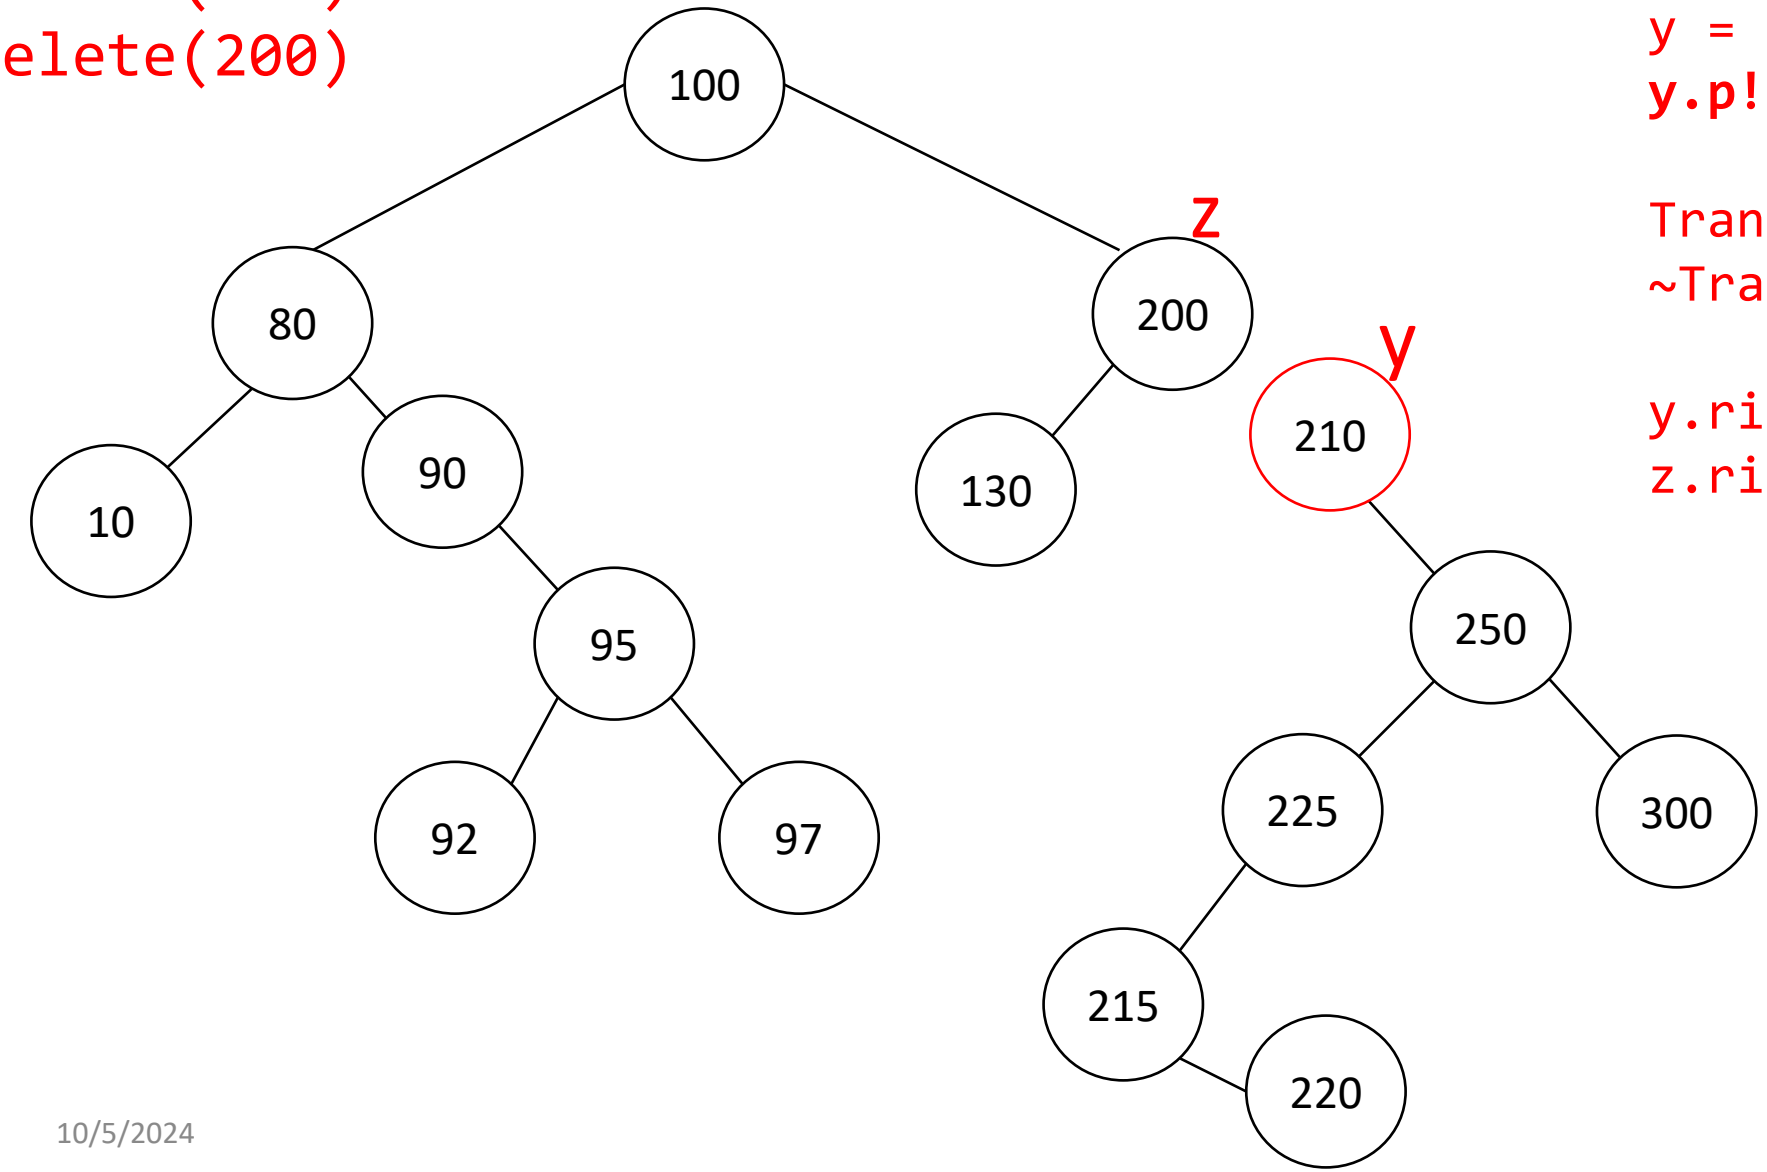


z=200, z.left!=Null,
z.right!=Null

y = successor(200)=210
y.p!=z, case-D

Transplant(y, y.right)
~Transplant(210, 215)

y.right = z.right
z.right.p = y

Insert(215)
Insert(220)
Delete(200)

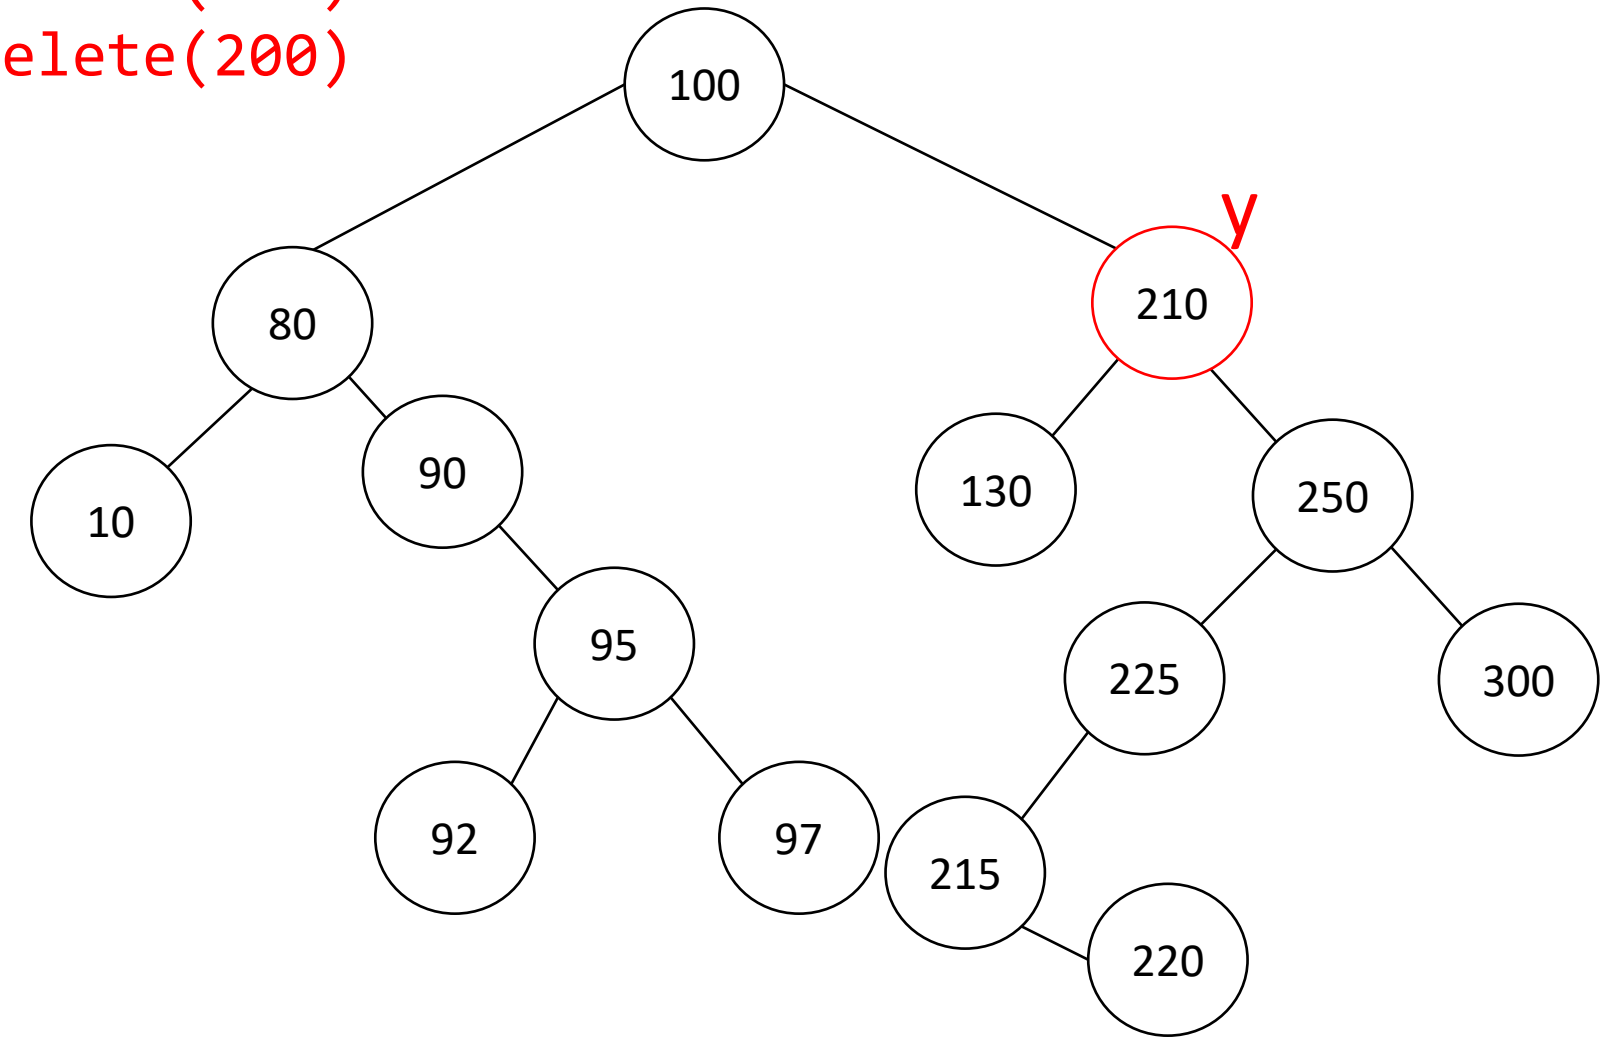

z=200, z.left!=Null,
z.right!=Null

y = successor(200)=210
y.p!=z, case-D


Transplant(y, y.right)
~Transplant(210, 215)

y.right = z.right
z.right.p = y

Transplant(z,y)
~transplant(200,210)

y.left = z.left
z.left.p=y


Delete(100)

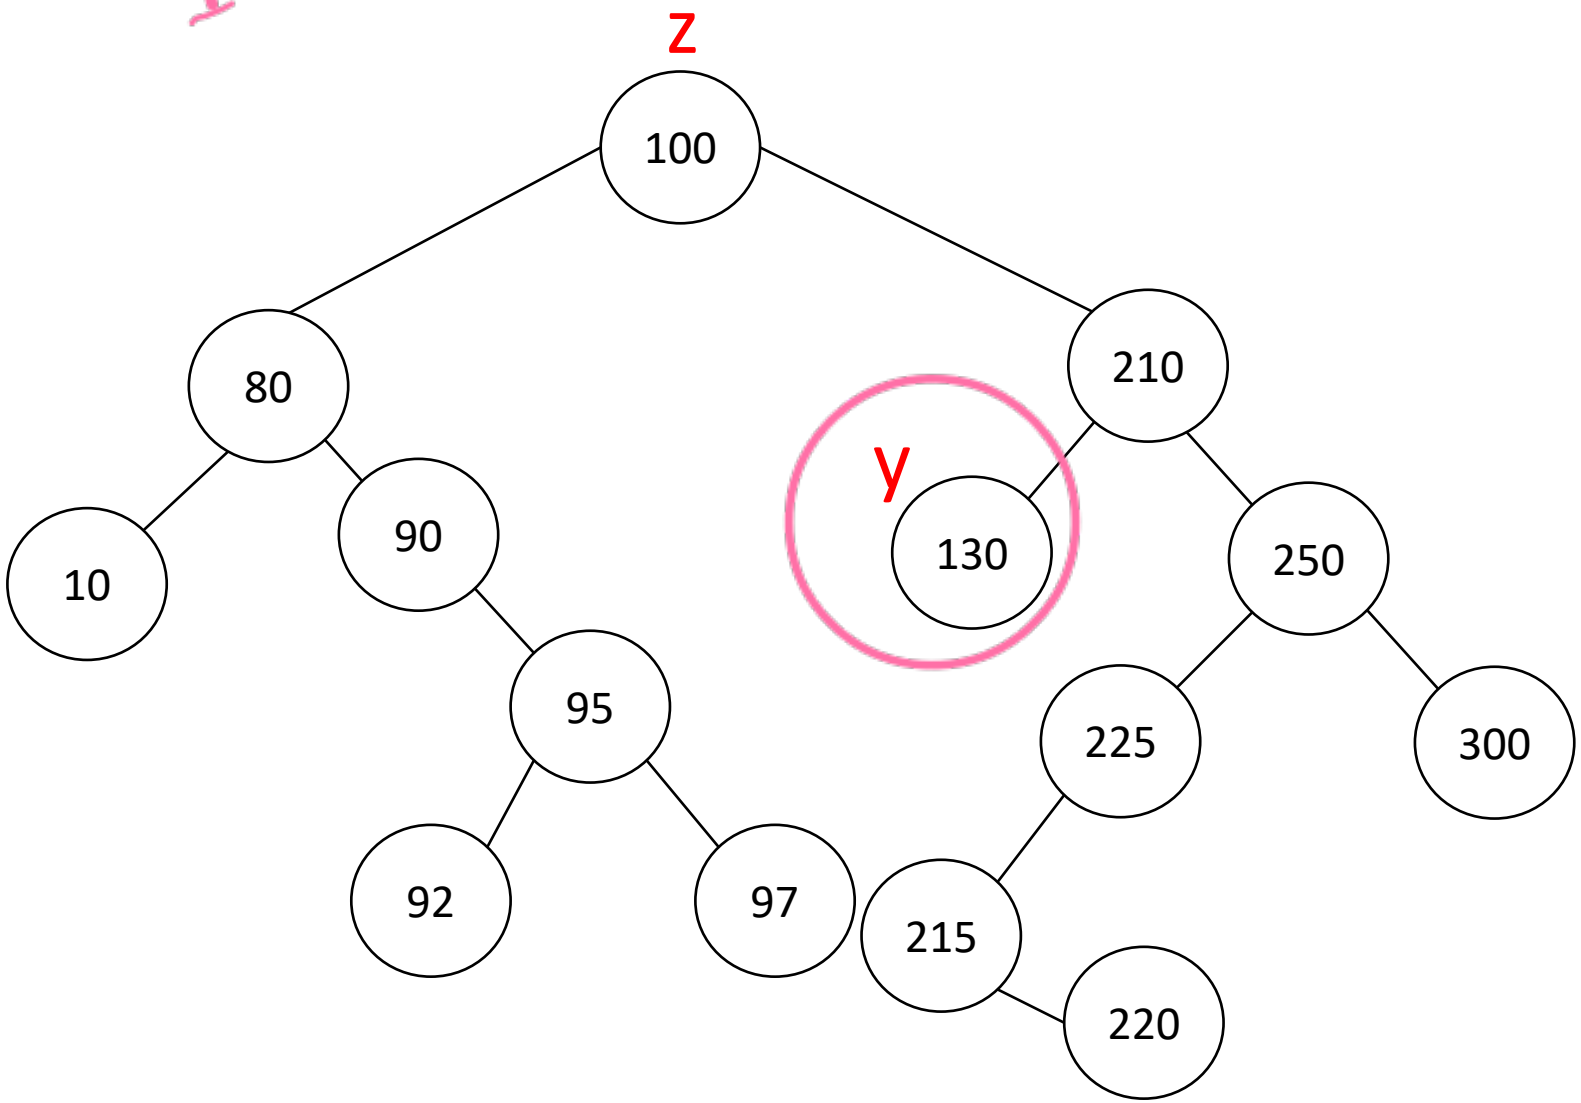

z=100, z.left!=Null,
z.right!=Null

y = successor(100)=130
y.p!=z, case-D

Delete(100)

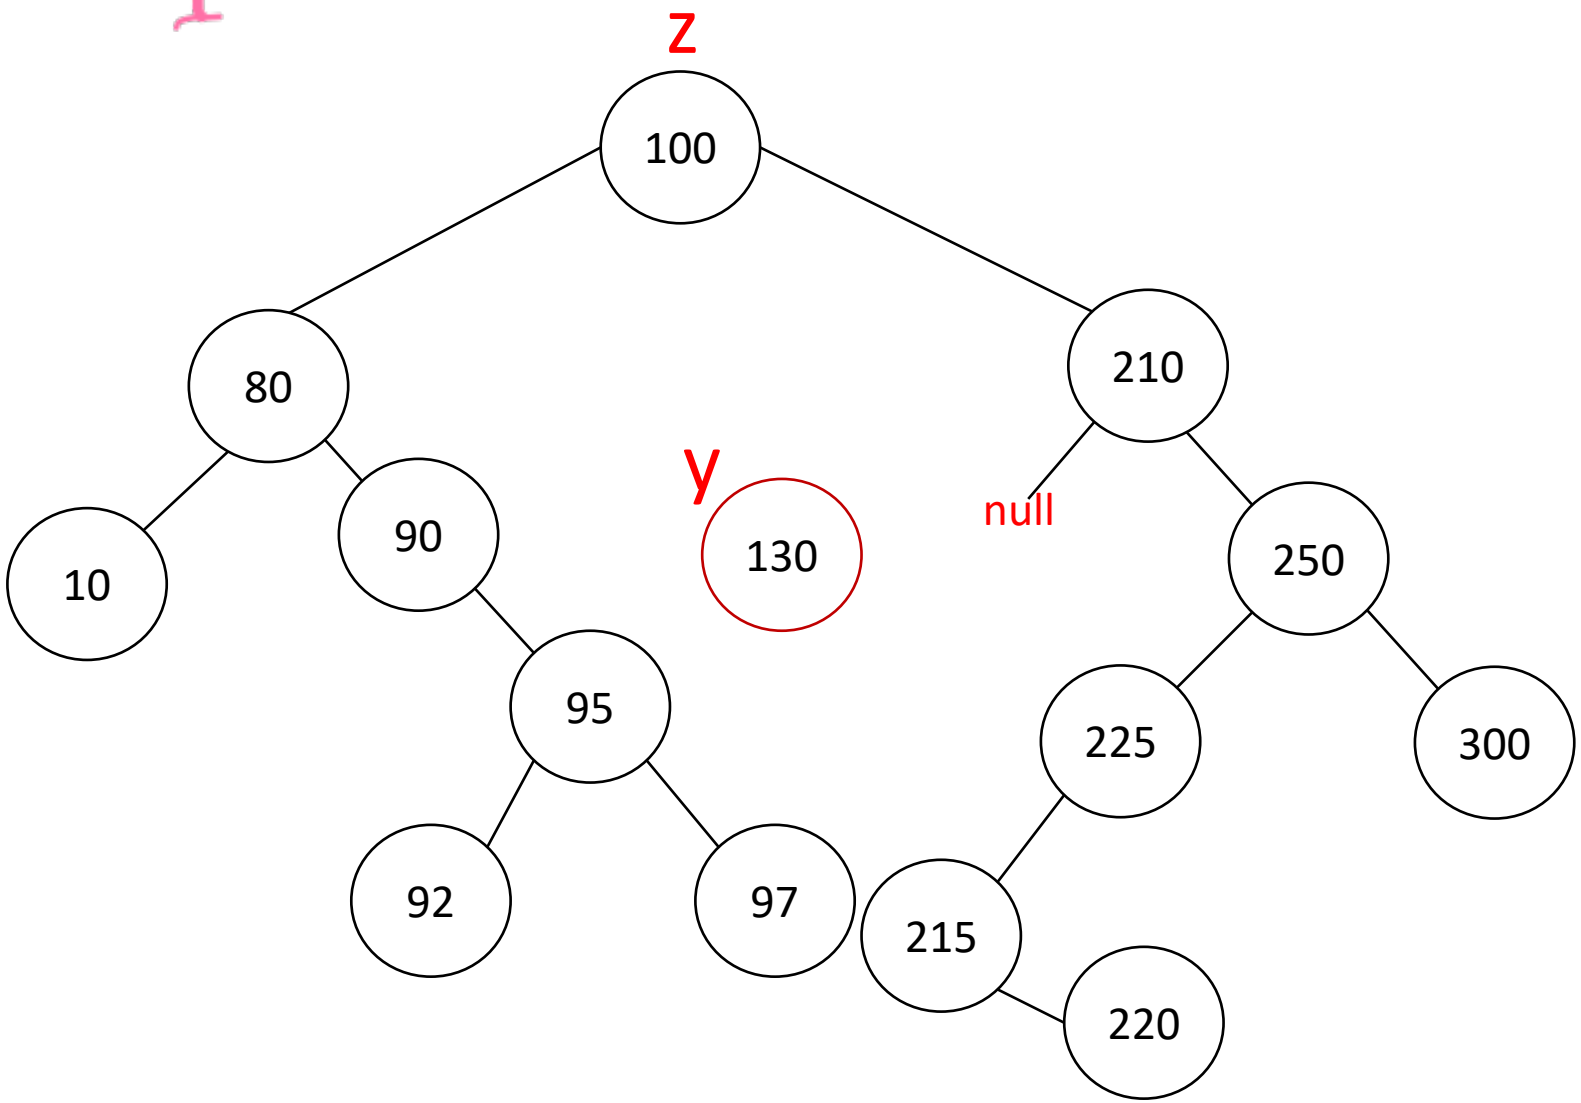


z=100, z.left!=Null,
z.right!=Null

y = successor(100)=130
y.p!=z, case-D

Transplant(y, y.right)
~Transplant(130, Null)

Delete(200)

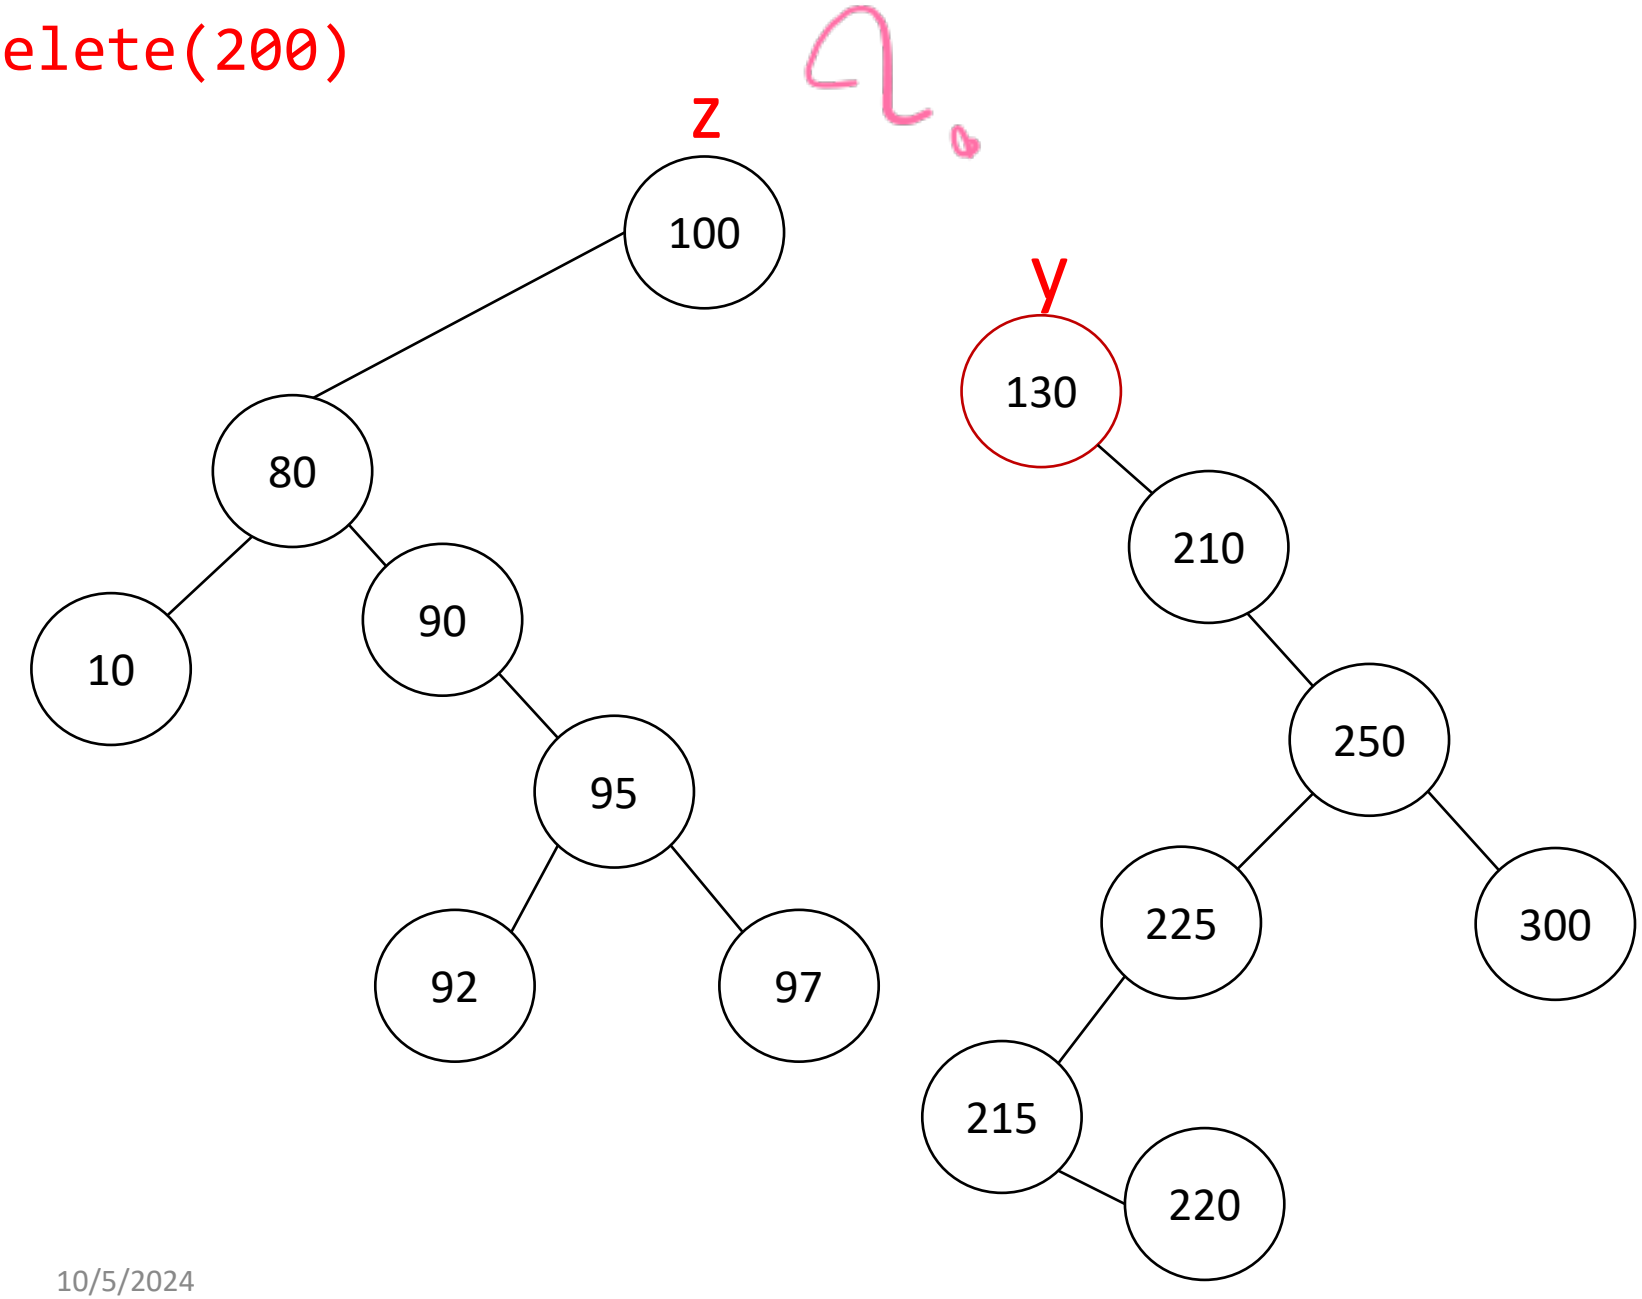


z=100, z.left!=Null, z.right!=Null

y = successor(100)=130
y.p!=z, case-D

Transplant(y, y.right)
~Transplant(130, Null)

y.right = z.right
z.right.p = y

Delete(200)

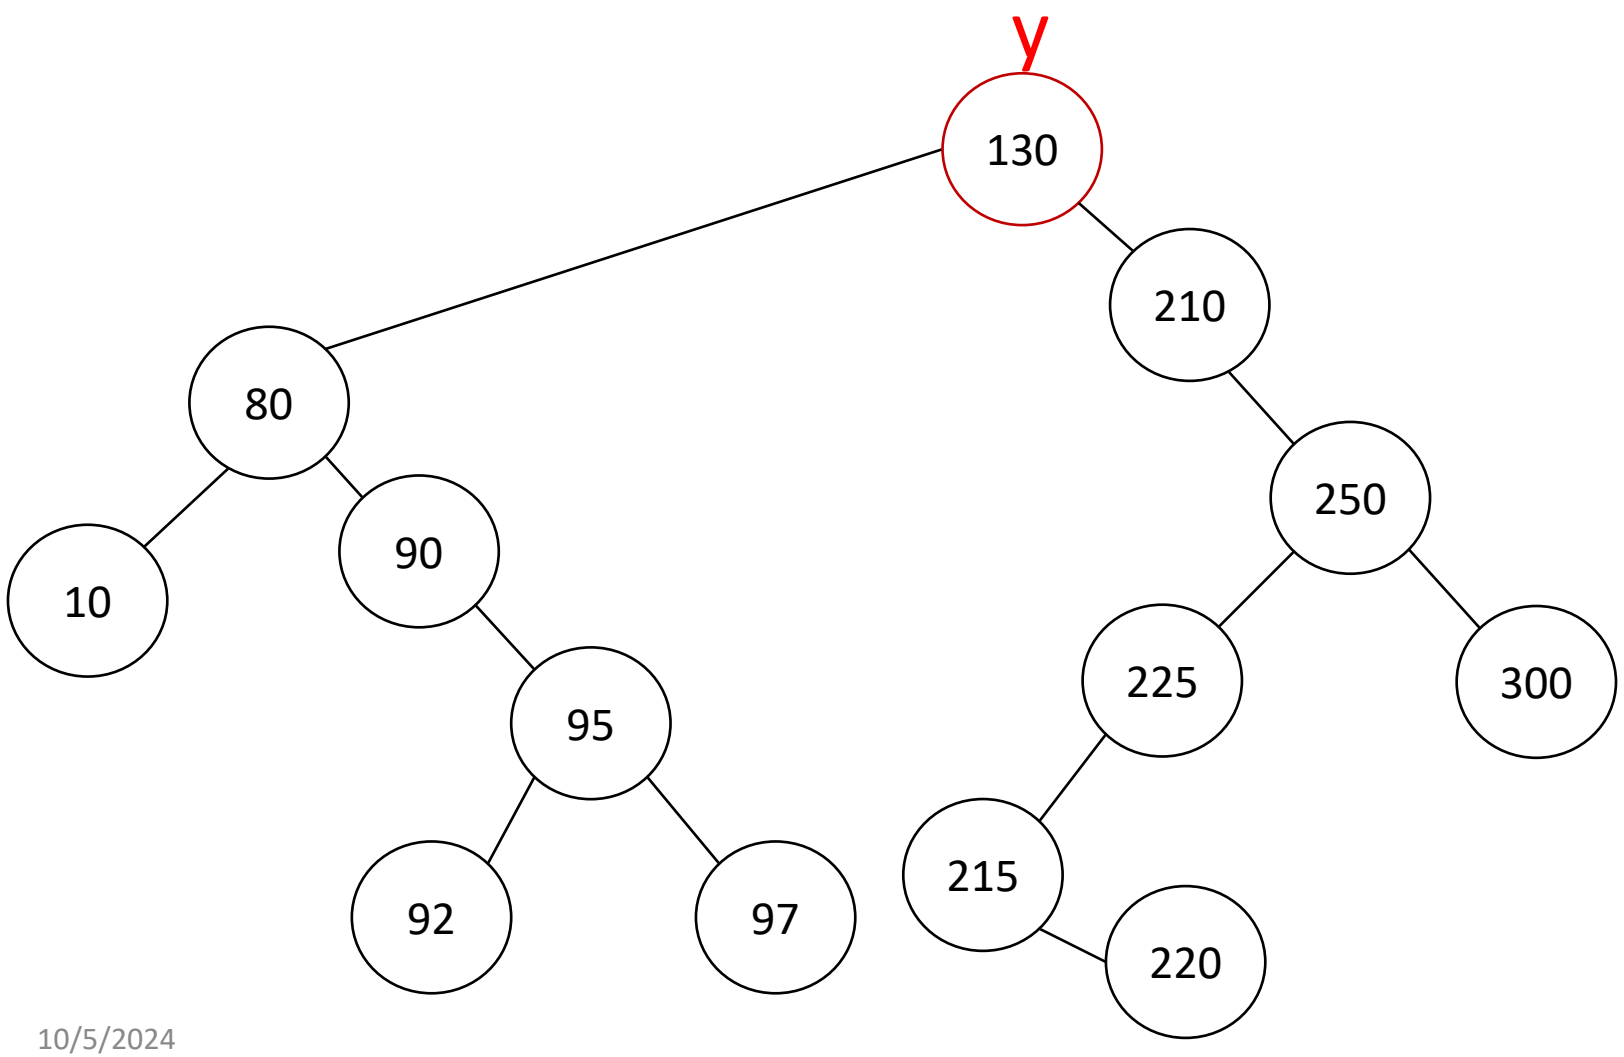

z=100, z.left!=Null,
z.right!=Null

y = successor(100)=130
y.p!=z, case-D

Transplant(y, y.right)
~Transplant(130, Null)

y.right = z.right
z.right.p = y

Transplant(z,y)
~transplant(200,210)

y.left = z.left
z.left.p=y

References

1. Chapter 12, Thomas H. Cormen, Charles E. Leiserson, Ronald L. Rivest, and Clifford Stein. 2009. Introduction to Algorithms, Third Edition (3rd. ed.). The MIT Press.

Thank you