3 DML

1. Insert
2. Update
3. Delete

Example: Students

ID	Name	Dept

CSE Students

(ID Name)

INSERT INTO

SELECT ID NAME

From S

where dept = 'CSE'

* Locking Mechanism.

Ch-4

where (S.dept = Dept.Name)

Inner Join

X.a = Y.b (standard)

Outer Join

T_1 (table) → T_2 4 records

5 records

$T_1.a = T_2.b$

3 " with (FK)

Left outer

2	=
3	
4	=
5	

(All records from 1st table

Right outer Join

Full " "

passport ⊕ ;

↓

matching part.

Full Join

⊕ = ⊕ / X

Full outer join - T_2

- T_1

Courses

- CID
- Credit
- Title

Student

- ID
- NAME
- CGPA

Registration2

- SID
- CID
- grade

Quiz !!!!!

ID NAME Course Title Grade

Select - - - -

hassle:

Createview → Reuse (no need to rewrite) Studentview → single structure

as select - - -


- - -

Very dynamic: physicall


Table

purpose:

1) Reuse SQL code (Virtual/Abstraction)
2) Access Control:

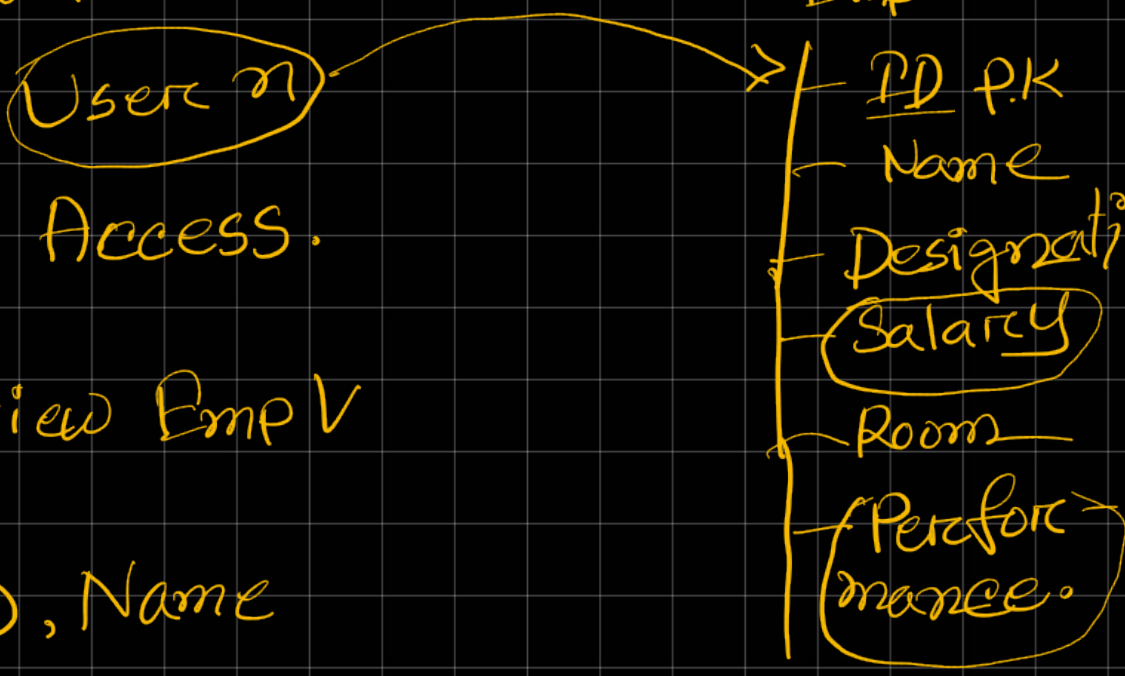

create view EmpV
as
Select ID, Name
Desig, Room
From Emp

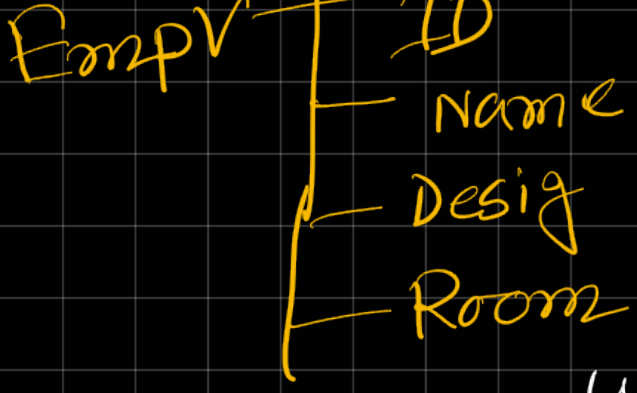


DML
1st purpose

⇒ view is read/write
whether I can manipulate data through view:

Simple view → based on

single table

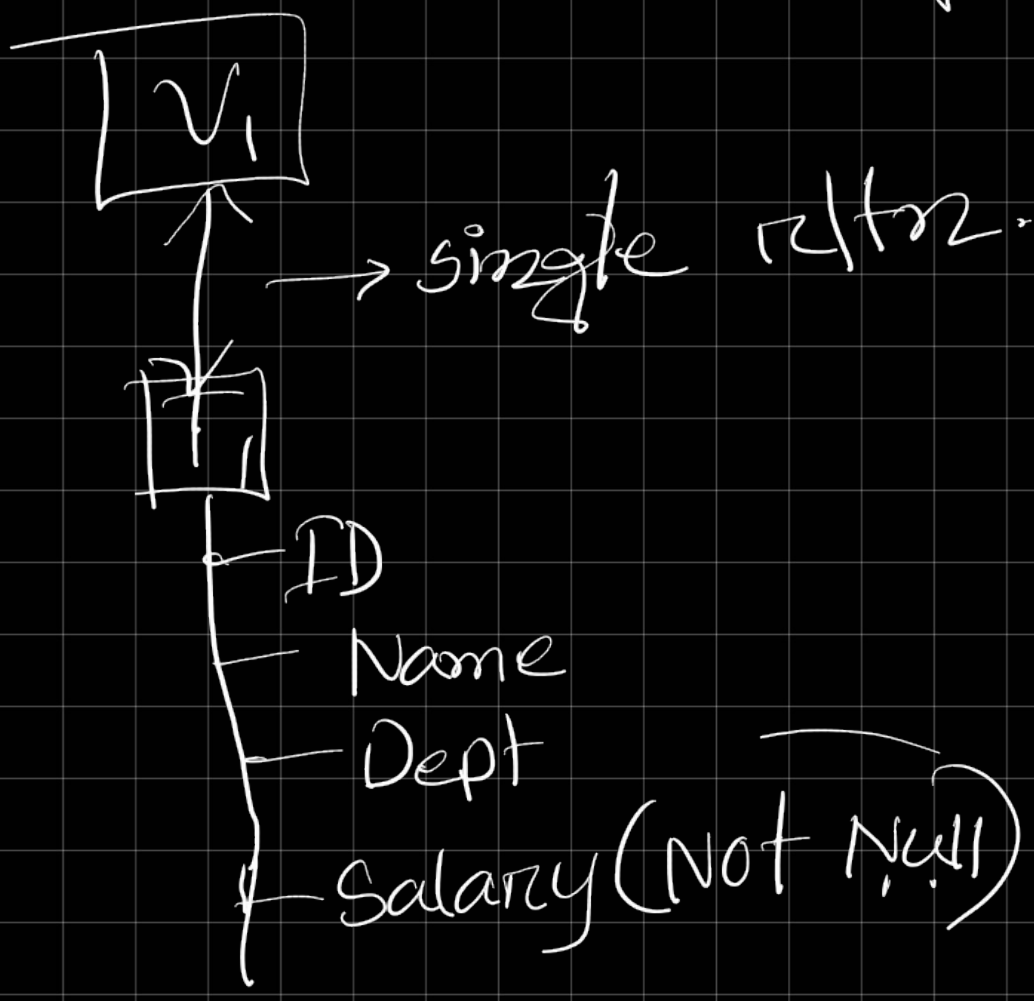

V1 [ID, Name]

insert into V1
value(101, 'abc'); ✗

✗ Create view V1 as
Select dept, count(*) T

from T_1
group by dept;

V_1

dept

T

restriction

Lec-5


1st -> simple view

2nd -> no null.

3rd -> No aggregate


OLAP -> Datawarehouse.



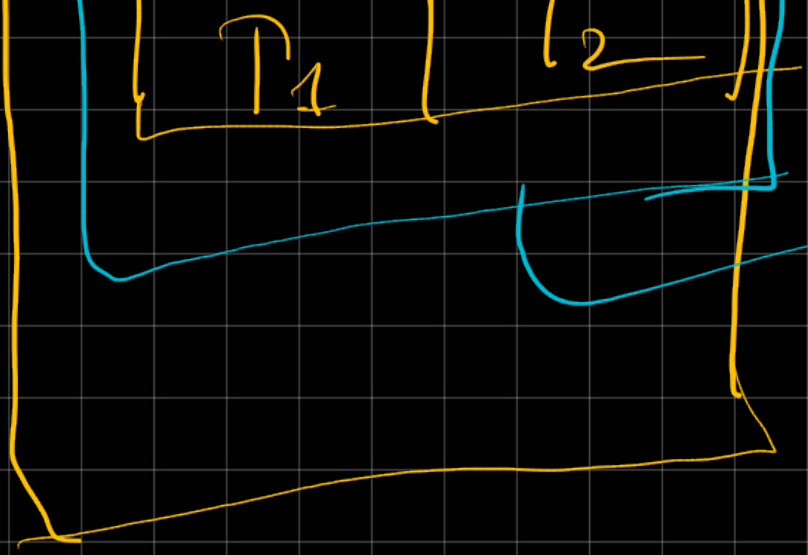

→ operational Database.

lock these 2 tables

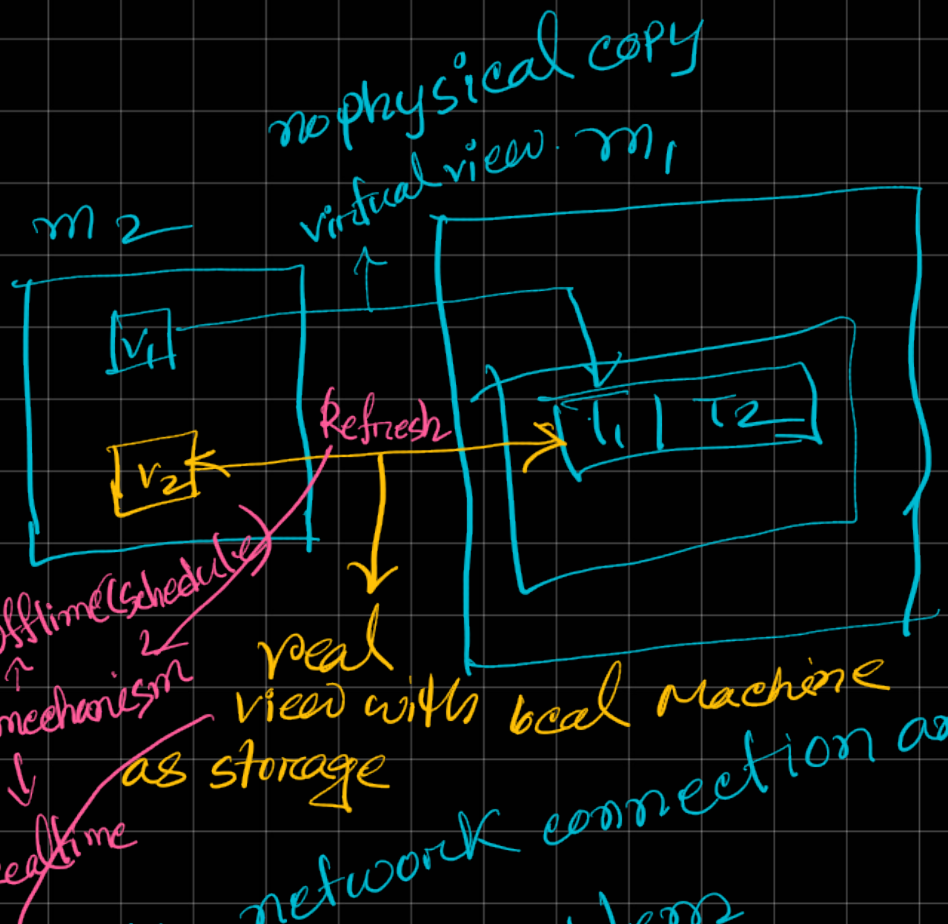

make network connection and extract.


Response time problem


1.

2. response time faster

(→ Materialized view.

Integrity constraints: Check from Table level.

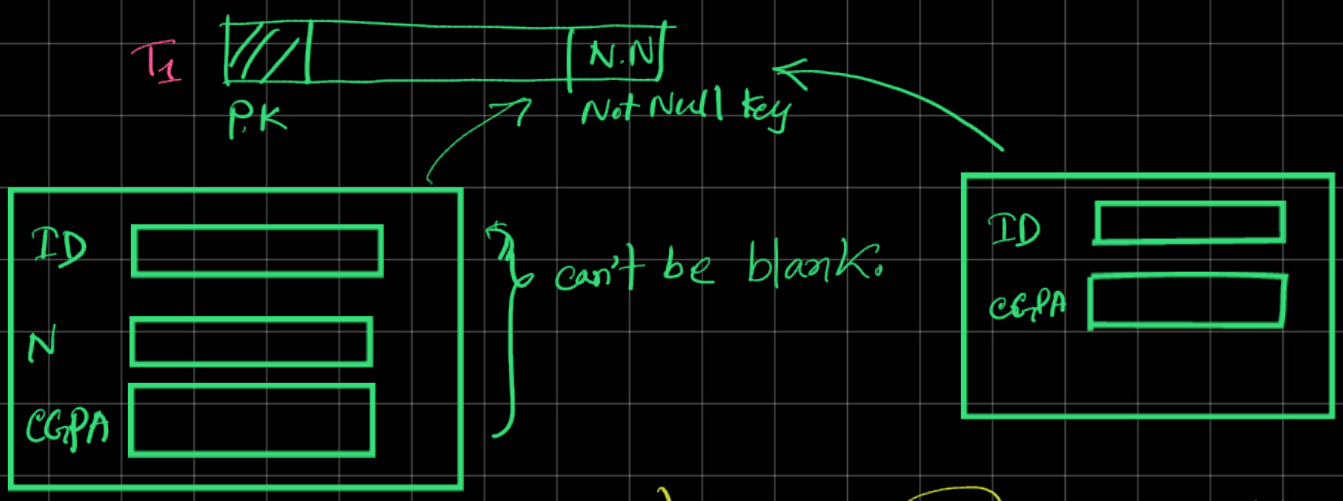

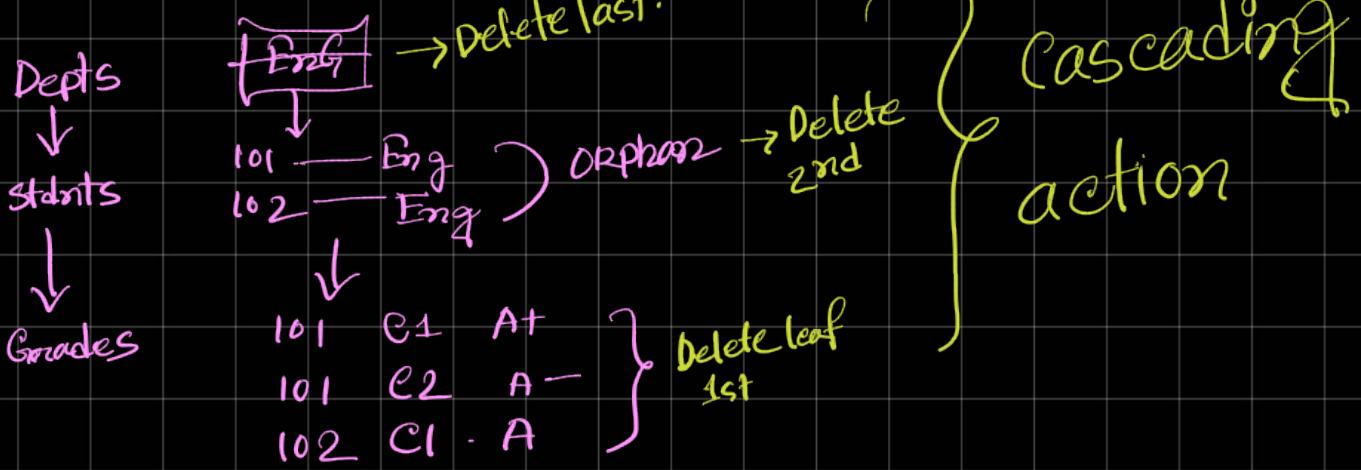

on delete cascade.



Issues gotta wait Mom/Dad has NID.

or,

F.Name
M "
} Dummy Var.