
transaction like stuff → Many to Many
Some entity on both sides (Reusability)

1 to 1 → very restricted


1 to many → most widely used (In oracle named ⇒ Master (1) detail
1-m

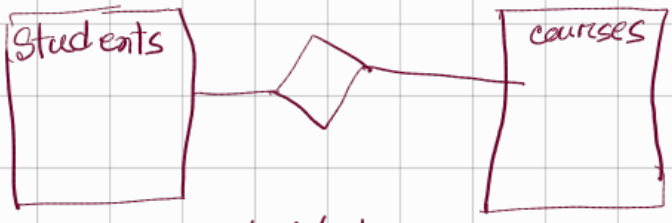

but for UI design we make it

should be m - m.


↳ subset of m-m
1-m is used in UI.



ER diagram Implementation:

↳ 1-m easiest.


Master-detail
Parent-child

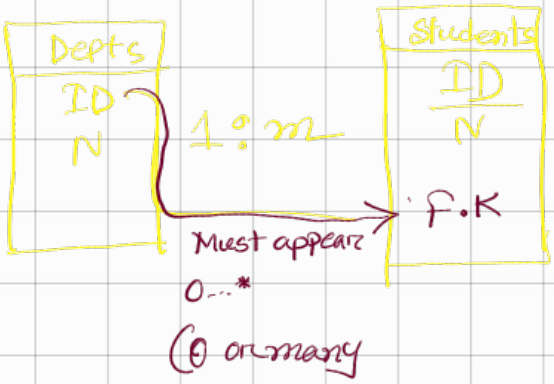


F.K towards many side.

V.I.

1 - 1

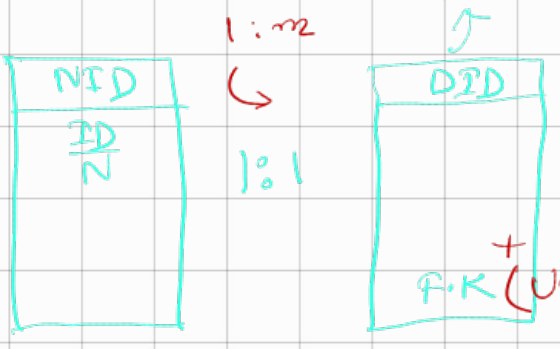

V.I.

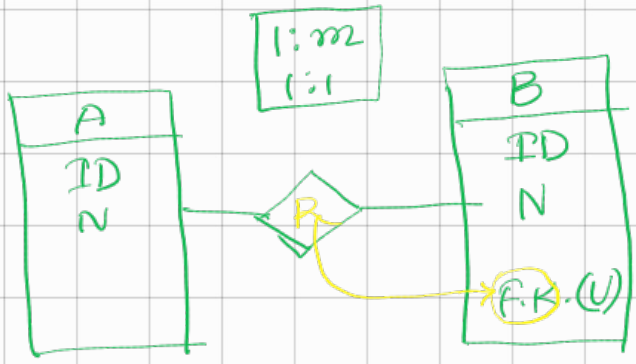


how to implement the R (Rltnship)?

=> 2 table needed (create)

the 1 table with Unique foreign key.

(2nd table)

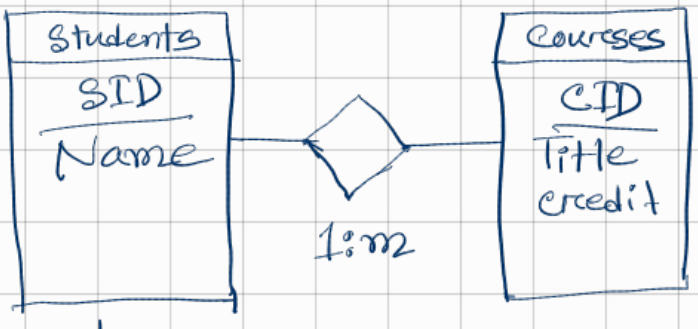

no way to make this many as SID is P.K can't appear more than once

So make a 3rd junction table.

Formula: 2 guys must come

1. P.K.

Prevent duplicate record insertion.



die making this diff credit hours years.




Combination of all records → no duplicate.

Mid exam: draw ER-D & implement using DDLs

☆ Must bring laptop next class. ☆

ERD to DDL-

#Generalization Specialization:

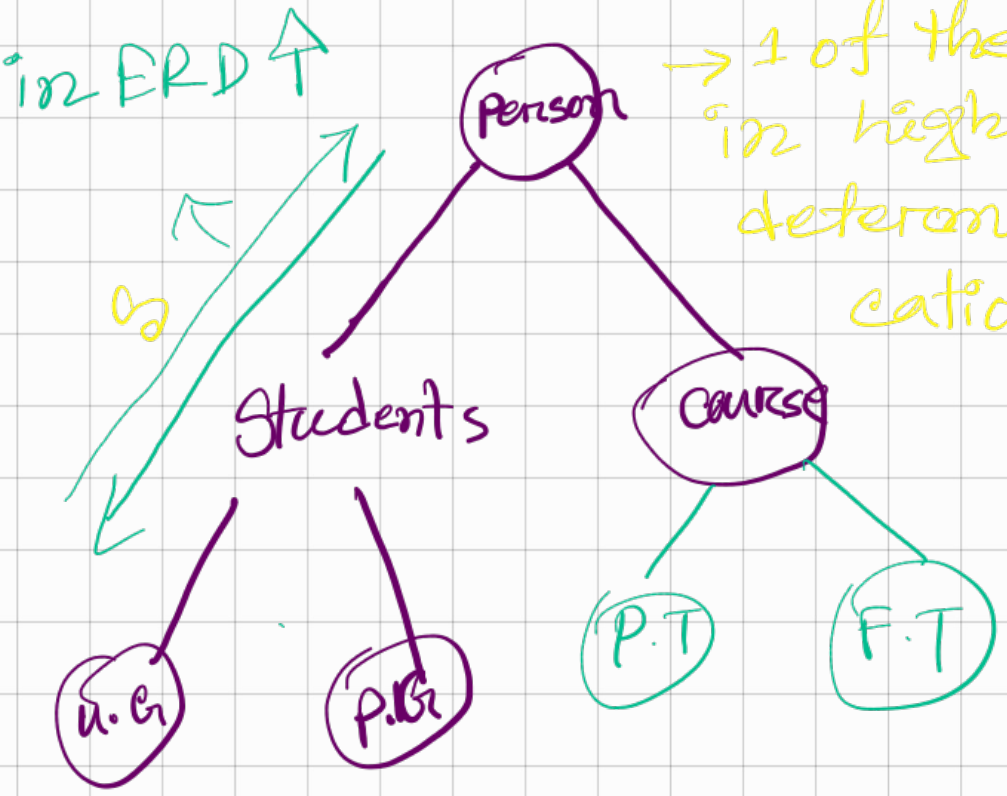

→ 1 of the attributes in higher layers determines classification.

root → General.

T > S → some lazy who

total > sum.

Generalization – spec

Specification hierarchy

student can't be graded

monolithic architect → old

modern → micro...

no transaction -> just Base

MongoDB → No asset- property.