



Modul Laravel 12

by Aksara Teknologi Mandiri



Daftar Isi

Modul Laravel 12	1
Daftar Isi	1
Apa yang baru di Laravel 12	2
Instalasi Laravel 12	2
Konfigurasi File System.....	3
Membuat Model dan Migration.....	3
Menampilkan Data dari Database	4
Insert Data ke Database	6
Edit dan Update Data	8
Hapus Data	10

Apa yang baru di Laravel 12

1. Starter Kit
2. Tampilan Baru
3. Tanpa Breaking Changes
4. Laravel Cloud


Instalasi Laravel 12

1. Menggunakan composer

```
composer global require laravel/installer
laravel new laravel-12
```

```
cd laravel-12
composer run dev
```

2. Menggunakan Laravel Herd

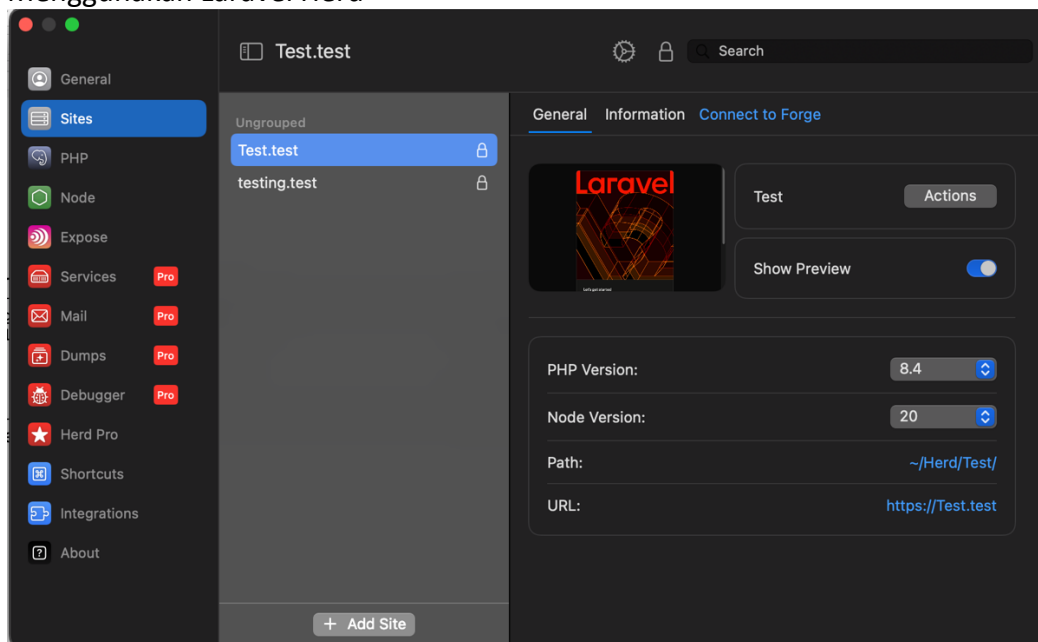

3. Install Laravel breeze

```
composer require laravel/breeze --dev
php artisan breeze:install
```

pilih blade with alpine

Konfigurasi File System

1. Konfigurasi File .env

```
FILESYSTEM_DISK=public
```

2. Menjalankan storage link

```
php artisan storage:link
```

Membuat Model dan Migration

1. Konfigurasi Koneksi database

```
DB_CONNECTION=mysql
DB_HOST=127.0.0.1
DB_PORT=3306
DB_DATABASE=laravel
DB_USERNAME=root
DB_PASSWORD=
```

2. Membuat model dan Migration

```
php artisan make:model Product -m
```

3. Menambahkan Field / Kolom di Migration

```
public function up(): void
{
    Schema::create('products', function (Blueprint $table) {
        $table->id();
        $table->string('image');
        $table->string('title');
        $table->text('description');
        $table->bigInteger('price');
        $table->integer('stock')->default(0);
        $table->timestamps();
    });
}
```

4. Konfigurasi Mass Assignment

```
protected $fillable = [
    'image', 'title', 'description', 'price', 'stock',
];
```

5. Menjalankan Migration

```
php artisan migrate
```

Menampilkan Data dari Database

1. Membuat Controller Product

```
php artisan make:controller ProductController --resource

//import model product
use App\Models\Product;

public function index()
{
    //get all products
    $products = Product::latest()->paginate(10);

    //render view with products
    return view('products.index', compact('products'));
}
```

2. Membuat Route Products

```
//import product controller
use App\Http\Controllers\ProductController;

//route resource for products
Route::resource('/products', ProductController::class);
```

Untuk mengecek routes yang ada
php artisan route:list

3. Membuat View Products Index

```
laravel-12
├── app
│   ├── Http
│   │   └── Controllers
│   │       └── ProductController.php
│   └── resources
│       ├── views
│       │   └── products
│       │       └── index.blade.php
│       └── routes
│           └── web.php
```

products/index.blade.php

```
<x-app-layout>
    <x-slot name="header">
```

```

        <div class="flex flex-row justify-between items-center">
            <h2 class="font-semibold text-xl text-gray-800 leading-tight">
                {{ __( 'Manage Products' ) }}
            </h2>
            <a href="{{ route('products.create' ) }}" class="py-2 px-4 bg-indigo-
700 text-white rounded-full">
                Add New
            </a>
        </div>
    </x-slot>

    <div class="py-12">
        <div class="max-w-7xl mx-auto sm:px-6 lg:px-8">
            <div class="bg-white overflow-hidden shadow-sm sm:rounded-lg p-10
flex flex-col gap-y-5">
                <table class="table-auto">
                    <thead>
                        <tr>
                            <th>IMAGE</th>
                            <th>TITLE</th>
                            <th>PRICE</th>
                            <th>STOCK</th>
                            <th>ACTIONS</th>
                        </tr>
                    </thead>
                    <tbody>
                        @forelse ($products as $product)
                            <tr>
                                <td class="text-center">
                                    
                                </td>
                                <td>{{ $product->title }}</td>
                                <td>{{ "Rp " . number_format($product->
price,2,',','.') }}</td>
                                <td>{{ $product->stock }}</td>
                                <td class="text-center">
                                    <form onsubmit="return confirm('Apakah Anda
Yakin ?');" action="{{ route('products.destroy', $product->id) }}"
method="POST">
                                        <a href="{{ route('products.edit',
$product->id) }}" class="py-2 px-4 bg-indigo-700 text-white rounded-
full">EDIT</a>
                                        @csrf
                                        @method('DELETE')
                                        <button type="submit" class="py-2 px-4
bg-red-700 text-white rounded-full">HAPUS</button>
                                    </form>
                                </td>
                            </tr>
                        @empty
                            <div class="bg-red-700 text-white px-4 py-3"
role="alert">
                                Data Products belum ada.
                            </div>
                        @endforelse
                    </tbody>
                </table>
            </div>
        </div>
    </div>
</x-app-layout>

```

Insert Data ke Database

1. Membuat Method Create dan Store di Controller

```
public function create()
{
    return view('products.create');
}

public function store(Request $request)
{
    $request->validate([
        'image' => 'required|image|mimes:jpeg,jpg,png|max:2048',
        'title' => 'required|min:5',
        'description' => 'required|min:10',
        'price' => 'required|numeric',
        'stock' => 'required|numeric'
    ]);

    //upload image
    $image = $request->file('image');
    $image->store('products', 'public');

    //create product
    Product::create([
        'image' => $image->hashName(),
        'title' => $request->title,
        'description' => $request->description,
        'price' => $request->price,
        'stock' => $request->stock
    ]);

    //redirect to index
    return redirect()->route('products.index');
}
```

2. Membuat Form Tambah Data

products/create.blade.php

```
<x-app-layout>
    <x-slot name="header">
        <h2 class="font-semibold text-xl text-gray-800 leading-tight">
            {{ __('New Product') }}
        </h2>
    </x-slot>

    <div class="py-12">
        <div class="max-w-3xl mx-auto sm:px-6 lg:px-8">
            <div class="bg-white overflow-hidden p-10 shadow-sm sm:rounded-lg">

                <form method="POST" action="{{ route('products.store') }}"
                enctype="multipart/form-data">
                    @csrf

                    <div class="mt-4">
                        <x-input-label for="image" :value="__('image')" />
```

```

        <x-text-input id="image" class="block mt-1 w-full"
type="file" name="image" required autofocus autocomplete="image" />
        <x-input-error :messages="$errors->get('image')"
class="mt-2" />
    </div>

    <div>
        <x-input-label for="title" :value="__('Title')"/>
        <x-text-input id="title" class="block mt-1 w-full"
type="text" name="title" :value="old('title') required autofocus
autocomplete="title" />
        <x-input-error :messages="$errors->get('title')"
class="mt-2" />
    </div>

    <div>
        <x-input-label for="description"
:value="__('Description')"/>
        <x-text-input id="description" class="block mt-1 w-
full" type="text" name="description" :value="old('description') required
autofocus autocomplete="description" />
        <x-input-error :messages="$errors->get('description')"
class="mt-2" />
    </div>

    <div>
        <x-input-label for="price" :value="__('Price')"/>
        <x-text-input id="price" class="block mt-1 w-full"
type="number" name="price" :value="old('price') required autofocus
autocomplete="price" />
        <x-input-error :messages="$errors->get('price')"
class="mt-2" />
    </div>

    <div>
        <x-input-label for="stock" :value="__('Stock')"/>
        <x-text-input id="stock" class="block mt-1 w-full"
type="number" name="stock" :value="old('stock') required autofocus
autocomplete="stock" />
        <x-input-error :messages="$errors->get('stock')"
class="mt-2" />
    </div>

    <div class="flex items-center justify-end mt-4">
        <button type="submit" class="font-bold py-4 px-6 bg-
indigo-700 text-white rounded-full">
            Add New Product
        </button>
    </div>
</form>

</div>
</div>
</div>
</x-app-layout>

```


Edit dan Update Data

1. Membuat Method edit dan update di Controller

```
public function edit(string $id)
{
    //get product by ID
    $product = Product::findOrFail($id);

    //render view with product
    return view('products.edit', compact('product'));
}

public function update(Request $request, string $id)
{
    //validate form
    $request->validate([
        'image' => 'image|mimes:jpeg,jpg,png|max:2048',
        'title' => 'required|min:5',
        'description' => 'required|min:10',
        'price' => 'required|numeric',
        'stock' => 'required|numeric'
    ]);

    //get product by ID
    $product = Product::findOrFail($id);

    //check if image is uploaded
    if ($request->hasFile('image')) {

        //delete old image
        Storage::disk('public')->delete('products/'.$product->image);

        //upload new image
        $image = $request->file('image');
        $image->store('products', 'public');

        //update product with new image
        $product->update([
            'image' => $image->hashName(),
            'title' => $request->title,
            'description' => $request->description,
            'price' => $request->price,
            'stock' => $request->stock
        ]);
    } else {

        //update product without image
        $product->update([
            'title' => $request->title,
            'description' => $request->description,
            'price' => $request->price,
            'stock' => $request->stock
        ]);
    }

    //redirect to index
    return redirect()->route('products.index');
}
```

2. Membuat Form Edit Data

products/edit.blade.php

```
<x-app-layout>
  <x-slot name="header">
    <h2 class="font-semibold text-xl text-gray-800 leading-tight">
      {{ __( 'Edit Product' ) }}
    </h2>
  </x-slot>

  <div class="py-12">
    <div class="max-w-3xl mx-auto sm:px-6 lg:px-8">
      <div class="bg-white overflow-hidden p-10 shadow-sm sm:rounded-lg">

        <form method="POST" action="{{ route('products.update',
$product->id) }}" enctype="multipart/form-data">
          @csrf
          @method('PUT')

          <div class="mt-4">
            <x-input-label for="image" :value="__('image')" />
            <x-text-input id="image" class="block mt-1 w-full"
type="file" name="image" required autofocus autocomplete="image" />
            <x-input-error :messages="$errors->get('image')"
class="mt-2" />
          </div>

          <div>
            <x-input-label for="title" :value="__('Title')" />
            <x-text-input id="title" class="block mt-1 w-full"
type="text" name="title" :value="old('title', $product->title)" required
autofocus autocomplete="title" />
            <x-input-error :messages="$errors->get('title')"
class="mt-2" />
          </div>

          <div>
            <x-input-label for="description"
:value="__('Description')" />
            <x-text-input id="description" class="block mt-1 w-
full" type="text" name="description" :value="old('description', $product-
>description)" required autofocus autocomplete="description" />
            <x-input-error :messages="$errors->get('description')"
class="mt-2" />
          </div>

          <div>
            <x-input-label for="price" :value="__('Price')" />
            <x-text-input id="price" class="block mt-1 w-full"
type="number" name="price" :value="old('price', $product->price)" required
autofocus autocomplete="price" />
            <x-input-error :messages="$errors->get('price')"
class="mt-2" />
          </div>

          <div>
            <x-input-label for="stock" :value="__('Stock')" />
            <x-text-input id="stock" class="block mt-1 w-full"
type="number" name="stock" :value="old('stock', $product->stock)" required
autofocus autocomplete="stock" />
            <x-input-error :messages="$errors->get('stock')"
class="mt-2" />
          </div>
        </form>
      </div>
    </div>
  </div>
</x-app-layout>
```

```

        </div>

        <div class="flex items-center justify-end mt-4">
            <button type="submit" class="font-bold py-4 px-6 bg-
indigo-700 text-white rounded-full">
                Update Product
            </button>
        </div>
    </form>

</div>
</div>
</div>
</x-app-layout>

```

Hapus Data

1. Membuat method destroy di Controller

```

public function destroy(string $id)
{
    //get product by ID
    $product = Product::findOrFail($id);

    //delete old image
    Storage::disk('public')->delete('products/'.$product->image);

    //delete product
    $product->delete();

    //redirect to index
    return redirect()->route('products.index');
}

```