
Absence Is Not Omission: Availability, Vintage, and the Measurement of Selective Benchmark Disclosure

Anonymous Author(s)

Affiliation

Address

email

Abstract

Providers choose which benchmark results a release document prints; independent evaluators score the same models on many more. Dating the instruments seems to answer whether omitted results trail printed ones: a benchmark published after a model shipped could not be reported. The comparison fails as a check on itself. Benchmarks postdating a release trail those predating it by 12.23 percentile points before any label enters, because the date deciding availability also fixes where a model sits in the benchmark’s comparison pool, an age-period-cohort collinearity reweighting cannot remove. The failure appears on a leaderboard we did not build: across fourteen HELM Lite releases, fixed models keep identical scores while every win rate moves; a pool-invariant companion moves nothing. Hand-coding every locatable release document, independently second-coded, shows the consequence: the coded gap rejects zero at +11.4, yet with labels removed the same releases return +14.1, the difference exactly what composition implies. A study built this way turns pool composition into apparent concealment. Reporting is performance-related, reported benchmarks standing 8.7 points above omitted eligible ones within release, yet no possession-grounded test detects withholding, the change-based gap keeping the predicted sign inside its null. Carrying a fixed suite across releases would make later silence informative; adding labels to a moving pool does not.

1 Introduction

For each frontier model release, providers disclose benchmark scores through a model card, while third parties execute standardised benchmarks for the same models [Liang et al., 2023, Epoch AI, 2026]. This paper asks whether benchmark availability can identify the older economic question of whether the provider’s undisclosed scores are typically worse than their reported scores. Only when the signal is common knowledge does disclosure unravel [Grossman, 1981, Milgrom, 1981]. As Dye [1985] details, when receivers cannot distinguish between senders who have no information, and senders who have bad information, receivers treat senders as the same, encouraging withholding. This indistinguishability extends to any research that attempts to analyse what was withheld, since we rely on the endowment, the signal a sender had at time of writing, which we do not observe in the work below.

The presence of benchmark release dates gives a rare ability to bound the endowment exogenously: when benchmarks are never shared before publication, any benchmark released after the model release is necessarily not in the provider’s endowment, regardless of whether providers ran it themselves. This lets us distinguish what was able to be disclosed, from what was unable to be disclosed.

First, we provide a new longitudinal study of benchmark disclosure that uses the boundary to construct a panel of a fixed snapshot of an independent benchmarking hub containing 819 model-versions, which we aggregate over scaffold variants to a panel of 353 provider releases, 46 organisations, 74 benchmarks, and 3,082 model-benchmark scores. We provide a verified release date for each benchmark, creating a new panel of 2,355 eligible model-benchmark scores, and 476 ineligible model-benchmark scores.

Second, we show that while the ability to bound the endowment is a unique and powerful feature to understand withholding, constructing a relative ranking of performance is required to judge withholding. Our central analysis compares reported, versus omitted benchmarks that were able to be reported, and requires the relative ranking to be unbiased across the two sides of availability. Instead, there is a 12.23 percentile point difference on average in performance between benchmarks created before the model release, versus those that were created after the model release, with pre-release benchmarks outperforming post-release benchmarks in 78.1% of the 146 releases that have cells in both groups. None of this calculation uses whether the provider reported the benchmark, and the least biased estimate of the relative ranking remains at 9.14 points. This remains a structural problem, as the verification of the endowment uses the same signal, the release date, that biases our relative ranking [Heckman, 1979]. In economic terms, the presence of benchmark vintages is a free signal to verify the endowment, which Dye [1985] demonstrates cannot be known to receivers in general. However, the signal to verify the endowment is not excludable in the relative ranking, and therefore is self-contaminating. This raises a fundamental design challenge for any research that verifies the presence of information via vintage, but then prices evidence using a relative ranking, win rate, or percentile. Not only must reporting decisions be observable, but also the relative ranking must maintain a consistent reference group that is invariant to the endowment.

In our third finding, we extend these concerns beyond our panel. In a sample of 14 published releases for HELM Lite, the pool expands (30 $\rightarrow$ 91 models); 24 models keep bit-for-bit identical scores; and all their published headline values change (five pairs reversing order). These changes do not show up in a parallel leaderboard maintained by the same group of authors, which presents an absolute headline. of HELM Lite, the pool grows from 30 models to 91 while 24 models keep bit-identical scores, and every one of their published headline values moves, five pairs reversing order. A companion leaderboard from the same team, behind an absolute headline, shows none of this.

In our fourth finding, we code this history. We hand-code the 100 releases with a locatable release-time document, independently replicated on a fifth ($\kappa = 0.95$ on reported vs. not), yielding the estimator such a study would use. Omitted benchmarks are +11.4 points higher than those the provider could not have reported (excluding zero, but falling short of its matched counterpart by what composition implies: it cannot separate concealment from the availability gap). What survives is composition: reported benchmarks are 8.7 points higher than omitted eligible benchmarks within release ($p = 0.0001$), and this is robust to benchmark fixed effects.

1.1 Related literature

The state of reporting in model documentation is imperfect, incomplete, and dependent on the sender, established [Stauffer et al., 2025, Kuehnert et al., 2026], with two papers focusing on the reporting gaps themselves: Zhang et al. [2026] finds a benchmark family missing from all main result tables across four flagship releases, and Ghosh et al. [2026] defines the reporting standard that would make the omission observable. Both lack benchmark dates, so there’s no way to distinguish a skipped benchmark from one the release predates. Bean et al. [2025] instead evaluates 445 benchmarks for construct validity, a different question about whether instruments measure what they’re claimed to, while we take the instruments as given.

Evidence is stronger on leaderboards: Singh et al. [2025] characterises selection in real time (providers testing private variants and publishing the best), while Xu et al. [2025] shifted HELM’s primary metric off a win rate that depends on the models compared. In both cases, the leaderboard changes for reasons other than the evidence, but neither isolates, and we do at the cell level, an omission from a result that could not have existed. What no paper

here controls for is availability, which we introduce: absent a confirmed benchmark date, the distinction between “wasn’t reported” and “did not exist” collapses.

The economics literature frames the problem and gives a cautionary note: silence unravels when endowments are commonly observed [Grossman, 1981, Milgrom, 1981] but persists if the recipient cannot distinguish an empty endowment from a concealed one [Dye, 1985, Jung and Kwon, 1988] or when revelation incurs a cost [Verrecchia, 1983], frictions our design does not separate. Empirically, the warning bears out: unravelling doesn’t occur in practice [Dranove and Jin, 2010, Jin and Leslie, 2003, Hotz and Xiao, 2013, Bederson et al., 2018] and in the lab [Jin et al., 2021]. What all this work misses is the endowment directly, the thing our bound aims to recover. Meanwhile, concurrent theory takes a direct approach to strategic assessment and persuasion [Truong et al., 2026, Dai et al., 2026]; theory, not measurement.

2 Data and Setting

2.1 The disclosure problem

A release i ships at date t_i carrying a single document. Let $\mathcal{B}$ index benchmarks, each with its own publication date τ_b , let $E_i \subseteq \mathcal{B}$ be the endowment, the benchmarks whose result the provider holds when it writes, and let $D_i \subseteq E_i$ be the disclosed set, which reports a score s_{ib} for each $b \in D_i$. The receiver observes D_i and its scores and must split the complement into results held back and results never held.

Under a commonly known endowment, silence is priced at the worst value it could conceal and disclosure unravels to $D_i = E_i$ [Grossman, 1981, Milgrom, 1981]. Two distinct frictions break that. In Verrecchia [1983] the endowment is known and disclosure is costly, so withholding is a cutoff in s_{ib} . In Section 3 of Dye [1985] disclosure is free but the receiver cannot tell an empty endowment from a concealed one, because a sender can prove possession and cannot prove emptiness.

Here an independent evaluator publishes s_{ib} for cells the provider passed over, and each τ_b makes infeasibility verifiable. Writing $A_i = \{b : \tau_b < t_i\}$ for the available set and O_i for the cells the evaluator scores,

$$D_i \subseteq E_i \subseteq A_i, \quad \theta = \Pr(b \notin D_i \mid b \in O_i \cap A_i).$$

A provider may hold results the evaluator never produced and a benchmark can exist and go unrun, so θ is defined against the evaluator’s coverage rather than the true endowment, and the Dye friction survives inside A_i .

Judging what was withheld then requires a measure of standing P_{ib} , since raw scores are not comparable across benchmarks. The design rests on an exclusion restriction: conditional on the innocent explanations, membership in A_i does not enter the equation for P_{ib} [Heckman, 1979]. A date rule cannot satisfy it: $t_i - \tau_b$, t_i and τ_b are exactly collinear, so if any two of the three move P_{ib} the third cannot be excluded from it. All three move it here, which Section 3 shows and Appendix B bounds. Two things follow, and they are not the same. The first is practical: estimating θ needs disclosure labels, which the coded record of Section 5 supplies. The second is structural: reading θ as evidence of withholding runs into A_i itself. Availability is a deterministic threshold in benchmark maturity, $\mathbf{1}[t_i - \tau_b > 0]$, so no cell of the same maturity sits on both sides of the boundary. Wherever standing depends on maturity, conditioning finely enough to make availability excludable destroys positivity. So availability alone cannot globally identify selective disclosure from any pool-relative standing measure, win rate or percentile alike, and a jointly estimated scale inherits the same selection through which cells exist. What survives, under continuity, is the discontinuity at the threshold.

2.2 The independent score set

We work with a pinned version of Epoch’s benchmarking hub scraped on August 17th, 2026. This data includes 819 model-versions. Since we are interested in release-level disclosure, we use organisation, model and release date to identify releases. Epoch uses a version attribute to distinguish different scaffolds within the same release, e.g. different reasoning effort or context length variants. Since the provider publishes one document for one release, we

collapse these versions to releases, taking the maximum score among scaffolds and retaining the spread as a check. We end up with a dataset with 353 releases, 74 benchmarks and 3,082 release-benchmark cells that have an associated independent score. The data is clustered by provider.

2.3 Eligibility and benchmark dates

A provider cannot omit a benchmark that did not yet exist. To ensure temporal eligibility, we collect release dates for benchmarks: the earliest verifiable public release date (from Epoch if available, from the primary source of the benchmark if not, translating between preprint dates, code repository dates and different versions to get the first public release date). A cell is eligible only if the benchmark release date strictly predates the release’s date and if the benchmark’s release date is verified. This restriction assumes providers could not have access to unreleased benchmarks; if a provider was given early access to a benchmark, this assumption would not hold. Such violations shrink rather than create the reporting gap; they move available cells into the postdating category. Such violations leave no trace in our coded data: no document reports a benchmark before its public release date. This restriction leaves 2,355 out of the 3,082 cells eligible. Cells whose benchmark strictly postdates the release’s date form a separate set of 476, cells that could not have been reported. We drop cells without a verified benchmark date rather than imputing a date; inaccuracies in dates shrink the boundary estimate we construct in Section 3. For comparing releases, we do not require a minimum number of benchmarks; this would exclude the releases that only have one eligible and one postdating cell. 57 out of 146 releases with both eligible and postdating cells have fewer than eight scored benchmarks. The more trivial obstacle, that how many benchmarks a release could report is set by when it shipped, is discussed in Appendix A.

To code disclosure, we adapt ORBIT, Outcome Reporting Bias In Trials. ORBIT is standardised in clinical trials, where disappearing outcomes (outcomes specified in the protocol but not reported in the publication) have a long literature on measurement [Chan et al., 2004, Kirkham et al., 2010, Dwan et al., 2013]. For existing cells, we record whether the provider reports a number, cites the benchmark without reporting, or reports a variant; for missing cells, we record whether a previous member of the same family reported it, if contemporaries reported it, or if no similar provider reported it. Of the 108 releases in the queue, 103 with eligible cells in our pinned dataset and five in a more recent vintage, we code the 100 for which we can locate a document from release time; 1,280 cells in total. None of the analysis before Section 5 depends on coded disclosure.

2.4 Measuring standing

Raw scores do not allow comparison across benchmarks, so we report relative performance as a percentile within benchmark by comparing each model to models whose release dates fall within 182 days before or after the focal release (“window”), using midranks for ties. We also report the number of peers and their share of the window released later than the focal model. This is the metric implied by a windowed comparison and what we demonstrate to be biased in a way that mimics selective disclosure.

2.5 Inference

Inference is constrained by the same structure. The panel has 46 nominal provider clusters, but 24 contribute fewer than ten cells, 20 appear in a single release, and the five largest hold 68.1% of the sample. Cluster-robust asymptotics are not credible below twelve clusters, and we report no analytic standard error there [Cameron et al., 2008]. Regression coefficients in that range use the restricted wild cluster bootstrap over 9,999 draws, which imposes the null before resampling Rademacher weights at the provider level. Release-level means use a cluster sign-flip randomization test over 9,999 draws, reversing an organisation’s contribution at once; it preserves provider dependence but not benchmark dependence, which the two-way clustered regressions carry, and their intervals are percentile bootstraps over 10,000 provider resamples. Both report $(k + 1)/(\text{draws} + 1)$, with k the draws at least as extreme as the observed statistic. Mirrored sign vectors leave 2^{G-1} distinct statistics over G clusters, so a resolution of 0.0001 needs fifteen clusters; the 18 organisations behind the headline estimate clear it.

3 The Availability Gap

3.1 The placebo comparison

To separate withheld from non-existent, we require a control group of non-endowment [Dye, 1985]. Dates appear to provide one: a postdating benchmark could not be reported without prepublication access, whereas an eligible one could. A disclosure label would report whether it was, and none enters. Any innocent reason an eligible looks poor, difficulty drift, saturation, or measure change, operates equally well on both groups, meaning their difference should be zero. One such innocent reason is inherently asymmetric: a benchmark prior to shipping can lie in the training set for a given model and one after it cannot, so contamination increases eligible standing only, beyond any reweighting of the comparison.

Not zero. On average eligible beats postdating by 12.23 percentile points among 146 releases of both cells, with the median 10.69, and the proportion of releases where it wins is 78.1%. This computation does not know whether benchmarks are reported. By constructing one that treats both sides of the window equally (see below), we find eligible to beat by 9.14 percentile points across 141 releases, positive 70.9%, still without removing it. Using a cluster sign-flip randomization test of the difference at the 18 organisations with both cell types produces $p = 0.0001$ as the smallest available from the draws. Groups ineligible to be reported already stand lower than ones eligible, so it is not a control.

3.2 Decomposing the gap

In Table 1 we identify the failure using a placebo regression with an indicator for whether the benchmark postdates the release (always within release). With release effects alone this is -13.5 points. But benchmark fixed effects account for 63.4% of it, structurally since the placebo cells are constructed to exist primarily in those benchmarks arriving late, which are less saturated, with 8.3% of scores in the latter half of the 54 benchmarks with ≥ 10 scores in the top decile of its own range vs. 13.2% in the former ($p = 0.015$), leaving more room below the ceiling. The term capturing the asymmetry in peer-window, i.e. what share of comparisons are made to models released after the model of interest, controls for 39.8% on its own, and once we include both benchmark fixed effects and both window terms, the remaining is 0.003 points, with a confidence interval up to $+3.4$, which is no more than one third of the pre-control difference.

Conditioning set	Placebo coefficient	t	Absorbed
Release fixed effects only	-13.529 (2.038)	-6.637	0.0%
Release FE + benchmark fixed effects	-4.949 (2.183)	-2.267	63.4%
Release FE + peer-window asymmetry	-8.151 (1.865)	-4.370	39.8%
Release FE + peer count	-2.107 (1.882)	-1.120	84.4%
Two-way fixed effects + both window terms	-0.003 (1.748)	-0.002	100.0%

Table 1: Placebo coefficient by conditioning set, percentile points, within release. Two-way provider-by-benchmark standard errors (45 by 61 clusters; provider-only in Appendix B), $n = 2,831$. Absorbed is the fall in absolute value from row one; peer count alone suppresses; the last row has both.

For the second dimension, the mechanism is geometric, with the peer-window being symmetric in calendar time, 182 days before or after, but not model coverage since the coverage begins when the benchmark arrives. Figure 1 depicts both objects against benchmark maturity at release: the relative proportion of newer peers declines with maturity and jumps at the availability threshold, whereas standing runs through it without a detectable break. Thus, the mechanism is discontinuous where the outcome is not; composition is a property of timing alone.

The share of a cell’s window released after the focal model is 0.4683 for eligible cells and 0.7065 for placebo cells, against 0.5 for a two-sided window. Within release, the slope of standing on that share is -30.63 percentile points per unit among eligible cells alone. We plot standing versus the share of newer peers simultaneously for both types of cells in Figure 2. Instead of the two types of cells forming distinct point clouds, they follow a common downward trend that only appears after accounting for changes in the benchmark makeup (see Table 1); eligible and placebo cells lie at different points on that line. By

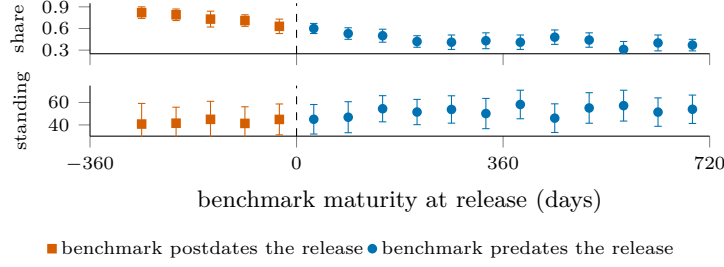


Figure 1: The mechanism and the outcome at the availability boundary. Top: the share of a cell’s window released after the focal model, against benchmark maturity at release; it falls with maturity and jumps at the boundary. Bottom: within-benchmark standing on the same axis, continuous through it. Sixty-day bins; intervals clustered on organisation.

242 construction, eligible and placebo cells are separated and never overlap on their assignment
 243 variable, the maturity of the benchmark at release; thus the difference between eligible and
 244 placebo cells is obtained by extrapolation rather than comparison on the common support.
 245 As a robustness check, we probe the continuity of the regression at the cutoff, the only
 246 part of the assignment variable where the analysis is identified, see Section 2.1 [Hahn et al.,
 247 2001]. The regression discontinuity analysis does not reveal a jump at the cutoff. Local
 248 linear regressions give negative coefficients for all bandwidths and orders, all confidence
 249 intervals include zero with the upper bound of the widest interval being +8.05, and the
 250 difference on a balance-driven bandwidth is -2.52 with a randomization p -value of 0.447
 251 [Cattaneo et al., 2015]. The two types of cells differ in mean maturity by 793 days, and
 252 the discrepancy between them is driven by that distance rather than the cutoff point itself
 253 (Appendix B for the balance tests).

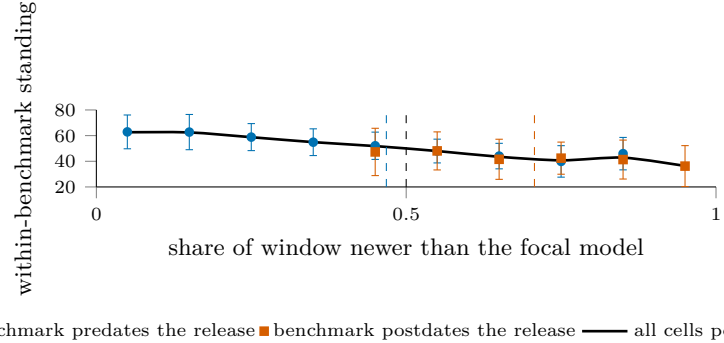


Figure 2: Standing against the share of a cell’s window released after the focal model; dashed verticals mark group mean shares, the black dashed line the symmetric 0.5. Eligible and placebo cells lie on one declining curve, so the contrast between them is a position on the curve, not a fact about disclosure. Intervals clustered on organisation.

254 It’s possible to decompose standing as a weighted combination of percentile-ranks against
 255 older and newer peers with the share of newer peers as weight, $\text{percentile} = (1 - w)P_{\text{old}} +$
 256 wP_{new} (exact cell-wise). The side-balanced standing, setting the weight to one half, available
 257 for 92.5% of all cells (92.8% for eligible-or-placebo cells), cuts the same slope to -8.56 .

258 Despite the identity holding, the gradient is not a mere book-keeping tautology: permute
 259 the scores within the same benchmark, and the capability trend disappears while publishing
 260 dates, window membership, peer counts and newer shares are bit-wise identical. Under that
 261 null the slope has an average of -0.09 with a standard deviation of 3.12; the measured
 262 value of -30.63 is 9.8 standard deviations out, unmatched by any of the 300 draws. Further,
 263 fitting a linear regression within each benchmark of scores against publishing date, then
 264 reconstructing the scores as predicted values plus permuted residuals within each benchmark,
 265 meaning there’s only a capability trend but no others, we are able to recover 93% of the
 266 slope over 200 draws. The comparison-set geometry by itself is inert; it only introduces bias
 267 when combined with the existing trend in capabilities.

3.3 Trimming and reweighting

The phenomenon has a name in nonparametric estimation: local averages are biased near the edge of a support, and the standard remedies recentre rather than discard [Gasser and Müller, 1979, Fan, 1992]. What is unusual is the boundary’s coincidence with the endowment: a benchmark was available to a release exactly when the model did not sit at the left edge of that benchmark’s coverage. The indicator of what a provider could have held is therefore the indicator of where the window is one-sided, and removing the edge removes the contrast. The coincidence has an older name, the age-period-cohort identity: release date, benchmark vintage and their difference are exactly collinear, and each has a measured signature here: t_i in the capability trend, τ_b in saturation, $t_i - \tau_b$ in window composition. Only the linear components are unidentified in that structure [Fosse and Winship, 2019a,b], so what fails is a slope. Three sign restrictions bound it: capability rises with the calendar, later benchmarks are less saturated, and standing rises with maturity. All three are assumptions on unidentified components, each motivated by a measurement of an identified quantity. Under them the unidentified component accounts for at most 24 to 34% of the placebo gap across specifications, roughly three percentile points, which is where the saturated regression also lands. The remainder is carried by the identified reduced-form slopes, and Appendix B gives the derivation.

Standing measure	Mean	Median	Positive	Sign-flip p	Releases	Cells
Windowed percentile, $\pm 182d$	+12.23	+10.69	78.1%	0.0001	146	100.0%
Rank against all models ever	+22.75	+22.66	89.0%	0.0001	146	100.0%
Trim to two-sided windows	+9.96	+10.69	72.2%	0.0001	115	70.4%
Side-balanced percentile	+9.14	+9.62	70.9%	0.0001	141	92.8%

Table 2: The label-free placebo null under each candidate measure: release-level mean standing of eligible minus postdating benchmarks, in percentile points. Every entry should be zero. Sign-flip p is the provider-clustered test of Section 2.5; Cells, the share of cells carrying the measure.

Table 2 shows what follows. Ranking against every model ever scored nearly doubles the contamination; trimming to two-sided windows discards 30% of the cells to remove 19%, its row the uncorrected gap on the retained cells, composition rather than correction. Shortening the window does reduce the gap, to +8.59 at 91 days, but in proportion to the asymmetry it removes rather than by breaking the mechanism. Across four widths and four benchmark-count minima the gap is positive in all 16 specifications, from +8.59 to +21.66, and tracks the eligible-minus-placebo gap in window composition at $r = 0.991$. Dropping any one of the 18 organisations leaves it between +11.45 and +13.20. The correction is a covariate, not a subsample.

One reading of that number would be too generous to it. Window composition is a function of the same dates that define the placebo indicator, so conditioning on it does not adjust for a confounder sitting outside the comparison; it splits the gap into the channel carrying it. A study that holds disclosure labels and wants an estimate of θ must first argue that window composition is settled before a provider decides what to report, or it conditions away part of what it measures. Provider identity explains little of the variance in window composition; Appendix B reports the decomposition and the coverage tilt it does not correct.

The side-balanced percentile is the one change of measure doing substantial work, cutting the placebo mean to +9.14 and the eligible-cell gradient to -8.56 . Figure 4 in Appendix B puts it against the uncorrected measure, near flat where cells are dense. Reweighting cannot reach what remains: balancing repairs the weight on each side of a model but not which models an evaluator chose to score early, so evaluator attention stays a confound. Undefined wherever a side is empty, it accompanies rather than replaces the uncorrected measure.

4 Evidence from HELM

All of this has been on a percentile computed here, on a panel composed here. It is possible that only the percentile design has this property, and not leaderboards generally. For example, HELM Lite is a leaderboard that publishes all its accuracy data at each versioned release, and retains this history. It also publishes a pool-relative headline [Liang et al., 2023], so the same evidence is read at 14 points in time while the pool expands.

When a leaderboard drifts, the first question is: has the suite changed? From v1.0.0 to v1.13.0, the 10 scenario columns are unchanged: no scenarios added, removed or renamed, except for a single column header relabel. Among the 24 models that span all 14 releases, all 240 published scenario scores remain bit-identical, as the evaluation pool expands from 30 to 91 models.

Published Mean win rate for all 24 constant models drifts (mean $|\text{drift}| = 0.1232$, max $|\text{drift}| = 0.2178$ for Mixtral 8x7B). This drift is mostly arithmetic: Mean win rate is computed as a win fraction, and a constant model compares against a larger, later pool over time; this drift correlates with initial standing ($r = -0.766$).

The key drift is in another direction. If the drift was a monotonic function of the bit-identical evidence then it would not change the ranking: monotonic transformations preserve rank order. This is not the case: 22 of the 24 constant models drift lower while two drift higher, and 5 of 276 pairs (1.8%) reorder between the first and last version; all are published rank inversions under bit-identical evidence. Figure 3, in Appendix B, plots the rank of each of the 24 constant models at the first version against the last. Each rank reversal is a crossing, visible and countable, on a bit-identical evidence base. This is distinct from overfitting to a test set [Roelofs et al., 2019]: here the evidence is bit-identical. It is the reference set that drifts. We observe a similar drift, from another cause, in Singh et al. [2025]: deprecation policy rather than a coverage boundary changing which models remain available; in both cases, the evidence remains constant and the ranking drifts with the reference set.

We also track a control: the HELM Capabilities leaderboard is from the same organisation, whose maintainers have diagnosed the win rate as pool-dependent [Xu et al., 2025]; it operates on the same infrastructure and release cadence, with a comparably expanding pool (22 $\rightarrow$ 68 models in 16 versions). Instead of reporting the win fraction, its headline metric is an absolute mean over scenarios. Among 22 models that span all versions, all 110 scenario scores remain bit-identical, none of the 22 headline values drift, and there are no rank reversals, at the endpoints or at any time. Because the headline is an absolute mean over bit-identical scores on a fixed suite, it cannot drift with the pool: no drift is arithmetic, a scope condition rather than a test that could have failed.

None of this needs to be interpreted as a mistake on the part of HELM: their absolute headline, on their own Capabilities leaderboard, is the point. A pool-relative headline is a joint statement, about the model and about the population assessed beside it; read later as statements about the models alone, two such numbers move standing between providers for reasons belonging to neither. The problem of making different-time metrics comparable is a classical equating problem [Kolen and Brennan, 2014], which is bypassed by estimating a scale jointly [Ho et al., 2025]. The panel and the leaderboard fail identically: the reference set, not the evidence, moves the number.

5 Coding the Record

Possible reasons for absence from model cards include irrelevancy to the model, absence of running, or withholding after running. Of these only the latter qualifies as disclosure [Grossman, 1981, Milgrom, 1981, Dye, 1985], and is thus one readers can price. The within-family drop narrows this: if the provider reported b at t but not at $t+1$, and an independent score exists, then (i) b is relevant, (ii) the provider had access to the benchmark harness, and (iii) the independent score serves as a registry-like counterfactual [Chan et al., 2004, Dwan et al., 2013, Kirkham et al., 2010]. But this does not establish that b was run for $t+1$, narrowing the Dye [1985] uncertainty but not closing it.

One coder coded the document released at release time for each of the 100 releases we can locate documents for (8 of 108 queued have none). We record which benchmarks they report, variants, mentions without scores, and explicitly-benign non-reports; we use these primitives and family history to mechanically derive the ORBIT categories. This results in 1,280 coded cells, 31 of which come from five of the most recent releases not in our pinned panel and are excluded. For a reliability study, a different coder double-coded a provider-stratified random fifth of the releases blind to the first and with no calibration communication (Appendix B notes the one release where this blinding was broken). Kappa scores are for the derived cells [Cohen, 1960], confidence intervals by resampling releases. We have agreement at

0.95 [0.80, 1.00] on the primitive judgment of whether a benchmark was reported, at 0.85 [0.72, 0.95] on the full set of categories, and at 0.81 [0.48, 1.00] on the high vs. low suspicion categories. The E cell that each coder derives is identical; this is encouraging but too rare a category for a reliability estimate (Appendix B gives the confusion structure). 76.9% of the 1,249 eligible coded cells that resolve in our panel report no number, with release-level mean of 73.1% [65.9, 79.2]. Note that this rate is descriptive, not yet evidence of selection.

Standing measure	Coded gap	95% CI	No labels	Difference
Windowed percentile, $\pm 182d$	+11.40	[+5.6, +17.0]	+14.13	-2.73
Side-balanced percentile, $\pm 182d$	+7.90	[-0.4, +15.2]	+9.82	-1.92
Rank against all models ever	+22.33	[+18.0, +28.1]	+24.50	-2.17
Windowed percentile, $\pm 90d$	+8.15	[+1.3, +14.7]	+10.36	-2.21
Windowed percentile, $\pm 365d$	+18.03	[+13.9, +23.1]	+20.53	-2.50

Table 3: The coded omission deficit beside the label-free gap, percentile points, over 71 releases and 13 providers (70 side-balanced). No labels is the contrast with no disclosure coding; Difference is Coded gap minus No labels. Provider-clustered bootstrap intervals; four of five exclude zero.

This section’s result is Table 3. The difference between disclosed and omitted is +8.7 points [4.1, 13.9] across 63 releases, and the intended availability contrast between omitted eligible and post-dating cells is +11.4 [5.6, 17.0] across 71 releases with both; the $p = 0.003$ would reject a zero null. When we read this against Section 3, we find that it is the availability gap: the label-free contrast on the same releases is +14.1, and the coded gap falls short by 1.9 to 2.7 points on every measure and window. This shortfall is an exact accounting identity: it is +2.7, the average over the same releases of the reported share $\times$ within-release reported-omitted gap, so our labels only change this contrast via composition.

And what’s left is composition. The +8.7 points of standing between reported and omitted eligible benchmarks within release exceeds all 9,999 count-preserving random assignments ($p = 0.0001$, floored at the number of draws, null standard deviation 1.9), and cannot be generated by the availability gap. It’s also robust to coding errors, variant reclassification, and leave-one-out analysis, because the availability gap is; and to benchmark identity: benchmark fixed effects alongside the release effects increase the coefficient from +7.4 to +9.3, and controlling for the window share leaves it at +7.4. But it cannot tell us that the standing caused the reporting: relevance, salience, within-eligible contamination all can move disclosure and performance together.

The remaining distance is possession; the original drop estimator and four possession cuts yield the same verdict. The drop estimator realises 16 drops across 15 releases and returns +2.9, opposite the withholding prediction, sign-flip $p = 0.25$ across five providers (the null its calibration priced). No document states that a benchmark was evaluated while reporting neither a score nor an outcome, across the 295 cells documenting a run. The change-based test (measuring each drop against its standing under the previous release) gives -3.7, the predicted sign, permutation $p = 0.16$ across 42 transitions; the possession tiers and equal-sized substitutions detect nothing further. Appendix B gives detail, and three unrepaired limits: unlocatable documents, coverage that may follow provider emphasis, and best-across-scaffolds scoring.

6 Conclusion

We set out to measure how much of what could be reported goes unreported by choice. The coded record returns the number and the reason to distrust it: +11.4 points, rejecting zero yet short of its label-free counterpart by what composition implies, too imprecise to exclude a strategic component. Such a study turns composition into apparent concealment. Three claims separate: non-reporting is extensive, composition is performance-related, withholding not established, possession tests returning null, absent, or opposite-signed evidence. Dating instruments bounds the endowment, an access assumption, fixing where a model sits in a benchmark’s coverage: what identifies it moves the measure pricing silence. A joint scale [Ho et al., 2025] shrinks but does not close the placebo gap; a fixed suite carried across releases would make later silence informative, narrowing the Dye [1985] pooling and growing the 16-drop record.

References

- Andrew M. Bean, Ryan Othniel Kearns, Angelika Romanou, Franziska Sofia Hafner, Harry Mayne, et al. Measuring what matters: Construct validity in large language model benchmarks. In *Advances in Neural Information Processing Systems* 38, 2025. arXiv:2511.04703.
- Benjamin B. Bederson, Ginger Zhe Jin, Phillip Leslie, Alexander J. Quinn, and Ben Zou. Incomplete disclosure: Evidence of signaling and countersignaling. *American Economic Journal: Microeconomics*, 10(1):41–66, 2018. doi: 10.1257/mic.20150178.
- A. Colin Cameron, Jonah B. Gelbach, and Douglas L. Miller. Bootstrap-based improvements for inference with clustered errors. *Review of Economics and Statistics*, 90(3):414–427, 2008. doi: 10.1162/rest.90.3.414.
- Matias D. Cattaneo, Brigham R. Frandsen, and Rocío Titiunik. Randomization inference in the regression discontinuity design: An application to party advantages in the U.S. senate. *Journal of Causal Inference*, 3(1):1–24, 2015. doi: 10.1515/jci-2013-0010.
- An-Wen Chan, Asbjørn Hróbjartsson, Mette T. Haahr, Peter C. Gøtzsche, and Douglas G. Altman. Empirical evidence for selective reporting of outcomes in randomized trials. *JAMA*, 291(20):2457–2465, 2004. doi: 10.1001/jama.291.20.2457.
- Jacob Cohen. A coefficient of agreement for nominal scales. *Educational and Psychological Measurement*, 20(1):37–46, 1960.
- Yifan Dai, Drew Fudenberg, and Harry Pei. Bayesian persuasion with selective disclosure, 2026. arXiv:2601.05914.
- David Dranove and Ginger Zhe Jin. Quality disclosure and certification: Theory and practice. *Journal of Economic Literature*, 48(4):935–963, 2010. doi: 10.1257/jel.48.4.935.
- Kerry Dwan, Carrol Gamble, Paula R. Williamson, and Jamie J. Kirkham. Systematic review of the empirical evidence of study publication bias and outcome reporting bias. *PLoS ONE*, 8(7):e66844, 2013. doi: 10.1371/journal.pone.0066844.
- Ronald A. Dye. Disclosure of nonproprietary information. *Journal of Accounting Research*, 23(1):123–145, 1985. doi: 10.2307/2490910.
- Epoch AI. Ai benchmarking hub. <https://epoch.ai/benchmarks>, 2026. Data snapshot of 17 August 2026, CC-BY.
- Jianqing Fan. Design-adaptive nonparametric regression. *Journal of the American Statistical Association*, 87(420):998–1004, 1992. doi: 10.1080/01621459.1992.10476255.
- Ethan Fosse and Christopher Winship. Bounding analyses of age-period-cohort effects. *Demography*, 56(5):1975–2004, 2019a. doi: 10.1007/s13524-019-00801-6.
- Ethan Fosse and Christopher Winship. Analyzing age-period-cohort data: A review and critique. *Annual Review of Sociology*, 45:467–492, 2019b. doi: 10.1146/annurev-soc-073018-022616.
- Theo Gasser and Hans-Georg Müller. Kernel estimation of regression functions. In *Smoothing Techniques for Curve Estimation*, volume 757 of *Lecture Notes in Mathematics*, pages 23–68. Springer, 1979. doi: 10.1007/BFb0098489.
- Avijit Ghosh, Anka Reuel, Jenny Chim, Wm. Matthew Kennedy, et al. Evaluation cards: An interpretive layer for ai evaluation reporting, 2026. arXiv:2606.09809.
- Sanford J. Grossman. The informational role of warranties and private disclosure about product quality. *Journal of Law and Economics*, 24(3):461–483, 1981. doi: 10.1086/466995.
- Jinyong Hahn, Petra Todd, and Wilbert Van der Klaauw. Identification and estimation of treatment effects with a regression-discontinuity design. *Econometrica*, 69(1):201–209, 2001. doi: 10.1111/1468-0262.00183.

461 James J. Heckman. Sample selection bias as a specification error. *Econometrica*, 47(1):
462 153–161, 1979. doi: 10.2307/1912352.

463 Anson Ho, Jean-Stanislas Denain, David Atanasov, Samuel Albanie, and Rohin Shah. A
464 rosetta stone for AI benchmarks, 2025. arXiv:2512.00193.

465 V. Joseph Hotz and Mo Xiao. Strategic information disclosure: The case of multiattribute
466 products with heterogeneous consumers. *Economic Inquiry*, 51(1):865–881, 2013. doi:
467 10.1111/j.1465-7295.2010.00340.x.

468 Ginger Zhe Jin and Phillip Leslie. The effect of information on product quality: Evidence
469 from restaurant hygiene grade cards. *Quarterly Journal of Economics*, 118(2):409–451,
470 2003. doi: 10.1162/003355303321675428.

471 Ginger Zhe Jin, Michael Luca, and Daniel Martin. Is no news (perceived as) bad news?
472 an experimental investigation of information disclosure. *American Economic Journal:*
473 *Microeconomics*, 13(2):141–173, 2021. doi: 10.1257/mic.20180217.

474 Woon-Oh Jung and Young K. Kwon. Disclosure when the market is unsure of information
475 endowment of managers. *Journal of Accounting Research*, 26(1):146–153, 1988.

476 Jamie J. Kirkham, Kerry M. Dwan, Douglas G. Altman, Carrol Gamble, Susanna Dodd,
477 Rebecca Smyth, and Paula R. Williamson. The impact of outcome reporting bias in
478 randomised controlled trials on a cohort of systematic reviews. *BMJ*, 340:c365, 2010. doi:
479 10.1136/bmj.c365.

480 Michael J. Kolen and Robert L. Brennan. *Test Equating, Scaling, and Linking: Methods*
481 *and Practices*. Springer, 3rd edition, 2014. doi: 10.1007/978-1-4939-0317-7.

482 Blaine Kuehnert, Nari Johnson, Ravit Dotan, and Hoda Heidari. Disclosure or mar-
483 keting? analyzing the efficacy of vendor self-reports for vetting public-sector ai. In
484 ACM Conference on Fairness, Accountability, and Transparency (FAccT), 2026. doi:
485 10.1145/3805689.3812220.

486 Percy Liang, Rishi Bommasani, Tony Lee, et al. Holistic evaluation of language models.
487 *Transactions on Machine Learning Research*, 2023. arXiv:2211.09110.

488 Wei Ma and George H. Chen. Missing not at random in matrix completion: The effectiveness
489 of estimating missingness probabilities under a low nuclear norm assumption. In *Advances*
490 *in Neural Information Processing Systems 32*, 2019. arXiv:1910.12774.

491 Justin McCrary. Manipulation of the running variable in the regression discontinuity design:
492 A density test. *Journal of Econometrics*, 142(2):698–714, 2008. doi: 10.1016/j.jeconom.
493 2007.05.005.

494 Paul R. Milgrom. Good news and bad news: Representation theorems and applications.
495 *Bell Journal of Economics*, 12(2):380–391, 1981. doi: 10.2307/3003562.

496 Rebecca Roelofs, Vaishaal Shankar, Benjamin Recht, Sara Fridovich-Keil, Moritz Hardt,
497 John Miller, and Ludwig Schmidt. A meta-analysis of overfitting in machine learning. In
498 *Advances in Neural Information Processing Systems 32*, 2019.

499 Shivalika Singh, Yiyang Nan, Alex Wang, Daniel D’Souza, Sayash Kapoor, Ahmet Üstün,
500 Sanmi Koyejo, Yuntian Deng, Shayne Longpre, Noah A. Smith, Beyza Ermis, Marzieh
501 Fadaee, and Sara Hooker. The leaderboard illusion. In *Advances in Neural Information*
502 *Processing Systems 38, Datasets and Benchmarks Track*, 2025. arXiv:2504.20879.

503 Sandip Sinharay and Paul W. Holland. The missing data assumptions of the NEAT design
504 and their implications for test equating. *Psychometrika*, 75(2):309–327, 2010. doi: 10.
505 1007/s11336-010-9156-6.

506 Leon Stauffer, Mick Yang, Anka Reuel, and Stephen Casper. Audit cards: Contextualizing
507 ai evaluations, 2025. arXiv:2504.13839.

- 508 Sang Truong, Serena Wang, Nick Haber, and Sanmi Koyejo. Strategic evaluation: Incen-
509 tivizing AI capability coverage with private benchmarks, 2026. Working paper.
- 510 Robert E. Verrecchia. Discretionary disclosure. *Journal of Accounting and Economics*, 5:
511 179–194, 1983. doi: 10.1016/0165-4101(83)90011-3.
- 512 Jialiang Xu, Yifan Mai, and Percy Liang. HELM capabilities: Evaluating LMs capability
513 by capability. Stanford Center for Research on Foundation Models blog, 2025. URL
514 <https://crfm.stanford.edu/2025/03/20/helm-capabilities.html>.
- 515 Chuyifei Zhang, Hongyu Cui, Xiaowen Huang, and Jitao Sang. Positional failures in long-
516 context LLMs: A blind spot in reasoning benchmarks, 2026. arXiv:2605.23170.

A What a Provider Could Report

The comparisons above do not take into account that the set of results a provider could publish is increasing as new benchmarks are published. In our panel the number of dated benchmarks increases from 11 at the end of 2019 to 62 by 2026. Once a new benchmark appears it remains available to every release after it. In this sense, the number of possibilities is always weakly increasing.

At the same time, what a single release could report grows more slowly and less evenly. On average, by half-year, the number of eligible benchmarks per release is 6.8 in 2023 H1, declining to 3.9 in 2024 H1 as releases outpaced the instruments now used to score them, and it is 10.1 by 2026 H1. Thus, in our data, the two series move together over the sample and apart within it. This lends some evidence that the opportunity set may partially be shaped by the date of the releases and not by the providers.

This simple observation shows that a count of omissions is merely a count of the calendar. If reported tables do not expand one for one with the stock, then omission rates will increase by arithmetic forces alone, and comparisons between early and late releases are a comparison across eras, not across providers. All that remains is composition: which benchmarks providers drop, conditional on availability, compared to what an indifferent selection over the same set would have produced. To conduct this exercise it is necessary to know what was available. But once that is known it is also necessary to know how the release stood on each available benchmark. As we show in the rest of the paper, the latter is far more difficult than the former [Dranove and Jin, 2010].

B Additional Checks

Does the provider choose the window composition? Section 3.3 conditions on window composition, which is admissible only if this is settled before the reporting decision. Fitting a regression of the fraction of a cell’s window released after the focal model, on provider dummies, yields an R^2 of 0.071 (45 organisations); for comparison, fitting benchmark dummies yields R^2 of 0.002 (61 benchmarks), while the release date alone explains R^2 of 0.104. At the level of cells, window composition appears almost idiosyncratic. This is consistent with it being determined by the scoring schedule of the evaluator, as opposed to the provider. It is not enough to establish it.

Is the evaluator’s coverage selective? The estimand also conditions on which cells are scored by the evaluator. This factor is by construction upstream of all others. On average, a release has 8.7 benchmarks scored; this varies with standard deviation 8.0, and spans a range of 1–38. It correlates with the provider’s release count ($r = 0.203$) and with release date ($r = 0.265$), where releases from the densest quartile of providers average 9.6 scored benchmarks, versus 8.4 for the rest. This suggests a mild tilt toward larger and later providers, which we do not adjust for in this paper.

Bounding the unidentified component. Let t be the release date, τ be the benchmark vintage, and $a = t - \tau$ be the maturity of the benchmark when the model met it. A regression of standing on these terms is by construction singular (the age-period-cohort problem), and only identifies $\Pi_p \equiv \beta_a + \beta_t$ and $\Pi_c \equiv \beta_\tau - \beta_a$, leaving a one-parameter family indexed by $\lambda \equiv \beta_a$. Fitting the reduced form across the 2,831 comparable cells, we obtain $\Pi_p = +4.12$ and $\Pi_c = -1.36$ percentile points per year. We can rely on three restrictions, derived from the body of the paper itself as opposed to external assumptions. (1) Capability is increasing in calendar time, i.e. $\beta_t \geq 0$. (2) Later benchmarks are less saturated, as directly quantified in Section 3.2, i.e. $\beta_\tau \leq 0$. (3) Standing is increasing in maturity, since a model on a young benchmark is ranked against newer peers, i.e. $\beta_a \geq 0$. Taken together, this means that $0 \leq \lambda \leq \min(\Pi_p, -\Pi_c) = 1.36$, where it is saturation, not capability, which is the binding restriction. On average, eligible and placebo cells differ by 2.17 years in maturity. Thus, at most, this unidentified component explains $1.36 \times 2.17 = 2.94$ percentile points, or 24% of the observed gap. If we include centred squared and cubed terms in t and τ (which are not collinear with a), then the ceiling moves to 34% and 31%. If we shuffle scores within benchmark, preserving every date and the rank deficiency while destroying the capability

570 trend, then this quantity drops to an average of 0.02 percentile points across 30 draws,
571 peaking at 0.24, confirming that the bound reflects the trend the geometry multiplies rather
572 than the geometry alone.

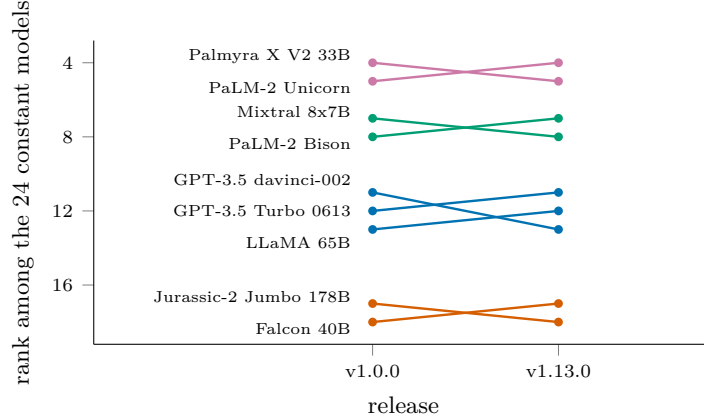


Figure 3: The nine HELM Lite models whose published order changed between the first release and the last, ranked among the 24 whose 240 scenario scores are bit-identical throughout; coloured by group of mutually reversing models, four groups and five reversed pairs in all. The control: across 16 HELM Capabilities releases behind an absolute headline, with the pool growing from 22 to 68, none of the 22 constant models’ headline values moved and no pair reversed.

573 The cutoff is a discontinuity. Treatment eligibility $\mathbf{1}[t_i > \tau_b]$, being a deterministic func-
574 tion of dates, is the problem that global approaches confront. Equating across different
575 instruments requires a common conditional relation across samples, which samples split by
576 a cutoff do not satisfy [Sinharay and Holland, 2010]; weighting by observed cell probability
577 assumes a non-vanishing observed probability, which a deterministic cutoff rules out [Ma
578 and Chen, 2019]; finally, a deterministic cutoff is a sharp discontinuity so that, at the cut-
579 off, standing is identified under continuity conditions regardless of what is true elsewhere
580 [Hahn et al., 2001]. We estimate local linear regressions using a triangular kernel and errors
581 clustered at the provider level with results of -8.82 (4.76) at ± 60 days, -6.85 (4.09) at ± 90 ,
582 -4.08 (3.11) at ± 180 and -2.85 (2.35) at ± 250 ; adding a quadratic term at each bandwidth
583 does not take any of these estimates across zero. All eight estimates are negative; every con-
584 fidence interval includes zero and the highest upper limit of the CI is $+8.05$, strictly below
585 the $+12.23$ the global comparison reports. Consistent with local randomization inference at
586 the cutoff [Cattaneo et al., 2015], we also increase symmetric bandwidths around the cutoff
587 and evaluate balance of the release’s benchmark count, scaffold count, and scaffold spread;
588 the minimum p value over these tests is 0.335 at ± 20 days and 0.571 at ± 40 , decreasing
589 to 0.058 at ± 60 ; we pick ± 40 days, ad hoc based on the balance tests, and thus the ran-
590 domization p value reported below is not corrected for that choice. The same difference
591 is -5.96 ($p = 0.23$) at ± 20 days and $+0.43$ ($p = 0.88$) at ± 60 . With 113 postdating and
592 114 eligible cells in this range, the difference in mean standing is -2.52 , randomization p of
593 0.447. There is no bunching against the cutoff: the ratio of cell counts within 30 days after
594 vs. 30 days before the cutoff is 0.95 (80 vs. 84 cells) [McCrary, 2008]. The mechanism is
595 discontinuous where standing is not. At the cutoff, the fraction of a cell’s window released
596 after the focal model has a step size of $+0.083$, translating, using the -30.63 gradient for
597 eligible cells, to about -2.5 percentile points, comfortably within all confidence intervals
598 above, so the cutoff design discriminates concealment from the availability gap only above
599 that size at the cutoff; at the narrowest bandwidths, the full -12.23 is not rejected either.
600 Peer count and raw score are continuous. The global difference arises because the average
601 cell maturity differs between the two samples by 793 days, not from anything at the cutoff.

602 A standing measure with no comparison window. The conclusion points at a scale esti-
603 mated jointly across benchmarks rather than against contemporaries, which eliminates the
604 comparison window from the measure. Fitting one does not close the gap. We jointly esti-
605 mate ability and difficulty across the 63 benchmarks reported on a single zero-one scale, with
606 a logit link, and regularise the loading toward one (unregularised, with this data density,

the loading is unidentified and goes above 65,000). Among benchmarks that carry at least twenty releases, and releases that carry at least three benchmarks, there are 31 benchmarks, with a total of 1,669 eligible cells. We fit the model on eligible cells alone, making the 226 postdating cells it scores out-of-sample.

The eligible-minus-placebo gap in the residuals is +0.336 residual SDs versus +0.449 for the windowed percentile on the same contrast, at $p = 0.005$, and positive in 64.0% of the 89 releases holding both kinds. Thus, removing the window shrinks the gap, but by only about a quarter, leaving it positive, which places this approach, on its jointly estimated scale, beside the 19% trimming and 25% side-balancing approaches, on their own scales, rather than ahead of them. Part of this gap may be the same selection re-expressed, since the difficulty parameters are estimated from the maturity-selected cells that exist; it also builds in an asymmetry, since its placebo cells are out-of-sample and every eligible cell is in-sample. When we shuffle the scores within a benchmark, preserving every date and the rank deficiency, this measure falls to an average of 0.02 over 30 draws.

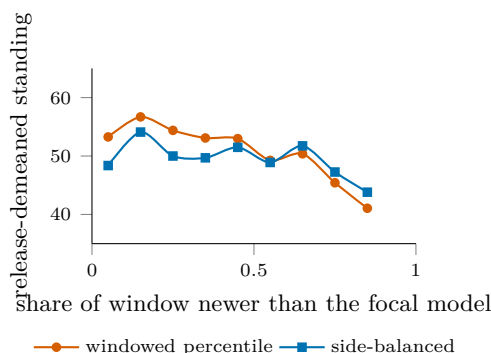


Figure 4: The side-balanced percentile against the windowed one, on eligible cells within release. The windowed measure slopes across the range while the side-balanced one is close to flat where cells are dense; the quoted gradients, -30.63 to -8.56 per unit share, are the within-release regression slopes on these cells, and the release-demeaned binned means shown are correspondingly flatter.

We also check whether the positive gap is a product of looking forward. A backward-only standing, ranking only among older peers, removes the window's forward half altogether, and still yields a label-free gap of +12.11 across 142 releases, eliminating this explanation.

Drop-design ceiling and calibration. The panel contains 144 pairs of adjacent same-family releases, spanning 711 shared eligible benchmarks and 15 organisations. Limiting to pairs with at least eight scored benchmarks for both releases narrows it to 37 pairs, 482 shared benchmarks and 8 organisations (the effective number of clusters), and we are in the regime where Section 2.5 reports no analytic standard error. Over 400 draws from each of the 117 releases that qualify for this test, the standard deviation of a drop gap under the null of no selective withholding is 19.4 percentile points when one benchmark is dropped, 14.4 when two are, and 12.4 when three are. At standard two-sided levels a single-drop event must therefore move the gap by roughly 38 points before it separates from noise, three times the contamination itself, and no single drop can be read alone.

Evidence of possession. Withholding argues that providers selectively choose which retained results not to report; the disclosure measure registers only what is printed. Four slices put reporting into the perspective of possession. (I) In the direct measures, a report must say that a benchmark has been run but not provide a measure or result; no such direct withholding report exists across 295 documented runs: all six Named No Number cases provide a result in a figure, chart or comparison. (II) Omission deficit by evidence of possession. Withholding argues that omission should attenuate and reverse with increased evidence of possession; composition says no. The deficit averages 18.9 (21 releases, dropped); 11.3 (51 releases, peers report); and 11.3 (69 releases, silent). There is no attenuation (more negative deficit) with increased evidence of possession: instead, the deficit is highest for dropped, the opposite gradient of the signature. (III) Drop tests on change rather than level. The previous estimator tests levels; a more stringent test would be if providers drop a benchmark when the family has declined on it, netting out structural salience and relevance. The

average change in 42 family transitions with a scored prior report is -3.7 percentile points (33 dropped and 86 retained cases), in the expected direction for withholding and $p = 0.16$ with a count-preserving permutation within transitions; in the original scores (kept where on the unit interval) the difference is -0.7 points and $p = 0.71$. These are two different subsamples of the 63 derived drop cells: the level test retains the 16 in releases that also retain a minimum of two reported benchmarks for the comparison; the change test retains 33 with an independently scored prior and post, with no minimum retention requirement. (IV) Substitutions. In the extreme case that withholding only argues for a constant reporting table, providers must drop a benchmark and report another in its place. No such cases are found in the record. None of these point to withholding. Only the change-based difference is in the predicted direction and cannot be statistically distinguished from the null of permutation; all others are null, non-existent, or sign-reversed.

Reliability. The second coder coded 20 of the 100 readable releases, stratified by provider. Categories that import peers' evidence are dependent across releases, a dependence not modelled by resampling releases. In 15 of these, 194 cells pair; excluded are i) one release with zero direct disclosure, whose rows for missing evidence are dropped by the pairing, a conservative selection as all eleven cells are trivial agreement, and ii) four releases not in the pinned sample. The reporting/not-reporting contingency table crosses in only one direction (47 reported/reported and 143 not/not): none the first coder reported was scored differently by the second; and all four disagreements with reporting switched are in a single release with a note to the second coder retaining four scores disputed by the first (in this case, the release document breaks its own blindness). Without it, agreement on reported/not is perfect, with an overall κ of 0.88 on 182 cells. The 14 disagreements are mostly (7) about the borderline between C and A, one between mention and scored, two about the derived category G/H split in a single release, and four are above. Three record limits are known but not corrected: eight releases cannot be located, arguably non-random, and likely to report less; the cells scored by the evaluator are subject to selection by provider emphasis, arguably biasing the reporting record up; and the take-best across scaffolds scoring does not explore asymmetric behaviour around the boundary. Full agreement on the high-suspicion marginals (5.7% each) pushes the split category κ up to 0.81 despite rarity; the large confidence interval is caused by eleven cells concentrated in a few releases.

Provider-only clustering. For comparison, the paper clusters by provider and benchmark in regressions. Errors with only provider clustering are smaller: 1.271 versus 2.038 by release effects, ratio 1.60; and 1.652 versus 1.748 in the fully saturated case, ratio 1.06. This says that there is genuine autocorrelation in the raw difference by benchmark, and not much in the benchmark effects and window terms, as suggested by the decomposition. While the headline test at $p = 0.0001$ for sign flip retains the provider dependence, it is the row above in the two-way regressions which states that the contamination is present in both dimensions, at $t = -6.6$.

686 NeurIPS Paper Checklist

687 1. Claims

688 Question: Do the main claims made in the abstract and introduction accurately
689 reflect the paper’s contributions and scope?

690 Answer: [\[Yes\]](#)

691 Justification: The abstract and introduction state both findings within their identi-
692 fied scope: the coded omission gap is indistinguishable from the label-free gap, and
693 within-release composition tracks standing. Section 5 reports the reliability of the
694 coding behind them.

695 2. Limitations

696 Question: Does the paper discuss the limitations of the work performed by the
697 authors?

698 Answer: [\[Yes\]](#)

699 Justification: Limitations appear where they bear on the argument rather than
700 only at the end. Section 2.1 bounds the estimand and states that the reported
701 omission rate is descriptive and identifies no withholding; Section 3.2 states that
702 the conditioning is a decomposition rather than a control strategy, and what a
703 study holding disclosure labels would additionally have to argue; Section 3.3 reports
704 the corrections that fail and the coverage the balanced measure loses; Section 5
705 reports the ceiling on the design that narrows endowment uncertainty furthest, its
706 16 realised drops, and the underpowered null they return.

707 3. Theory assumptions and proofs

708 Question: For each theoretical result, does the paper provide the full set of assump-
709 tions and a complete (and correct) proof?

710 Answer: [\[Yes\]](#)

711 Justification: Section 2.1 states one identification result, that a temporal eligibility
712 gate cannot satisfy the exclusion restriction the design needs, and gives its argument
713 in full: the three date variables are exactly collinear, so excluding one requires
714 that at least two of them not move standing. Section 3 shows all three move
715 it. Appendix B states the three sign restrictions used to bound the unidentified
716 component and derives the bound from them. Everything else in Section 2.1 restates
717 published results with citation.

718 4. Experimental result reproducibility

719 Question: Does the paper fully disclose all the information needed to reproduce
720 the main experimental results of the paper to the extent that it affects the main
721 claims and/or conclusions of the paper (regardless of whether the code and data
722 are provided or not)?

723 Answer: [\[Yes\]](#)

724 Justification: Every number in the paper is written by one command into a single
725 machine-readable file, and the data snapshot it was computed against is pinned
726 by a per-file SHA-256 manifest in the released code. Section 2 states the release
727 key, the eligibility rule, the window width, and which estimates impose a minimum
728 benchmark count and which do not.

729 5. Open access to data and code

730 Question: Does the paper provide open access to the data and code, with sufficient
731 instructions to faithfully reproduce the main experimental results, as described in
732 supplemental material?

733 Answer: [\[Yes\]](#)

734 Justification: Code and derived data are released with instructions. The indepen-
735 dent scores are redistributed by their publisher under CC-BY and are fetched rather
736 than copied, then verified against the pinned manifest, so an upstream change is
737 reported rather than silently absorbed. The external leaderboard evidence is frozen

with a SHA-256 per source file, because a public leaderboard moves and the argument depends on the exact values.

6. Experimental setting/details

Question: Does the paper specify all the training and test details (e.g., data splits, hyperparameters, how they were chosen, type of optimizer) necessary to understand the results?

Answer: [Yes]

Justification: There is no model training. The choices that affect the estimates are stated in Section 2: the release key, the rule for collapsing scaffold variants, the 182-day comparison window, which estimates impose a minimum benchmark count and which do not, and the treatment of pairs whose benchmark vintage is unverified.

7. Experiment statistical significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [Yes]

Justification: Section 2.5 states the inference protocol. The cluster count is small and unevenly distributed, so below twelve clusters no analytic standard error is reported, coefficients in that range use a restricted wild cluster bootstrap, release-level means use a cluster sign-flip randomization test, and no result is called significant on a cluster-t alone. Table 1 reports a standard error with every coefficient, the headline contrast carries a randomization p-value, and the permutation null is reported with its mean, its spread and the number of draws reaching the observed value.

8. Experiments compute resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [Yes]

Justification: All analysis runs in seconds on a laptop. There is no training, no accelerator use, and no discarded run.

9. Code of ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics <https://neurips.cc/public/EthicsGuidelines>?

Answer: [Yes]

Justification: The work uses published benchmark scores and public release documents, involves no human subjects and no personal data, and makes no claim about any individual.

10. Broader impacts

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [Yes]

Justification: Section 4 states the consequence for a reader of a pool-relative leaderboard, namely that such a number describes standing within one vintage of the evaluated pool rather than a property of the model. The conclusion states that whether the record needed to measure withholding should grow is a reporting-standard question. The paper does not attribute concealment to any named provider, because the design does not support that.

11. Safeguards

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pre-trained language models, image generators, or scraped datasets)?

789 Answer: [N/A]
790 Justification: No model, dataset or other asset with misuse potential is released.
791 The release is analysis code and derived tables built from already public sources.

792 12. Licenses for existing assets
793 Question: Are the creators or original owners of assets (e.g., code, data, models),
794 used in the paper, properly credited and are the license and terms of use explicitly
795 mentioned and properly respected?
796 Answer: [Yes]
797 Justification: The independent scores are credited to their publisher and used under
798 CC-BY, and the external leaderboard is cited to its published description. Both are
799 named in the text and in the released code.

800 13. New assets
801 Question: Are new assets introduced in the paper well documented and is the
802 documentation provided alongside the assets?
803 Answer: [Yes]
804 Justification: The released code documents how each number is produced, the snap-
805 shot manifest records the exact data build, and the frozen external evidence records
806 a source URL, a retrieval date and a SHA-256 for every file.

807 14. Crowdsourcing and research with human subjects
808 Question: For crowdsourcing experiments and research with human subjects, does
809 the paper include the full text of instructions given to participants and screenshots,
810 if applicable, as well as details about compensation (if any)?
811 Answer: [N/A]
812 Justification: The work involves no crowdsourcing and no human subjects.

813 15. Institutional review board (IRB) approvals or equivalent for research with human
814 subjects
815 Question: Does the paper describe potential risks incurred by study participants,
816 whether such risks were disclosed to the subjects, and whether Institutional Review
817 Board (IRB) approvals (or an equivalent approval/review based on the requirements
818 of your country or institution) were obtained?
819 Answer: [N/A]
820 Justification: The work involves no human subjects, so no review board approval
821 was required.

822 16. Declaration of LLM usage
823 Question: Does the paper describe the usage of LLMs if it is an important, original,
824 or non-standard component of the core methods in this research? Note that if the
825 LLM is used only for writing, editing, or formatting purposes and does not impact
826 the core methodology, scientific rigor, or originality of the research, declaration is
827 not required.
828 Answer: [Yes]
829 Justification: All disclosure-coding categories standing in the paper were hand-
830 assigned by a human coder from archived release-time documents under the frozen
831 protocol, with an independent second coder recoding a provider-stratified 20% sam-
832 ple (Section 5), so no number reported here depends on a model’s judgment. A
833 superseded early pass had used a large language model on the same task; those
834 labels were cleared before analysis and none enters. Every number is produced by
835 the released code from the pinned snapshot. Language models were otherwise used
836 only for writing and code assistance.