

Basic HTML and CSS

Lecture 2

Hypertext Markup Language (HTML)

- Describes the *content* and structure of information on a web page
- Not the same as the presentation (appearance on screen)
- Surrounds text content with opening and closing tags
- Each tag's name is called an element
 - syntax: `<element> content </element>`
 - example: `<p>This is a paragraph</p>`

XHTML

- Uses a markup format called XML
- XML + HTML = XHTML
- Standardized in 2000
- A strict XHTML page uses some different syntax and tags than HTML

Structure of XHTML page

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.1//EN"
"http://www.w3.org/TR/xhtml11/DTD/xhtml11.dtd">

<html xmlns="http://www.w3.org/1999/xhtml">
  <head>
    information about the page
  </head>

  <body>
    page contents
  </body>
</html>
```

HTML

- HTML is saved with extension .html
- Basic structure: tags that enclose content, i.e., elements
- **Header** describes the page
- **Body** contains the page's contents

Page Title <title>

```
...  
    <head>  
        <title> HARRY POTTER AND THE DEATHLY HALLOWS  
- PART 2 </title>  
    </head>  
...
```

HTML

- Placed within the head of the page
- Displayed in web browser's title mark and when bookmarking the page

Paragraph <p>

```
...  
    <body>  
        <p> Harry Potter and the Deathly Hallows,  
the last book in the series, begins directly after the  
events of the sixth book.  
Voldemort      has completed his ascension to power and  
gains          control of the Ministry of Magic</p>  
    </body>
```

HTML

Harry Potter and the Deathly Hallows, the last book in the series, begins directly after the events of the sixth book. Voldemort has completed his ascension to power and gains control of the Ministry of Magic

output

- Placed within the body of the page

Headings <h1>, <h2>, ... <h6>

```
<h1> Harry Potter </h1>  
<h2> Books </h2>  
<h3> Harry Potter and the Philosopher's Stone </h3>
```

HTML

Harry Potter

Books

Harry Potter and the Philosopher's Stone

output

Horizontal rule <hr />

```
<p> First paragraph </p>  
<hr />  
<p> Second Paragraph </p>
```

HTML


First Paragraph

Second Paragraph

output


- Should be immediately closed with />

Block and Inline Statements

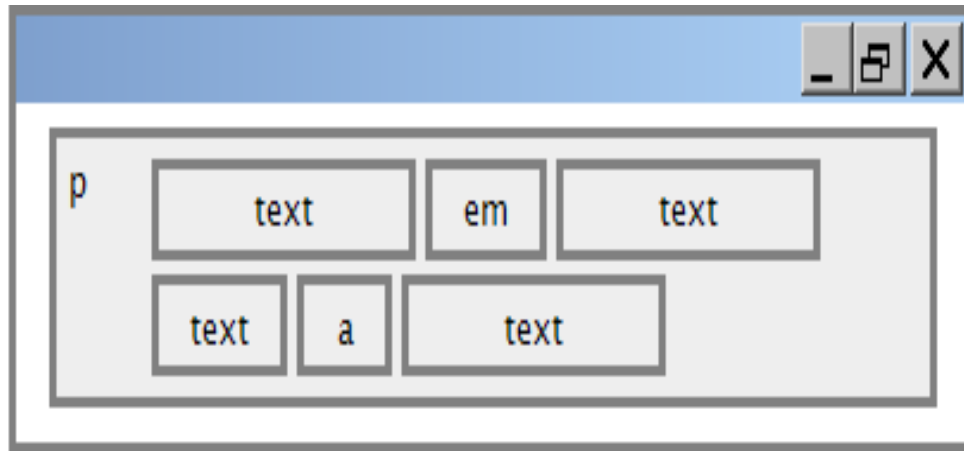

- Block elements contain an entire large region of content
 - examples: paragraphs, lists, table cells
 - the browser places a margin of whitespace between block elements for separation

Block and Inline Statements (cont.)

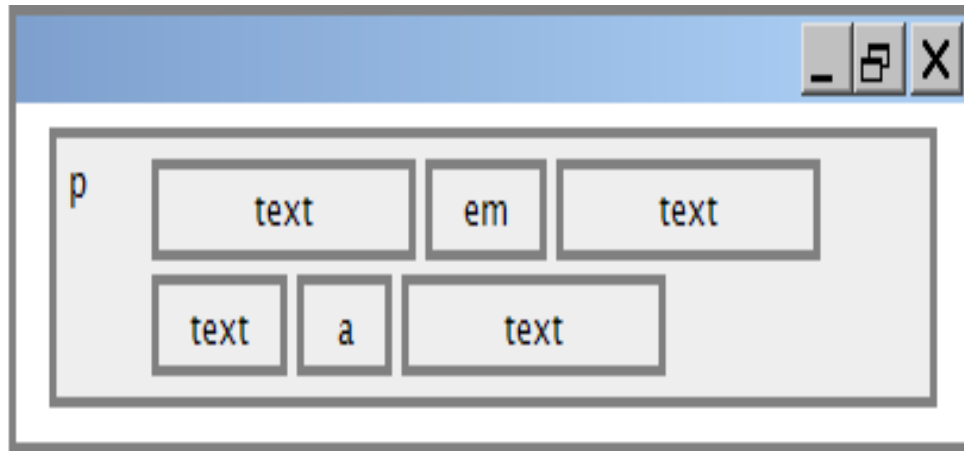

- Inline elements affect a small amount of content
 - examples: bold text, code fragments, images
 - the browser allows many inline elements to appear on the same line
 - must be nested inside a block element

More HTML tags

- Some tags can contain additional information called attributes
 - syntax: **<element attribute="value" attribute="value"> content </element>**
 - example: `Next page`

More HTML tags

- Some tags don't contain content; can be opened and closed in one tag

- syntax:

- <element attribute="value" attribute="value" />**

- example: **<hr />**

- example:

- **

Links <a>

```
<p>  
Search  
<a href="http://www.google.com/">Google</a>  
now!  
</p>
```

HTML

Search [Google](http://www.google.com/) now!

output

- The **href** attribute specifies the destination URL
- Links or *anchors* are inline elements, so they must be placed inside a block element such as a `p` or `h1`

More about anchors

```
<p><a href="deathlyHallows-book.html">Harry Potter and the  
Deathly Hallows Book</a></p>
```

```
<p><a href="http://en.wikipedia.org"  
title="Search">Wikipedia</a></p>
```

HTML

[Harry Potter and the Deathly Hallows](#)

[Wikipedia](#)

output

- Types of URLs that can appear in anchors:
 - Absolute: to another web site
 - Relative: to another page on this web site

Nesting tags

Bad

```
<p>  
<a href=" deathlyHallows-book.html"> Harry Potter and the  
Deathly Hallows Book </p>  
<p>  
This text also links to Harry Potter Book</a>  
</p>
```

HTML

- Tags must be correctly nested: a closing tag must match the **most recently opened tag**
- The browser may render it correctly anyway, but it is invalid XHTML

Images

```

```

HTML



- The src attribute specifies source of the image URL
- XHTML also requires an alt attribute describing the image

More about images

```
<a href="http://harrypotter.net/">  
  
</a>
```

HTML



- If placed inside an a anchor, the image will become a link
- The title attribute specifies an optional tooltip

Line Break


```
<p>One Ring to rule them all, One Ring to find them, <br  
> One Ring to bring them all and in the darkness bind  
them.</p>
```

```
<p> In the Land of Mordor where the Shadows lie. </p>
```

HTML

One Ring to rule them all, One Ring to find them,
One Ring to bring them all and in the darkness bind them

In the Land of Mordor where the Shadows lie.

output

- br should be immediately closed with />
- br should not be used to separate paragraphs or used multiple times in a row to create spacing

Comments <!-- ... -->

```
<!-- My web page, by Bob Student  
CSE 380, Fall 2048 -->  
<p>CS courses are <!-- NOT --> a lot of fun!</p>
```

HTML

CS courses are a lot of fun!

output

- Comments are useful for disabling sections of a page
- Comments cannot be nested and cannot contain a --

Phrase elements ,

```
<p>  
HTML is <em>really</em>,  
<strong>REALLY</strong> fun!  
</p>
```

HTML

HTML is *really* **REALLY** fun!

output

- **em**: emphasized text (usually in italic)
- **strong**: strongly emphasized text (usually in bold)
- The tags must be properly nested for a valid page

Unordered list: ,

```
<ul>  
<li>No shoes</li>  
<li>No shirt</li>  
<li>No problem!</li>  
</ul>
```

HTML

- No shoes
- No shirt
- No problem!

output

- **ul** represents a bulleted list of items (block)
- **li** represents a single item within the list (block)

More about unordered lists

```
<ul>
<li>Harry Potter characters:
<ul>
<li>Harry Potter</li>
<li>Hermione</li>
<li>Ron</li>
</ul>
</li>
<li>LOTR characters:
<ul>
<li>Frodo</li>
<li>Bilbo</li>
<li>Sam</li>
</ul>
</li>
</ul>
```

HTML

More about unordered lists (cont.)

- Harry Potter characters:
 - Harry Potter
 - Hermione
 - Ron
- LOTR characters:
 - Frodo
 - Bilbo
 - Sam

output

Ordered list

```
<p>Apple business model:</p>
<ol>
<li>Beat Microsoft</li>
<li>Beat Google</li>
<li>Conquer the world!</li>
</ol>
```

HTML

Apple business model:

1. Beat Microsoft
2. Beat Google
3. Conquer the world

output

- **ol** represents a numbered list of items
- we can make lists with letters or Roman numerals using CSS (later)

Common error: Not closing a list

```
<ul>  
<li>No shoes</li>  
<li>No shirt</li>  
<li>No problem!</li>  
<p>Paragraph after list...</p>
```

HTML

- No shoes
- No shirt
- No problem!

Paragraph after list...

output

- If you leave a list open, subsequent contents will be indented

Common Error: Improper nested list placement

```
<ul>
<li>Harry Potter characters:</li>
<ul>
<li>Harry Potter</li>
<li>Hermione</li>
<li>Ron</li>
</ul>
</li>
<li>LOTR characters:
<ul>
<li>Frodo</li>
<li>Bilbo</li>
<li>Sam</li>
</ul>
</ul>
```

HTML

- closing the outer li too early (or not at all) will render correctly in most browsers, but it is incorrect XHTML

Definition list <dl>, <dt>, <dd>

```
<dl>
<dt>newbie</dt> <dd>one who does not have mad skills</dd>
<dt>jaded</dt> <dd>tired, bored, or lacking enthusiasm
</dd>
<dt>frag</dt> <dd>a kill in a shooting game</dd>
</dl>
```

HTML

newbie	one who does not have mad skills
jaded	Tired, bored, or lacking enthusiasm
frag	a kill in a shooting game

output

- **dl** represents a list of definitions of terms
- **dt** represents each term, and **dd** its definition

Tables <table>, <tr>, <td>

```
<table>
  <tr><td>1,1</td><td>1,2 okay</td></tr>
  <tr><td>2,1 real wide</td><td>2,2</td></tr>
</table>
```

HTML

1,1	1,2 okay
2,1 real wide	2,2

output

- ❑ `table` defines the overall table, `tr` each row, and `td` each cell's data
- ❑ Useful for displaying large row/column data sets
- ❑ NOTE: tables are sometimes used by novices for web page layout, but this is not proper semantic HTML and should be avoided

Table headers, captions: <th>, <caption>

```
<table>
  <caption>My important data</caption>
  <tr><th>Column 1</th><th>Column 2</th></tr>
  <tr><td>1,1</td><td>1,2 okay</td></tr>
  <tr><td>2,1 real wide</td><td>2,2</td></tr>
</table>
```

HTML

My important data

Column 1

Column 2

1,1

1,2 okay

2,1 real wide

2,2

output

- ❑ th cells in a row are considered headers
- ❑ a caption at the start of the table labels its meaning

Quotations <blockquote>

```
<p>As Lincoln said in his famous Gettysburg Address:</p>
  <blockquote>
    <p>Fourscore and seven years ago, our fathers
brought forth
    on this continent a new nation, conceived in
liberty, and
    dedicated to the proposition that all men are
created equal.</p>
  </blockquote>
```

HTML

As Lincoln said in his famous Gettysburg Address:

Fourscore and seven years ago, our fathers brought forth on this continent a new nation, conceived in liberty, and dedicated to the proposition that all men are created equal.

output

- a lengthy quotation

Inline quotations <q>

```
<p>Quoth the Raven, <q>Nevermore.</q></p>
```

HTML

Quoth the Raven, “Nevermore.”

output

- a short quotation
- Why not just write the following?
- `<p>Quoth the Raven, "Nevermore."</p>`
- We don't use " marks for two reasons:
 - XHTML shouldn't contain literal quotation mark characters; they should be written as `"`;
 - using `<q>` allows us to apply CSS styles to quotations

HTML Character Entities

character(s)	entity
< >	< >
é è ñ	é è ñ
™ ©	™ ©
π δ Δ	π δ Δ
И	И
" &	" &

Inline quotations <q>

```
<p>  
<a  
href=&quot;http://google.com/search?q=xenia&ie=utf-  
8&aq=t&quot;&gt;  
Search Google for Xenia  
</a>  
</p>
```

HTML

```
<p> <a href="http://google.com/search?q=xenia&ie=utf-8&aq=t"> Search  
Google for Xenia </a> </p>
```

output

Computer code `<code>`

```
<p>  
The <code>ul</code> and <code>ol</code>  
tags make lists.  
</p>
```

HTML

The `ul` and `ol` tags make lists.

output

- code: a short section of computer code

Preformatted text <pre>

```
<pre>
Bill Gates speaks
    You will be assimilated
    Microsoft fans delirious
</pre>
```

HTML

```
Bill Gates speaks
    You will be assimilated
    Microsoft fans delirious
```

output

- Displayed with exactly the whitespace / line breaks given in the text
- Shown in a fixed-width font by default

Preformatted text <pre>

```
<pre><code>
    public static void main(String[] args) {
        System.out.println("Hello, world!");
    }
</code></pre>
```

HTML

```
public static void main(String[] args) {
    System.out.println("Hello, world!");
}
```

output

- When showing a large section of computer code, enclose it in a `pre` to preserve whitespace and a `code` to describe the semantics of the content

Web Standards

- Why use XHTML and web standards?
 - more rigid and structured language
 - more interoperable across different web browsers
 - more likely that our pages will display correctly in the future
 - can be interchanged with other XML data: SVG (graphics), MathML, MusicML, etc.

W3C XHTML Validator

```
<p>  
    <a href="http://validator.w3.org/check/referer">  
          
    </a>  
</p>
```

HTML



- checks your HTML code to make sure it meets the official strict XHTML specifications

Web page metadata <meta>

```
<meta name="description"
content="Harry Potter Official Website." />
<meta name="keywords" content="harry potter, harry potter
and the deathly hallows, deathly hallows, ministry of
magic, resurrection stone, clock of invisibility" />
<meta http-equiv="Content-Type"
content="text/html; charset=iso-8859-1" />
```

HTML

- information about your page (for a browser, search engine, etc.)
- placed in the head of your XHTML page
- meta tags often have both the name and content attributes
 - some meta tags use the http-equiv attribute instead of name

meta element to aid browser / web server

```
<meta http-equiv="Content-Type"  
content="type of document (character encoding)" />  
<meta http-equiv="refresh"  
content="how often to refresh the page (seconds)" />  
</head>
```

HTML

- using the Content-Type gets rid of the W3C "tentatively valid" warning
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1" />
- the meta refresh tag can also redirect from one page to another:
<meta http-equiv="refresh" content="5;url=http://www.bjp.com" />
 - why would we want to do this? (example)

meta element to describe the page

```
<head>
<meta name="author"
content="web page's author" />
<meta name="revised"
content="web page version and/or last modification date"
/>
<meta name="generator"
content="the software used to create the page" />
</head>
```

HTML

- many WYSIWYG HTML editors (FrontPage, PageMaker, etc.) place their names in the meta generator tag

meta element to aid search engines

```
<head>
<meta name="description"
content="how you want search engines to display your page"
/>
<meta name="keywords"
content="words to associate with your page (comma
separated)" />
</head>
```

HTML

- these are suggestions to search engines about how to index your page
- the search engine may choose to ignore them

The good, the bad and the... ugly!

```
<p>  
<font face="Arial">Shashdot.</font>  
News for <b>nerds!!</b> You will <i>never</i>, <u>EVER</u>  
be  
<font size="+4" color="red">BORED</font> here!  
</p>
```

HTML

Shashdot. News for **nerds!!** You will never, EVER be **BORED** here!

output

- Tags such as b, i, u, and font are discouraged in strict XHTML
- Why is this bad?

Cascading Style Sheets (CSS)

- Describes the appearance, layout, and presentation of information on a web page
 - HTML describes **the content** of the page
- Describes *how* information is to be displayed, not *what* is being displayed
- Can be embedded in HTML document or placed into separate .css file

Basic CSS rule syntax

```
selector {  
property: value;  
property: value;  
...  
property: value;  
}
```

CSS

```
p {  
font-family: sans-serif;  
color: red;  
}
```

CSS

- A CSS file consists of one or more **rules**
- Each rule starts with a **selector**
- A selector specifies an HTML element(s) and then applies style **properties** to them
 - a selector of `*` selects all elements

Attaching a CSS file <link>

```
<head>
...
<link href="filename" type="text/css" rel="stylesheet" />
...
</head>
```

HTML

```
<link href="style.css" type="text/css" rel="stylesheet" />
<link href="http://www.google.com/uds/css/gsearch.css"
rel="stylesheet" type="text/css" />
```

HTML

- A page can link to multiple style sheet files
 - In case of a conflict (two sheets define a style for the same HTML element), the latter sheet's properties will be used

Embedding style sheets: <style>

```
<head>
<style type="text/css">
p { font-family: sans-serif; color: red; }
h2 { background-color: yellow; }
</style>
</head>
```

HTML

- CSS code can be embedded within the head of an HTML page
- *Bad style* and should be avoided when possible (why?)

Inline styles: the style attribute

```
<p style="font-family: sans-serif; color: red;">  
This is a paragraph</p>
```

HTML

This is a paragraph

output

- Higher precedence than embedded or linked styles
- Used for one-time overrides and styling a particular element
- *Bad style* and should be avoided when possible (why?)

CSS properties for colors

```
p {  
  color: red;  
  background-color: yellow;  
}
```

CSS

This paragraph uses the style above

output

property	description
color	color of the element's text
background-color	color that will appear behind the element

Specifying colors

```
p { color: red; }  
h2 { color: rgb(128, 0, 196); }  
h4 { color: #FF8800; }
```

CSS

This paragraph uses the first style above

This h2 uses the second style above.

This h4 uses the third style above.

output

- color names: aqua, black, blue, fuchsia, gray, green, lime, maroon, navy, olive, purple, red, silver, teal, white (white), yellow
- RGB codes: red, green, and blue values from 0 (none) to 255 (full)
- hex codes: RGB values in base-16 from 00 (0, none) to FF (255, full)

Grouping styles

```
p, h1, h2 {  
  color: green;  
}  
h2 {  
  background-color: yellow;  
}
```

CSS

This paragraph uses the above style.

This h2 uses the above styles.

output

- A style can select multiple elements separated by commas
- The individual elements can also have their own styles

CSS comments `/*...*/`

```
/* This is a comment.  
It can span many lines in the CSS file. */  
p {  
  color: red; background-color: aqua;  
}
```

CSS

- CSS (like HTML) is usually not commented as rigorously as programming languages such as Java
- The `//` single-line comment style is NOT supported in CSS
- The `<!-- ... -->` HTML comment style is also NOT supported in CSS

CSS properties for fonts

property	description
font-family	which font will be used
font-size	how large the letters will be drawn
font-style	used to enable/disable italic style
font-weight	used to enable/disable bold style

[Complete list of font properties](http://www.w3schools.com/css/css_reference.asp#font) (http://www.w3schools.com/css/css_reference.asp#font)

font-family

```
p {  
  font-family: Georgia;  
}  
h2 {  
  font-family: "Courier New";  
}
```

CSS

This paragraph uses the first style above.

This h2 uses the second style above.

output

- Enclose multi-word font names in quotes

More about font-family

```
p {  
  font-family: Garamond, "Times New Roman", serif;  
}
```

CSS

This paragraph uses the above style.

output

- We can specify multiple fonts from highest to lowest priority
- Generic font names:
 - serif, sans-serif, cursive, ~~FANTASY~~, monospace
- If the first font is not found on the user's computer, the next is tried
- Placing a generic font name at the end of your font-family value, ensures that every computer will use a valid font

font-size

```
p {  
    font-size: 24pt;  
}
```

CSS

This paragraph uses the style above.

output

- units: pixels (**px**) vs. point (**pt**) vs. m-size (**em**)

16px, 16pt, 1.16em

- vague font sizes: xx-small, x-small, small, medium, large, **x-large**, **xx-large**, smaller, **larger**
- percentage font sizes, e.g.: 90%, **120%**

font-size

```
p {  
    font-size: 24pt;  
}
```

CSS

This paragraph uses the style above.

output

- **pt** specifies number of point, where a point is $1/72$ of an inch onscreen
- **px** specifies a number of pixels on the screen
- **em** specifies number of m-widths, where 1 em is equal to the font's current size

font-weight, font-style

```
p {  
  font-weight: bold;  
  font-style: italic;  
}
```

CSS

This paragraph uses the style above.

output

- Either of the above can be set to normal to turn them off (e.g. headings)

CSS properties for text

property	description
text-align	alignment of text within its element
text-decoration	decorations such as underlining
line-height, word-spacing, letter-spacing	gaps between the various portions of the text
text-indent	indents the first letter of each paragraph

[Complete list of text properties](http://www.w3schools.com/css/css_reference.asp#text) (http://www.w3schools.com/css/css_reference.asp#text)

text-align

```
blockquote { text-align: justify; }  
h2 { text-align: center; }
```

CSS

The Gollum's Quote

We wants it, we needs it. Must have the precious. They stole it from us.
Sneaky little hobbitses. Wicked, tricky, false!

output

- `text-align` can be `left`, `right`, `center`, or `justify`



text-decoration

```
p {  
  text-decoration: underline;  
}
```

CSS

This paragraph uses the style above.

output

- can also be overline, ~~line-through~~, blink, or none
- effects can be combined:

```
text-decoration: overline underline;
```

The list-style-type property

```
ol { list-style-type: lower-roman; }
```

CSS

- **Possible values:**

i. none : No marker

ii. disc (default), circle , square

iii. Decimal: 1, 2, 3, etc.

iv. decimal-leading-zero: 01, 02, 03, etc.

v. lower-roman: i, ii, iii, iv, v, etc.

vi. upper-roman: I, II, III, IV, V, etc.

vii. lower-alpha: a, b, c, d, e, etc.

viii. upper-alpha: A, B, C, D, E, etc.

x. lower-greek: alpha, beta, gamma, etc.

others: hebrew, armenian, georgian, cjk-ideographic, hiragana...

Body styles

```
body {  
  font-size: 16px;  
}
```

CSS

- Applies a style to the entire body of your page
- Saves you from manually applying a style to each element

Cascading Style Sheets

- Properties of an element *cascade* together in this order:
 - browser's default styles
 - external style sheet files (in a <link> tag)
 - internal style sheets (inside a <style> tag in the page's header)
 - inline style (the style attribute of the HTML element)

Inheriting styles

```
body { font-family: sans-serif; background-color: yellow; }  
p { color: red; background-color: aqua; }  
a { text-decoration: underline; }  
h2 { font-weight: bold; text-align: center; }
```

CSS

This is a heading

A styled paragraph. Previous slides are available on the website.

- A bulleted list

output

- when multiple styles apply to an element, they are inherited
- a more tightly matching rule can override a more general inherited rule

Styles that conflict

```
p, h1, h2 { color: blue; font-style: italic; }  
h2 { color: red; background-color: yellow; }
```

CSS

This paragraph uses the first style above.

This heading uses both styles above.

output

- when two styles set conflicting values for the same property, the latter style takes precedence

W3C CSS Validator

```
<p>  
<a href="http://jigsaw.w3.org/css-  
validator/check/referer">  
</a>  
</p>
```

CSS



output

- jigsaw.w3.org/css-validator/
- checks your CSS to make sure it meets the official CSS specifications

CSS properties for backgrounds

property	description
background-color	color to fill background
background-image	image to place in background
background-position	placement of bg image within element
background-repeat	whether/how bg image should be repeated
background-attachment	whether bg image scrolls with page
background	shorthand to set all background properties

background-image

```
body {  
  background-image: url("images/draft.jpg");  
}
```

CSS

This is the first paragraph

This is the second paragraph...

It occupies 2 lines

- background image/color fills the element's content area

background-repeat

```
body {  
background-image: url("images/draft.jpg");  
background-repeat: repeat-x;  
}
```

CSS

This is the first paragraph

This is the second paragraph...

It occupies 2 lines

- can be repeat (default), repeat-x, repeat-y, or no-repeat

background-position

```
body {  
  background-image: url("images/draft.jpg");  
  background-repeat: no-repeat;  
  background-position: 370px 20px;  
}
```

CSS

This is the first paragraph

This is the second paragraph...
It occupies 2 lines



- value consists of two tokens, each of which can be top, left, right, bottom, center, a percentage, or a length value in px, pt, etc.
- value can be negative to shift left/up by a given amount

Aside: Favorites icon ("favicon")

```
<link href="filename" type="MIME type" rel="shortcut icon" />
```

HTML

```
<link href="yahoo.gif" type="image/gif" rel="shortcut icon" />
```

HTML



- The link tag, placed in the HTML page's head section, can specify an icon
 - this icon will be placed in the browser title bar and bookmark/favorite

HTML id attribute

```
<p>Coding Horror! Coding Horror!</p>  
<p id="mission">Our mission is to combine programming and  
<q>human</q> factors with geekiness!</p>
```

HTML

Coding Horror! Coding Horror!

Our mission is to combine programming and “human” factors with geekiness!

output

- A unique ID for an element on a page
- Each ID must be unique; can only be used once in the page



Linking to sections of a web page

```
<p>Visit <a href=
"http://www.textpad.com/download/index.html#downloads">
textpad.com</a> to get the TextPad editor.</p>
<p><a href="#mission">View our Mission Statement</a></p>
```

HTML

Visit [textpad.com](http://www.textpad.com) to get the TextPad editor.

[View our Mission Statement](#)

output

- Link target can include an ID at the end, preceded by a #
- Browser will load that page and scroll to element with given ID

CSS ID selectors

```
#mission {  
font-style: italic;  
font-family: "Garamond", "Century Gothic", serif;  
}
```

CSS

Coding Horror! [Coding Horror!](#)

Our mission is to combine programming and “human” factors with geekiness!
output

- Applies style only to the paragraph that has the ID of mission

HTML class attribute

```
<p class="shout">Coding Horror! Coding Horror!</p>  
<p class="special">See our special deal on Droids!</p>  
  
<p class="special">Today only!</p>
```

HTML

Coding Horror! Coding Horror!

See our special deal on Droids!

Today only!

output

- A way to group some elements and give a style to only that group
- Unlike an id, a class can be reused as much as you like on the page



CSS class selectors

```
.special {  
background-color: yellow;  
font-weight: bold;  
}  
p.shout {  
color: red;  
font-family: cursive;  
}
```

CSS

Coding Horror! Coding Horror!

See our special deal on Droids!

Today only!

output



CSS class selectors

```
<p class="shout">Coding Horror! Coding Horror!</p>  
<p class="special">See our special deal on Droids!</p>  
  
<p class="special shout">Today only!</p>
```

HTML

Coding Horror! Coding Horror!

See our special deal on Droids!

Today only!

output



CSS ID selectors

```
a:link { color: #FF0000; } /* unvisited link */  
a:visited { color: #00FF00; } /* visited link */  
a:hover { color: #FF00FF; } /* mouse over link */
```

CSS

[Buy Early Buy Often!](#)

output

CSS ID selectors

class	description
:active	an activated or selected element
:focus	an element that has the keyboard focus
:hover	an element that has the mouse over it
:link	a link that has not been visited
:visited	a link that has already been visited
:first-letter	the first letter of text inside an element
:first-line	the first line of text inside an element
:first-child	an element that is the first one to appear inside another

STYLING PAGE SECTIONS

Why do we need page sections?

- Style individual elements, groups of elements, sections of text or of the page
- Create complex page layouts



Sections of a page <div>

```
<div class="shout">  
<h2>Coding Horror! Coding Horror!</h2>  
<p class="special">See our special deal on Droids!</p>  
<p>We'll beat any advertised price!</p>  
</div>
```

HTML

Coding Horror! Coding Horror!

See our special deal on Droids!

We'll beat any advertised price!

output

- Tag used to indicate a logical section or area of a page
- Has no appearance by default, but you can apply styles to it



Inline Sections

```
<h2>Coding Horror! Coding Horror!</h2>
<p>See our <span class="special">spectacular</span> deal
on Droids!</p>
<p>We'll beat <span class="shout"> any advertised
price</span>!</p>
```

HTML

Coding Horror! Coding Horror!

See our **spectacular** deal on Droids!

We'll beat **any advertised price!**

output

- has no onscreen appearance, but you can apply a style or ID to it, which will be applied to the text inside the span



CSS context selectors

```
selector1 selector2 {  
  properties  
}
```

CSS

- applies the given properties to selector2 only if it is inside a selector1 on the page

```
selector1 > selector2 {  
  properties  
}
```

CSS

- applies the given properties to selector2 only if it is *directly* inside a selector1 on the page

Context selector example

```
<p>Eat at <strong>Greasy's Burger</strong>...</p>
<ul>
<li>The <strong>greasiest</strong> burgers in town!</li>
<li>Yummy and greasy at the same time!</li>
</ul>
```

HTML

```
li strong { text-decoration: underline; }
```

CSS

Eat at **Greasy's Burger...**

- The greasiest burgers in town!
- Yummy and greasy at the same time!

output



More complex example

```
<div id="ad">
<p>Eat at <strong>Greasy's Burger</strong>...</p>
<ul>
<li class="important">The <strong>greasiest</strong>
burgers in town!</li>
<li>Yummy and <strong>greasy at the same time
</strong>!</li>
</ul>
</div>
```

HTML

```
#ad li.important strong { text-decoration: underline; }
```

CSS

Eat at **Greasy's Burger...**

- The **greasiest** burgers in town!
- Yummy and **greasy at the same time!**

output


The CSS Box Model

- Every element composed of:
 - content
 - a border around the element
 - padding between the content and the border
 - a margin between the border and other content




The CSS Box Model (cont.)


- width = content width
+ L/R padding + L/R
border + L/R margin
- height = content
height + T/B padding
+ T/B border + T/B
margin
- IE6 doesn't do this
right

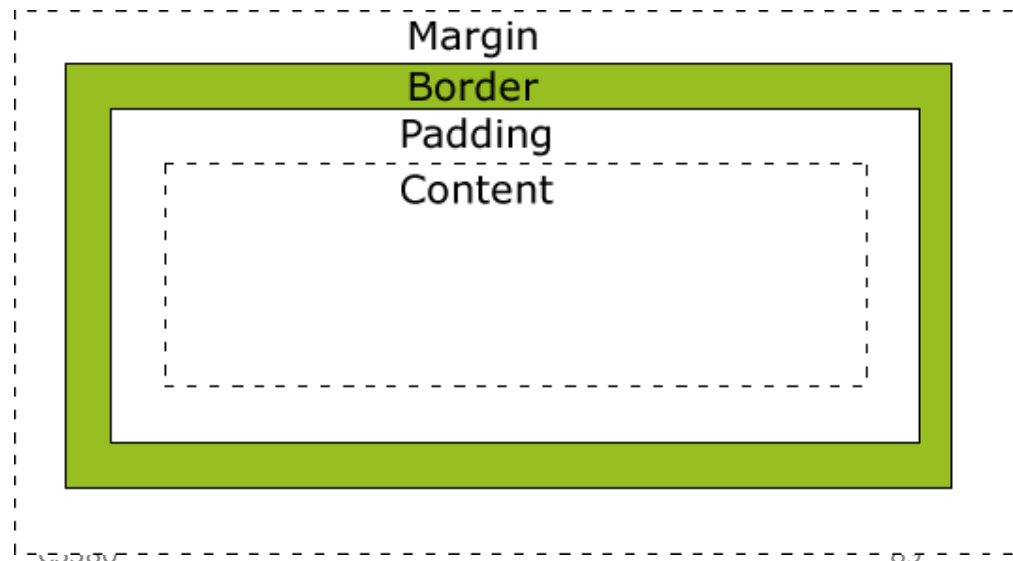


Document Flow – block elements

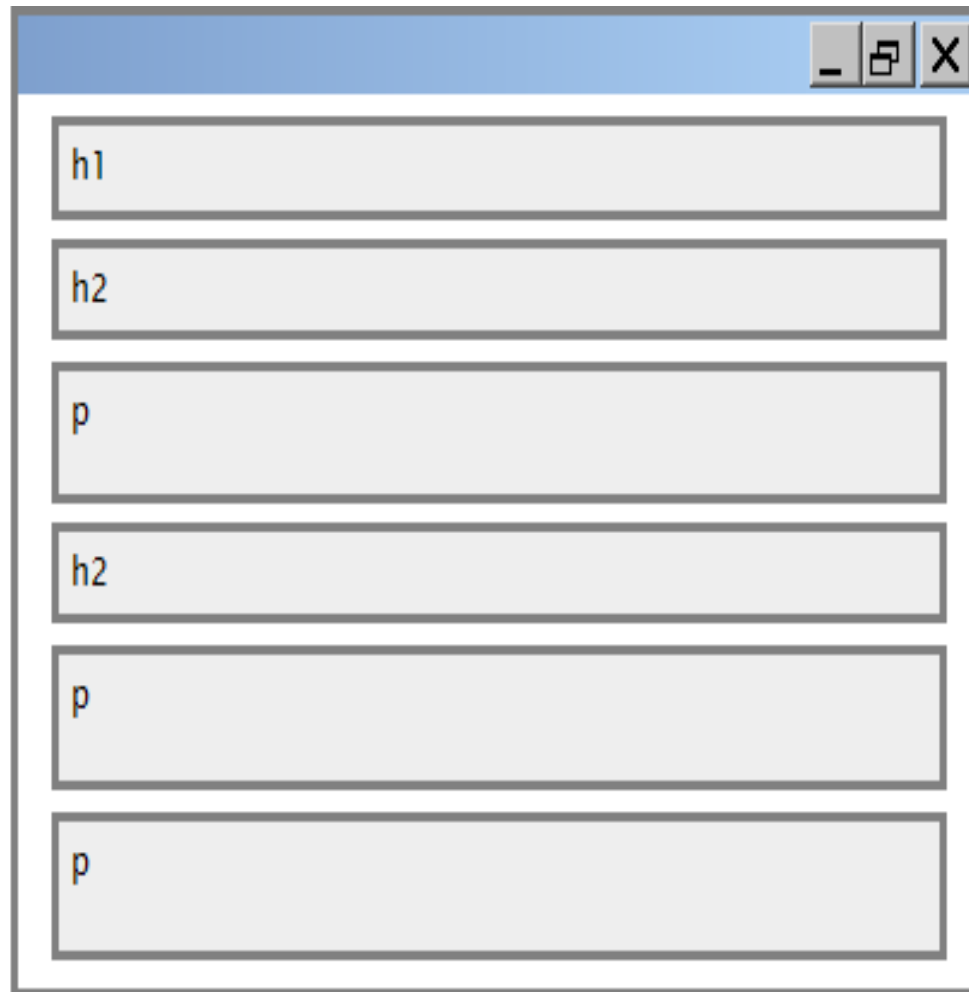

Document flow - inline elements

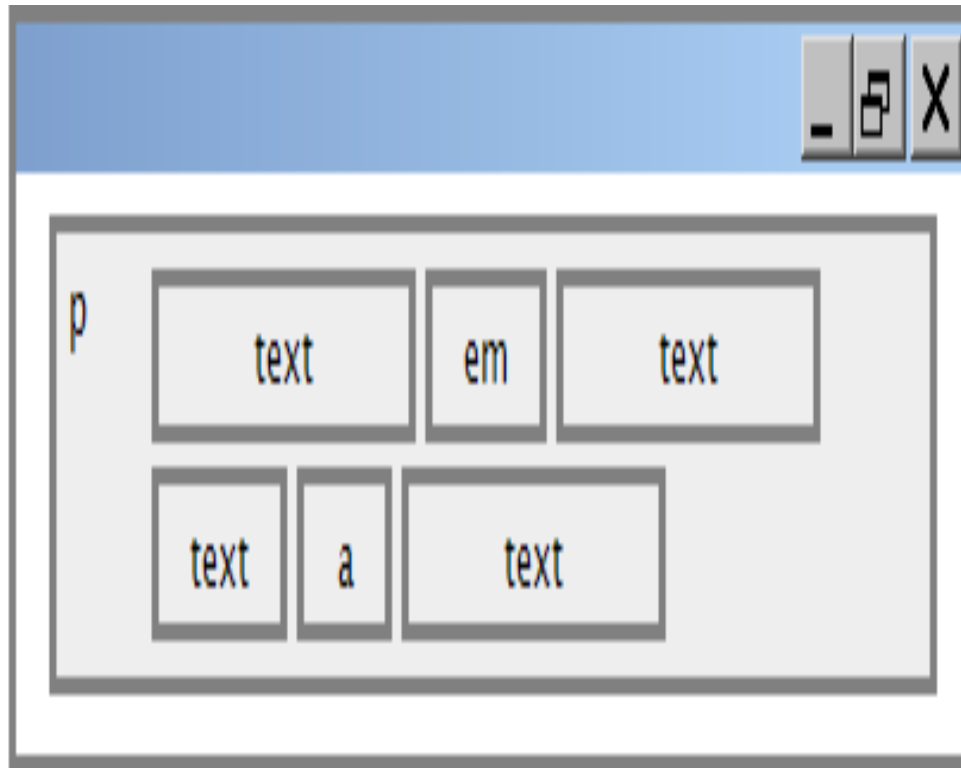

Document flow - a larger example

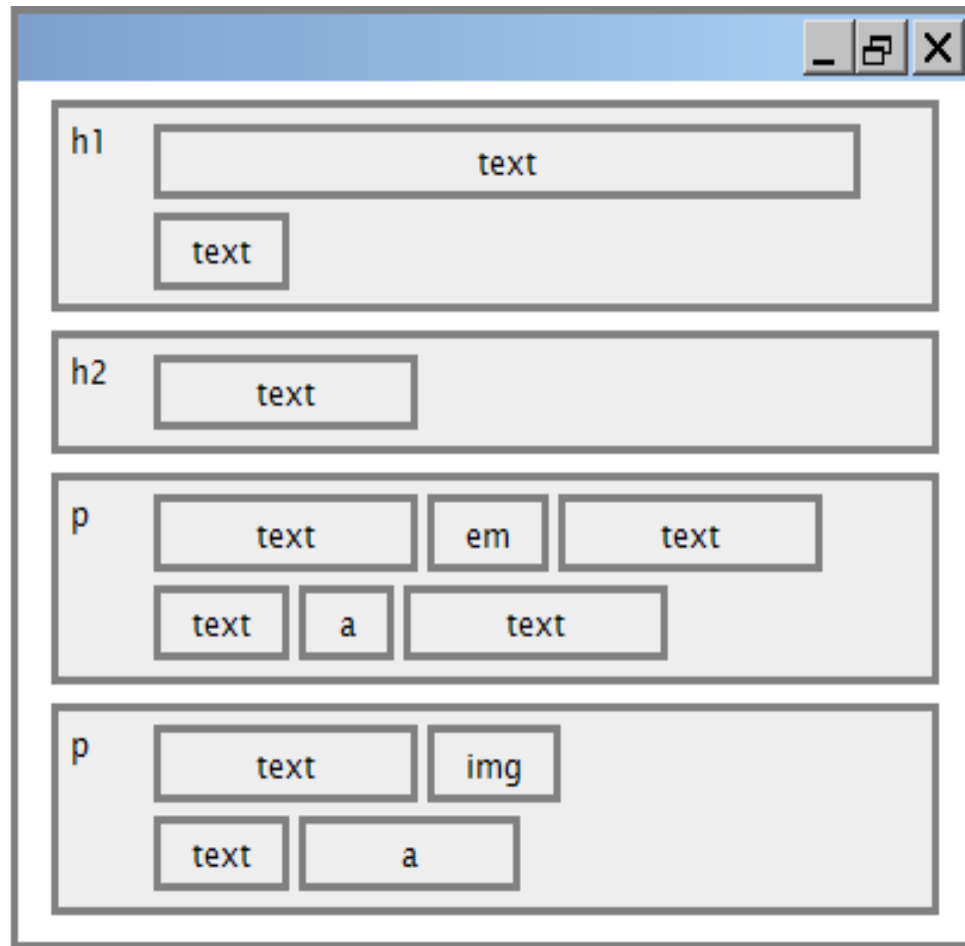

CSS properties for borders

```
h2 { border: 5px solid red; }
```

CSS

This is a heading.

output

property	description
border	thickness/style/size of border on all 4 sides

- Thickness: px, pt, em, or thin, medium, thick
- Style: none, hidden, dotted, dashed, double, groove, inset, outset, ridge, solid
- color

More border properties

property	description
border-color, border-width, border-style	specific properties of border on all 4 sides
border-bottom, border-left, border-right, border-top	all properties of border on a particular side
border-bottom-color, border-bottom-style, border-bottom-width, border-left-color, border-left-style, border-left-width, border-right-color, border-right-style, border-right-width, border-top-color, border-top-style, border-top-width	properties of border on a particular side

[Complete list of border properties](http://www.w3schools.com/css/css_reference.asp#border)

http://www.w3schools.com/css/css_reference.asp#border

Another border example

```
h2 {  
border-left: thick dotted #CC0088;  
border-bottom-color: rgb(0, 128, 128);  
border-bottom-style: double;  
}
```

CSS

•
•
•
•
This is a heading.

output

- each side's border properties can be set individually
- if you omit some properties, they receive default

CSS properties for padding

property	description
padding	padding on all 4 sides
padding-bottom	padding on bottom side only
padding-left	padding on left side only
padding-right	padding on right side only
padding-top	padding on top side only
Complete list of padding properties http://www.w3schools.com/css/css_reference.asp#padding	

Padding example 1

```
p { padding: 20px; border: 3px solid black; }  
h2 { padding: 0px; background-color: yellow; }
```

CSS

This is a first paragraph.

This is a second paragraph.

This is a heading

output

Padding example 2

```
p {  
padding-left: 200px; padding-top: 30px;  
background-color: fuchsia;  
}
```

CSS

This is a first paragraph

This is a second paragraph

output

- each side's padding can be set individually
- notice that padding shares the background color of the element

CSS properties for margins

property	description
margin	margin on all 4 sides
margin-bottom	margin on bottom side only
margin-left	margin on left side only
margin-right	margin on right side only
margin-top	margin on top side only
Complete list of margin properties http://www.w3schools.com/css/css_reference.asp#margin	

Margin example 1

```
p {  
  margin: 50px;  
  background-color: fuchsia;  
}
```

CSS

This is a first paragraph

This is a second paragraph

output

- notice that margins are always transparent

Margin example 2

```
p {  
  margin-left: 8em;  
  background-color: fuchsia;  
}
```

CSS

This is a first paragraph

This is a second paragraph

output

- each side's margin can be set individually

CSS properties for dimensions

```
p { width: 350px; background-color: yellow; }  
h2 { width: 50%; background-color: aqua; }
```

CSS

This paragraph uses the first style above

An h2 heading

output

property	description
width, height	how wide or tall to make this element (block elements only)
max-width, max-height, min-width, min-height	max/min size of this element in given dimension

Centering a block element: auto margins

```
p {  
margin-left: auto;  
margin-right: auto;  
width: 750px;  
}
```

CSS

Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua.

output

- ❑ works best if `width` is set (otherwise, may occupy entire width of page)
- ❑ to center inline elements within a block element, use `text-align: center;`

The CSS `float` property (reference)

```
img.headericon {  
  float: right; width: 130px;  
}
```

CSS

Ghostbusters is a 1984 American science fiction comedy film written by co-stars Dan Aykroyd and Harold Ramis about three eccentric New York City parapsychologists-turned-ghost capturers.




output

property	description
float	side to hover on; can be left, right, or none (default)

- removed from normal document flow; underlying text wraps around as necessary

Floating elements diagram

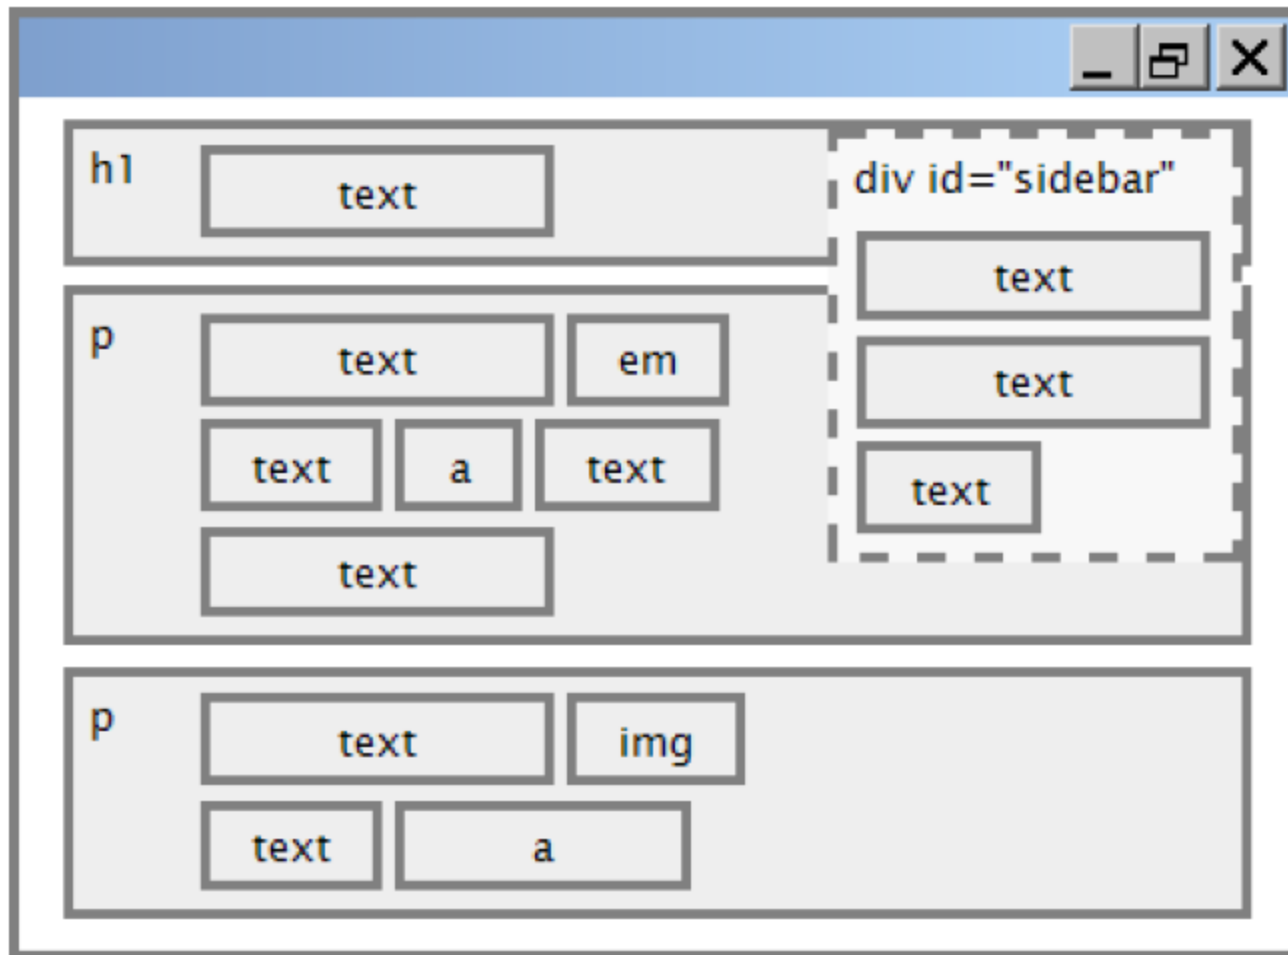

Common float bug: missing width

I am not floating, no width

I am floating right, no width

I am not floating, 45% width

I am floating right, 45% width

- often floating block elements must have a width property value
- Let's try "floating"

The `clear` property

```
p { background-color: fuchsia; }  
h2 { clear: right; background-color: yellow; }
```

CSS

Mario is a fictional character in his video game series. Serving as Nintendo's mascot and the main protagonist of the series, Mario has appeared in over 200 video games since his creation



Super Mario Fan Site!

output


The `clear` property (cont.)

property	description
<code>clear</code>	disallows floating elements from overlapping this element; can be left, right, or none (default)

Clear diagram

```
div#sidebar { float: right; }  
p { clear: right; }
```

CSS

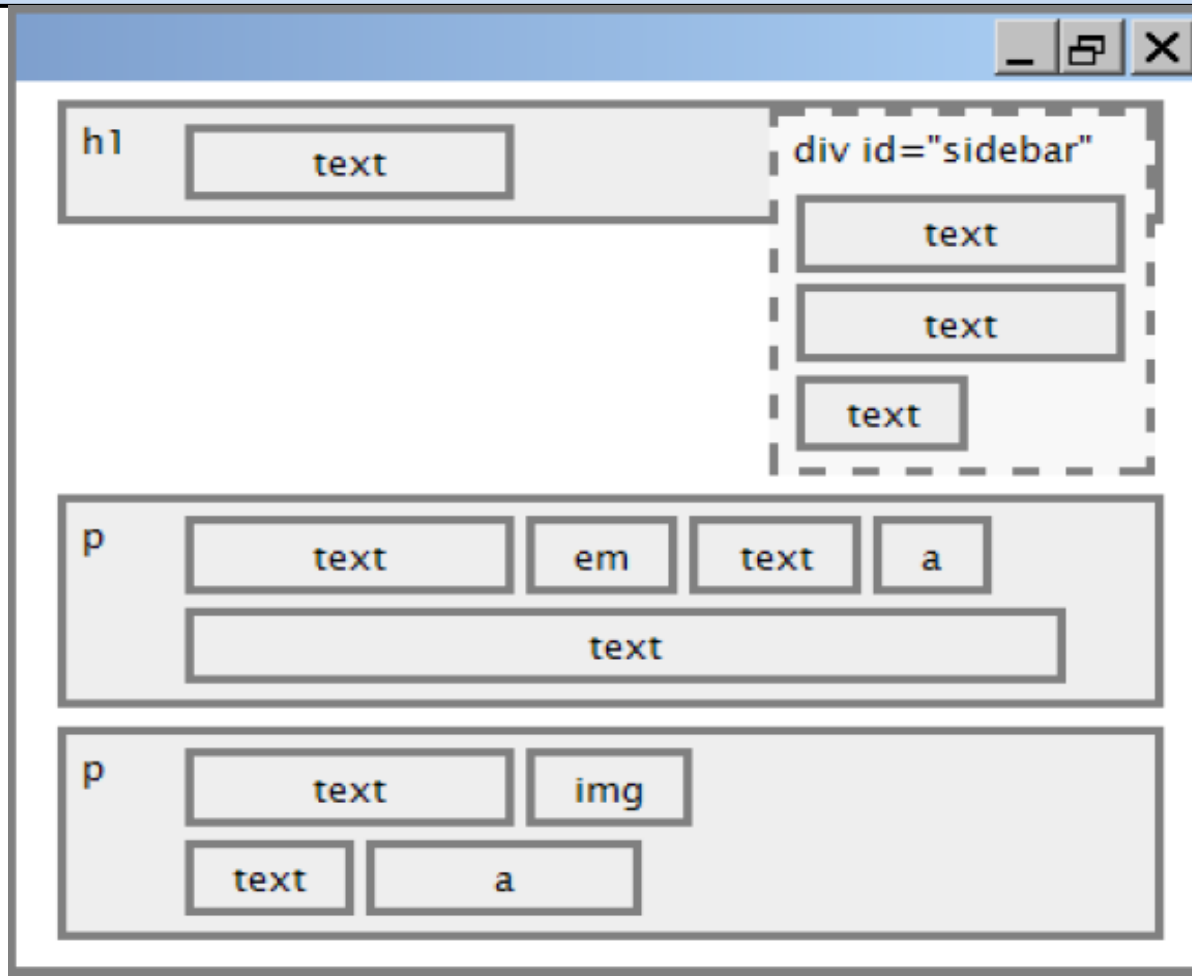

Common error: container too short

```
<p>
Mario is a fictional character in his video game
series.....</p>
```

HTML

```
p { border: 2px dashed black; }
img { float: right; }
```

CSS

Mario is a fictional character in his video game series.
Serving as Nintendo's mascot and the main protagonist
of the series, Mario has appeared in over 200 video
games since his creation.



output

The overflow property

```
p { border: 2px dashed black;  
  overflow: hidden; }
```

CSS

Mario is a fictional character in his video game series. Serving as Nintendo's mascot and the main protagonist of the series, Mario has appeared in over 200 video games since his creation.



output

The `overflow` property (cont.)

property	description
<code>overflow</code>	specifies what to do if an element's content is too large; can be <code>auto</code> , <code>visible</code> , <code>hidden</code> , or <code>scroll</code>

Multi-column layouts

```
<div>
  <p>first paragraph</p>
  <p>second paragraph</p>
  <p>third paragraph</p>
  Some other text that is important
</div>
```

HTML

```
p { float: right; width: 25%; margin: 0.5em;
border: 2px solid black; }
div { border: 3px dotted green; overflow: hidden; }
```

CSS

Some other text that is important

third paragraph

second paragraph

first paragraph

output

SIZING AND POSITIONING

The position property (examples)

```
div#ad {  
    position: fixed;  
    right: 10%;  
    top: 45%;  
}
```

CSS


property	value	description
position	static	default position
	relative	offset from its normal static position
	absolute	a fixed position within its containing element
	fixed	a fixed position within the browser window
top, bottom, left, right	positions of box's corners	

Absolute positioning

```
#sidebar {  
position: absolute;  
left: 400px;  
top: 50px;  
}
```

CSS

- removed from normal flow
positioned relative to the block
element containing them
- actual position determined by
top, bottom, left, right
- should often specify a width
property as well

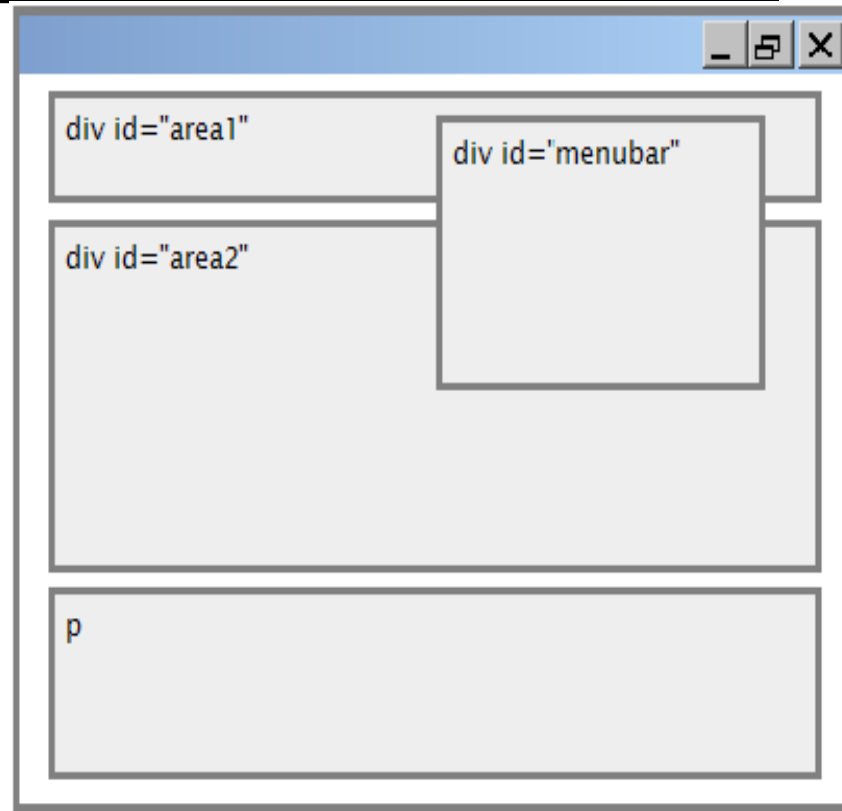

```
#menubar{position: relative; }
```


CSS

Fixed positioning

```
#menubar { position: relative; }
```

CSS

- removed from normal flow
- positioned relative to the browser window even when the user scrolls the window, element will remain in the same place

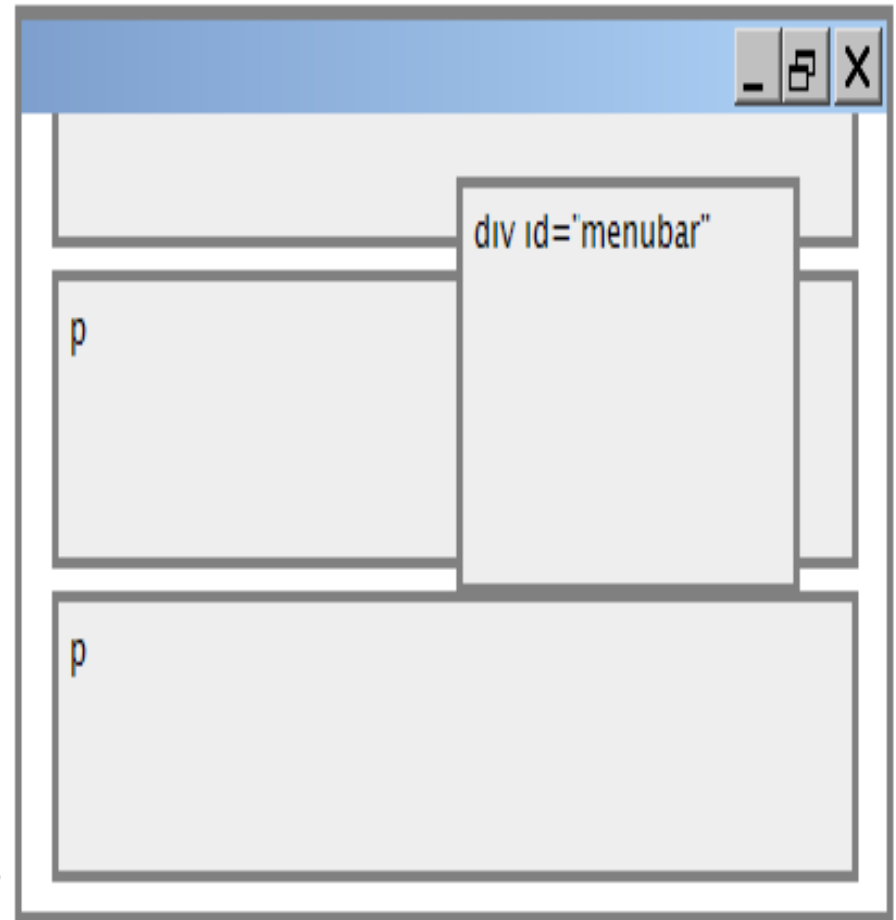

Alignment vs. float vs. position

1. If possible, lay out an element by *aligning* its content
 - horizontal alignment: text-align
 - set this on a block element; it aligns the content within it (not the block element itself)
 - vertical alignment: vertical-align
 - set this on an inline element, and it aligns it vertically within its containing element
2. If alignment won't work, try *floating* the element
3. If floating won't work, try *positioning* the element
 - absolute/fixed positioning are a last resort and should not be overused

Details about inline boxes

- Size properties (`width`, `height`, `min-width`, etc.) are ignored for inline boxes
- `margin-top` **and** `margin-bottom` are ignored,
- **but** `margin-left` **and** `margin-right` are not ignored

Details about inline boxes

- the containing block box's `text-align` property controls horizontal position of inline boxes within it
 - `text-align` does not align block boxes within the page
- each inline box's `vertical-align` property aligns it vertically within its block box

The vertical-align property

property	description
vertical-align	specifies where an inline element should be aligned vertically, with respect to other content on the same line within its block element's box

- can be top, middle, bottom, baseline (default), sub, super, text-top, text-bottom, or a length value or %
 - baseline means aligned with bottom of non-hanging letters



vertical-align example

```
<p style="background-color: yellow;">
  <span style="vertical-align: top; border: 1px solid
red;">
    Don't be sad! Turn that frown
     upside down!
    
    Smiling burns calories, you know.
     Anyway, look at this
cute puppy; isn't he adorable! So cheer up, and have a
nice day. The End.
  </span>
</p>
```

HTML

vertical-align example (cont.)

124



Don't be sad! Turn that frown

upside down!



Smiling burns calories, you

know.

day. The End.

Anyway, look at this cute puppy; isn't he adorable! So cheer up, and have a nice




output

Common bug: space under image

```
<p style="background-color: red; padding: 0px; margin: 0px">  
  
</p>
```

HTML

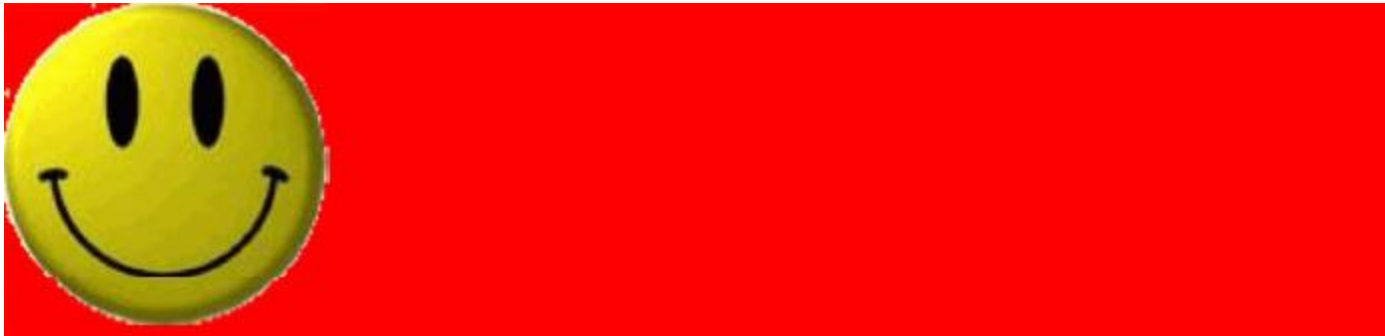

- ❑ red space under the image, despite padding and margin of 0
- ❑ this is because the image is vertically aligned to the baseline of the paragraph (not the same as the bottom)
- ❑ setting vertical-align to bottom fixes the problem (so does setting line-height to 0px)

The `display` property

```
h2 { display: inline; background-color: yellow; }
```

CSS

This is a heading **This is another heading**

output

property	description
display	sets the type of CSS box model an element is displayed with

- values: `none`, `inline`, `block`, `run-in`, `compact`, ...
- use sparingly, because it can radically alter the page layout

The `display` property (cont.)

```
p.secret {  
    visibility: hidden;  
}
```

CSS

output

- hidden elements will still take up space onscreen, but will not be shown
 - to make it not take up any space, set `display` to `none` instead
- can be used to show/hide dynamic HTML content on the page in response to events

The display property

```
<ul id="topmenu">  
  <li>Item 1</li>  
  <li>Item 2</li>  
  <li>Item 3</li>  
</ul>
```

HTML

```
#topmenu li {  
display: inline;  
border: 2px solid gray;  
margin-right: 1em;  
}
```

CSS

Item 1 Item 2 Item 3

output

- ❑ lists and other block elements can be displayed inline
- ❑ flow left-to-right on same line
- ❑ width is determined by content

Box-Sizing

```
p {  
    box-sizing: content-box;  
    /*  
    box-sizing: padding-box  
    box-sizing: border-box  
    */  
}
```

CSS

This allows specifying how you want to set the size of a block.

- *content-box* sets width/height to content, and anything beyond added up to total width/height (padding+border+margin)
- *padding-box* sets width/height to both content and padding, and anything beyond added up to total width/height (border+margin)
- *border-box* sets width/height to both content and padding, and anything beyond added up to total width/height (margin)

Box Sizing Example

```
<div class="parent">
  <p>Parent div with 50% width.</p>
  <div class="child">
    <p>Child div with 90% width, 4px black border, and 20%
padding </p>
  </div>
  <div class="twins">
    <p>Child div with 50% width, 4px black border, and 1em
padding</p>
  </div>
  <div class="twins">
    <p>Child div with 50% width, 4px black border, and 1em
padding</p>
  </div>
</div>
```



HTML

Box Sizing Example (cont)

```
.parent {  
  width: 50%;  
  border: 5px solid #E18728;  
  float: left;  
  /* box-sizing: border-box */  
}  
  
.child {  
  width: 90%;  
  padding: 20%;  
  border: 4px solid black;  
  margin: .5em auto;  
}  
  
.twins {  
  width: 50%;  
  padding: 1em;  
  border: 4px solid black;  
  float: left;  
}
```

CSS

Box-Sizing With and Without

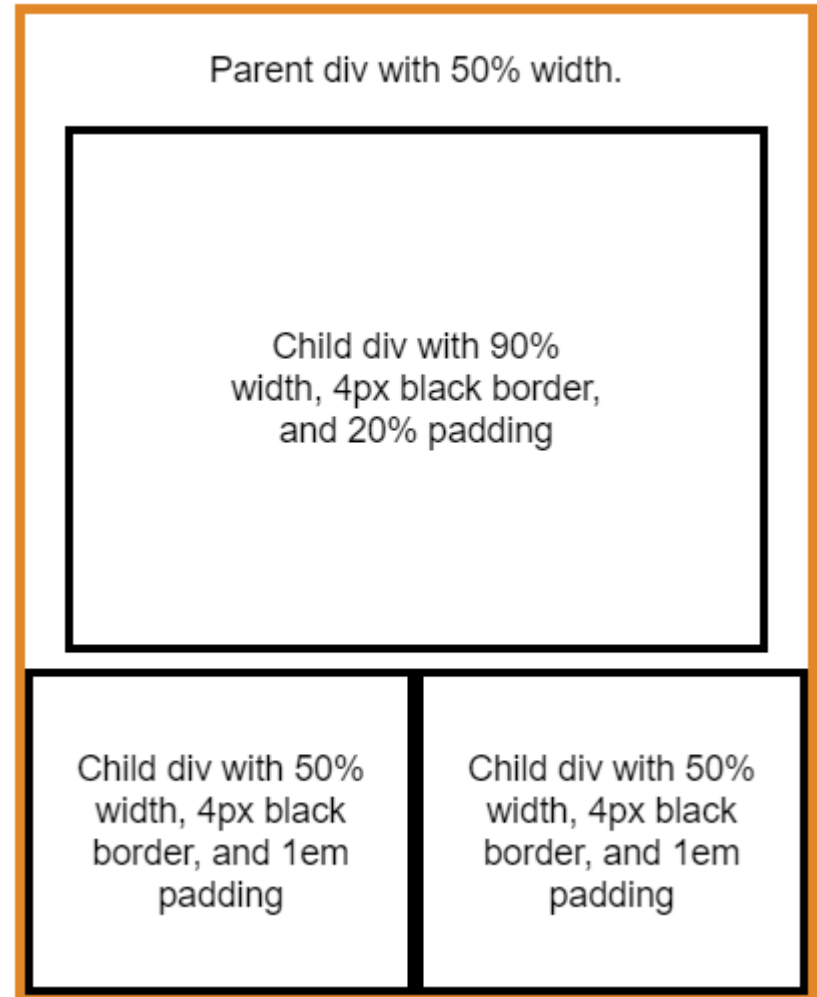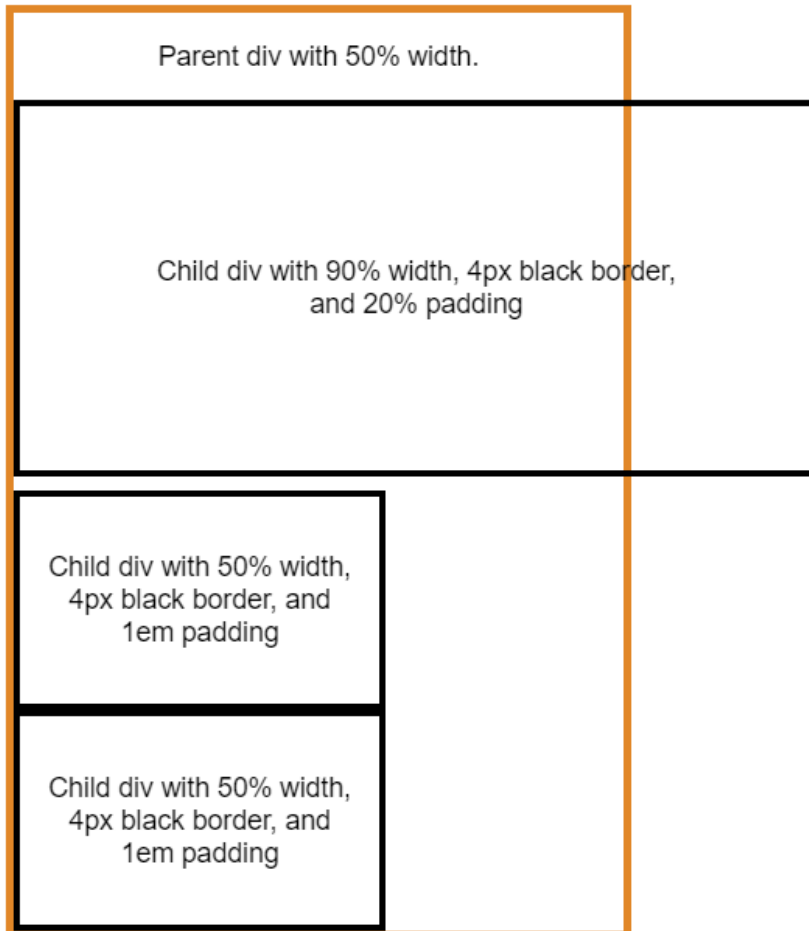

Additional Materials to Read

- Cascading and Inheritance Rules:
 - <http://monc.se/kitchen/38/cascading-order-and-inheritance-in-css>
- Flexboxes:
 - <https://css-tricks.com/snippets/css/a-guide-to-flexbox/>