
Fahm.

TECHNICAL OVERVIEW

10 November 2026

How data reaches Fahm

The browser talks to Fahm. Fahm requests and checks source content before displaying it.

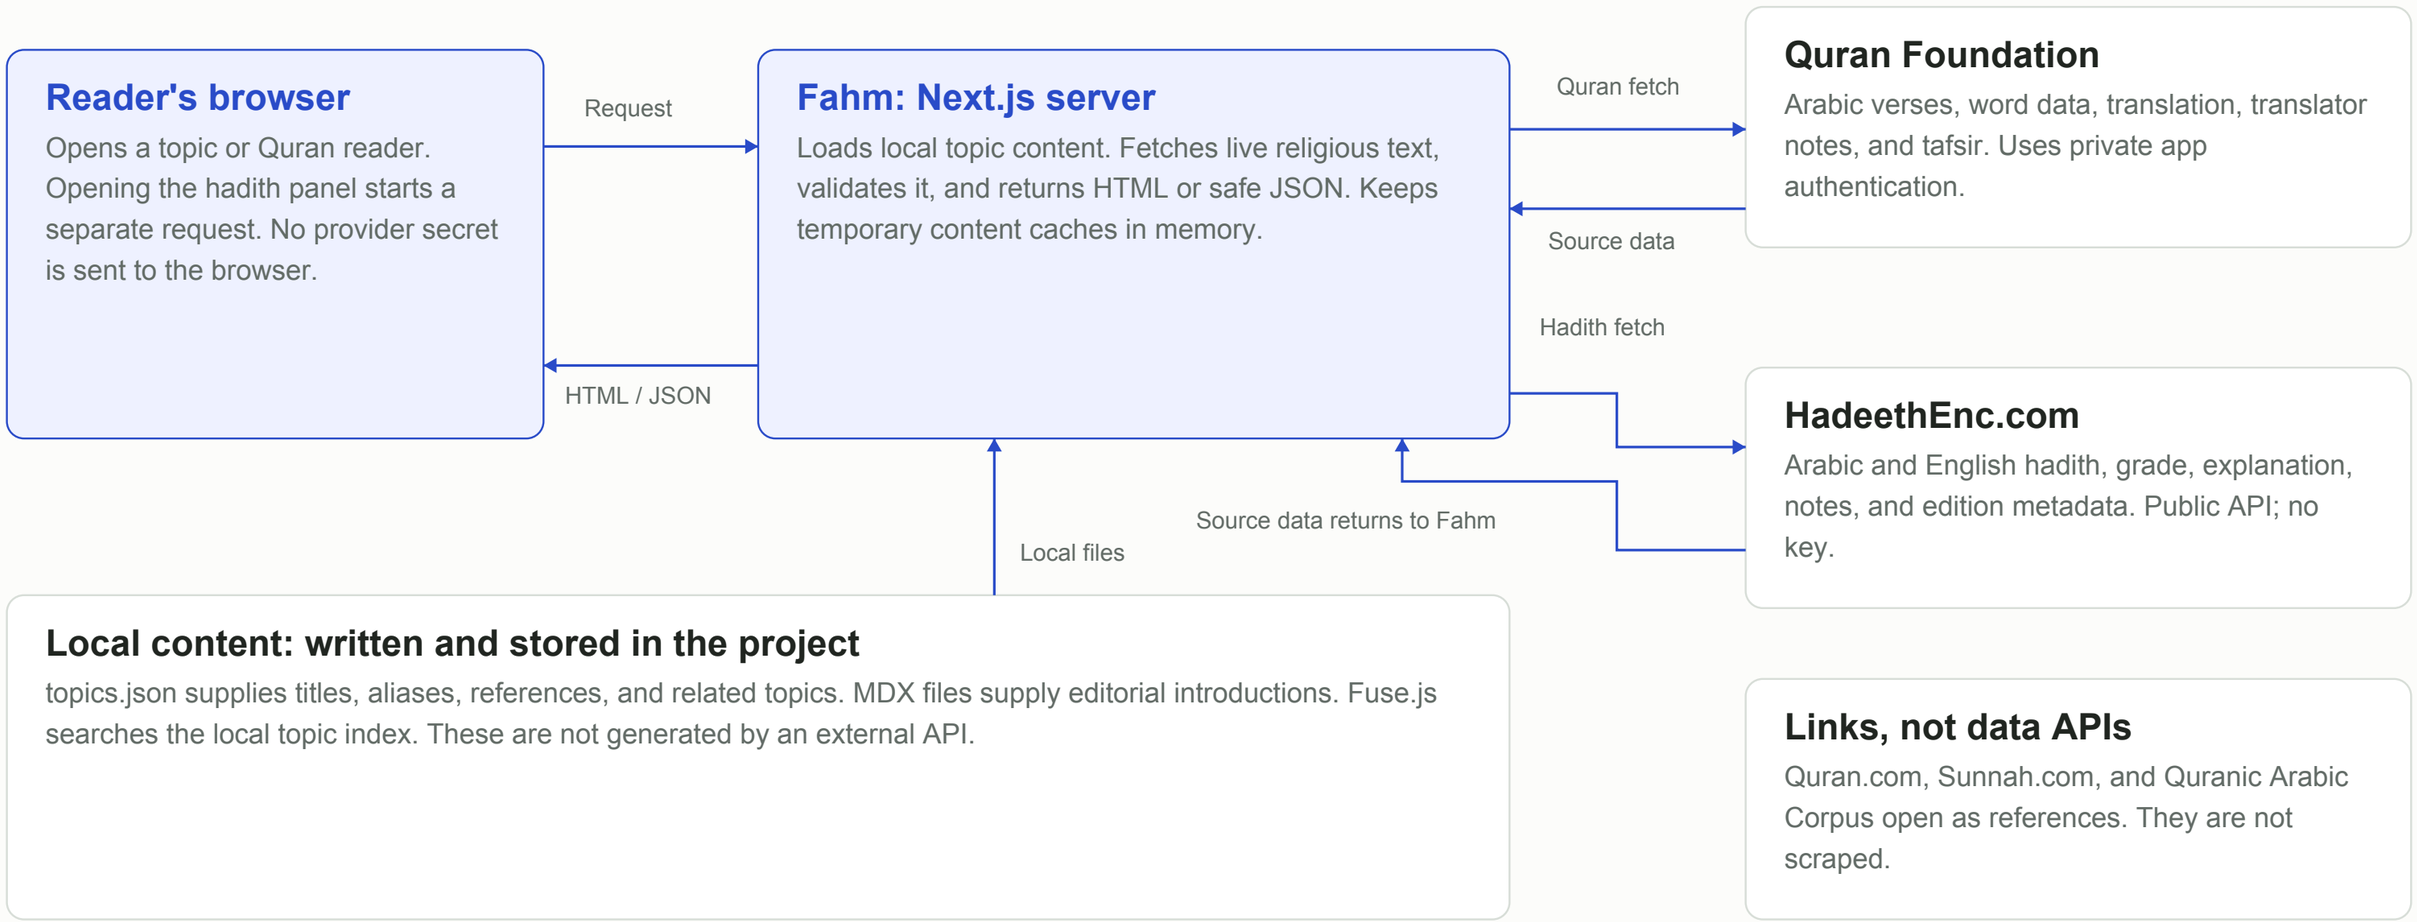

What is stored where?

Private server settings

QF_CLIENT_ID and QF_CLIENT_SECRET live in ignored .env.local during local development. No actual secret appears in this document.

Temporary server memory

Validated content can be reused for one hour. OAuth tokens are managed in memory by the Quran SDK. No content database is implemented.

Browser preferences

Only theme and Arabic text size are saved locally. No user account or saving step is required.

Fahm.

TECHNICAL OVERVIEW

10 November 2026

Quran: from page request to readable passage

Triggered by the Hardship & ease topic or /quran/94. No public Quran proxy route is needed.

1 Page requests the chapter

The Server Component calls getAshSharhExperience(). It loads live data at request time, rather than bundling it into the build.

2 Check memory cache

Use a validated entry if younger than one hour. Concurrent loads share one pending request. Otherwise fetch fresh data.

3 Authenticate through the SDK

@quranjs/api uses app credentials for OAuth client credentials. It reuses its in-memory token cache. The reader does not sign in.

4 Fetch provider data

Request all 8 verses of chapter 94 with words, translation 20, and tafsir 169. Fetch translation and tafsir catalogs in parallel; then fetch referenced footnotes.

5 Validate and normalize

Check verse order, Arabic, word locations, resource credits, and notes. Sanitize allowed publisher HTML. Produce a typed LivePassage object.

6 Render the experience

Pass safe data into reading components. Show 94:5-6 on the topic; all 8 verses in context and reader. Word and context panels reuse loaded data.

CACHE HIT: step 2 returns the saved LivePassage directly to step 6; no provider request is needed.

What the server asks for

Chapter 94	8 Arabic verses + occurrence-specific words + Saheeh International (20) + Ibn Kathir (169)
Resource catalogs	Translation and tafsir names/authors are checked so the correct publisher is credited.
Footnotes	Read unique note IDs from the translation, fetch each note, and attach it to the right verse.
Production hosts	OAuth: oauth2.quran.foundation | Content gateway: apis.quran.foundation

Failure behavior 15-second request timeout; incomplete data fails. Show Try again + Quran.com. No sample or expired-cache fallback.

Code map: src/lib/quran/config.ts, server.ts, passage.ts | src/app/topics/[slug]/page.tsx | src/app/quran/[surah]/page.tsx

Fahm.

TECHNICAL OVERVIEW

10 November 2026

Hadith: fetched only when its panel opens

A separate loading path keeps hadith-source availability independent of Quran page fetching.

1 Open the hadith panel

HadithDetail mounts and shows a loading state. The browser makes a same-origin request to Fahm, not directly to the publisher.

2 Call the local API route

GET /api/hadith/muslim-2999 calls getHadith(). The endpoint is fixed; it does not accept arbitrary publisher URLs.

3 Check memory cache

Reuse validated content for one hour. Concurrent callers share a request. On a cache miss, make the three public requests below.

4 Fetch in parallel

GET English record 3298. GET Arabic record 3298. HEAD the current English download redirect to identify the publisher edition; no spreadsheet body is downloaded.

5 Validate the narration

Both records must be 3298 and have identical Arabic. Bibliography must reference Muslim 2999. Require translation, grade, explanation, notes, and a valid edition.

6 Return and display

200 JSON contains the full reading and credits. React escapes publisher plain text. Show Arabic, English, grade, explanation, notes, bibliography, and copy action.

CACHE HIT: step 3 returns the saved reading directly to step 6. API responses remain Cache-Control: no-store.

Publisher requests (server-side; no credentials)

GET English	https://hadeethenc.com/api/v1/hadeeths/one/?language=en&id=3298
GET Arabic	https://hadeethenc.com/api/v1/hadeeths/one/?language=ar&id=3298
HEAD edition	https://hadeethenc.com/en/browse/download/en

If the provider fails

Return 503 unavailable. Respect Retry-After when present; disable retry until the cooldown ends. Offer a collection-source link. Requests time out after 15 seconds.

Cache limits and source identity

Memory is per server process; restarts and new instances fetch again. No database or offline bundle. Edition identifies the English release, not a per-record revision.

Code map: src/components/hadith-detail.tsx | src/app/api/hadith/muslim-2999/route.ts | src/lib/hadith/{server,provider,model}.ts