
How *Beamtime* works

Runs are **plain files**, the index is **a cache**, and every frontend calls **one operation set**.

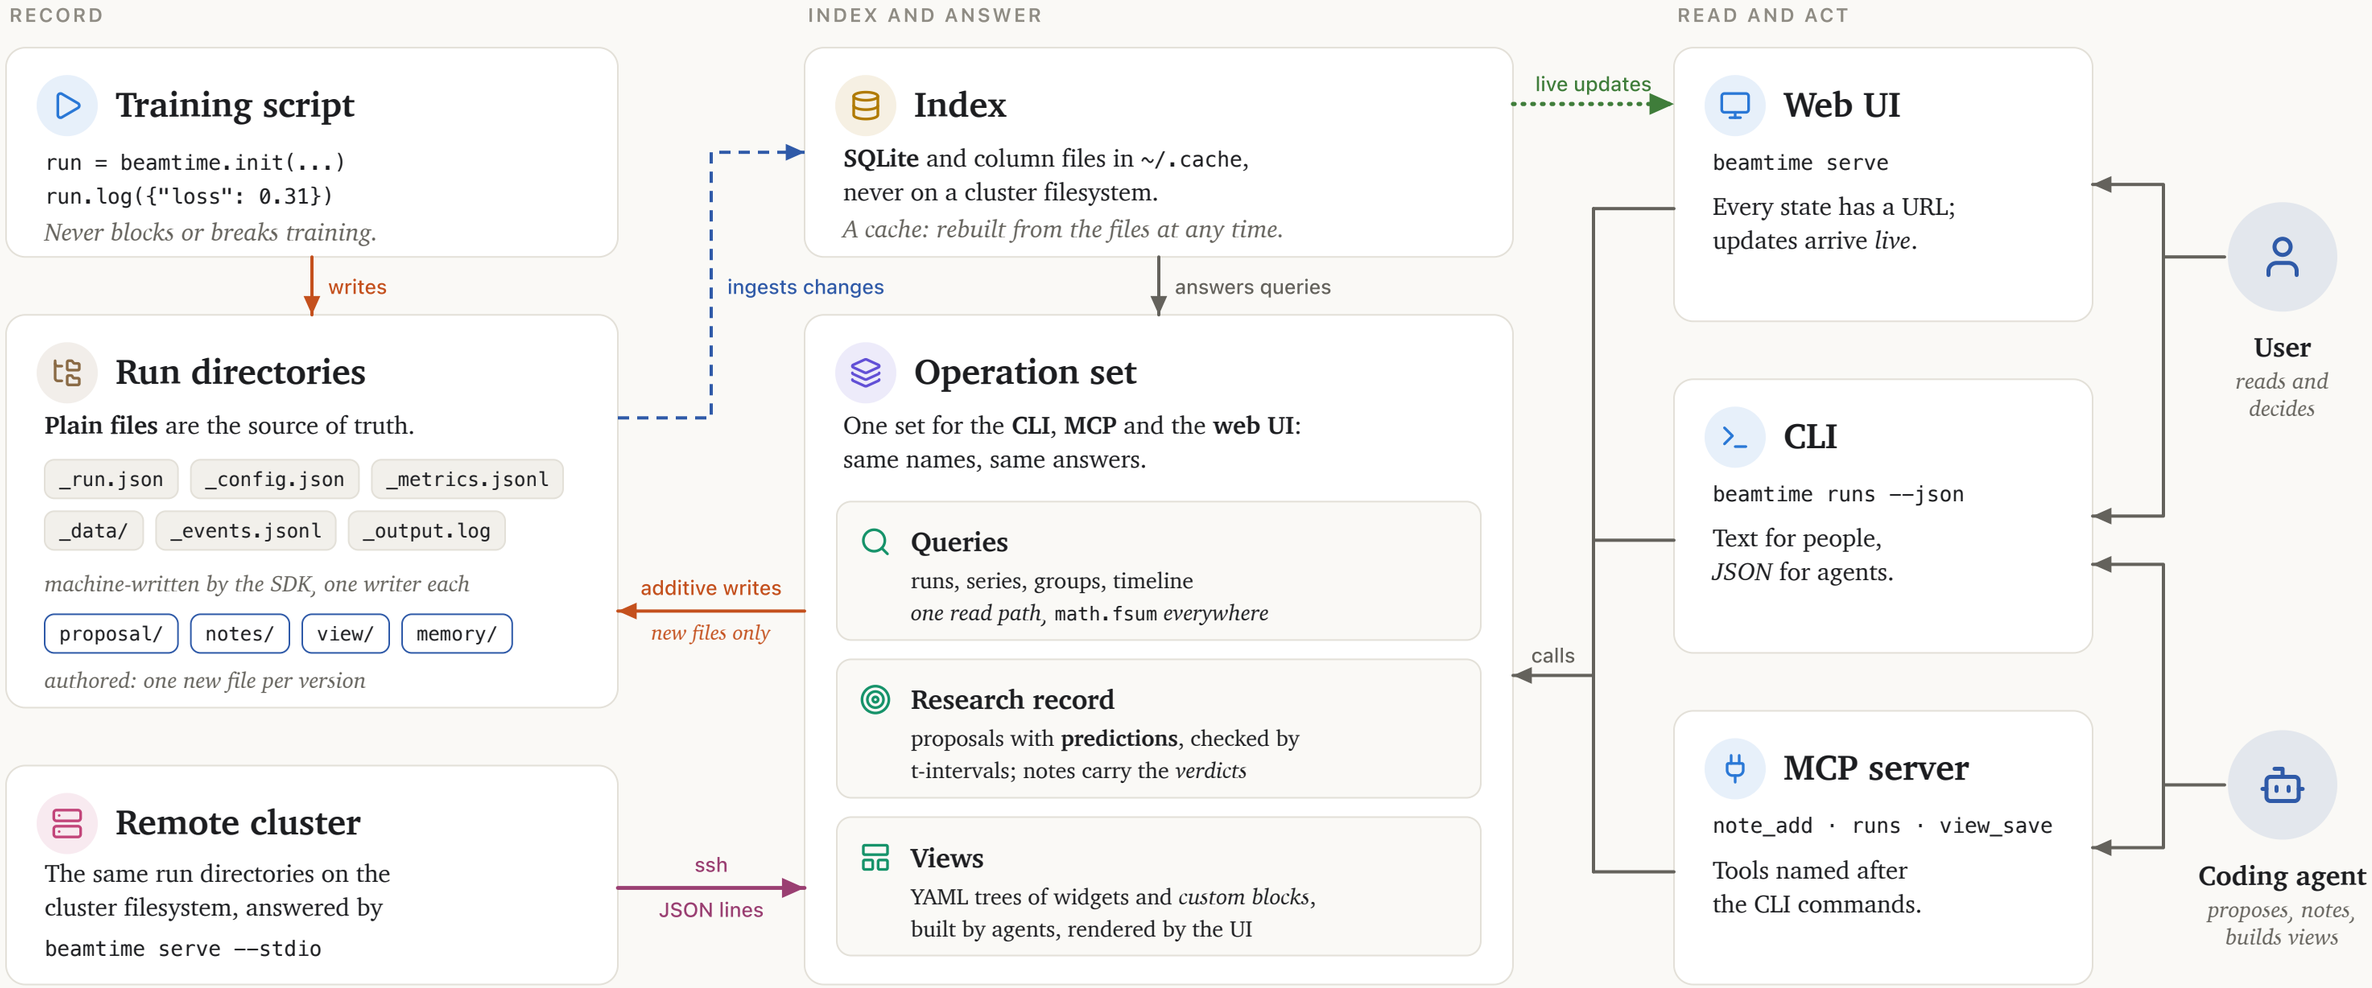

Files are the truth.
One writer per file; the index is only a cache.

Agents first.
Agents log runs, check predictions and build views.

Records, never runs.
Beamtime observes experiments; it never launches them.