

Bio-494 Week 1

Noah

HEADER 1

HEADER 2

BOLD *ITALICS*

this is a list

- item 1
- item 2
- item 3

Any text you write outside of code “chunks” is just text. It is how you annotate the code

lines 20-22 are a chunk of R code, bookended by the three back-ticks

```
## -- Attaching packages ----- tidyverse 1.3.0 --

## v ggplot2 3.3.2      v purrr  0.3.4
## v tibble  3.0.4      v dplyr  1.0.2
## v tidyr   1.1.2      v stringr 1.4.0
## v readr   1.4.0      v forcats 0.5.0

## -- Conflicts ----- tidyverse_conflicts() --
## x dplyr::filter() masks stats::filter()
## x dplyr::lag()     masks stats::lag()
```

Here I am reading in a file.

Including Plots

You can also embed plots, for example:

```
movies_imdb %>% select(movie_title,title_year,duration,imdb_score)
```

```
## # A tibble: 4,704 x 4
##   movie_title      title_year duration imdb_score
##   <chr>          <dbl>    <dbl>    <dbl>
## 1 Avatar          2009      178      7.9
## 2 Pirates of the Caribbean: At World's End 2007      169      7.1
## 3 Spectre          2015      148      6.8
## 4 The Dark Knight Rises 2012      164      8.5
## 5 John Carter      2012      132      6.6
## 6 Spider-Man 3      2007      156      6.2
## 7 Tangled          2010      100      7.8
## 8 Avengers: Age of Ultron 2015      141      7.5
## 9 Harry Potter and the Half-Blood Prince 2009      153      7.5
## 10 Batman v Superman: Dawn of Justice 2016      183      6.9
```

```
## # ... with 4,694 more rows
imdb_minimal=movies_imdb %>% select(movie_title,title_year,duration,imdb_score)
imdb_minimal=movies_imdb %>% select(movie_title,title_year,duration,imdb_score)
joined=full_join(imdb_minimal,movies_rottentom,by=c("movie_title"="title"))
```

ggplot data

ggplot aesthetics

```
plot_imdb = ggplot(movies_imdb) + aes(x=title_year,y=imdb_score)
summary(plot_imdb)
```

```
## data: color, director_name, num_critic_for_reviews, duration,
##   director_facebook_likes, actor_3_facebook_likes, actor_2_name,
##   actor_1_facebook_likes, gross, genres, actor_1_name, movie_title,
##   num_voted_users, cast_total_facebook_likes, actor_3_name,
##   facenumber_in_poster, plot_keywords, movie_imdb_link,
##   num_user_for_reviews, language, country, content_rating, budget,
##   title_year, actor_2_facebook_likes, imdb_score, aspect_ratio,
##   movie_facebook_likes [4704x28]
## mapping:  x = ~title_year, y = ~imdb_score
## faceting: <ggproto object: Class FacetNull, Facet, gg>
##   compute_layout: function
##   draw_back: function
##   draw_front: function
##   draw_labels: function
##   draw_panels: function
##   finish_data: function
##   init_scales: function
##   map_data: function
##   params: list
##   setup_data: function
##   setup_params: function
##   shrink: TRUE
##   train_scales: function
##   vars: function
##   super:  <ggproto object: Class FacetNull, Facet, gg>
```

Add layers to a ggplot object with +

```
plot_imdb = ggplot(movies_imdb)
plot_imdb = plot_imdb + aes(x=title_year,y=imdb_score)
summary(plot_imdb)
```

```
## data: color, director_name, num_critic_for_reviews, duration,
##   director_facebook_likes, actor_3_facebook_likes, actor_2_name,
##   actor_1_facebook_likes, gross, genres, actor_1_name, movie_title,
##   num_voted_users, cast_total_facebook_likes, actor_3_name,
##   facenumber_in_poster, plot_keywords, movie_imdb_link,
##   num_user_for_reviews, language, country, content_rating, budget,
##   title_year, actor_2_facebook_likes, imdb_score, aspect_ratio,
##   movie_facebook_likes [4704x28]
## mapping:  x = ~title_year, y = ~imdb_score
## faceting: <ggproto object: Class FacetNull, Facet, gg>
```

```
## compute_layout: function
## draw_back: function
## draw_front: function
## draw_labels: function
## draw_panels: function
## finish_data: function
## init_scales: function
## map_data: function
## params: list
## setup_data: function
## setup_params: function
## shrink: TRUE
## train_scales: function
## vars: function
## super: <ggproto object: Class FacetNull, Facet, gg>
```


ggplot geoms

```
plot_imdb = plot_imdb + geom_point()
summary(plot_imdb)
```

```
## data: color, director_name, num_critic_for_reviews, duration,
## director_facebook_likes, actor_3_facebook_likes, actor_2_name,
## actor_1_facebook_likes, gross, genres, actor_1_name, movie_title,
## num_voted_users, cast_total_facebook_likes, actor_3_name,
## facenumber_in_poster, plot_keywords, movie_imdb_link,
## num_user_for_reviews, language, country, content_rating, budget,
## title_year, actor_2_facebook_likes, imdb_score, aspect_ratio,
## movie_facebook_likes [4704x28]
## mapping: x = ~title_year, y = ~imdb_score
## faceting: <ggproto object: Class FacetNull, Facet, gg>
## compute_layout: function
## draw_back: function
## draw_front: function
## draw_labels: function
## draw_panels: function
## finish_data: function
## init_scales: function
## map_data: function
## params: list
## setup_data: function
## setup_params: function
## shrink: TRUE
## train_scales: function
## vars: function
## super: <ggproto object: Class FacetNull, Facet, gg>
## -----
## geom_point: na.rm = FALSE
## stat_identity: na.rm = FALSE
## position_identity
```

```
plot_imdb
```

```
## Warning: Removed 97 rows containing missing values (geom_point).
```

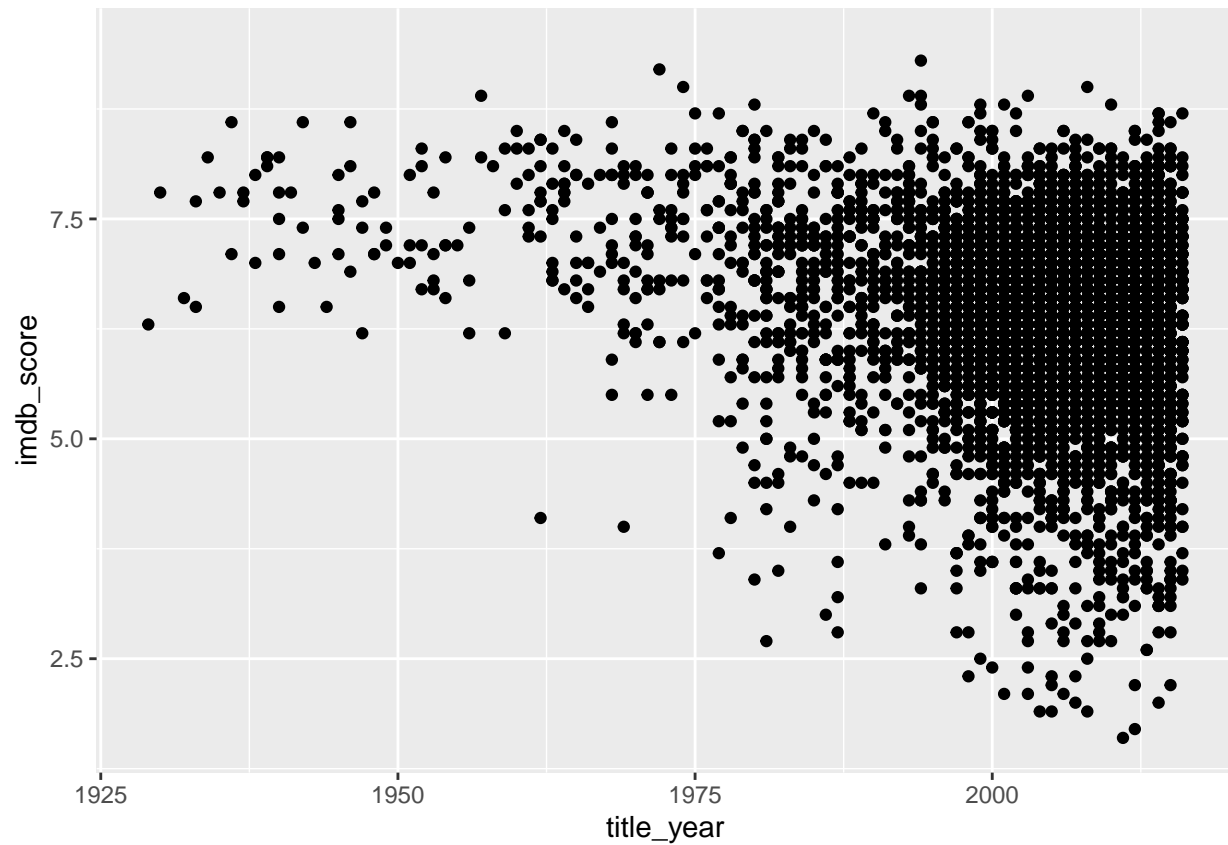


back to the slides for a second.

some nice default themes

```
plot_imdb = plot_imdb + theme_classic(base_size = 20)
plot_imdb
```


```
## Warning: Removed 97 rows containing missing values (geom_point).
```

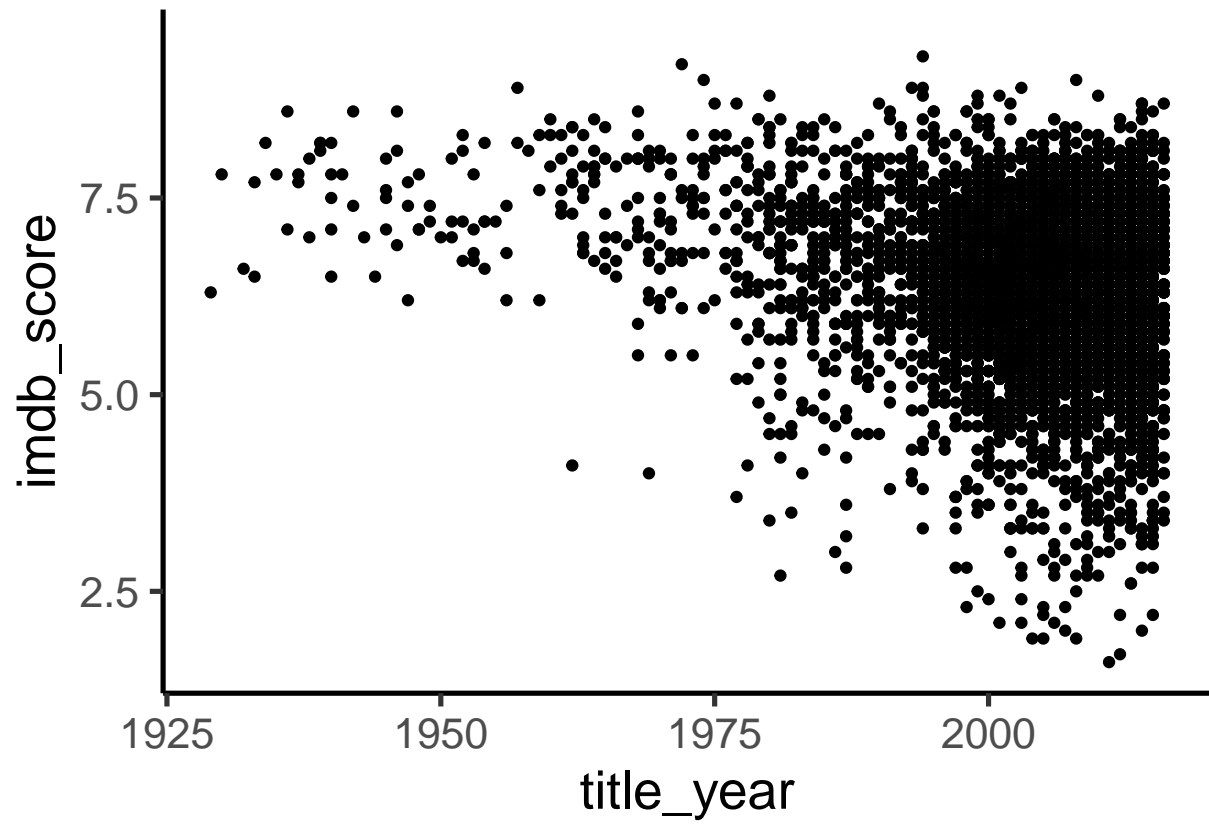

and axis labels


```
plot_imdb + xlab("movie release year") + ylab("IMDB score")
```

```
## Warning: Removed 97 rows containing missing values (geom_point).
```

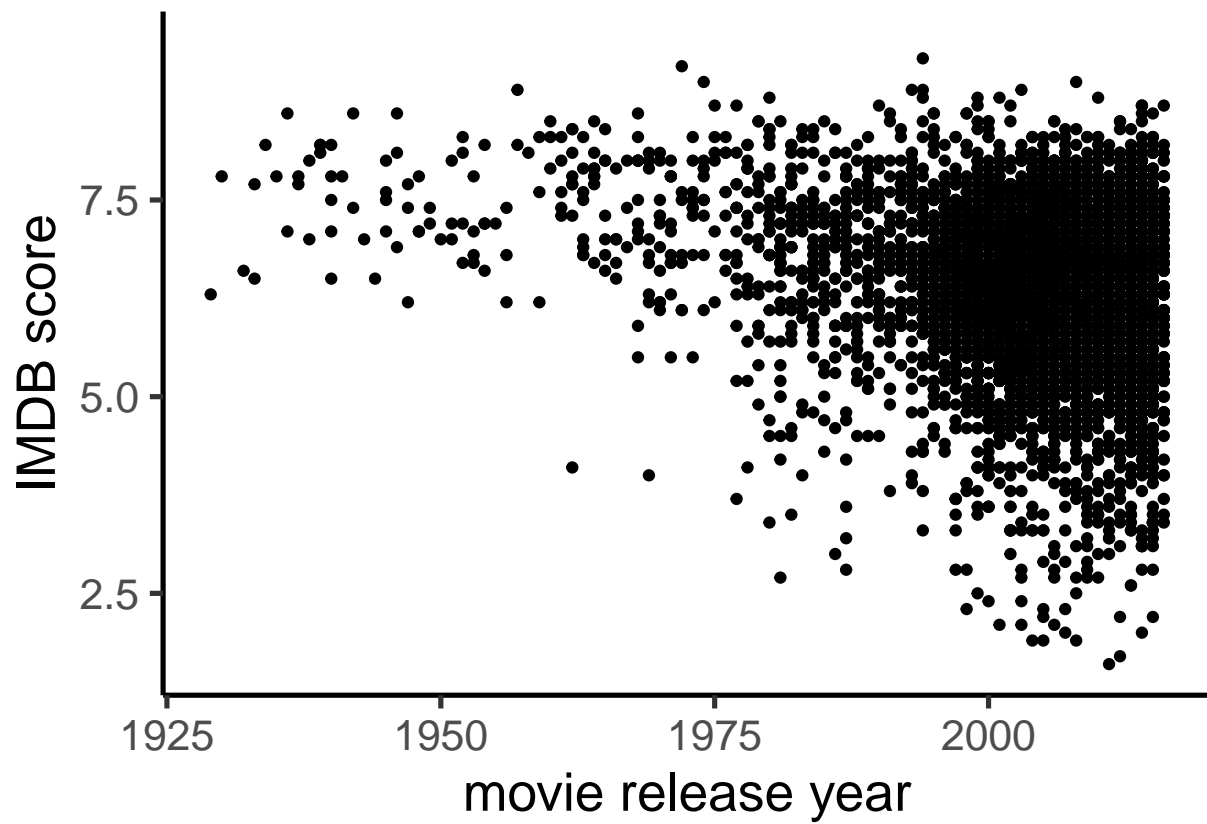

```
plot_imdb + xlab("movie release\n(year)") + ylab("IMDB score")
```

```
## Warning: Removed 97 rows containing missing values (geom_point).
```

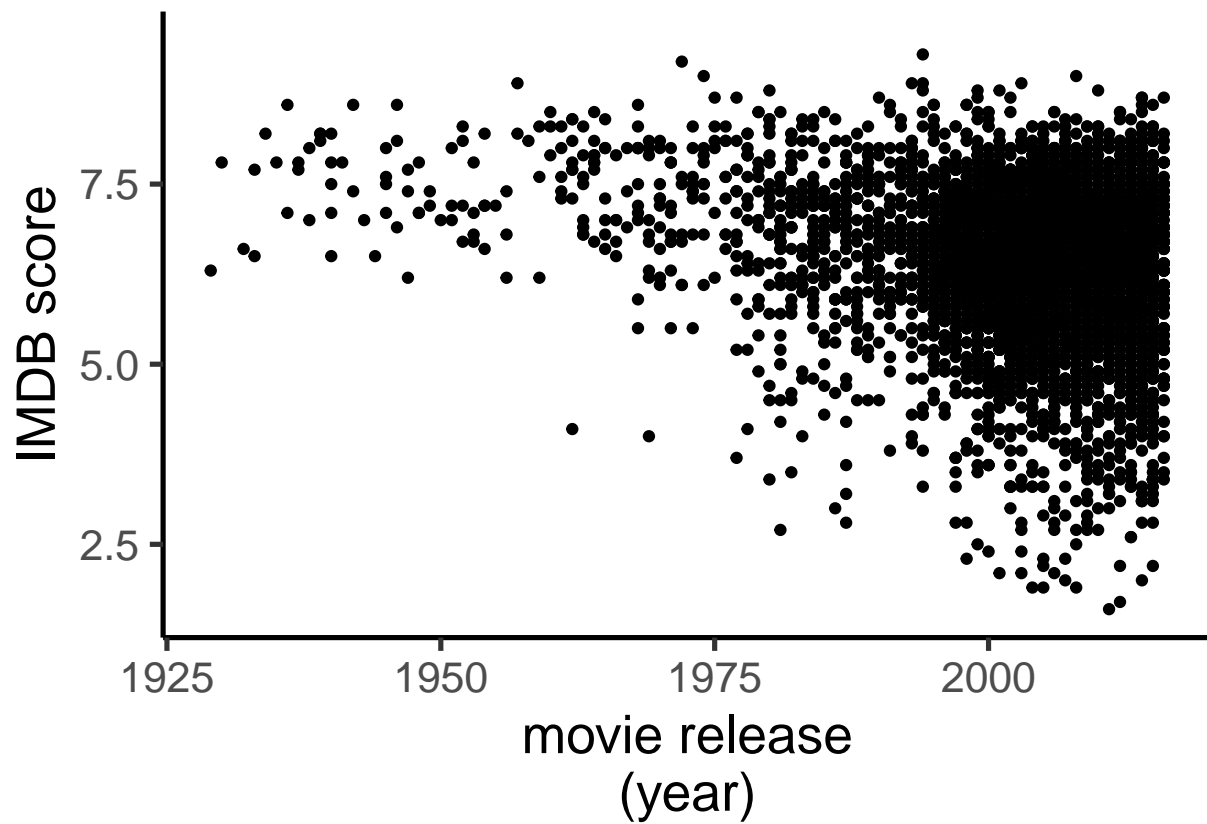


```
plot_imdb=plot_imdb + xlab("movie release year") + ylab("IMDB score")
```

ggplot scale

```
plot_imdb + scale_y_continuous(limits=c(0,10))+scale_x_continuous(limits=c(1975,2010))
```

```
## Warning: Removed 1449 rows containing missing values (geom_point).
```

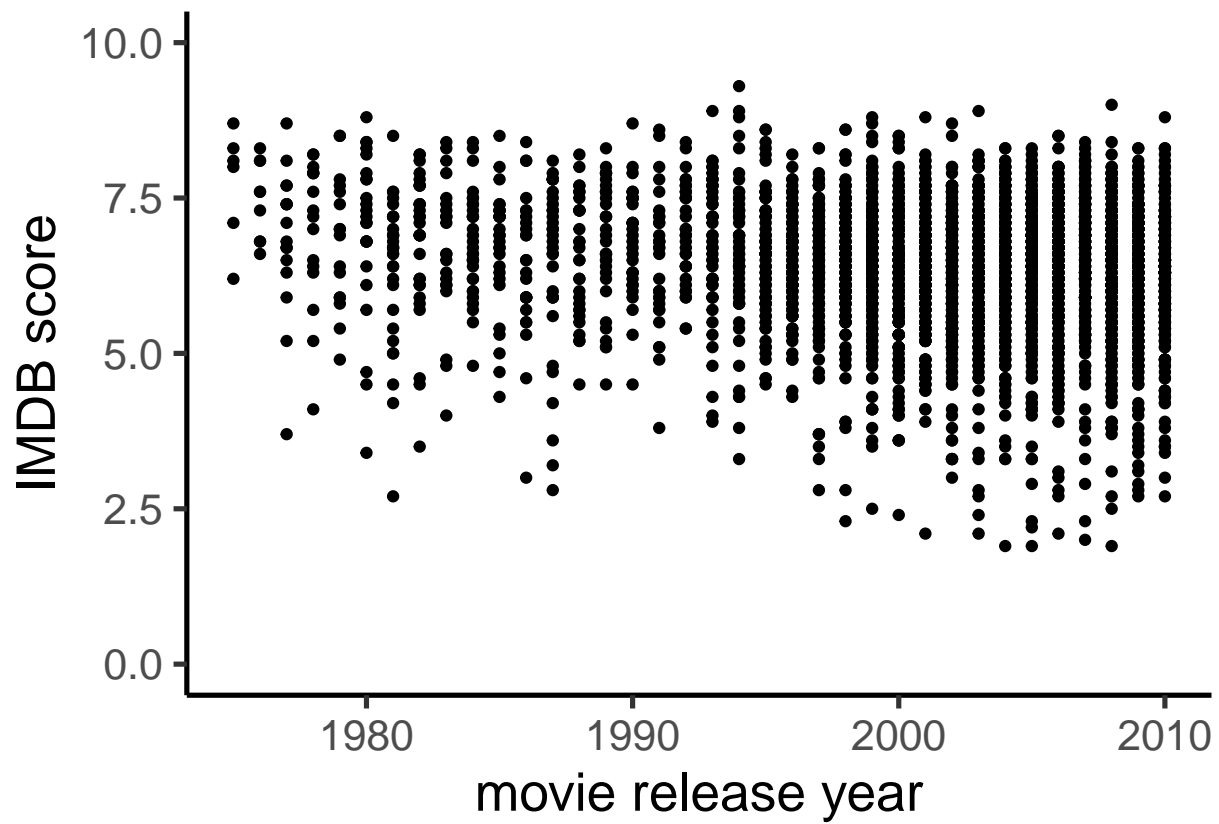


ggplot statistics

```
plot_imdb + stat_smooth(method="lm")
```

```
## Warning: Removed 97 rows containing non-finite values (stat_smooth).
```

```
## Warning: Removed 97 rows containing missing values (geom_point).
```
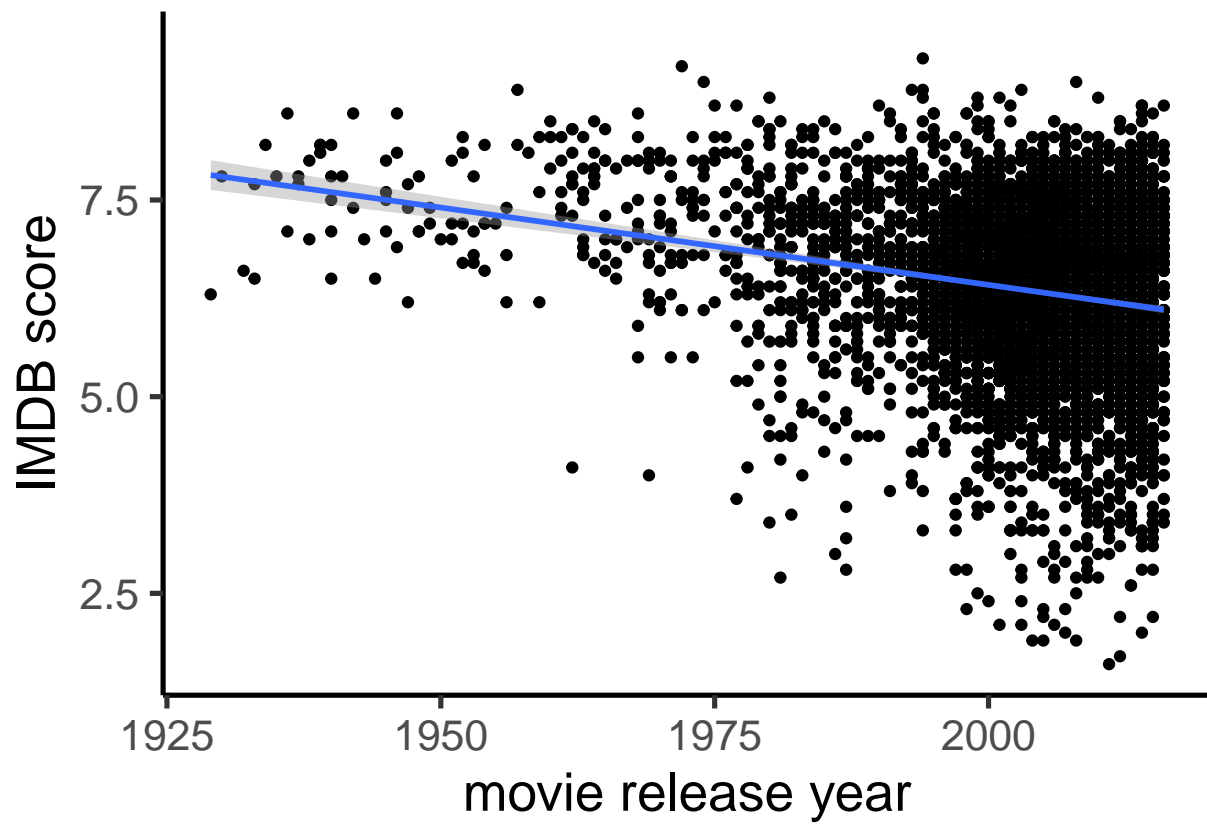
```
plot_imdb + stat_smooth(method="lm", se=F)
```

```
## Warning: Removed 97 rows containing non-finite values (stat_smooth).
```

```
## Warning: Removed 97 rows containing missing values (geom_point).
```

