# 787 - Cheapest Flights Within K stops

- min_heap = maintain cheapest cost O(1)
- visited = set[(visited_city, path_len)]
- stop = 1  path_len = stop + 2  A -> STOP -> B

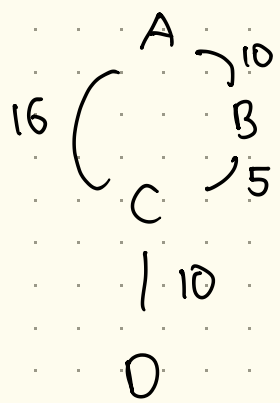


(B, 1), (C, 2), (C, 1), (D, 3), (D, 2)

Two attributes

- cost (heap)
- stops_used (visited)

can get to C for 15, 2
16, 1

either are candidates

Time Complexity  n = nodes
E = flights
K = max stops

$K \cdot E \cdot \log(n \cdot K)$

heap operation on (cost, K)

SC: $O(V + E + K)$