

Program Setup and Launch guide

Background

This is a group project. The current repository is finalized based on project **22CS016** only and may/does not reflect the final contribution for **22CS015**.

Prerequisites

- The setup OS should be Windows. The following guidelines were only tested on Windows.

Step 1 – repository settings (do once)

1. Install NPM (can be downloaded [here](#)) (version select 18.x.x).
 - Upon installation, make sure the command 'npm' is responsive.

```
C:\Users\peter>npm
npm WARN config global `--global`, `--local` are deprecated. Use `--location=global` instead.
npm <command>


Usage:
npm install          install all the dependencies in your project
npm install <foo>    add the <foo> dependency to your project
npm test             run this project's tests
npm run <foo>        run the script named <foo>
npm <command> -h     quick help on <command>
npm -l              display usage info for all commands
npm help <term>     search for help on <term> (in a browser)
npm help npm        more involved overview (in a browser)

All commands:
access, adduser, audit, bin, bugs, cache, ci, completion,
config, dedupe, deprecate, diff, dist-tag, docs, doctor,
edit, exec, explain, explore, find-dupes, fund, get, help,
hook, init, install, install-ci-test, install-test, link,
ll, login, logout, ls, org, outdated, owner, pack, ping,
pkg, prefix, profile, prune, publish, rebuild, repo,
restart, root, run-script, search, set, set-script,
shrinkwrap, star, stars, start, stop, team, test, token,
uninstall, unpublish, unstar, update, version, view, whoami
```


2. CD to **app** folder, execute CLI command "npm i".
3. CD to **smart_contract** folder, execute CLI command "npm i".

Step 2 – wallet settings (do once)


- **Important: Keep the Blockchain's local node opened when setting up wallet network.**
 - CD to **smart_contract** folder, run **localnode.bat**.
- Install MetaMask for Chrome (can be downloaded [here](#)).
- Upon installation, set up Blockchain wallet.
 - A page like this should be automatically opened.

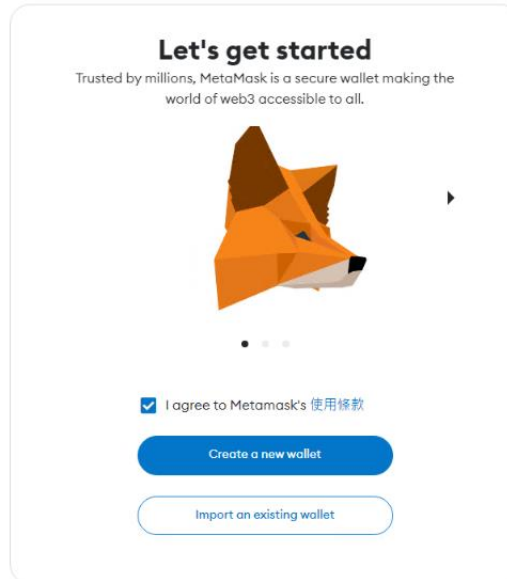


- Agree the terms then click “Import an existing wallet”. You could also create your own wallet.
- On the next page, click “I Agree”
- Input the following secret recovery phrase:
 - *limit error book doll distance lecture traffic mad brick wire essence mean*
 - (Directly copy the whole sentence then paste to the first input box)
- Click the confirm button.
- The page should be shown as follows:

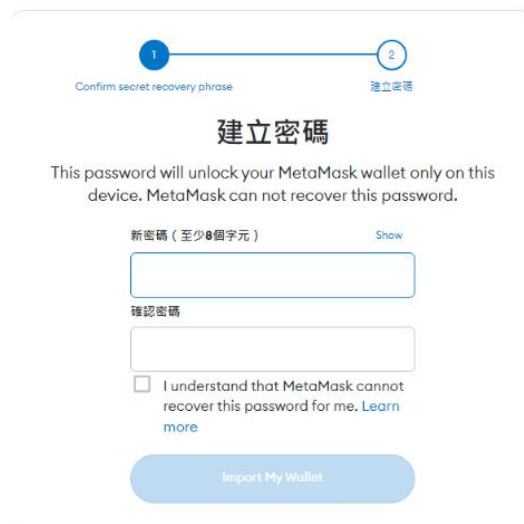The image shows the MetaMask '建立密碼' (Create Password) screen. At the top, there is a progress bar with two steps: '1 Confirm secret recovery phrase' and '2 建立密碼'. Below the progress bar, the title '建立密碼' is displayed. Underneath the title, it says 'This password will unlock your MetaMask wallet only on this device. MetaMask can not recover this password.' There are two input fields: '新密碼 (至少8個字元)' (New Password (at least 8 characters)) and '確認密碼' (Confirm Password). To the right of the first input field is a 'Show' link. Below the input fields, there is a checkbox with the text 'I understand that MetaMask cannot recover this password for me. Learn more'. At the bottom, there is a blue button labeled 'Import My Wallet'.

- Set the new password to **Cityufyp2022**
 - **Not recommended to change any new passwords.**
- Click the import button.
- After some confirmation dialogs, initialized page should be displayed as follows:

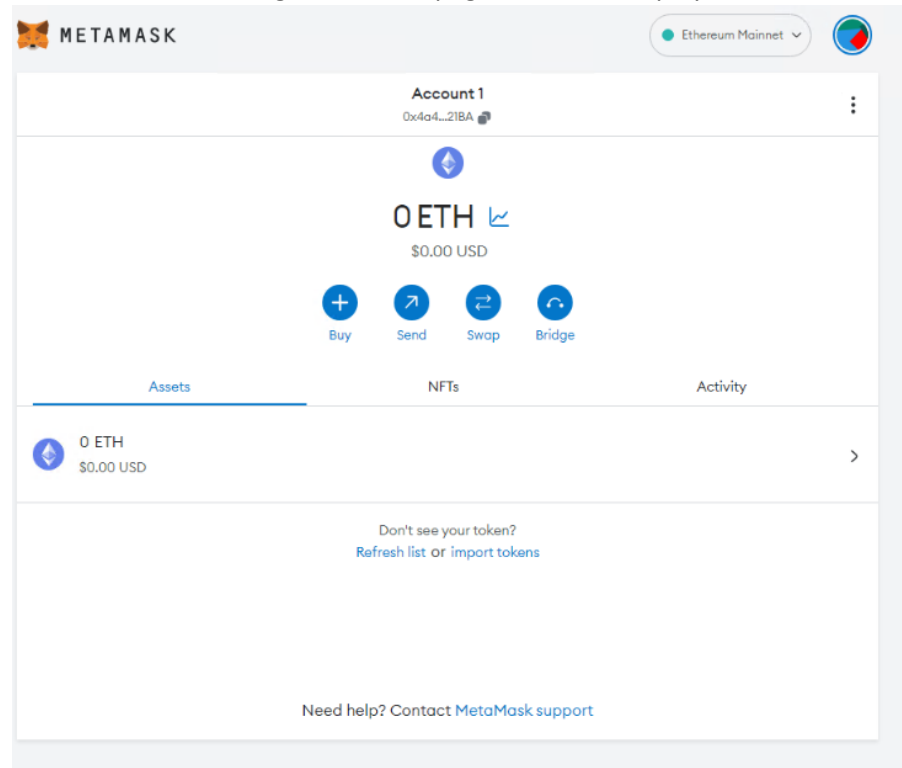

-
- Open “settings”.

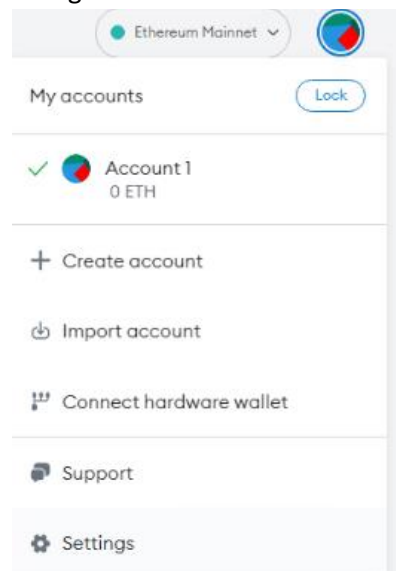

- In the **Advanced** tab, turn on the following feature:

Show test networks
Select this to show test networks in network list



- In the **Networks** tab, click “Add a network” → “Add a network manually”.

Networks > Add a network > Add a network manually

⚠ A malicious network provider can lie about the state of the blockchain and record your network activity. Only add custom networks you trust.

Network name

New RPC URL


Chain ID ⓘ

Currency symbol


Block explorer URL (Optional)

- Input the network information as follows:
 - Network name: localhost
 - New RPC URL: <http://localhost:8545>
 - Chain ID: 31337
 - ETH
- Save the information.


- If there is a dialog box:

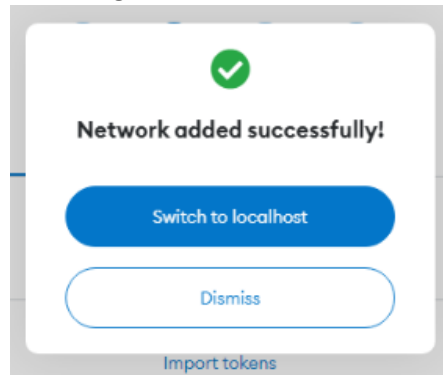

- Click “Switch to localhost”
- Else, switch to localhost host using the network tab on the top right corner.

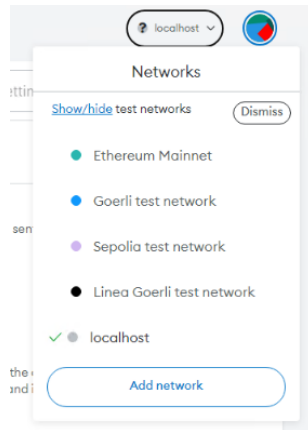

- Import local accounts from **localnode.bat**.

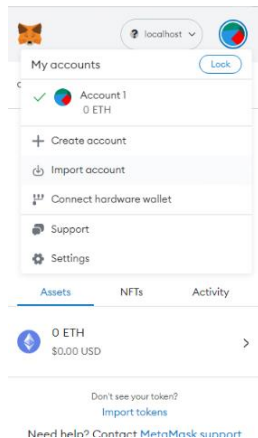

- Right click the account profile → “Import account”
- Open the “localnode.bat”, following information should be displayed:

```
Select C:\Windows\system32\cmd.exe

C:\Users\FYP\Desktop\FYP\smart_contract>npx hardhat node
Started HTTP and WebSocket JSON-RPC server at http://127.0.0.1:8545/

Accounts
=====

WARNING: These accounts, and their private keys, are publicly known.
Any funds sent to them on Mainnet or any other live network WILL BE LOST.

Account #0: 0xf39Fd6e51aad88F6F646e6a8827279cFFb92266 (10000 ETH)
Private Key: 0xac0974bec39a17e36ba4a6b4d238ff944bacb478cbed5efcae784d7bf4f2ff80

Account #1: 0x70997970C51812dc3A010C7d01b50e0d17dc79C8 (10000 ETH)
Private Key: 0x59c6995e998f97a5a0044966f0945389dc9e86dae88c7a8412f4603b6b78690d

Account #2: 0x3C44CdDdB6a900fa2b585dd299e03d12FA4293BC (10000 ETH)
Private Key: 0x5de4111afa1a4b94908f83103eb1f1706367c2e68ca870fc3fb9a804cdab365a


Account #3: 0x90F79b6F6E82c4f80365E785982E1f101E93b906 (10000 ETH)
Private Key: 0x7c852118294e51e653712a81e05800f419141751be58f605c371e15141b007a6

Account #4: 0x15d34AAf54267D07c367839AAf71A00a2C6A65 (10000 ETH)
Private Key: 0x47e179ec19748593b187f80a00eb0da91f1b9d0b13f8733639f19c30a34926a


Account #5: 0x9965507D1a55bC2695C8ba16F837d81980A4dc (10000 ETH)
Private Key: 0x8b3a350cf5c34c9194ca85829a2df0ec3153be03185e2d3348e872092edffba

Account #6: 0x976EA74026E726554dB657fA54763abd0C3a0aa9 (10000 ETH)
Private Key: 0x92db14e403b83dfe3df233f83dfa3a0d7096f21ca9b0d6d6b8d88b2b2ec1564e
```

- Import any private key to the MetaMask window:

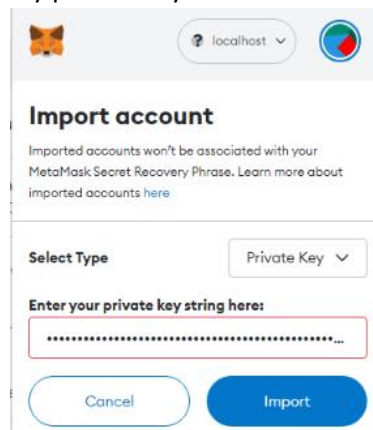


- New account should be set as follows:

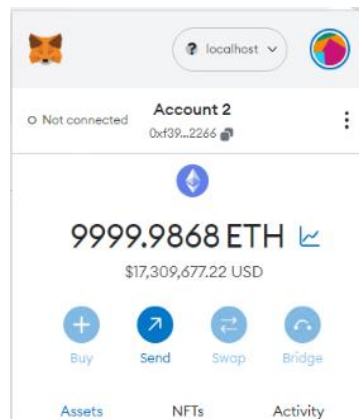

Step 3 (do once)

- Install IPFS desktop (can be downloaded [here](#), named “IPFS-Desktop-Setup-{version}.exe”).
- After launching the program, go the “Settings” tab then configure the following Json file as follows:

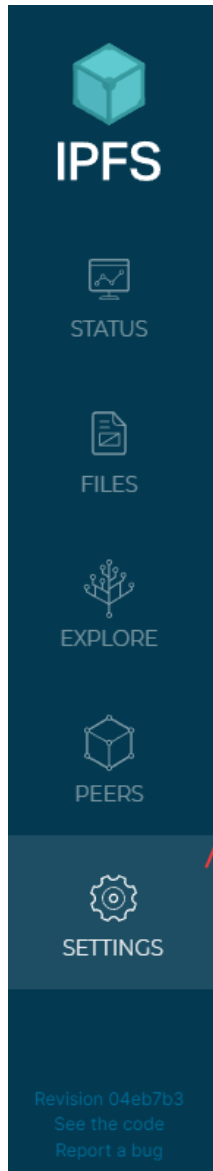


Step 4 (do every time launch)


- *App folder*: click **run.bat**.
- *Smart_contract folder*: click **localnode.bat** first. When the account list is shown, click **deploy.bat**.
- Start IPFS desktop.

Step 5 (do every time launch)

- Go to localhost:5173
- For each imported MetaMask account: profile icon → Settings → Advanced → Clear activity tab data

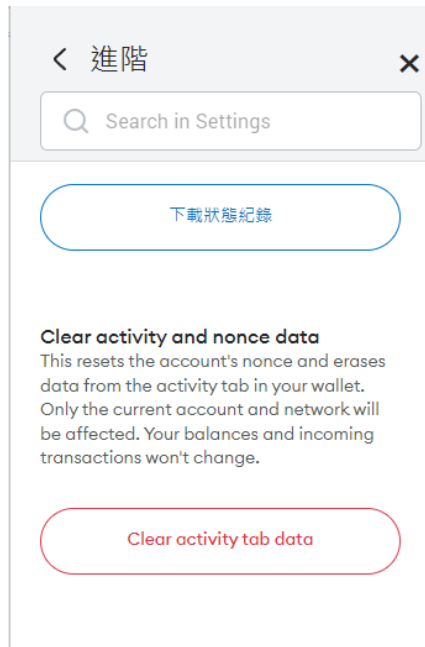

- Connect to a MetaMask wallet account, renew the crypto keypair.

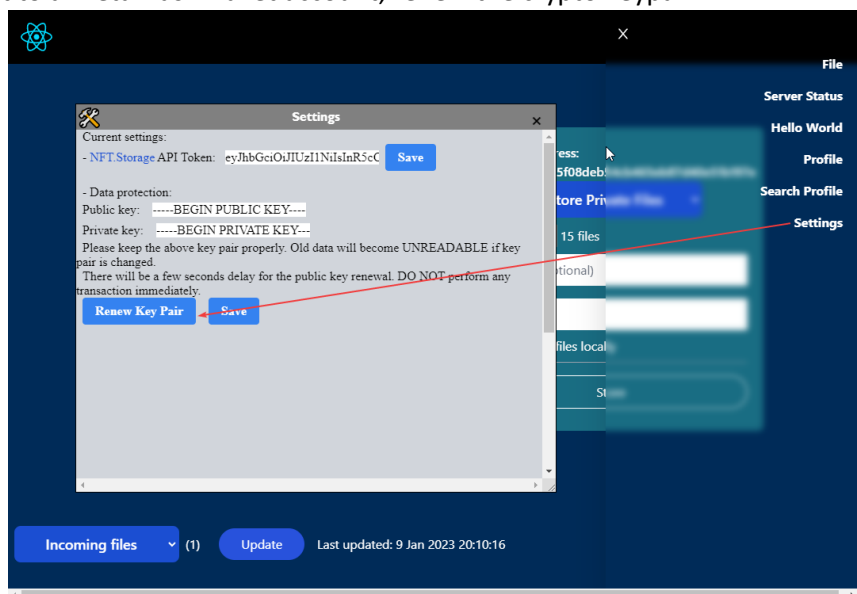

- At this time, the system should be working.