

The screenshot shows the VS Code editor with the following components:


- EXPLORER:** The file tree on the left shows the project structure. The `routes` folder is expanded, and `app.js` is selected.
- EDITOR:** The `app.js` file is open. The following code is visible:

```
25 // **** connect DB
26 const connectDb = require('./db/connect')
27
28 // Routers
29 const authRouter = require('./routes/auth')
30 const jobsRouter = require('./routes/jobs')
31
32 // error handler
33 const notFoundMiddleware = require('./middleware/not-found')
34 const errorHandlerMiddleware = require('./middleware/error-handler')
35
36 app.use(express.json())
37 // extra packages
38
39 // routes
40 app.use('api/v1/auth', authRouter)
41 app.use('api/v1/jobs', jobsRouter)
42
43 app.use(notFoundMiddleware)
44 app.use(errorHandlerMiddleware)
45
46 /*
47 *****
```

The `authRouter` and `jobsRouter` are highlighted with a red box. The `router.post('/register', register)` line in the `auth.js` file is also highlighted with a red box.


- TERMINAL:** The terminal at the bottom shows the server output:

```
Server is listening on port 5000...
[nodemon] restarting due to changes...
[nodemon] starting 'node app.js'
Server is listening on port 5000...
[nodemon] restarting due to changes...
[nodemon] starting 'node app.js'
Server is listening on port 5000...
[nodemon] restarting due to changes...
[nodemon] starting 'node app.js'
Server is listening on port 5000...
[nodemon] restarting due to changes...
[nodemon] starting 'node app.js'
Server is listening on port 5000...
[nodemon] restarting due to changes...
[nodemon] starting 'node app.js'
Server is listening on port 5000...
```

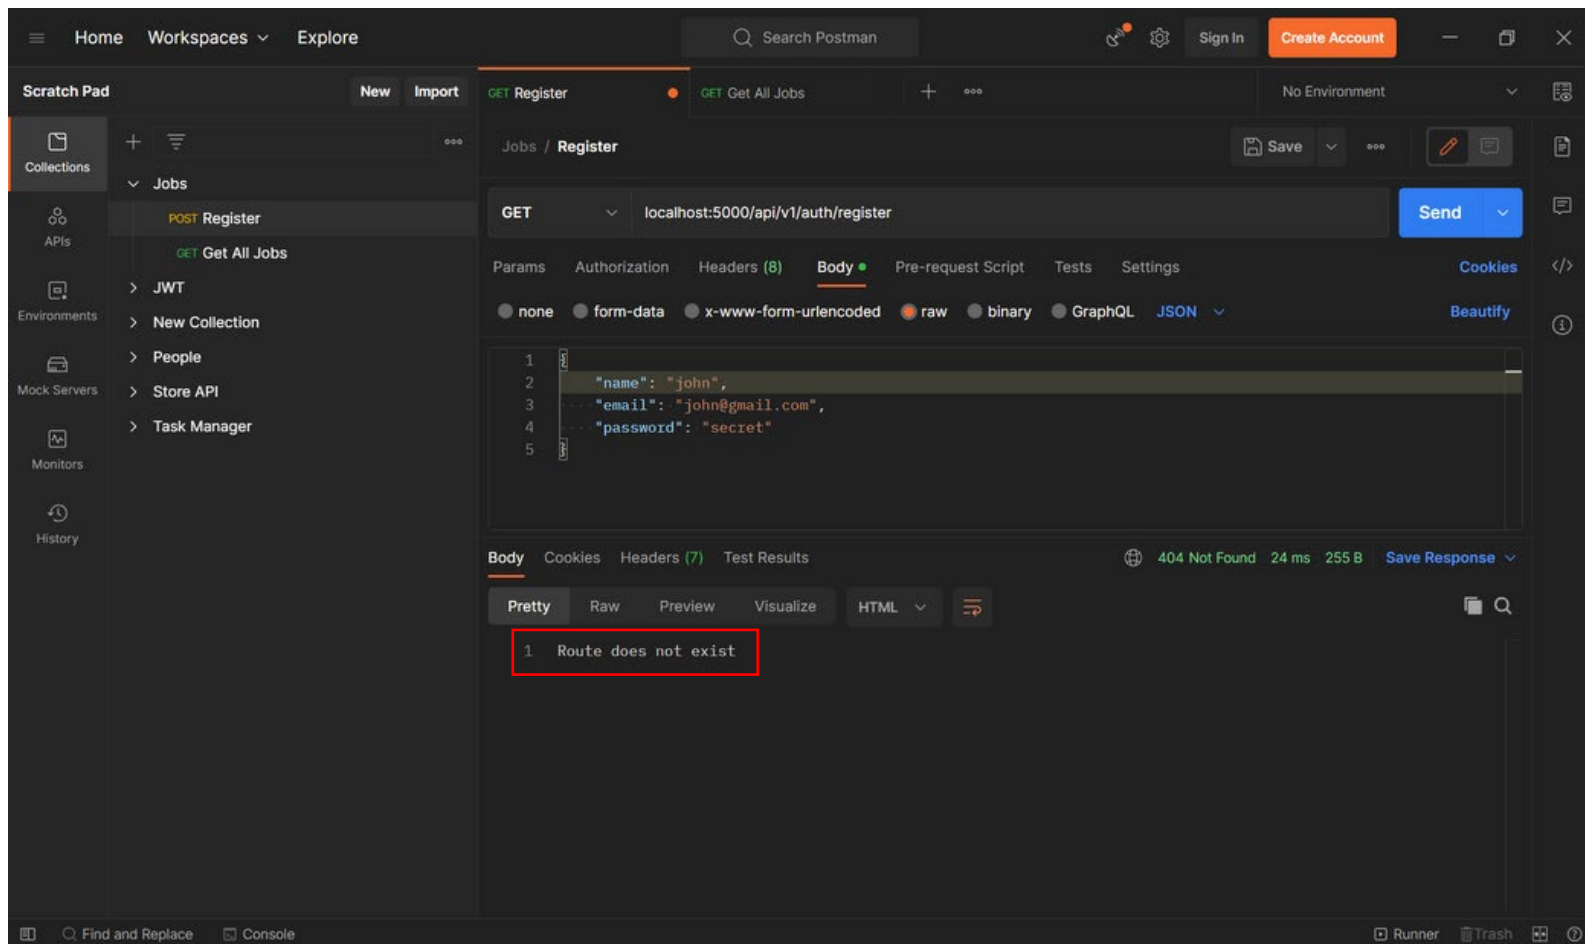

Route does not exist

How to fix

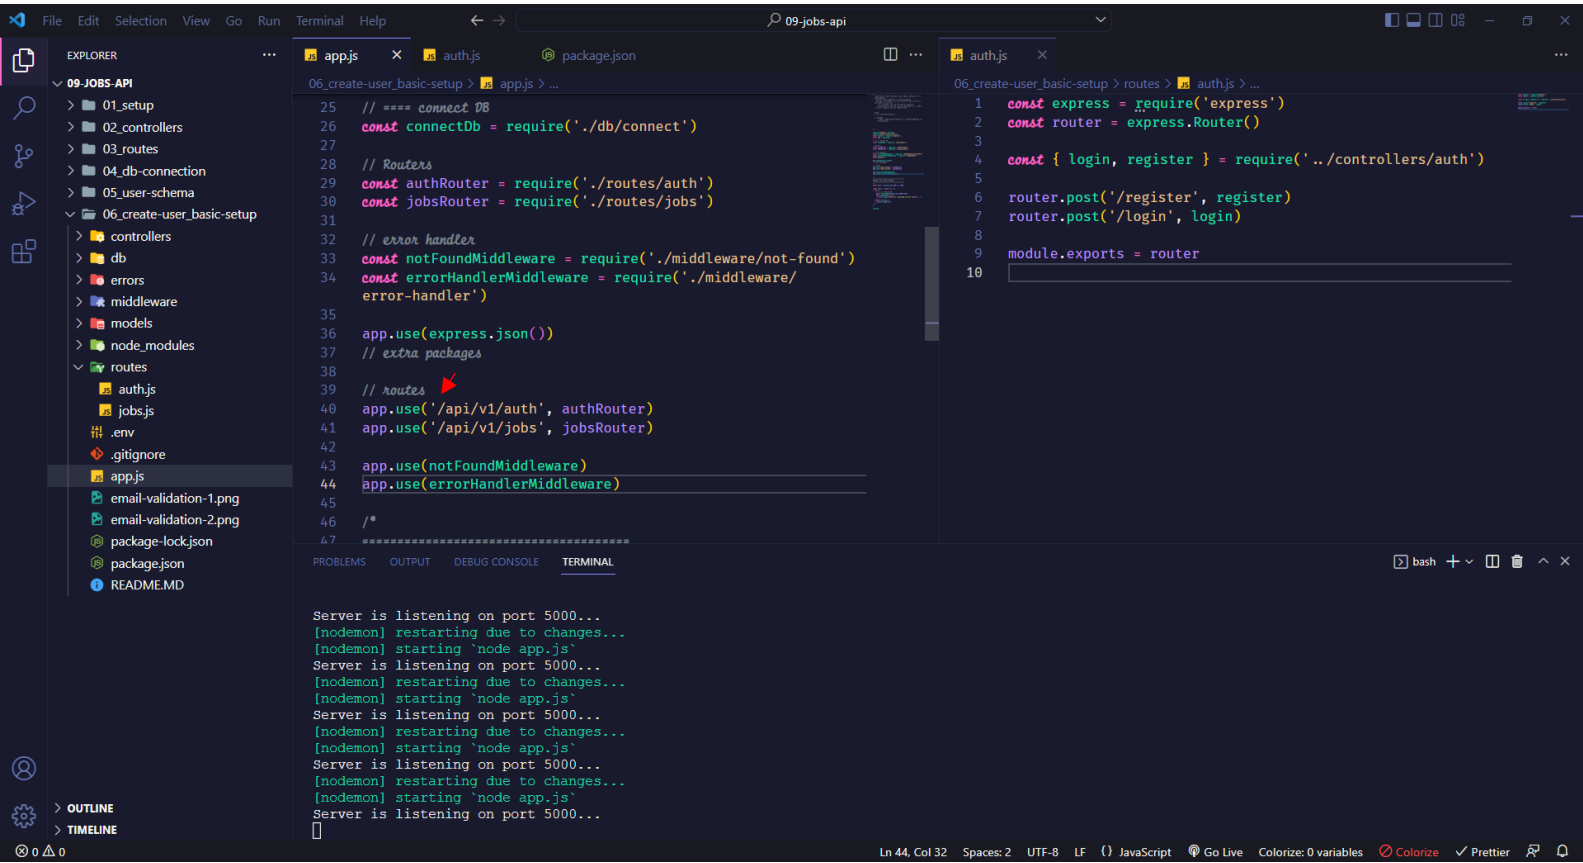

thêm / vào trước api >> /api chứ ko phải api/

