

HomeWorkspacesReportsExplore

My Workspace

NewImport

Collections

APIs

Environments

Mock Servers

Monitors

History

You don't have any collections

Collections let you group related requests, making them easier to access and run.

Create a new Collection

GETlocalhost:5000/api/...

localhost:5000/api/people

GETlocalhost:5000/api/people

Send

ParamsAuthorizationHeaders (7)BodyPre-request ScriptTestsSettingsCookies

Query Params

KEY	VALUE	DESCRIPTION	Bulk Edit
Key	Value	Description	

BodyCookiesHeaders (7)Test Results

200 OK12 ms378 BSave Response

PrettyRawPreviewVisualizeJSON

```
1 {
2   "success": true,
3   "data": [
4     {
5       "id": 1,
6       "name": "john"
7     },
8     {
9       "id": 2,
10      "name": "peter"
11     },
12     {
13       "id": 3,
```

Find and Replace

Console

BootcampRunnerTrash

Post Request

HomeWorkspacesReportsExplore

My Workspace

NewImport

Collections

APIs

Environments

Mock Servers

Monitors

History

You don't have any collections

Collections let you group related requests, making them easier to access and run.

Create a new Collection

POSTlocalhost:5000/a...

No Environment

localhost:5000/api/people

Save

Send

POST

localhost:5000/api/people

Params

Authorization

Headers (8)

Body

Pre-request Script

Tests

Settings

none

form-data

x-www-form-urlencoded

raw

binary

GraphQL

Text

1

Body

Cookies

Headers (7)

Test Results

Pretty

Raw

Preview

Visualize

JSON

13

14

15

16

17

18

19

20

21

22

23

24

25

"id": 3,

"name": "susan"

}

{

"id": 4,

"name": "anna"

}

{

"id": 5,

"name": "emma"

}

]

}

Find and Replace

Console

Bootcamp

Runner

Trash

Headers (8)

HomeWorkspacesReportsExplore

My Workspace

NewImport

Collections

APIs

Environments

Mock Servers

Monitors

History

You don't have any collections

Collections let you group related requests, making them easier to access and run.

Create a new Collection

POSTlocalhost:5000/a...

No Environment

localhost:5000/api/people

Save

Send

POST

localhost:5000/api/people

Params

Authorization

Headers (9)

Body

Pre-request Script

Tests

Settings

none

form-data

x-www-form-urlencoded

raw

binary

GraphQL

JSON

1

2

3

"name": "john"

Body

Cookies

Headers (7)

Test Results

Pretty

Raw

Preview

Visualize

JSON

13

14

15

16

17

18

19

20

21

22

23

24

25

"id": 3,

"name": "susan"

}

{

"id": 4,

"name": "anna"

}

{

"id": 5,

"name": "emma"

}

]

}

Find and Replace

Console

Bootcamp

Runner

Trash

ngay khi chúng ta thêm data vào body thì header nhảy lên thành 9

The screenshot shows the Postman interface with a workspace named "My Workspace". A POST request is configured to "localhost:5000/api/people". The "Headers" tab is selected, showing the following headers:

Header	Value
Postman-Token	<calculated when request is sent>
Content-Type	application/json
Content-Length	<calculated when request is sent>
Host	<calculated when request is sent>

The "Body" tab is selected, showing a JSON response:

```
1 {
2   "success": true,
3   "person": "john"
4 }
```

The status bar indicates "201 Created" with a response time of "57 ms" and a size of "272 B".


và có thêm trường Content-Type = JSON

The screenshot shows the Postman interface with the same workspace. The POST request is still configured to "localhost:5000/api/people". The "Body" tab is selected, showing a JSON response:


```
1 {
2   "success": false,
3   "msg": "please provide name value"
4 }
```

The status bar indicates "400 Bad Request" with a response time of "6 ms" and a size of "295 B".



Setup Variable

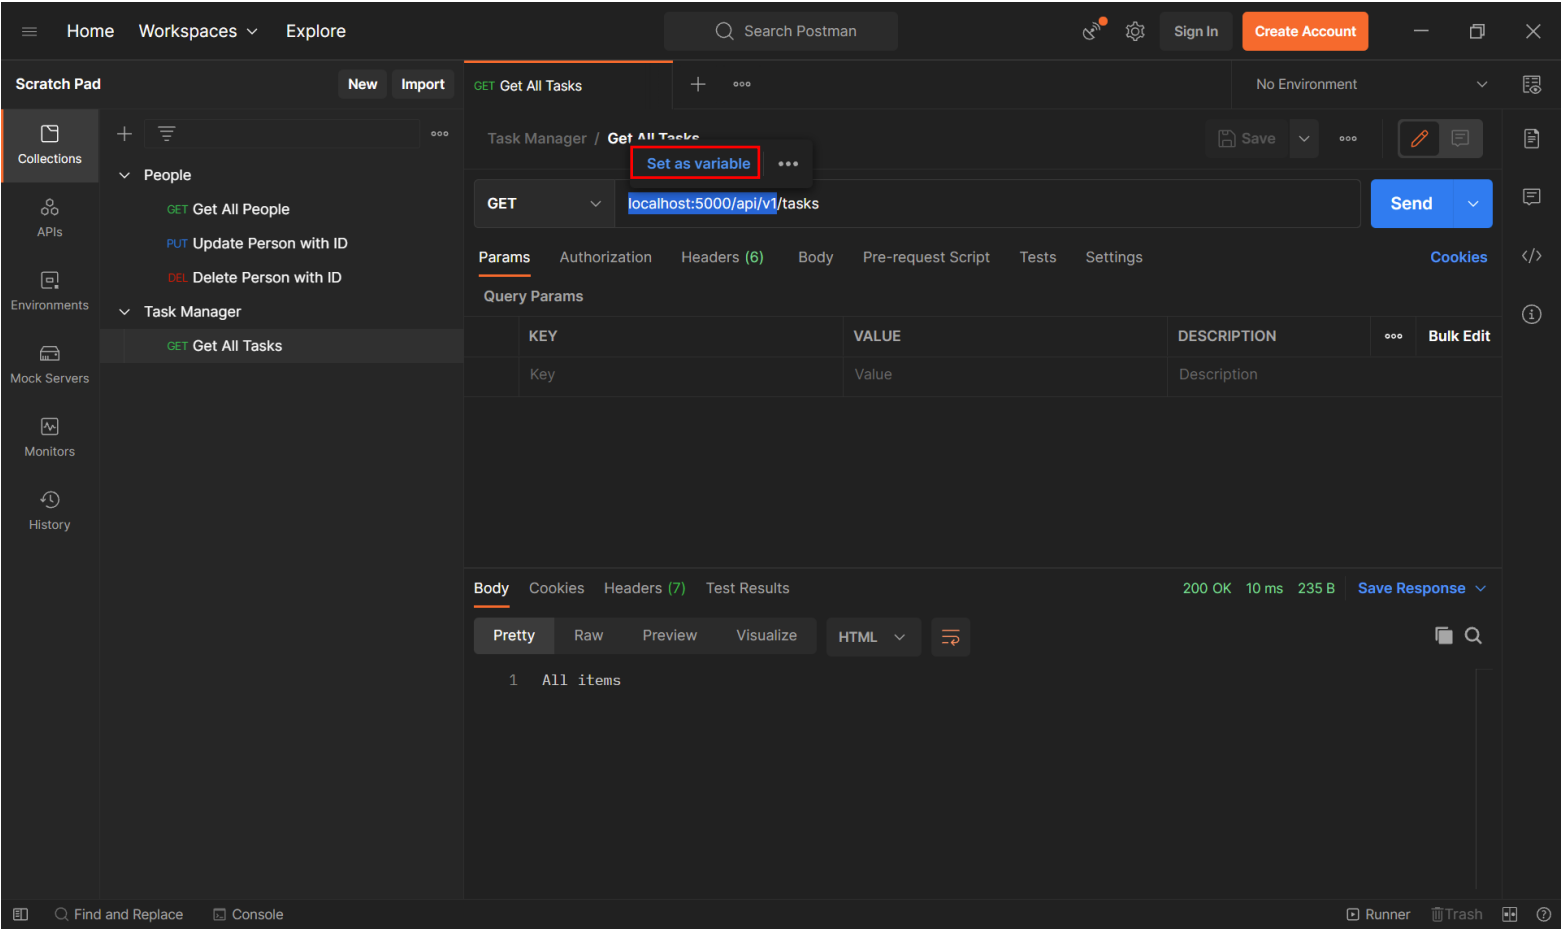

cách 1: bôi đen text cần set variable >> sẽ hiện ra

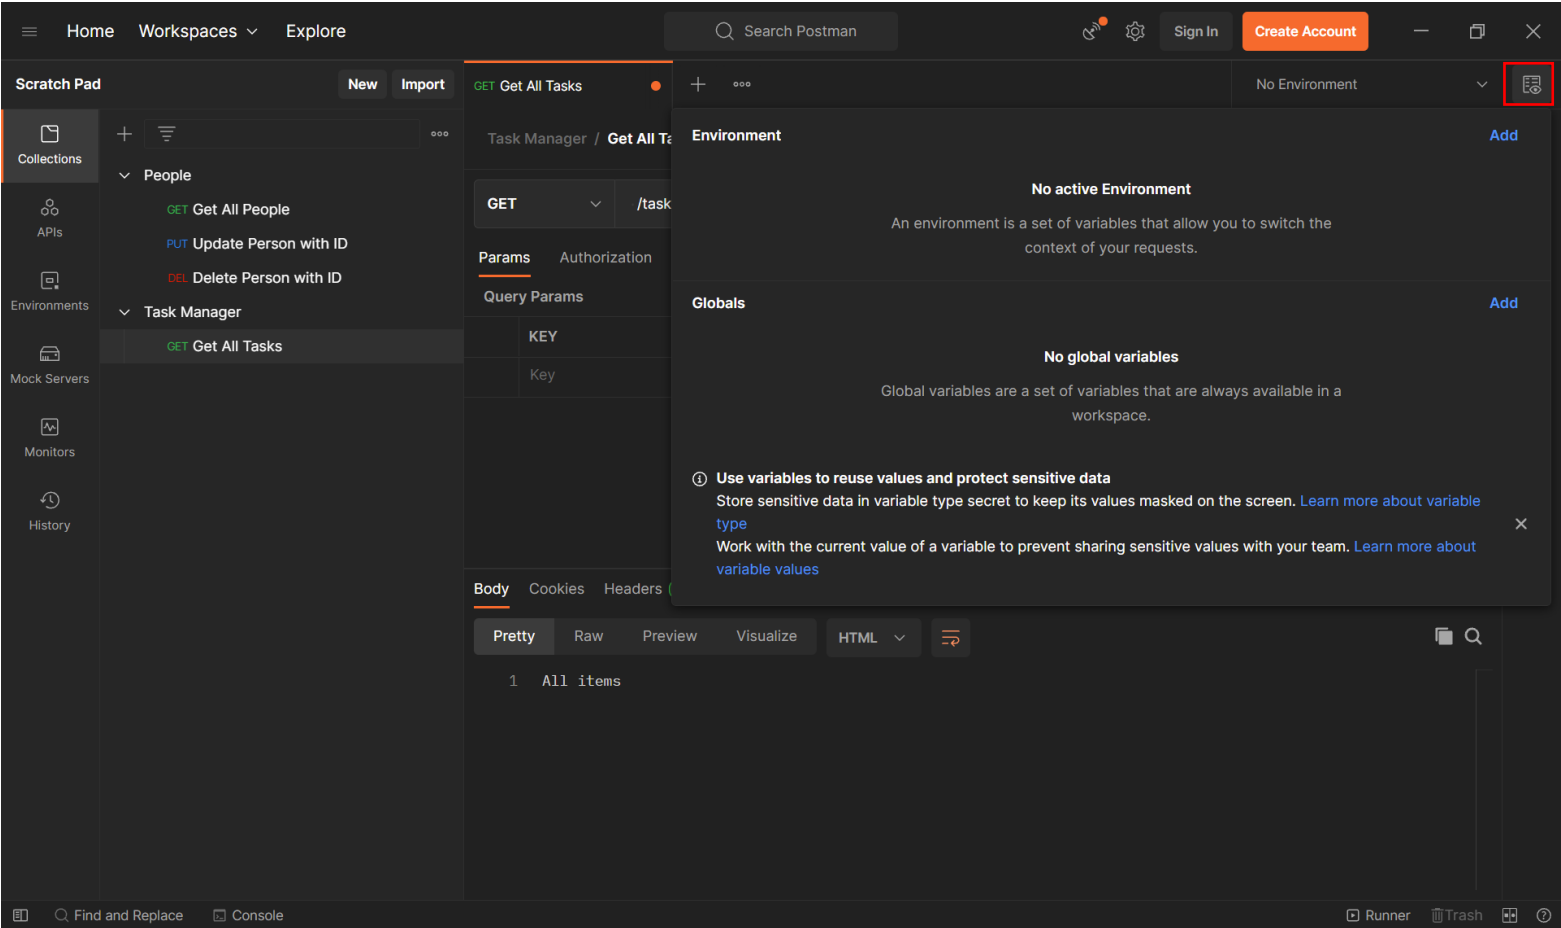

cách 2:

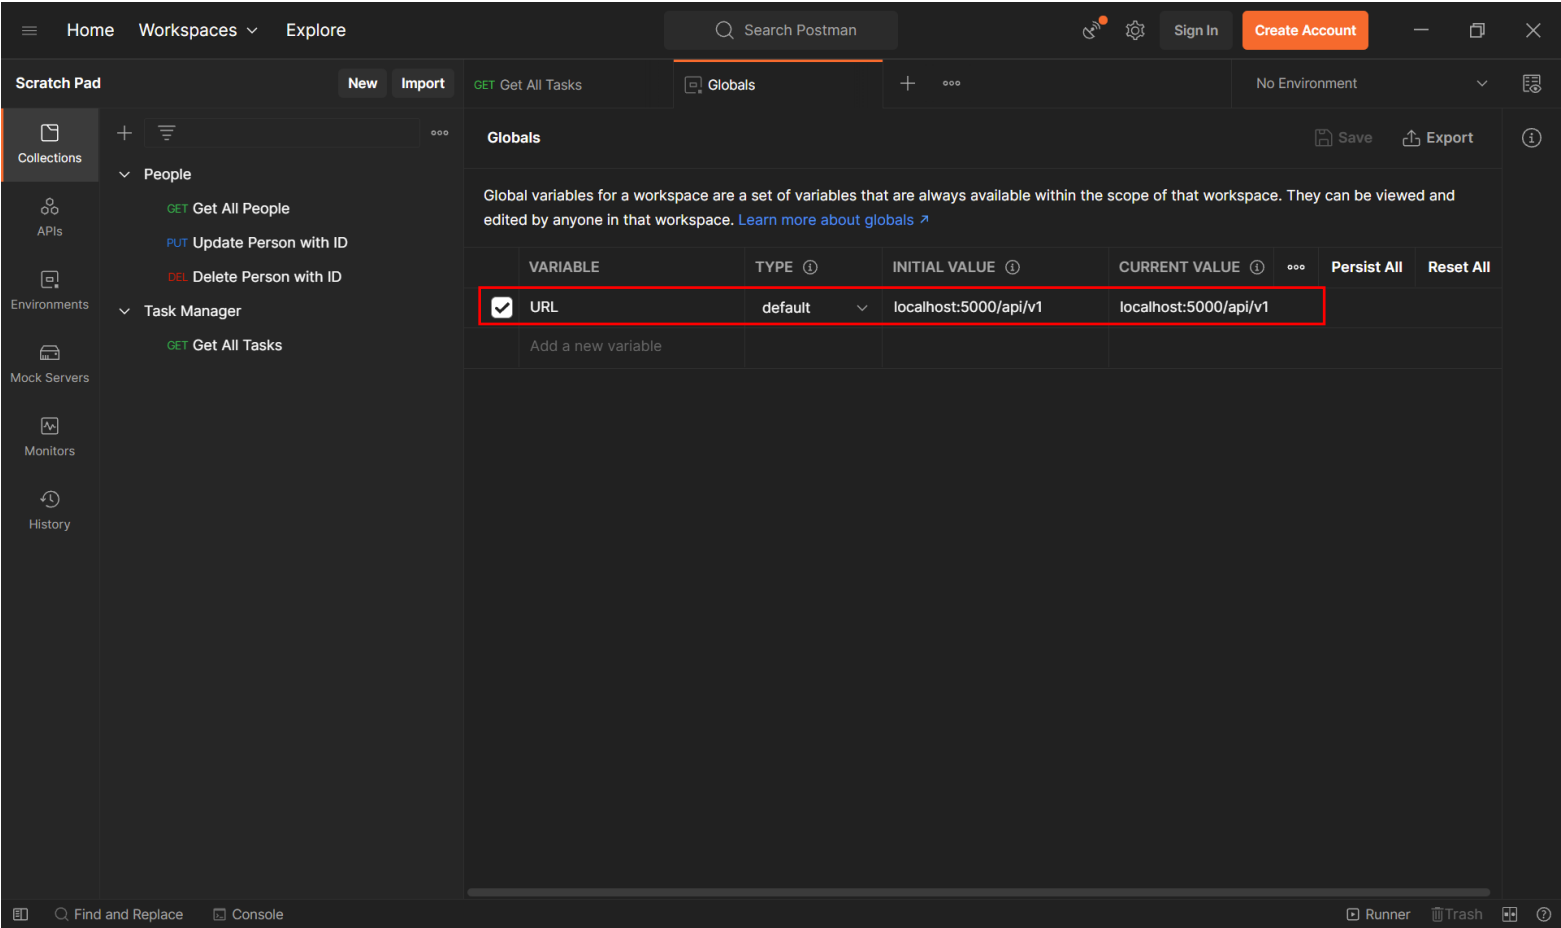

cách sử dụng >>> {{ Variable }}

Query Parameter

HomeWorkspacesExplore

Search Postman

Sign InCreate Account

Scratch Pad

NewImport

GET Get All Products (TESTING)GET Get All Products

No Environment

Collections

New Collection

People

Store API

GET Get All Products

GET Get All Products (TESTING)

Task Manager

Store API / Get All Products

Save

Send

GET

{{URL}}/products

Params

Authorization

Headers (6)

Body

Pre-request Script

Tests

Settings

Cookies

Query Params

KEY	VALUE	DESCRIPTION
Key	Value	Description

Body

Cookies

Headers (7)

Test Results

200 OK17 ms259 B

Save Response

Pretty

Raw

Preview

Visualize

JSON

1

2

3

"msg": "products route"

Find and Replace

Console

Runner

Trash

HomeWorkspacesExplore

Search Postman

Sign InCreate Account

Scratch Pad

NewImport

GET Get All Products (TESTING)GET Get All Products

No Environment

Collections

New Collection

People

Store API

GET Get All Products

GET Get All Products (TESTING)

Task Manager

Store API / Get All Products

Save

Send

GET

{{URL}}/products?name=joe

Params

Authorization

Headers (6)

Body

Pre-request Script

Tests

Settings

Cookies

Query Params

KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/> name	joe	
Key	Value	Description

Body

Cookies

Headers (7)

Test Results

200 OK17 ms259 B

Save Response

Pretty

Raw

Preview

Visualize

JSON

1

2

3

"msg": "products route"

Find and Replace

Console



Runner

Trash



ngay khi thêm ? và thêm key=value pair >> tự động đc thêm vào ở ô query params bên dưới >> có thể check và uncheck


Set Token Dynamically in Postman

Check Jobs API >> NodeJS-Smilga >> getAllJobs

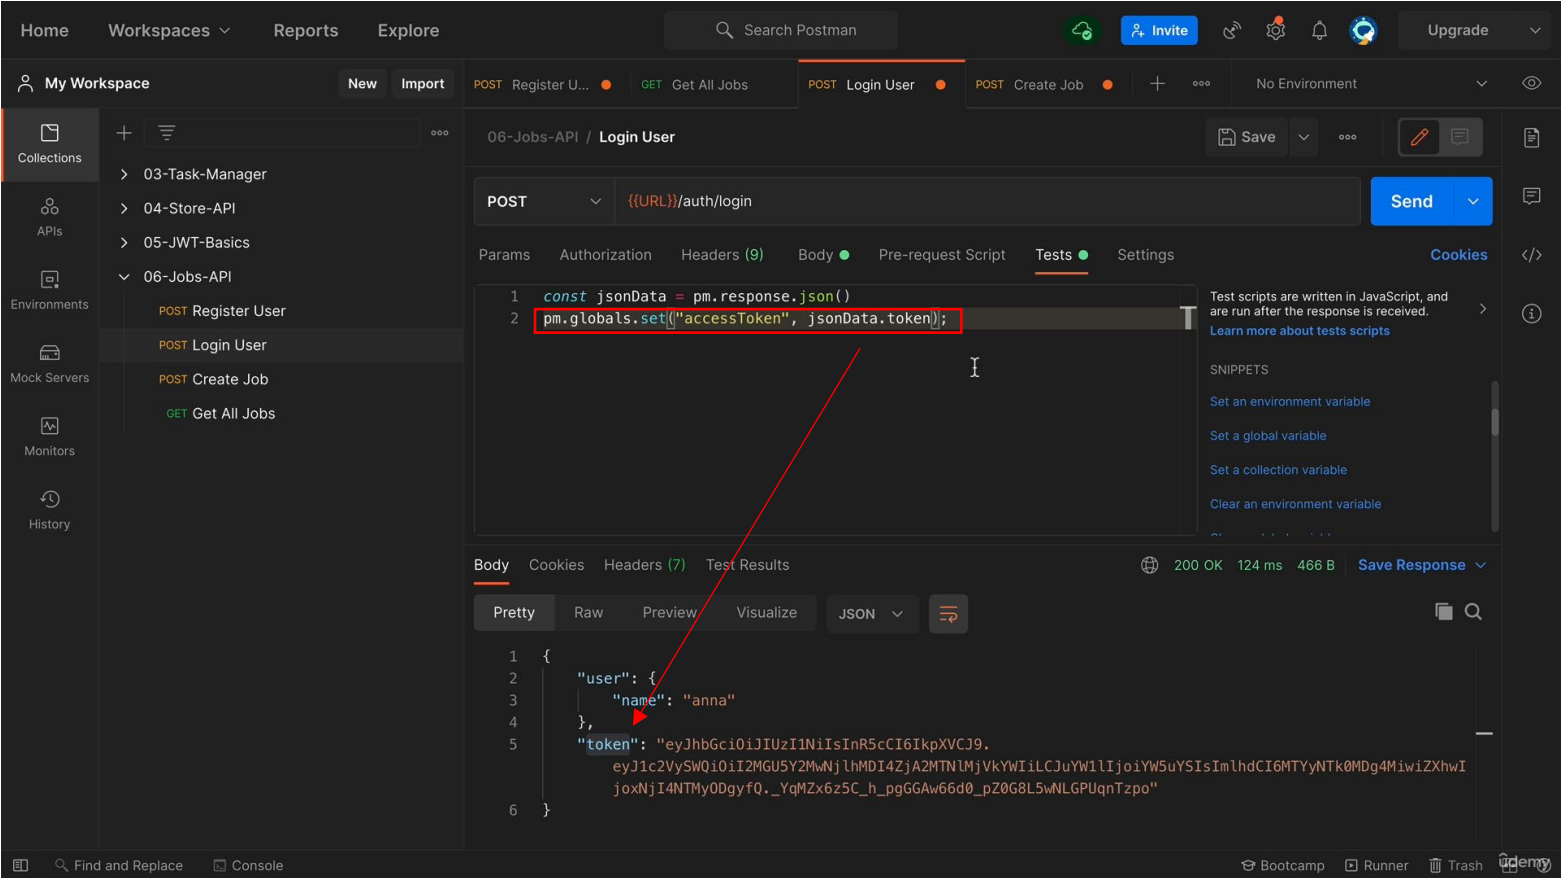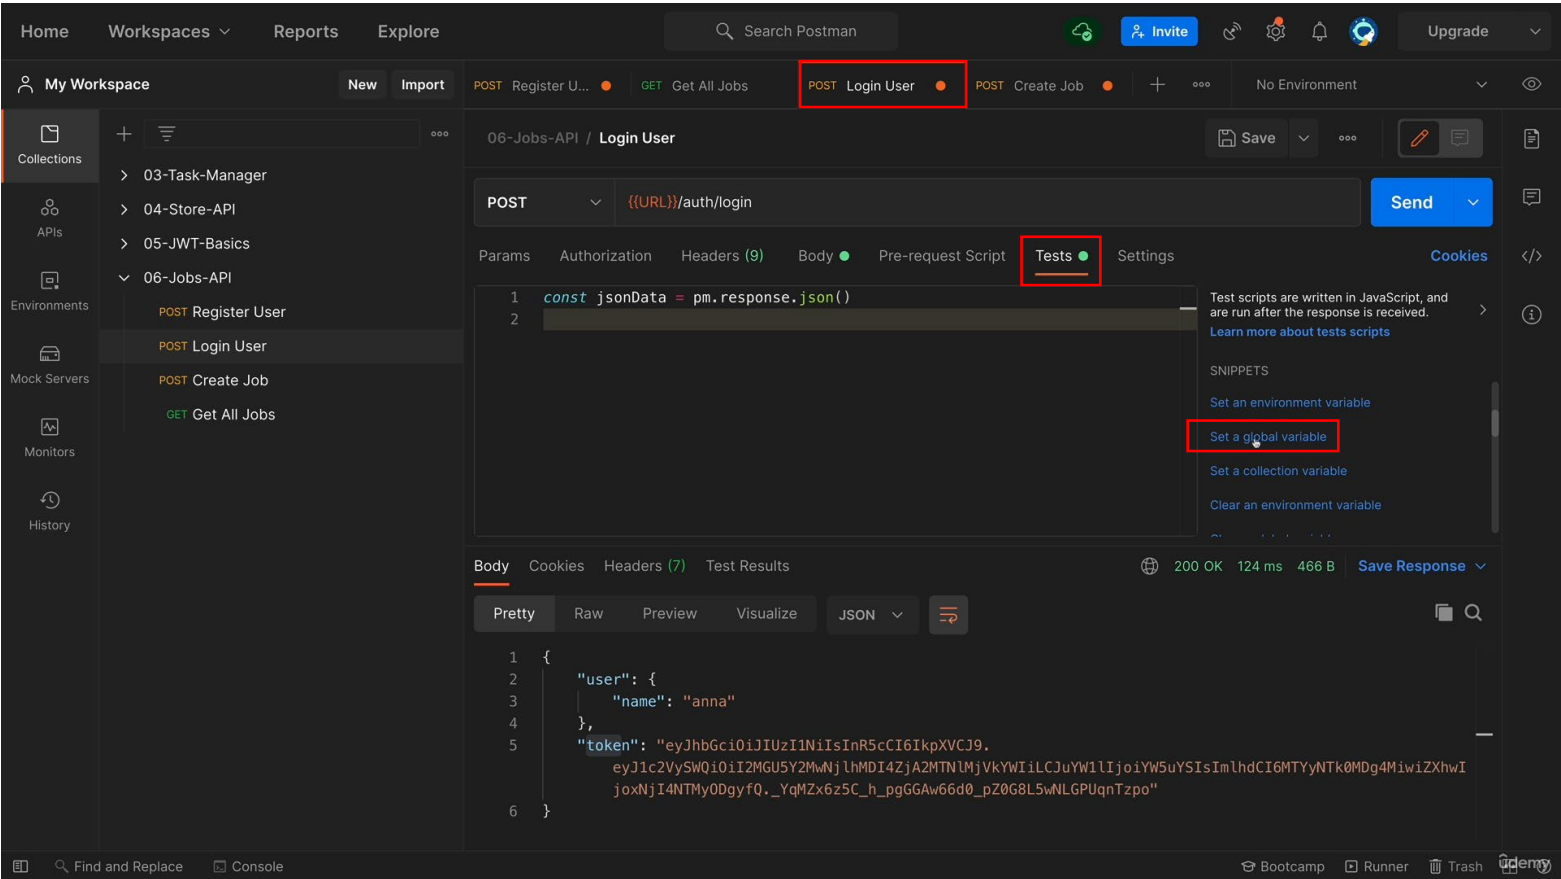


pm là postman

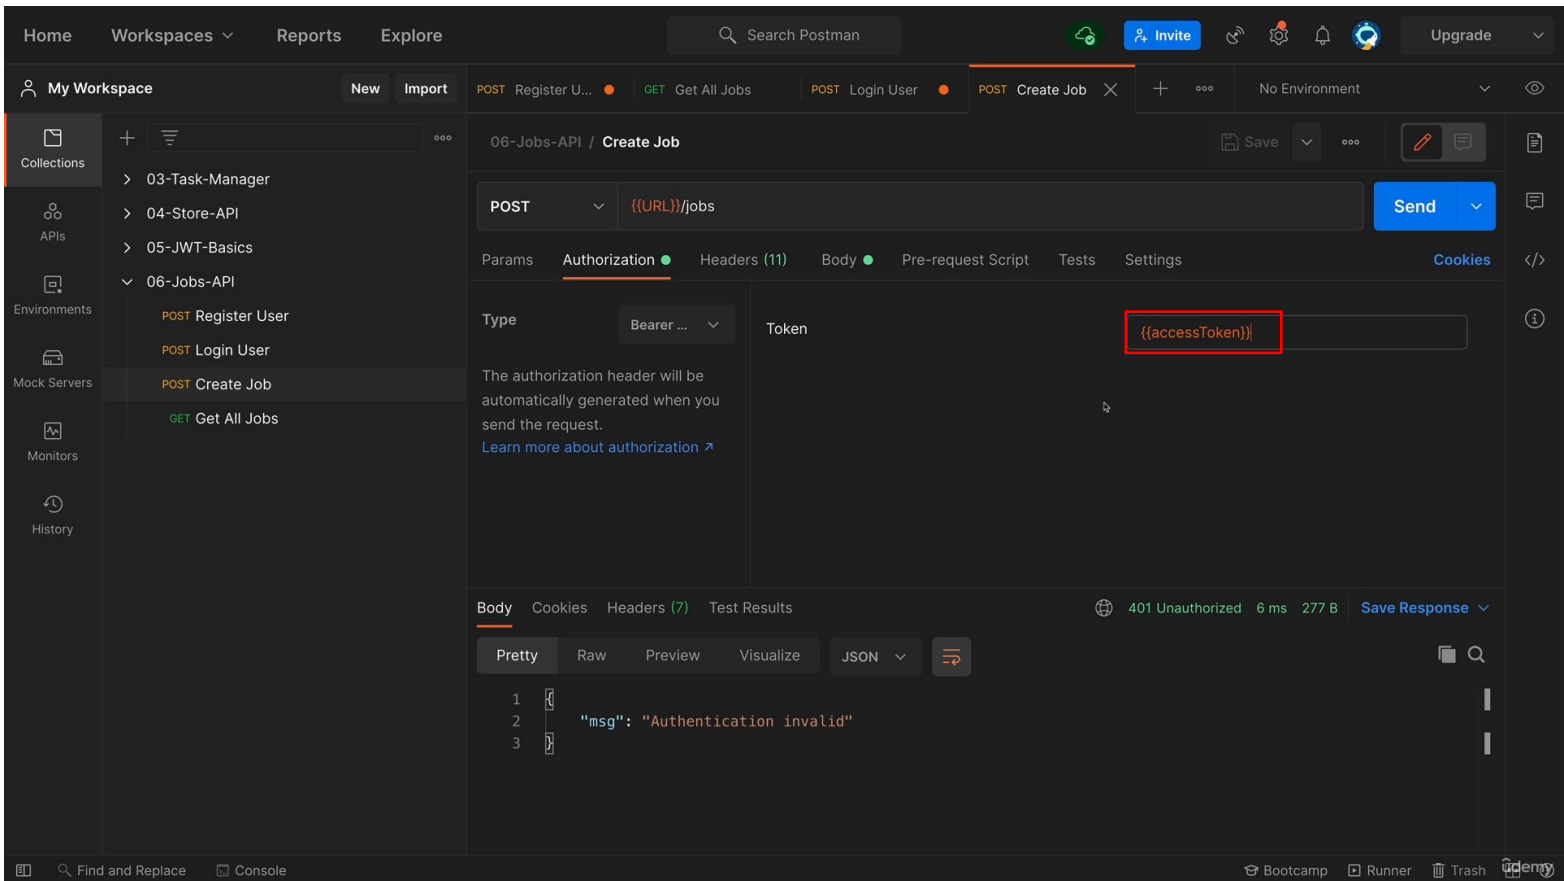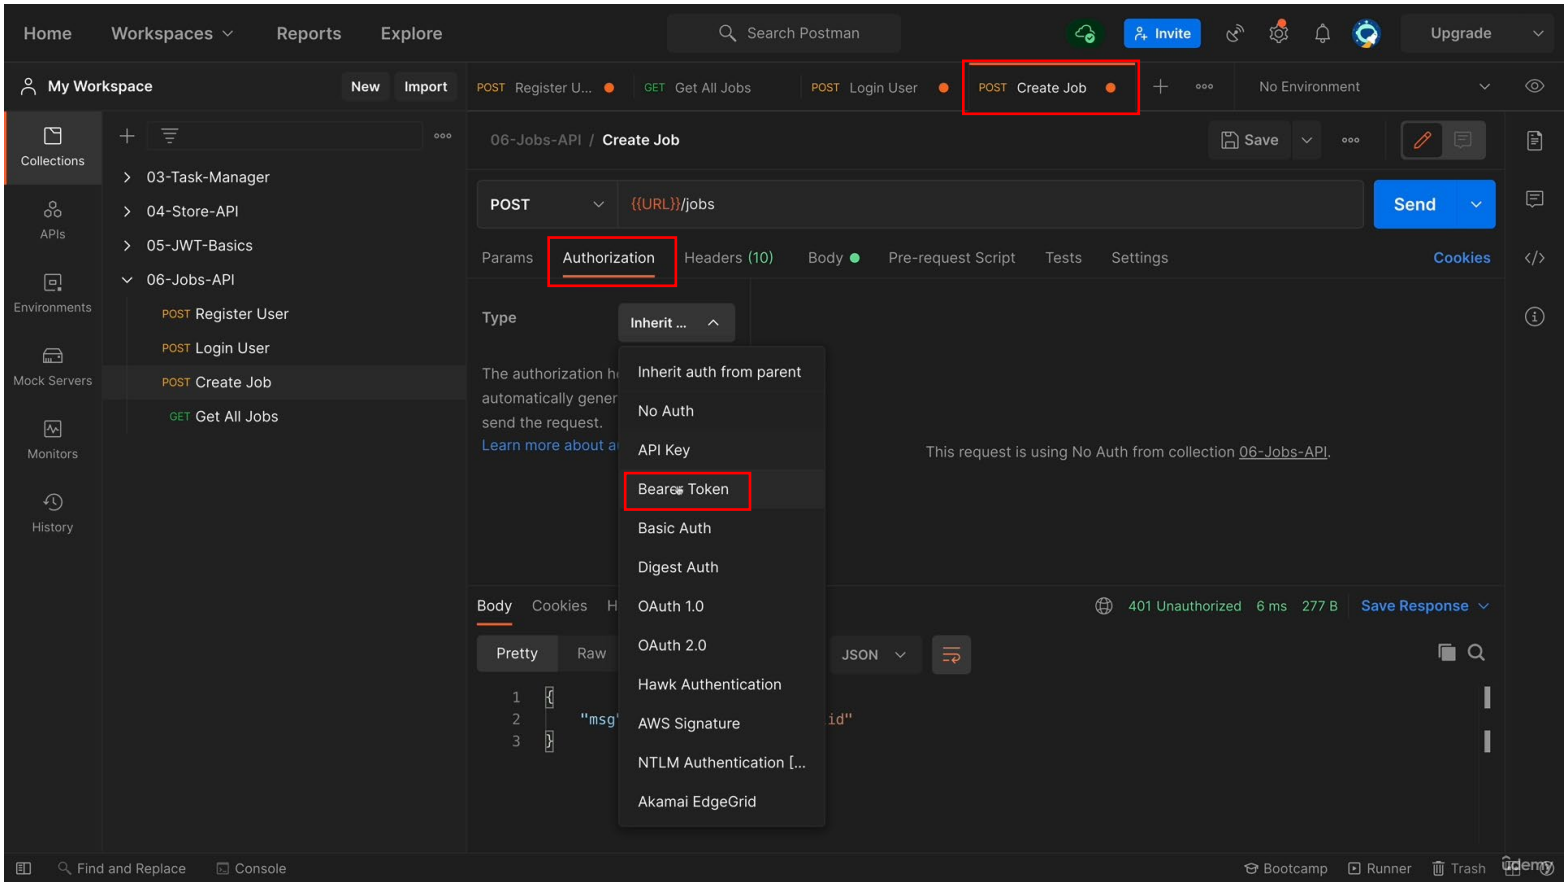

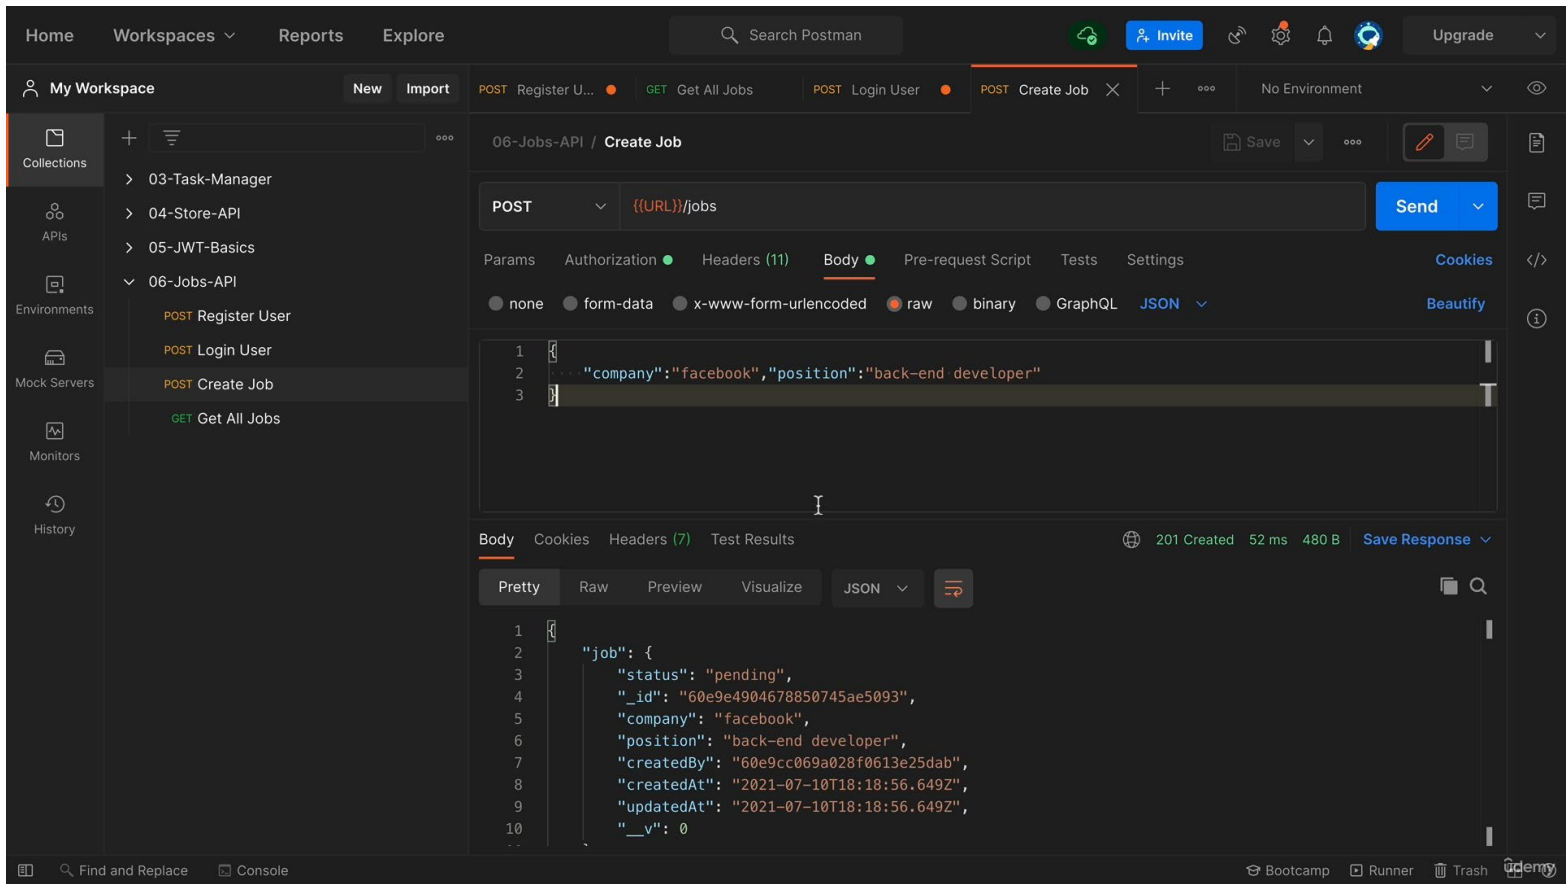

lúc này có thể sử dụng

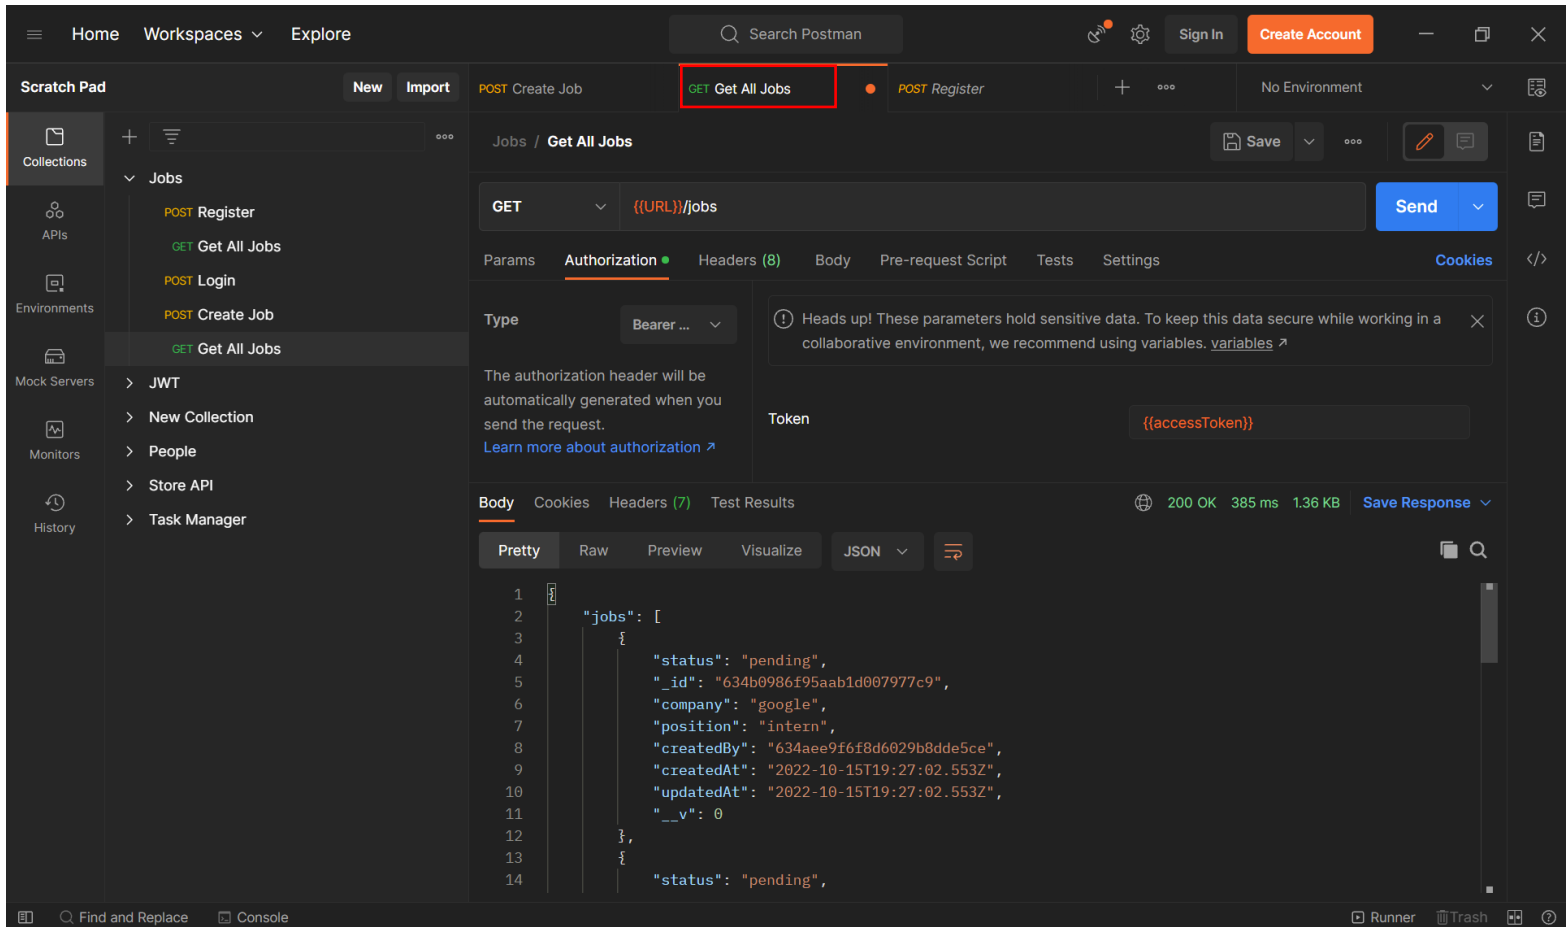

test getAllJobs

The screenshot shows the Postman interface with a workspace named "My Workspace". The left sidebar lists collections, including "06-Jobs-API" which contains the "POST Register User" request. The main panel shows the details of this request, including the URL, headers, and the "Tests" tab. The test script is as follows:



```
1 const jsonData = pm.response.json()
2 pm.globals.set("accessToken", jsonData.token);
```

The response body is displayed in JSON format:

```
{
  "user": {
    "name": "anna"
  },
  "token": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VySw0iOiI2MGU5Y2MwNjIhMDI4ZjA2MTNlMjVhYWIiLCJyZW1iOiIyYXV5YSIsImhhdCI6MTYyNTkzNDg1NSwiZXhwIjoxNjI4NTI0ODU1fQ.P29xuwwHYjlioZWGqTlFDH0-8GPEZuJpuUzMhz4ww1k"
```

làm tương tự ở register

Upload Image to Postman

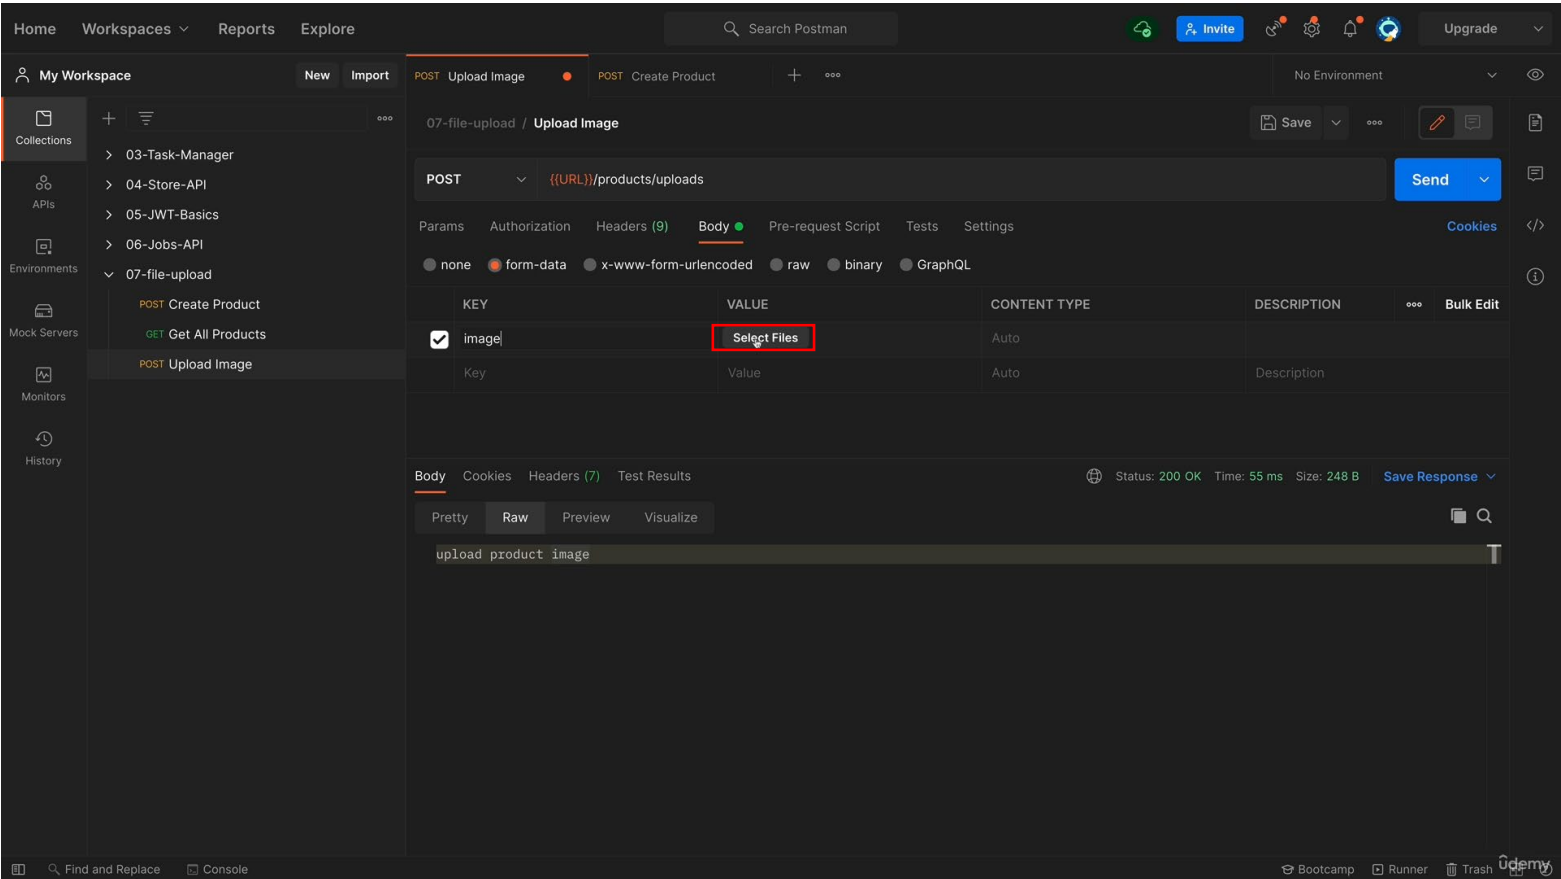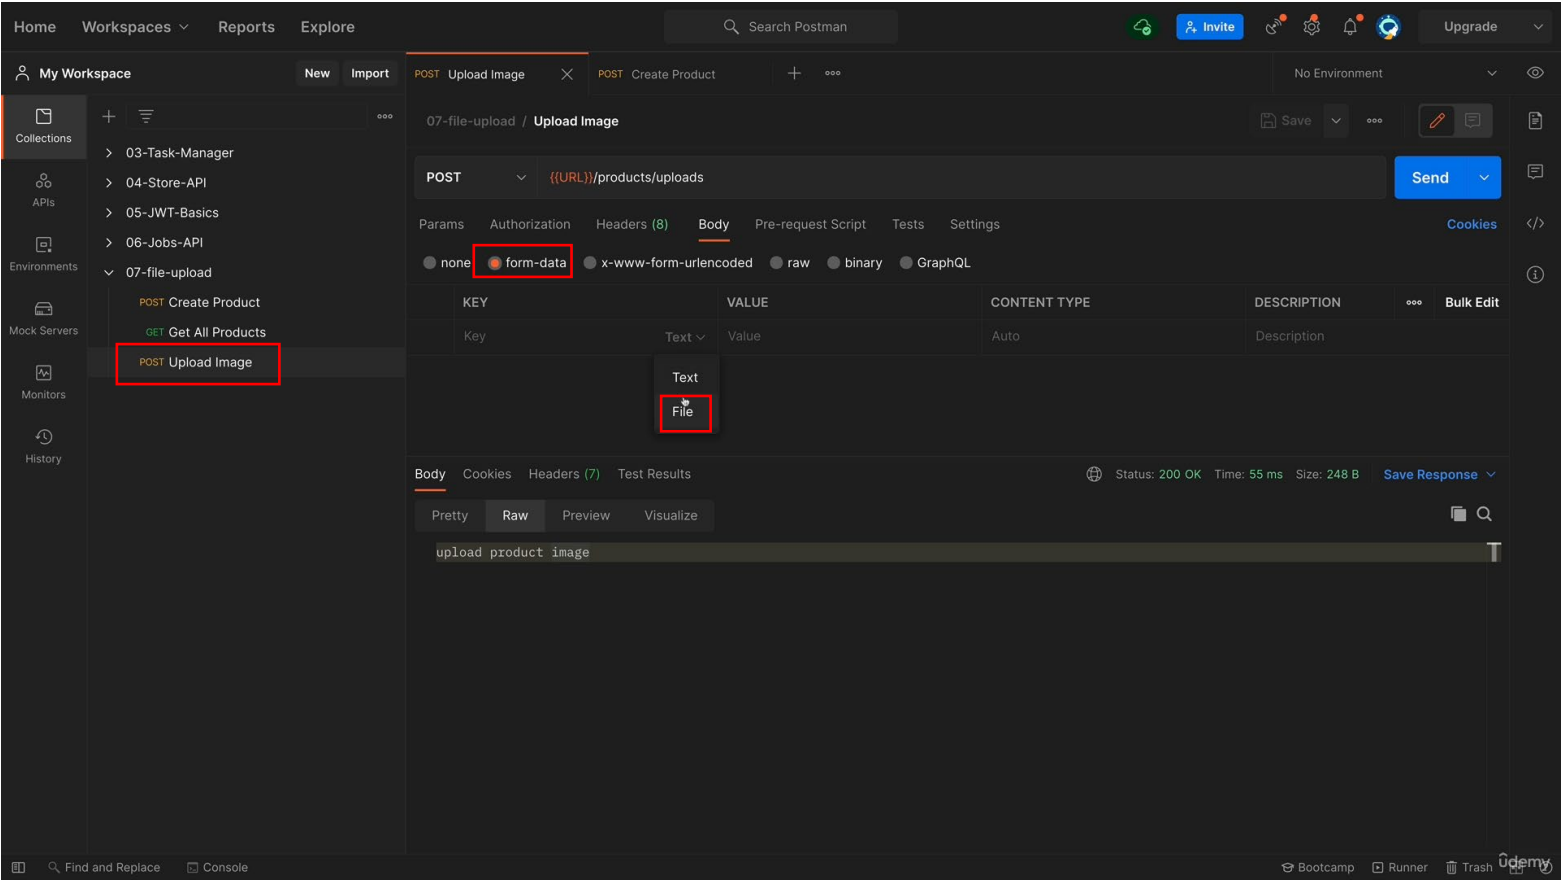

HomeWorkspaces▼ReportsExplore

My Workspace

NewImport

03-Task-Manager

04-Store-API

05-JWT-Basics

06-Jobs-API

07-file-upload

POSTCreate Product

GETGet All Products

POSTUpload Image

07-file-upload / U

POST

ParamsAuth

noneform

KEY	VALUE	CONTENT TYPE	DESCRIPTION	Bulk Edit
<input checked="" type="checkbox"/> image	Select Files	Auto		
Key	Value	Auto	Description	

BodyCookiesHeaders (7)Test Results

Status: 200 OKTime: 55 msSize: 248 BSave Response

PrettyRawPreviewVisualize

upload product image

computer-1.jpeg

computer-2.jpeg

computer-3.jpeg

computer-4.jpeg

computer-5.jpeg

computer-6.jpeg

computer-1.jpeg

JPEG image - 63 KB

InformationShow More

CreatedJul 26, 2021 at 12:39 PM

ModifiedJul 26, 2021 at 12:39 PM

Last accessedJul 26, 2021 at 11:57 AM

Save

Send

Cookies

Find and Replace

Console

BootcampRunnerTrash

Odemy

Setup Environment in Postman

[illegible]

Ví dụ, project trước chúng ta setup {URL} là localhost:3000/api/v1 >> nhưng project này chúng ta muốn port là 5000

Home

Workspaces ▾

API Network ▾

Reports

Explore

Search Postman

🔄

Invite

🔔

👤

📧

🔒

Upgrade ▾

My Workspace

NewImportOverview

Collections

> 00-testing

> 03-Task-Manager

> 04-Store-API

> 05-JWT-Basics

> 06-Jobs-API

> 07-file-upload

> 10-E-Commerce-DEV

> 11-User-Workflow-DEV

> 12-Express-Session-DEV

> 13-Yelp-Clone-DEV

My Workspace

Add summary to briefly explain what this workspace is all about.

This workspace contains all your collections and environments or integrations created on them.

In this workspace

10 Collections0 APIs0 Environments

Activity

UserEntity

September 16, 2021

johnsmilga edited the 13-Yelp-Clone-DEV collection.
7:46 AM

johnsmilga edited the 12-Express-Session-DEV collection.
7:46 AM

johnsmilga edited the 11-User-Workflow-DEV collection. View Changelog
7:57 AM

September 15, 2021

johnsmilga edited the 11-User-Workflow-DEV collection. View Changelog
7:20 PM

johnsmilga edited the 11-User-Workflow-DEV collection. View Changelog



Environment

No active Environment

An environment is a set of variables that allow you to switch the context of your requests.

GlobalsEdit

VARIABLE	INITIAL VALUE	CURRENT VALUE
URL	localhost:3000/api/v1	localhost:3000/api/v1
PROD_URL	https://jobs-api-06.herokuapp.com/api/v1	https://jobs-api-06.herokuapp.com/api/v1
accessToken		eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VySWQiOiIzMGYyYjY1OTAyMTFjOTAwMDQ0ZmY5MWEiLCJuYWVlIjoieWY1IiwiaWF0IjoxNjEzNTZmM4LClleHAiOjE2... <div><div>📘 Use variables to reuse values in different places. Work with the current value of a variable to prevent sharing sensitive values with your team. Learn more about variable values</div></div>

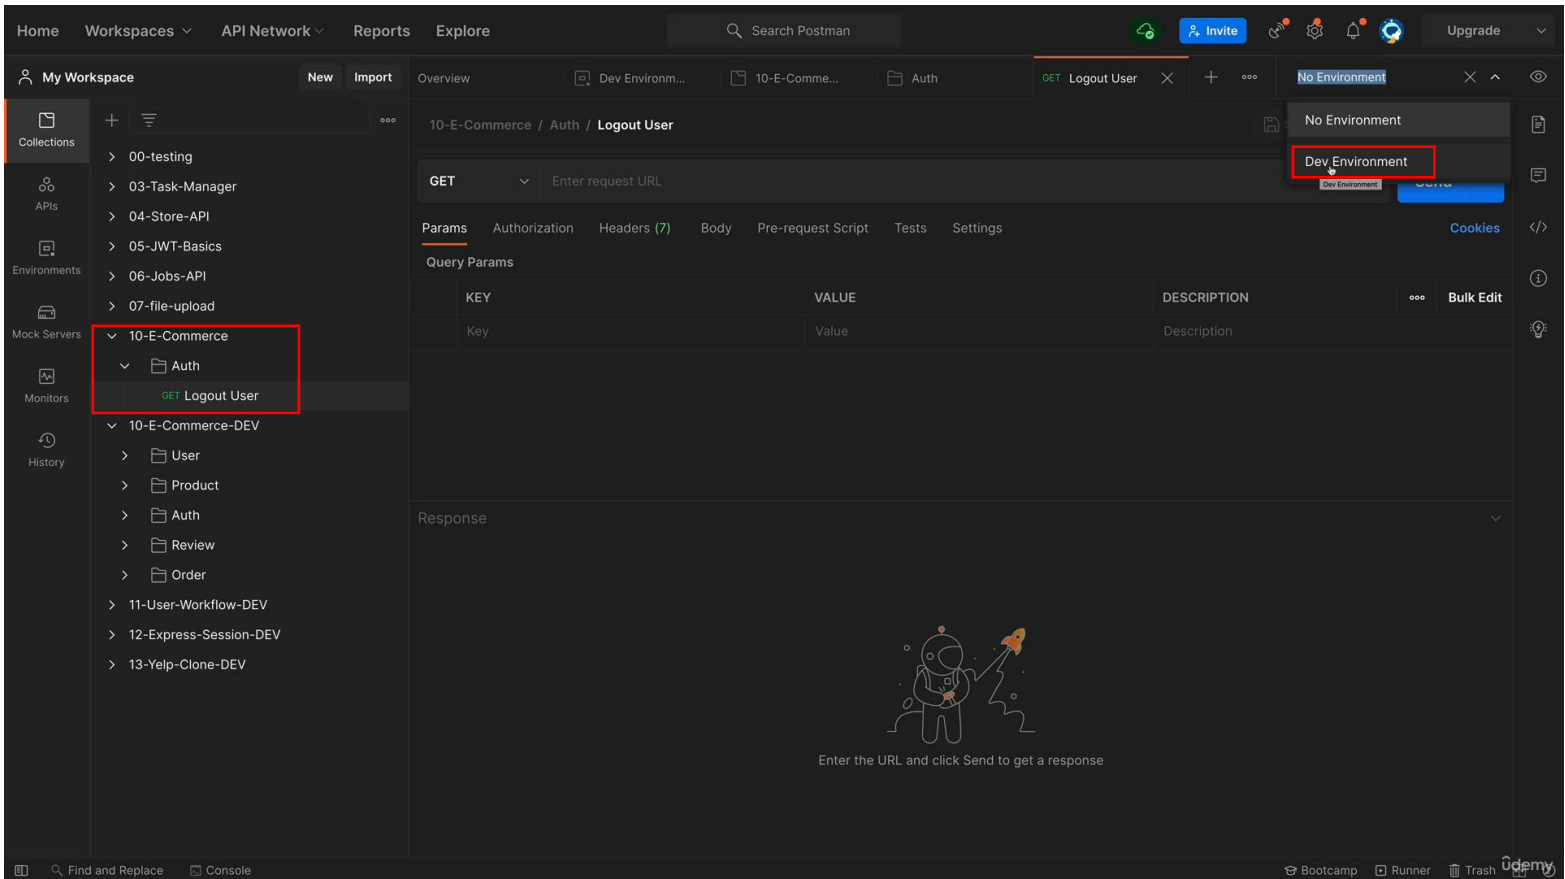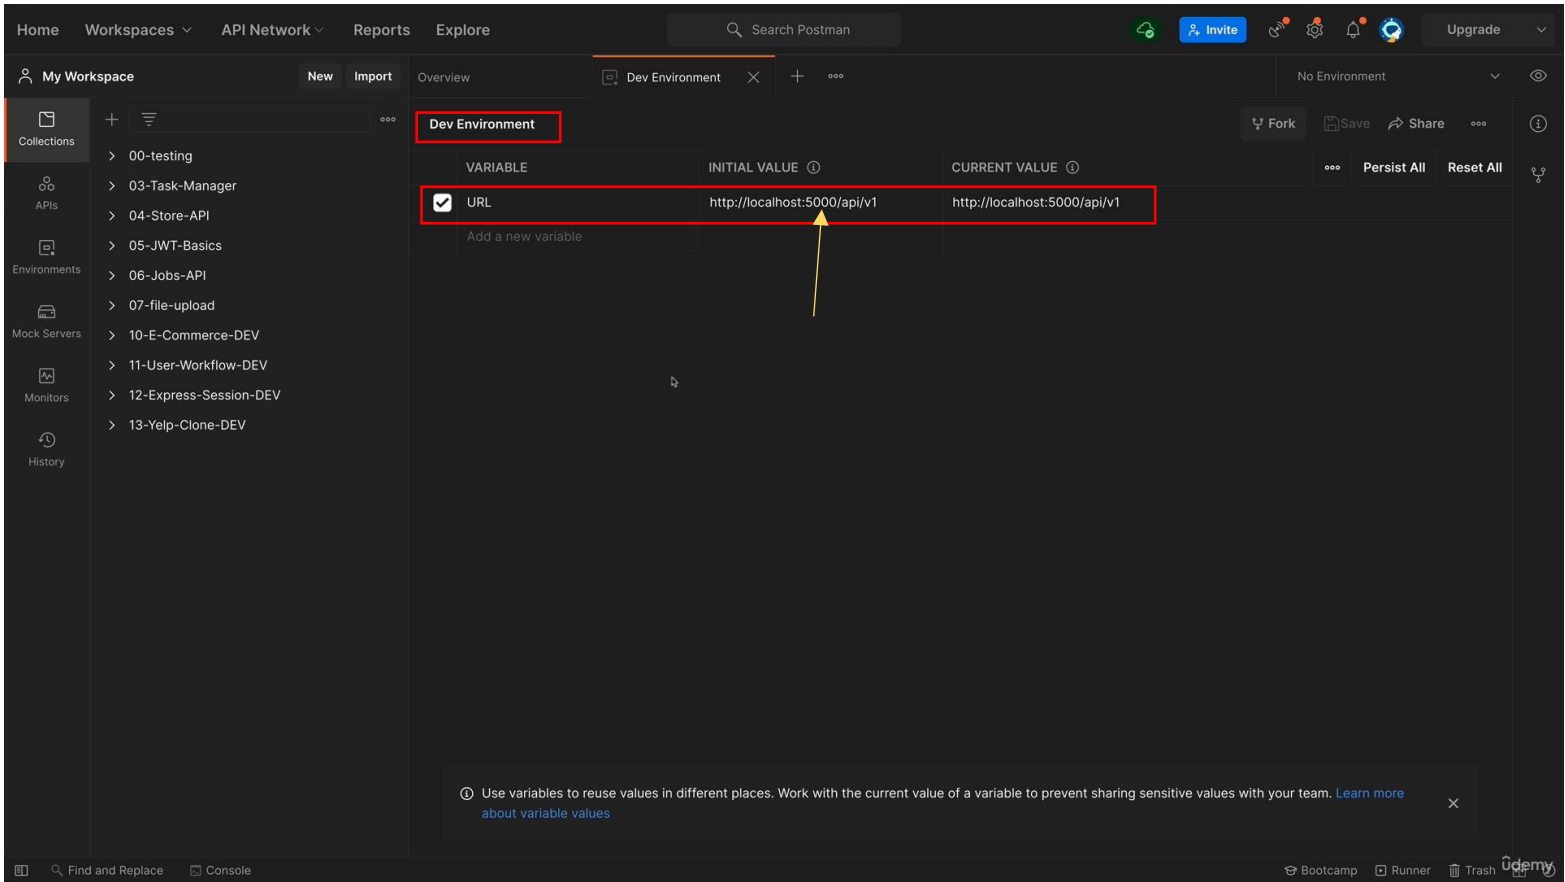

giờ sử dụng chỉ cần chọn Dev Environment là đc

