

Restart cấu hình mailcow

```
mailcow@mail:/opt/mailcow-dockerized$ sudo docker compose down
[+] down 19/19
✓Container mailcowdockerized-ofelia-mailcow-1      Removed
✓Container mailcowdockerized-dockerapi-mailcow-1    Removed
✓Container mailcowdockerized-olefy-mailcow-1        Removed
✓Container mailcowdockerized-watchdog-mailcow-1     Removed
✓Container mailcowdockerized-memcached-mailcow-1    Removed
✓Container mailcowdockerized-acme-mailcow-1         Removed
✓Container mailcowdockerized-postfix-mailcow-1      Removed
✓Container mailcowdockerized-nginx-mailcow-1        Removed
✓Container mailcowdockerized-sogo-mailcow-1         Removed
✓Container mailcowdockerized-php-fpm-mailcow-1      Removed
✓Container mailcowdockerized-rspamd-mailcow-1       Removed
✓Container mailcowdockerized-postfix-tlspol-mailcow-1 Removed
✓Container mailcowdockerized-dovecot-mailcow-1      Removed
✓Container mailcowdockerized-clamd-mailcow-1        Removed
✓Container mailcowdockerized-mysql-mailcow-1        Removed
✓Container mailcowdockerized-redis-mailcow-1        Removed
✓Container mailcowdockerized-unbound-mailcow-1      Removed
✓Container mailcowdockerized-netfilter-mailcow-1    Removed
✓Network mailcowdockerized_mailcow-network         Removed
```

Khởi động Mailcow

```
mailcow@mail:/opt/mailcow-dockerized$ sudo docker compose up -d
WARN[0000] mount of type 'volume' should not define 'bind' option
[+] up 1/7
[+] up 7/11mailcowdockerized_mailcow-network      Created
✓Network mailcowdockerized_mailcow-network      Created
✓Container mailcowdockerized-dockerapi-mailcow-1 Created
[+] up 11/14 mailcowdockerized-memcached-mailcow-1 Created
[+] up 17/18mailcowdockerized_mailcow-network      Created
[+] up 19/19ailcowdockerized_mailcow-network      Created
✓Network mailcowdockerized_mailcow-network      Created
✓Container mailcowdockerized-dockerapi-mailcow-1 Started
✓Container mailcowdockerized-memcached-mailcow-1 Started
✓Container mailcowdockerized-netfilter-mailcow-1 Started
✓Container mailcowdockerized-sogo-mailcow-1      Started
✓Container mailcowdockerized-olefy-mailcow-1     Started
✓Container mailcowdockerized-unbound-mailcow-1   Healthy
✓Container mailcowdockerized-redis-mailcow-1     Started
✓Container mailcowdockerized-clamd-mailcow-1     Started
✓Container mailcowdockerized-mysql-mailcow-1     Started
✓Container mailcowdockerized-postfix-tlspol-mailcow-1 Started
✓Container mailcowdockerized-php-fpm-mailcow-1   Started
✓Container mailcowdockerized-postfix-mailcow-1   Started
✓Container mailcowdockerized-dovecot-mailcow-1   Started
✓Container mailcowdockerized-ofelia-mailcow-1    Started
✓Container mailcowdockerized-rspamd-mailcow-1    Started
✓Container mailcowdockerized-nginx-mailcow-1     Started
✓Container mailcowdockerized-acme-mailcow-1      Started
✓Container mailcowdockerized-watchdog-mailcow-1  Started
```

Kiểm tra container

```

mailcow@mail:/opt/mailcow-dockerized$ sudo docker compose ps
NAME                                IMAGE
US                                  PORTS
mailcowdockerized-acme-mailcow-1    ghcr.io/mailcow/acme:1.97
3 minutes
mailcowdockerized-clamd-mailcow-1    ghcr.io/mailcow/clamd:1.71
4 minutes (healthy)
mailcowdockerized-dockerapi-mailcow-1 ghcr.io/mailcow/dockerapi:2.12
4 minutes
mailcowdockerized-dovecot-mailcow-1  ghcr.io/mailcow/dovecot:2.3.21.1-2
4 minutes      0.0.0.0:110->110/tcp, [::]:110->110/tcp, 0.0.0.0:143->143/t
->995/tcp, [::]:995->995/tcp, 0.0.0.0:4190->4190/tcp, [::]:4190->4190/tcp, 127.0.
mailcowdockerized-memcached-mailcow-1 memcached:alpine
4 minutes      11211/tcp
mailcowdockerized-mysql-mailcow-1    mariadb:10.11
4 minutes      127.0.0.1:13306->3306/tcp
mailcowdockerized-netfilter-mailcow-1 ghcr.io/mailcow/netfilter:1.64
4 minutes
mailcowdockerized-nginx-mailcow-1    ghcr.io/mailcow/nginx:1.30.3-1
4 minutes      0.0.0.0:80->80/tcp, [::]:80->80/tcp, 0.0.0.0:443->443/tcp,
mailcowdockerized-ofelia-mailcow-1    mcuadros/ofelia:latest
4 minutes
mailcowdockerized-olefy-mailcow-1     ghcr.io/mailcow/olefy:1.15
4 minutes
mailcowdockerized-php-fpm-mailcow-1    ghcr.io/mailcow/phpfpm:8.2.29-3
4 minutes      9000/tcp
mailcowdockerized-postfix-mailcow-1    ghcr.io/mailcow/postfix:3.10.12-1
3 minutes      0.0.0.0:25->25/tcp, [::]:25->25/tcp, 0.0.0.0:465->465/tcp,
mailcowdockerized-postfix-tlspol-mailcow-1 ghcr.io/mailcow/postfix-tlspol:1.8.2
4 minutes
mailcowdockerized-redis-mailcow-1     redis:7.4.6-alpine
4 minutes      127.0.0.1:7654->6379/tcp
mailcowdockerized-rspamd-mailcow-1     ghcr.io/mailcow/rspamd:4.1.0-1
4 minutes
mailcowdockerized-sogo-mailcow-1       ghcr.io/mailcow/sogo:5.12.9-1
4 minutes
mailcowdockerized-unbound-mailcow-1    ghcr.io/mailcow/unbound:1.25.1-1
4 minutes (healthy) 53/tcp, 53/udp
mailcowdockerized-watchdog-mailcow-1    ghcr.io/mailcow/watchdog:2.11
3 minutes
mailcow@mail:/opt/mailcow-dockerized$ |

```

Truy cập Web UI

<https://mail.lab.local>

Administrator Login



admin

.....

Login

or login with

FIDO2/WebAuthn Login

Tạo Domain

Domains

Làm mới

Toggle allActions+ Add domain

Tìm kiếm:

Hiện thị 25 mục


	Domain	Aliases	Mailboxes	Quota	Statistics	Default mailbox size	Max. size of a mailbox	RL	Relay domain	Active	Action
	vd.lab	0 / 400	2 / 10	2.0 GiB / 10.0 GiB	13 / 19.4 KiB	3.0 GiB	10.0 GiB	∞	×	✓	EditRemoveDNS

Hiện thị từ 1 đến 1 của 1 mục


TRƯỚC1TIẾP

Toggle allActions+ Add domain


Tạo User



User1 gửi mail

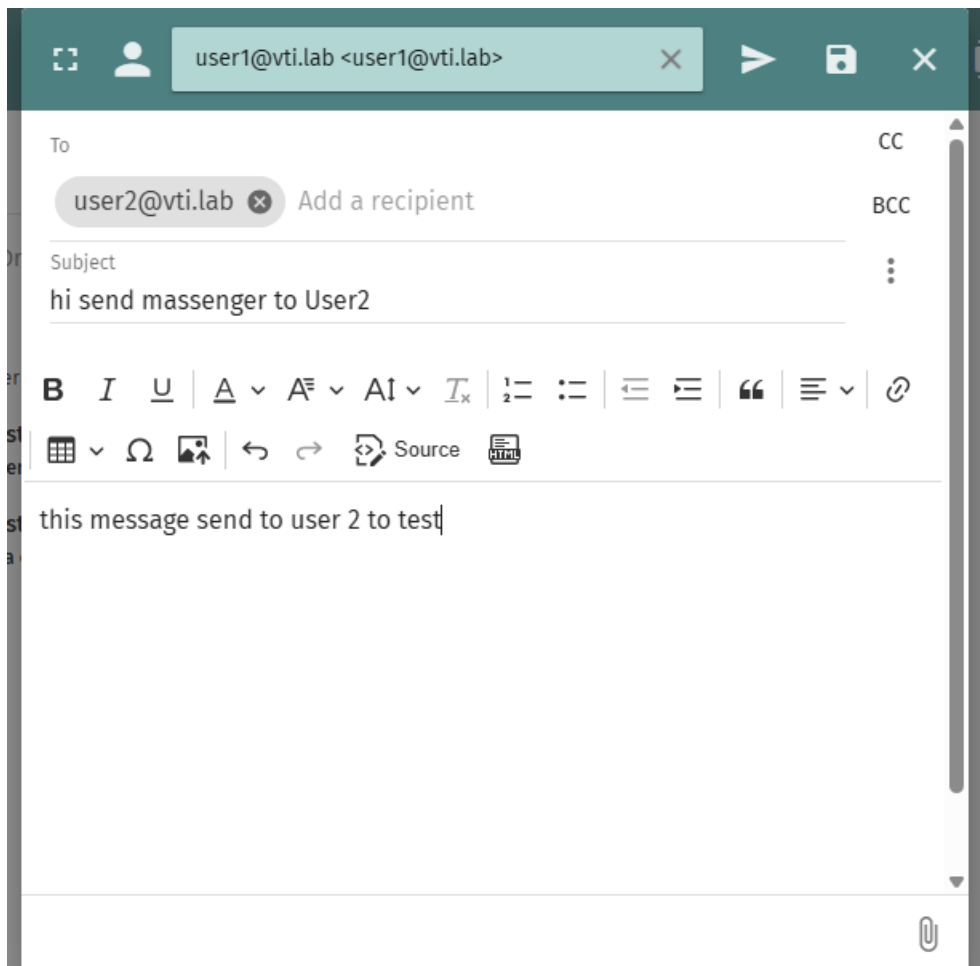

Mail nhận từ user2

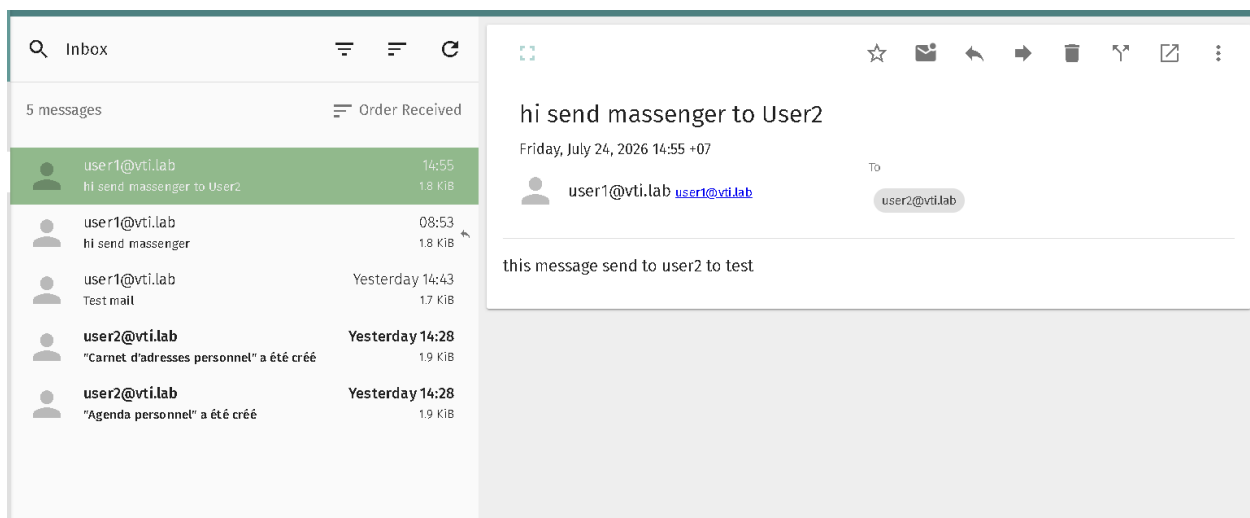

Xem Mail Queue

```
mailcow@mail:/opt/mailcow-dockerized$ sudo docker exec -it mailcowdockerized-postfix-mailcow-1 postqueue -p
Mail queue is empty
mailcow@mail:/opt/mailcow-dockerized$
```

Theo dõi log

```
mailcow@mail:/opt/mailcow-dockerized$ sudo docker compose logs -f dovecot-mailcow
dovecot-mailcow-1 | Waiting for database to come up...
dovecot-mailcow-1 | Uptime: 2 Threads: 4 Questions: 50 Slow queries: 0 Opens: 35 Open tables: 28 Queries per second avg: 25.000
dovecot-mailcow-1 | Detecting SKIP_FTS: enabling Flatcurve (FTS)
dovecot-mailcow-1 | Configuring FTS Settings...
dovecot-mailcow-1 | Setting FTS Memory Limit (per process) to 128 MB
dovecot-mailcow-1 | Setting FTS Process Limit to 1
dovecot-mailcow-1 | grep: /etc/dovecot/extra.conf: No such file or directory
dovecot-mailcow-1 | % Total % Received % Xferd Average Speed Time Time Time Current
dovecot-mailcow-1 | % Total % Received % Xferd Average Speed Time Time Time Current
100 236 100 236 0 0 176 0 0:00:01 0:00:01 --:--:-- 177
dovecot-mailcow-1 | gzip: invalid magic
dovecot-mailcow-1 | 2026-07-24 14:46:43,085 INFO Set uid to user 0 succeeded
dovecot-mailcow-1 | 2026-07-24 14:46:43,090 INFO supervisord started with pid 1
dovecot-mailcow-1 | 2026-07-24 14:46:44,096 INFO spawned: 'processes' with pid 111
dovecot-mailcow-1 | 2026-07-24 14:46:44,104 INFO spawned: 'dovecot' with pid 112
dovecot-mailcow-1 | 2026-07-24 14:46:44,110 INFO spawned: 'syslog-ng' with pid 113
dovecot-mailcow-1 | Jul 24 14:46:44 29c8e64a358a syslog-ng[113]: syslog-ng starting up; version='4.8.3'
dovecot-mailcow-1 | 2026-07-24 14:46:45,189 INFO success: processes entered RUNNING state, process has stayed up for > than 1 seconds (startsecs)
dovecot-mailcow-1 | 2026-07-24 14:46:45,189 INFO success: dovecot entered RUNNING state, process has stayed up for > than 1 seconds (startsecs)
dovecot-mailcow-1 | 2026-07-24 14:46:45,189 INFO success: syslog-ng entered RUNNING state, process has stayed up for > than 1 seconds (startsecs)
dovecot-mailcow-1 | Jul 24 14:47:04 29c8e64a358a dovecot: imap-login: Disconnected: Connection closed (no auth attempts in 0 secs): user=<>, rip=172.
2, lip=172.22.1.250, TLS, TLSv1.3 with cipher TLS_AES_256_GCM_SHA384 (256/256 bits)
dovecot-mailcow-1 | Jul 24 14:47:04 29c8e64a358a dovecot: imap-login: Disconnected: Connection closed (no auth attempts in 0 secs): user=<>, rip=172.
```

```
mailcow@mail:/opt/mailcow-dockerized$ sudo docker compose logs -f postfix-mailcow
postfix-mailcow-1 | 2026-07-24 14:47:02,501 INFO Set uid to user 0 succeeded
postfix-mailcow-1 | 2026-07-24 14:47:02,503 INFO supervisord started with pid 1
postfix-mailcow-1 | 2026-07-24 14:47:03,508 INFO spawned: 'processes' with pid 8
postfix-mailcow-1 | 2026-07-24 14:47:03,509 INFO spawned: 'postfix' with pid 9
postfix-mailcow-1 | 2026-07-24 14:47:03,515 INFO spawned: 'syslog-ng' with pid 10
postfix-mailcow-1 | Uptime: 30 Threads: 6 Questions: 353 Slow queries: 0 Opens: 50 Open tables: 43 Q
postfix-mailcow-1 | Jul 24 14:47:03 134c917c6531 syslog-ng[10]: syslog-ng starting up; version='4.8.1'
postfix-mailcow-1 | Checking if ASN for your IP is listed for Spamhaus Bad ASN List...
postfix-mailcow-1 | 2026-07-24 14:47:05,198 INFO success: processes entered RUNNING state, process has stay
postfix-mailcow-1 | 2026-07-24 14:47:05,198 INFO success: syslog-ng entered RUNNING state, process has stay
postfix-mailcow-1 | The AS of your IP is NOT listed as a banned AS from Spamhaus!
```

```
mailcow@mail:/opt/mailcow-dockerized$ sudo docker compose logs -f rspamd-mailcow
rspamd-mailcow-1 | OK
rspamd-mailcow-1 | 2026-07-24 14:47:00 #1(main) <8f3403>; main; main: rspamd 4.1.0 is loading configuration, build id
rspamd-mailcow-1 | 2026-07-24 14:47:00 #1(main) <>; lua; lua_cfg_transform.lua:500: converted surbl rules to rbl rule
rspamd-mailcow-1 | 2026-07-24 14:47:00 #1(main) <>; lua; lua_cfg_transform.lua:516: converted emails rules to rbl rul
rspamd-mailcow-1 | 2026-07-24 14:47:00 #1(main) <n3ba9e>; cfg; rspamd_config_set_action_score: action reject has been
verride it with new priority: 1, old threshold: nan, new threshold: 15.00
rspamd-mailcow-1 | 2026-07-24 14:47:00 #1(main) <n3ba9e>; cfg; rspamd_config_set_action_score: action add header has
0, override it with new priority: 1, old threshold: nan, new threshold: 8.00
rspamd-mailcow-1 | 2026-07-24 14:47:00 #1(main) <n3ba9e>; cfg; rspamd_config_set_action_score: action greylist has be
override it with new priority: 1, old threshold: nan, new threshold: 7.00
rspamd-mailcow-1 | 2026-07-24 14:47:00 #1(main) rspamd_regex_library_init: pcre2 is compiled with JIT for x86 64bit
rspamd-mailcow-1 | 2026-07-24 14:47:00 #1(main) <n3ba9e>; cfg; rspamd_map_parse_backend: map '/etc/rspamd/local.d/map
ut it can be loaded automatically later
rspamd-mailcow-1 | 2026-07-24 14:47:00 #1(main) <n3ba9e>; lua; misc.lua:131: url_suspect plugin is enabled, skipping
rspamd-mailcow-1 | 2026-07-24 14:47:00 #1(main) <n3ba9e>; lua; lua_redis.lua:834: use default Redis settings for neur
rspamd-mailcow-1 | 2026-07-24 14:47:00 #1(main) <n3ba9e>; lua; init.lua:59: controller plugin maps; register webui pa
rspamd-mailcow-1 | 2026-07-24 14:47:00 #1(main) <n3ba9e>; lua; init.lua:59: controller plugin maps; register webui pa
rspamd-mailcow-1 | 2026-07-24 14:47:00 #1(main) <n3ba9e>; lua; init.lua:59: controller plugin maps; register webui pa
rspamd-mailcow-1 | 2026-07-24 14:47:00 #1(main) <n3ba9e>; lua; init.lua:59: controller plugin maps; register webui pa
rspamd-mailcow-1 | 2026-07-24 14:47:00 #1(main) <n3ba9e>; lua; init.lua:59: controller plugin selectors; register web
rspamd-mailcow-1 | 2026-07-24 14:47:00 #1(main) <n3ba9e>; lua; init.lua:59: controller plugin selectors; register web
rspamd-mailcow-1 | 2026-07-24 14:47:00 #1(main) <n3ba9e>; lua; init.lua:59: controller plugin selectors; register web
rspamd-mailcow-1 | 2026-07-24 14:47:00 #1(main) <n3ba9e>; lua; init.lua:59: controller plugin selectors; register web
rspamd-mailcow-1 | 2026-07-24 14:47:00 #1(main) <n3ba9e>; lua; init.lua:59: controller plugin neural; register webui
```


LAB Outlook

PHẦN 1: CẤU HÌNH MAILBOX

YÊU CẦU: SỬ DỤNG OUTLOOK CLASSIC

Bước 1: Vào Control Panel – Mail (Microsoft Outlook) – Show Profiles...

Bước 2: Chọn Prompt for a profile to be used – Chọn Add – Đặt tên profile - OK

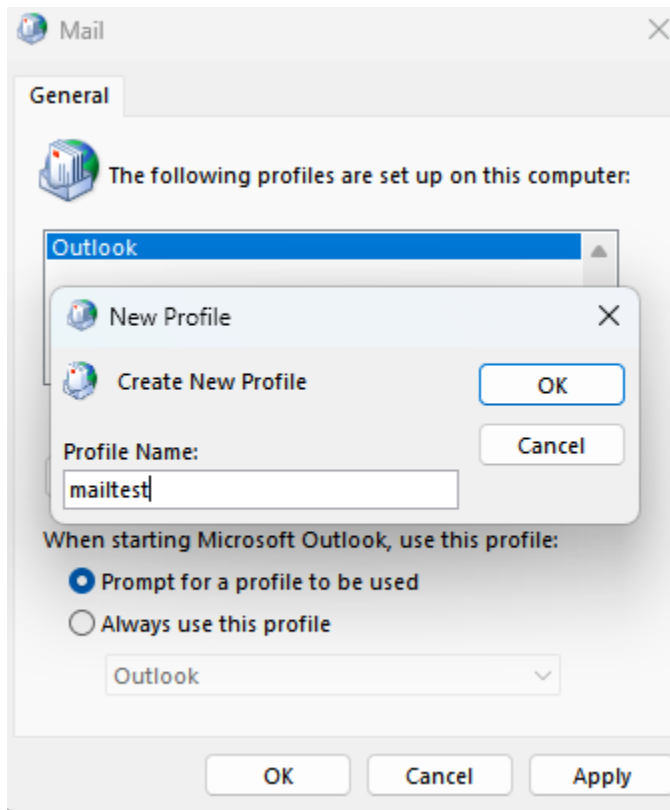

Bước 3: Chọn Manual setup or additional server types – Next

 Add Account ✕

Auto Account Setup
Manual setup of an account or connect to other server types.

☐ **Email Account**

Your Name:
Example: Ellen Adams

Email Address:
Example: ellen@contoso.com

Password:
Retype Password:
Type the password your Internet service provider has given you.

☒ **Manual setup or additional server types**

< Back Next > Cancel Help

Bước 4: Chọn POP or IMAP – Next

Add Account

Choose Your Account Type

☐ **Microsoft 365**
Automatic setup for Microsoft 365 accounts

Email Address:
Example: ellen@contoso.com

☒ **POP or IMAP**
Advanced setup for POP or IMAP email accounts

☐ **Exchange ActiveSync**
Advanced setup for services that use Exchange ActiveSync

< Back Next > Cancel Help

Bước 5: Khai báo các thông số mailbox tương tự bên dưới.

Lưu ý:


Account type chọn IMAP

User name: Gõ theo format: Doamin\user

 Add Account ✕

POP and IMAP Account Settings
Enter the mail server settings for your account.



User Information	Test Account Settings
Your Name: mailto:mailtest	We recommend that you test your account to ensure that the entries are correct.
Email Address: mailto:mailtest@vti.lab	Test Account Settings ...
Server Information	☒ Automatically test account settings when Next is clicked
Account Type: IMAP	
Incoming mail server: mail.vti.lab	
Outgoing mail server (SMTP): mail.vti.lab	
Logon Information	Mail to keep offline: All
User Name: mailto:mailtest@vti.lab	
Password:	More Settings ...
☒ Remember password	
☐ Require logon using Secure Password Authentication (SPA)	

Sau đó click More Settings để thực hiện Bước 6:

Tại tab Outgoing Server, chọn như hình bên dưới

 Internet Email Settings ✕

General **Outgoing Server** **Advanced**

☒ My outgoing server (SMTP) requires authentication

☒ Use same settings as my incoming mail server

☐ Log on using


User Name:

Password:


☒ Remember password

☐ Require Secure Password Authentication (SPA)



Tại tab Advance, cấu hình như hình bên dưới, click OK

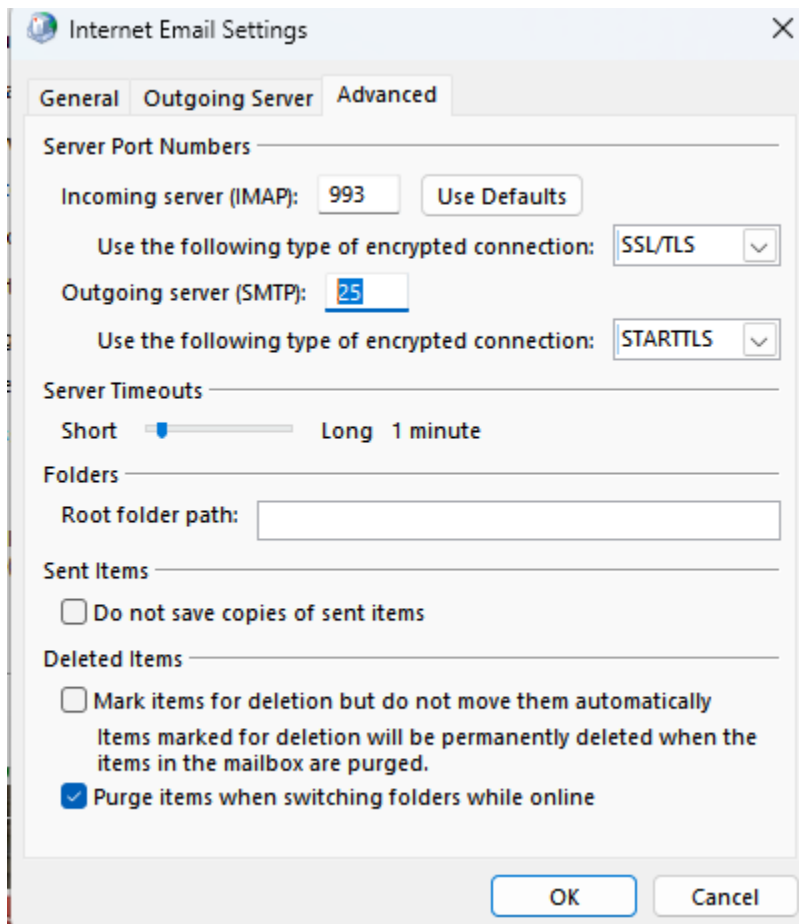

Cấu hình mail khi thành công

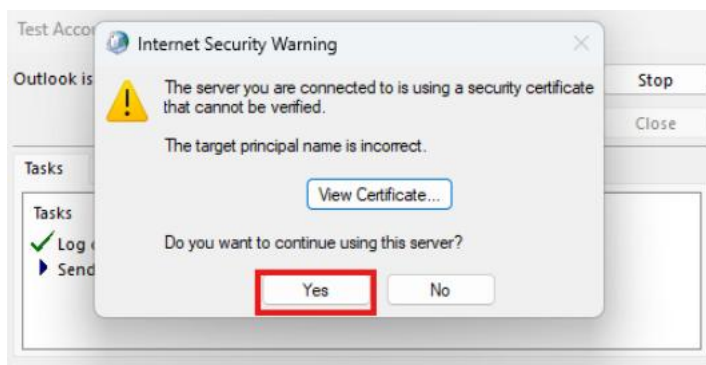

Nếu cấu hình thành công sẽ có thông báo như hình bên dưới. Click Close - Finish

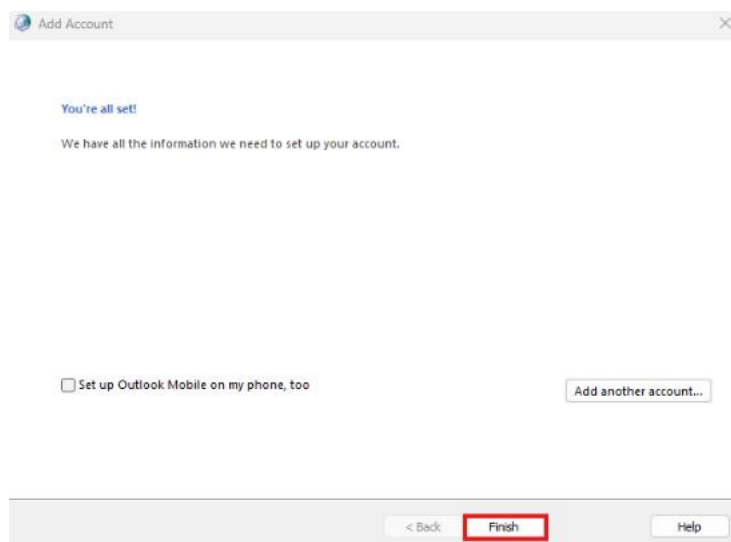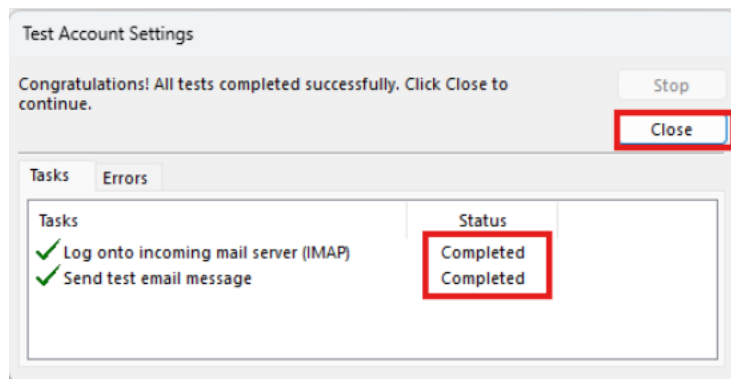

Khi mở Outlook, hệ thống sẽ yêu cầu chọn Profile cần mở, chọn và click OK

