

Nguyễn Hải Đăng - 1350050060

in Java thì lớp này gọi là lớp cha ví dụ

Bài tập 1

```
public  
class Animal {  
    void makeSound() {  
        System.out.println("Ting beu");  
    }  
}
```

```
class Pig extends Animal {  
    @Override
```

```
    void makeSound() {  
        System.out.println("Ua in");  
    }  
}
```

```
class dog extends Animal {  
    @Override
```

```
    void makeSound() {  
        System.out.println("gau gau");  
    }  
}
```

```
class cat extends Animal {  
    @Override
```

```
void makeSound () {  
    System.out.println("Meo meo");  
}
```

```
class Bird extends Animal {  
    void makeSound () {  
        System.out.println("Chip chip");  
    }  
}
```

```
class main {  
    public static void main (String args[])  
    {
```

```
        Animal a = new Pig;
```

```
        Animal b = new Dog;
```

```
        Animal c = new Cat;
```

```
        Animal d = new Bird;
```

```
        a.makeSound;
```

```
        b.makeSound;
```

```
        c.makeSound;
```

```
        d.makeSound;
```

```
    }  
}
```

Bài tập

```
class Car {
```

```
    private String name;
```

```
    public Car (String name) {
```

```
        this.name = name;
```

```
    }
```

```
    public move() {
```

```
        System.out.println("run run");
```

```
    }
```

```
class LandRover extends Car {
```

```
    super(name)
```

```
    LandRover (String name) {
```

```
        super(name);
```

```
    }
```

```
    // override
```

```
    public move() {
```

```
        System.out.println("LandRover");
```

```
    }
```

```
}
```

```
class Ford extends Car {
```

```
    Ford (String name) {
```

```
        super(name);
```

```
    }
```

Một trang ở một tương lai

```
public move() {
```

```
↓
```

```
}
```

```
class Honda extends Car {
```

```
    Honda (String name) {
```

```
        Super (name);
```

```
↓
```

```
@ override
```

```
public move() {
```

```
↓
```

```
↓
```

```
class Main {
```

```
    public static void main (String args[])
```

```
↓
```

```
        Car a = new LandRover ("Land Rover");
```

```
        Car b = new Ford ("Ford");
```

```
        Car c = new Honda ("Honda");
```

```
        a.move;
```

```
        b.move;
```

```
        c.move;
```

```
↓
```

~~~~~

Ngày 11/10/2023 - 13:50:00

Bài tập 1

class Person {

private String name;

private Date birthday;

public ~~setName~~ String setName

{

this.name = name;

}

public Date setBirthday {

~~this.birthday~~ birthday;

}

public String getDetails {

return "Name: " + name + ", Birthday: " + birthday;

}

}

Myung-Hwa Song - 1350050060

public class Employee extends Person {  
 private double salary;  
 public void setSalary (double salary) {  
 this.salary = salary;  
 }  
}

a Carriage

return super.getDetail() + Salary : + Salary of doctor


```
public class Manager extends Employee {
    private Employee assistant;

    public setAssistant(Employee assistant) {
        this.assistant = assistant;
    }
}
```

@override

```
@Override  
public String getDetail(A) {  
    return Assistant : * assistant;  
}
```

Nguyen Han Day - 1350680066

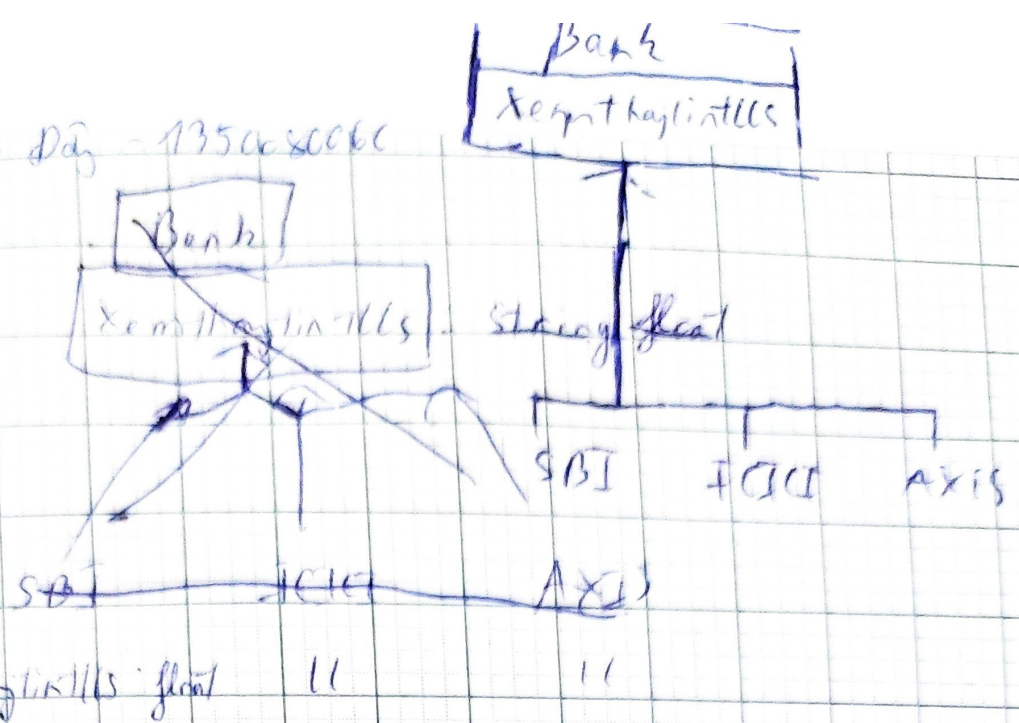

```
class Bank {
```

```
    public float xemthayintills() {
```

```
        this.xemthayintills = xemthayintills;
```

```
    }
```

```
class SBI extends Bank {
```

```
    @Override
```

```
    public float xemthayintills() {
```

```
        this.xemthayintills = 8.0;
```

```
    }
```

```
}
```

```
class ICT extends Bank {
```

```
    @Override
```

```
    public float xemthayintills() {
```

```
        this.xemthayintills = 7.0;
```

```
    }
```

```
}
```

Assignment: Hare Dui  
~~public~~ AXIS

class AXIS extends Bank {  
 @Override

public float xenthaytin() {

return xenthaytin = 9.0;

}

}

class main {

public static void main (String[] args) {

Bank b1 = new SBI();

Bank b2 = new IICI();

Bank b3 = new AXIS();

}

}

Nguyễn Học Dũng - 135080060

Bài tập 3

```
class NhanVien {
```

```
    protected String ten;
```

```
    protected long luong;
```

```
    public NhanVien() {
```

```
    }
```

```
    public NhanVien(String ten) {
```

```
        this.ten = ten;
```

```
    }
```

```
    protected salaryString loaiNhanVien() { return ""; }
```

```
    }
```

```
    public void tinhLuong() {
```

```
    }
```

```
        this.luong = luong;
```

```
    }
```

```
    public void xuatThongTin() {
```

```
        System.out.println("Ten: " + ten + " Luong: " + luong);
```

```
    }
```

```
class NhanVienFullTime extends NhanVien {
```

```
    }
```

```
    private int loaiChucVu;
```

ngay la day - 13.5 ca 8 ca 6 ca

private int ngay la than;

public nhan vien full time ( string ten, int ngay la than, int  
laoi chuc vu ) {

this . ten = ten;

this . ngay la than = ngay la than;

this . laoi chuc vu = laoi chuc vu;

~~@ override~~

public string laoi nhan vien () {

~~@ override~~

public void tinh luong () {

class nhan vien part time extends nhan vien;

private int ngay la than; int qic la nhan vien;

@ override

public void tinh luong () {

Nguyen Hai Dong,  
Bài tập 4

class lop xe {

private String soxe;

private String loai;

private String ngaydh;

private boolean trthai;

public void nhap() {

this.soxe = soxe;

this.loai = loai;

this.ngaydh = ngaydh;

this.trthai = trthai;

}

public void in() {

return soxe: + soxe + loai: + loai + ngaydh:  
+ ngaydh + trthai: + trthai;

}

class chuyen xe extends lop xe

{

private int msx;

private String ten;

private String naiden

private float donat thue

@Override

Bài tập 4

import java.util

class lop xe {

private String maxxe

private String locai

private String ngaydk

private boolean trThai

public xe (xe x) {

this.~~maxxe~~ maxxe = x. maxxe;

this. locai = x. locai;

this. ngaydk = x. ngaydk;

this. trThai = x. trThai;

public void nhap (Scanner sc) {

maxxe = sc. nextLine();

locai = sc. nextLine();

ngaydk = sc. nextLine();

trThai = sc. nextLine();

public in() {

System.out. println ("Maxxe: " + maxxe);

```

system.out.println("Loai:" + loai);
system.out.println("gag day hien:" + ngayde);
system.out.println("trang thai:" + trothai);
}
}

```

class chuyen xe extends lup xe {

private int msc;

private String ten

private String noi den

private double don th

@ override

public void nhap() {

super.nhap

~~Scanner~~ Scanner sc = new Scanner(System.in);

~~msc = sc.nextInt();~~

System.out.print("Nhap msc:");

msc = sc.nextInt();

sc.nextLine();

System.out.print("Nhap ten:");

ten = sc.nextLine();

System.out.print("Nhap noi den:");

noi den = sc.nextLine();

```
System.out.println("Deant-thu:");  
deant-thu = ant Double();
```

6. Override

```
public void in() {
```

```
    super.in
```

```
    System.out.println("m sc" + msc);
```

```
    System.out.println("len" + len);
```

```
    // ("Naiden" + naiden);
```

```
    ["Deant-thu" + deant-thu];
```